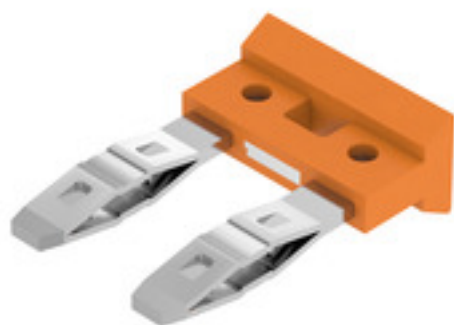


SCM/SDI P CC**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Product image**

Cross-connection for the sockets in the D-SERIES DRM.

General ordering data

Version	D-SERIES, Cross-connector
Order No.	7760056366
Type	SCM/SDI P CC
GTIN (EAN)	6944169773327
Qty.	10 pc(s).

SCM/SDI P CC

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Depth	18.2 mm	Depth (inches)	0.717 inch
Height	5.7 mm	Height (inches)	0.224 inch
Width	12.1 mm	Width (inches)	0.476 inch
Net weight	1 g		

Cross-connection data

Rated voltage	250 V	Rated current	2 A
Insulation	Yes	Touch-safe protection	Yes
Colour	orange	Number of cross-connected terminals	2
Number of poles	2	Pitch in mm (P)	8 mm
Type of mounting	Plugged	Version	for D-SERIES sockets with PUSH IN connection

General data

Version	for D-SERIES sockets with PUSH IN connection	Colour	orange
---------	--	--------	--------

Insulation coordination

Rated voltage	250 V
---------------	-------

Connection data

Pitch in mm (P)	8 mm
-----------------	------

Classifications

ETIM 6.0	EC002586	ETIM 7.0	EC002586
ETIM 8.0	EC002586	ETIM 9.0	EC002586
ETIM 10.0	EC002586	ECLASS 9.1	27-37-16-92
ECLASS 10.0	27-37-16-92	ECLASS 11.0	27-37-16-92
ECLASS 12.0	27-37-16-92	ECLASS 13.0	27-37-16-92
ECLASS 14.0	27-37-16-92	ECLASS 15.0	27-37-16-92

Environmental Product Compliance

RoHS Compliance Status	Compliant without exemption
REACH SVHC	No SVHC above 0.1 wt%

Approvals

ROHS	Conform
------	---------

Downloads

Engineering Data	CAD data – STEP
Catalogues	Catalogues in PDF-format


SCM/SDI P CC

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings


Dimensional drawing

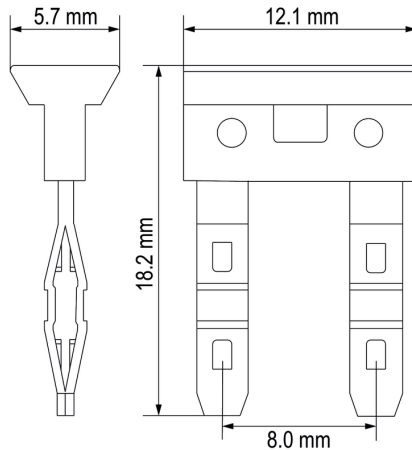

Example of use

How to install cross connection


to cross connect A2 contacts of SDI... PUSH IN sockets

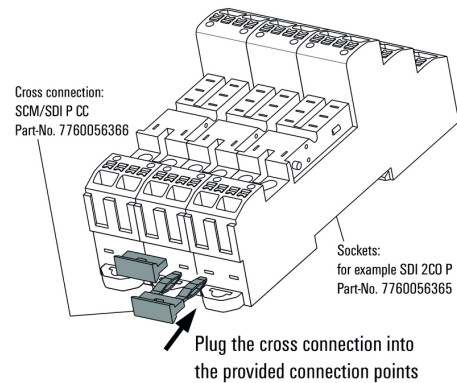

Example of use

How to install cross connection

to cross connect A2 contacts of SCM... PUSH IN sockets

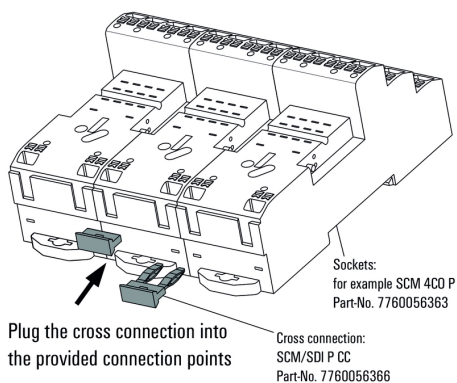

How to install cross connection

to cross connect A2 contacts of SCM... PUSH IN sockets

Example of use

Cross connection

between SDI... and SCM... PUSH IN sockets is possible

