

**SIEMENS**



# Fuse Systems

SENTRON

Configu-  
ration  
Manual

Edition  
10/2015

[siemens.com/lowvoltage](http://siemens.com/lowvoltage)



Fuse Systems



|     |                                                                                        |
|-----|----------------------------------------------------------------------------------------|
| 2   | <b>Introduction</b>                                                                    |
| 8   | <b>NEOZED fuse systems</b><br>NEOZED fuse links                                        |
| 15  | <b>DIAZED fuse systems</b>                                                             |
| 24  | <b>Cylindrical fuse systems</b><br>Cylindrical fuse links and cylindrical fuse holders |
| 32  | Fuse holders in size 10 x 38 mm and Class CC                                           |
| 36  | <b>Class CC fuse systems</b>                                                           |
| 40  | <b>Busbar systems</b>                                                                  |
| 45  | <b>3NA, 3ND LV HRC fuse systems</b><br>LV HRC fuse links                               |
| 68  | LV HRC signal detectors                                                                |
| 69  | LV HRC fuse bases and accessories                                                      |
| 78  | <b>SITOR semiconductor fuses</b><br>LV HRC design                                      |
| 147 | Cylindrical fuse design                                                                |
| 168 | NEOZED and DIAZED design                                                               |
| 172 | <b>Configuration</b>                                                                   |
| 186 | <b>Photovoltaic fuses</b><br>Introduction                                              |
| 186 | PV cylindrical fuses                                                                   |
| 191 | PV cumulative fuses                                                                    |

**For further technical product information:**

Siemens Industry Online Support:  
[www.siemens.com/lowvoltage/product-support](http://www.siemens.com/lowvoltage/product-support)

→ Entry type:  
Application example  
Certificate  
Characteristic  
Download  
FAQ  
Manual  
Product note  
Software archive  
Technical data

# Fuse Systems

## Introduction

### Overview

| Devices                                                                                                                                       | Page | Application                                                                                                                                                                                                                             | Standards                                                                                                                                             | Used in                   |                       |          |
|-----------------------------------------------------------------------------------------------------------------------------------------------|------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|-----------------------|----------|
|                                                                                                                                               |      |                                                                                                                                                                                                                                         |                                                                                                                                                       | Non-residential buildings | Residential buildings | Industry |
|  <b>NEOZED fuse systems</b>                                  | 8    | MINIZED switch disconnectors, bases, fuse links from 2 A to 63 A of operational class gG and accessories. Everything you need for a complete system.                                                                                    | Fuse system:<br>IEC 60269-3;<br>DIN VDE 0636-3<br><br>Safety switching devices<br>IEC/EN 60947-3<br>DIN VDE 0638;<br>DIN EN 60947-3<br>(VDE 0660-107) | ✓                         | ✓                     | ✓        |
|  <b>DIAZED fuse systems</b>                                  | 15   | Fuse links from 2 A to 100 A in various operational classes, base versions with classic screw base connections. A widely used fuse system.                                                                                              | IEC 60269-3;<br>DIN VDE 0635;<br>DIN VDE 0636-3;<br>CEE 16                                                                                            | ✓                         | ✓                     | ✓        |
| <b>Cylindrical fuse systems</b>                                                                                                               |      |                                                                                                                                                                                                                                         |                                                                                                                                                       |                           |                       |          |
|  <b>Cylindrical fuse links and cylindrical fuse holders</b> | 24   | Line protection or protection of switching devices.<br><br>The fuse holders with touch protection ensure the safe "no-voltage" replacement of fuse links.<br><br>Auxiliary switches can be retrofitted.                                 | IEC 60269-1, -2, -3;<br>NF C 60-200;<br>NF C 63-210, -211;<br>NBN C 63269-2,<br>CEI 32-4, -12<br><br>Fuse holders:<br>File No. E171267                | ✓                         | ✓                     | ✓        |
|  <b>Fuse holders in size 10 x 38 mm and Class CC</b>       | 32   | For installing fused loaded motor starter combinations.                                                                                                                                                                                 | IEC 60269-1, -2;<br>IEC 60947-4;<br>UL 4248-1,<br>File No. E171267<br>CSA 250269, 6225-01<br><br>Auxiliary switches:<br>UL 508,<br>File No. E334003   | ✓                         | --                    | ✓        |
|  <b>Class CC fuse systems</b>                              | 36   | These comply with American standard and have UL and CSA approval, for customers exporting OEM products and mechanical engineers.<br><br>Modern design with touch protection according to BGV A3 for use in "branch circuit protection". | Fuse holders:<br>UL 4248-1, E171267<br>CSA 22.2<br><br>Fuse links:<br>UL 248-4,<br>File No. E258218,<br>CSA 231237, 1422-02<br>and 1422-82            | ✓                         | ✓                     | ✓        |
|  <b>Busbar systems</b>                                     | 40   | Busbars for NEOZED fuse bases, NEOZED fuse disconnectors, MINIZED switch disconnectors, DIAZED fuse systems and for the cylindrical fuse systems.<br><br>Compact cylindrical fuse holders for busbars.                                  | DIN EN 60439-1<br>(VDE 0660-500)<br><br><br>UL 4248-1, E337131                                                                                        | ✓                         | ✓                     | ✓        |

| Devices                                                                             | Page                              | Application | Standards                                                                                                                                                                                                                       | Used in                                                                                                                                                                             |                       |          |   |
|-------------------------------------------------------------------------------------|-----------------------------------|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|----------|---|
|                                                                                     |                                   |             |                                                                                                                                                                                                                                 | Non-residential buildings                                                                                                                                                           | Residential buildings | Industry |   |
| 3NA, 3ND LV HRC fuse systems                                                        |                                   |             |                                                                                                                                                                                                                                 |                                                                                                                                                                                     |                       |          |   |
|    | LV HRC fuse links                 | 45          | Fuse links from 2 A to 1250 A for selective line protection and system protection in non-residential buildings, industry and power utilities.                                                                                   | IEC 60269-1, -2;<br>EN 60269-1;<br>DIN VDE 0636-2;<br>CSA 16325 - 1422-02                                                                                                           | ✓                     | ✓        | ✓ |
|    | LV HRC signal detectors           | 68          | Signal detectors for when a fuse is tripped on all LV HRC fuse links with combination or front indicators with non-insulated grip lugs.<br><br>Plus the comprehensive accessory range required for LV HRC fuse systems.         | --                                                                                                                                                                                  | ✓                     | ✓        | ✓ |
|    | LV HRC fuse bases and accessories | 69          | Fuse bases for screw or snap-on mounting onto standard mounting rails, available as 1-pole or 3-pole version.                                                                                                                   | IEC 60269-1, -2;<br>EN 60269-1;<br>DIN VDE 0636-2<br><br>UL 4248-1,<br>File No. E171267-IZLT2<br>(only downstream from branch circuit protection)<br><br>CSA C22.2<br>No. 4248.1-07 | ✓                     | ✓        | ✓ |
| SITOR semiconductor fuses                                                           |                                   |             |                                                                                                                                                                                                                                 |                                                                                                                                                                                     |                       |          |   |
|  | LV HRC design                     | 78          | Fuse links in LV HRC design and a huge variety of models support a wide range of applications from 500 V to 1500 V and 150 A to 1600 A. Fuses with slotted blade contacts, bolt-on links or female thread, and special designs. | UL 4248-13, File No. E167357-JFHR2                                                                                                                                                  | --                    | --       | ✓ |
|  | Cylindrical fuse design           | 147         | Fuse links, fuse holders – usable as fuse switch disconnectors and fuse bases up to 600/690 V AC and 400/700 V DC from 1 A to 100 A in the sizes 10 × 38 mm, 14 × 51 mm and 22 × 58 mm.                                         | Fuse links:<br>UL 4248-13, File No. E167357-JFHR2<br>CSA 248170, 1422-30<br><br>Fuse holders:<br>UL 4248-1, File No. E171267-IZLT<br>CSA 248170, 6225-01                            | --                    | --       | ✓ |
|  | NEOZED and DIAZED design          | 168         | NEOZED fuse links for 400 V AC and 250 V DC and DIAZED for 500 V AC and 500 V DC.                                                                                                                                               | --                                                                                                                                                                                  | --                    | --       | ✓ |
| Photovoltaic fuses                                                                  |                                   |             |                                                                                                                                                                                                                                 |                                                                                                                                                                                     |                       |          |   |
|  | PV cylindrical fuses              | 186         | Fuses with a rated voltage of 1000 V DC and operational class gPV for the protection of photovoltaic modules, their connecting cables and other components.                                                                     | IEC 60269-6                                                                                                                                                                         | ✓                     | ✓        | ✓ |
|  | PV cumulative fuses               | 191         | Fuses with a rated voltage of 1000 V and 1500 V DC, a rated current of 63 A to 630 A and operational class gPV for the protection of connecting cables and other components.                                                    | IEC60269-6                                                                                                                                                                          | ✓                     | ✓        | ✓ |

# Fuse Systems

## Introduction

### Overview

#### Rated voltage $U_n$

The rated voltage is the designated voltage of the fuse and is used to determine its test conditions and operational voltage limits.

For LV HRC and SITOR fuse links, the rated voltage is always the rms value of an AC voltage.

For wind power plants and some industrial applications, a higher voltage tolerance is demanded of the LV HRC and SITOR fuses than the tolerance of +5 % defined in the standard. On request, you can obtain a manufacturer's declaration for the rated voltage of 690 V +10 %.

In the case of NEOZED and DIAZED fuse links, a distinction is made between AC and DC voltage values.

#### Rated current $I_n$

The rated current of a fuse link is the designated current of the fuse link and is the current up to which it can be continuously loaded under prescribed conditions without adverse affects.

#### Rated frequency

The rated frequency is the frequency for which the fuse link is rated with regard to power dissipation, current, voltage, characteristic curve and breaking capacity.

#### Selectivity

Several fuses are usually connected in series in a system. Selectivity ensures that only the faulty electric circuit and not all operating processes are interrupted in a system in serious cases.

Siemens fuses of operational class gG, at an operational voltage of up to 400 V AC and a ratio of 1:1.25, are interselective, i.e. from rated current level to rated current level. This is achieved by means of the considerably smaller band of scatter of  $\pm 5\%$  of the time/current characteristics, which far exceeds the demand for a ratio of 1:1.6 specified in the standard.

It is therefore possible to use smaller conductor cross-sections due to the lower rated currents.


#### Breaking capacity

The rated breaking capacity is the highest prospective short-circuit current  $I_p$  that the fuse link can blow under prescribed conditions.

A key feature of these fuses is their high rated breaking capacity with the smallest footprint. The basic demands and circuit data for tests – voltage, power factor, actuating angle, etc. – are specified in both national (DIN VDE 0636) and international (IEC 60269) regulations.

However, for a constant fail-safe breaking capacity, from the smallest non-permissible overload current through to the highest short-circuit current, a number of quality characteristics need to be taken into account when designing and manufacturing fuse links. These include the design of the fuse element with regard to dimensions and punch dimension and its position in the fuse body, as well as its compressive strength and the thermal resistance of the body. The chemical purity, particle size and the density of the quartz sand also play a key role.

The rated breaking capacity for AC voltage for NEOZED fuses – and the majority of DIAZED fuses – is 50 kA, and in the case of our LV HRC fuses (NH type), it is even 120 kA. The various type ranges of SITOR semiconductor fuses have different switching capacities ranging from 50 to 100 kA.

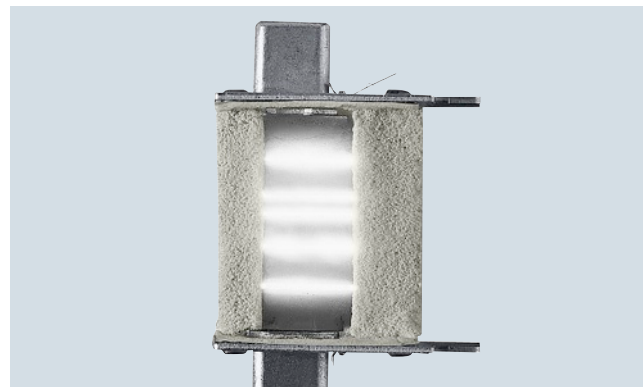

Faster arcing and precise arc quenching are the requirements for a reliable breaking capacity.

#### Operational classes

Fuses are categorized according to function and operational classes. The first letter defines the function class and the second the object to be protected:

##### 1st letter

a = Partial range protection  
(accompanied fuses):

Fuse links that carry currents at least up to their specified rated current and can switch currents above a specific multiple of their rated current up to their rated breaking current.

g = Full range protection  
(general purpose fuses):

Fuse links that can continuously carry currents up to at least their specified rated current and can switch currents from the smallest melting current through to the breaking current. Overload and short-circuit protection.

##### 2nd letter

G = Cable and line protection  
(general applications)

M = Switching device protection in motor circuits  
(for protection of motor circuits)

R, S = Semiconductor protection/thyristor protection  
(for protection of rectifiers)

L = Cable and line protection  
(in acc. with the old, no longer valid DIN VDE)

B = Mine equipment protection

Tr = Transformer protection

The designations "slow" and "quick" still apply to DIAZED fuses. These are defined in IEC/CEE/DIN VDE.

In the case of "quick" characteristics, the fuse blows in the breaking range faster than those of operational class gG.

In the case of DIAZED fuse links for DC railway network protection, the "slow" characteristic is particularly suitable for switching off direct currents with greater inductance. Both characteristics are also suitable for the protection of cables and lines.

Full range fuses (gG, gR, quick, slow) reliably break the current in the event of non-permissible overload and short-circuit currents.

Partial range fuses (aM, aR) exclusively serve short-circuit protection.


The following operational classes are included in the product range:

|       |                                                                                   |
|-------|-----------------------------------------------------------------------------------|
| gG    | (DIN VDE/IEC) = Full-range cable and line protection                              |
| aM    | (DIN VDE/IEC) = Partial-range switching device protection                         |
| aR    | (DIN VDE/IEC) = Partial-range semiconductor protection                            |
| gR    | (DIN VDE/IEC) = Full-range semiconductor protection                               |
| gS    | (DIN VDE/IEC) = Full-range semiconductor protection and cable and line protection |
| quick | (DIN VDE/IEC/CEE) = Full-range cable and line protection                          |
| slow  | (DIN VDE) = Full range cable and line protection                                  |

### Characteristic curves (time/current characteristic curves)

The time/current characteristic curve specifies the virtual time (e.g. the melting time) as a function of the prospective current under specific operating conditions.

Melting times of fuse links are presented in the time/current diagrams with logarithmic subdivision as a function of their currents. The melting time characteristic curve extends from the lowest melting current, which still just causes the melting conductor to melt asymptotically to the  $I^2t$  line of equal Joulean heat values in the range of higher short-circuit currents, which specifies the constant melting heat value  $I^2t$ . For the sake of simplicity, the time/current characteristics diagrams omit the  $I^2t$  lines (c).

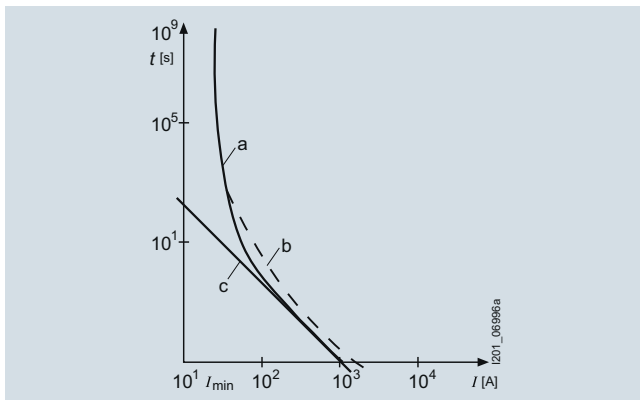

General representation of the time/current characteristic curve of a fuse link of operational class gL/gG

$I_{\min}$ : Smallest melting current

- a: Melting time/current characteristic
- b: Breaking time characteristic curve
- c:  $I^2t$  line

The curve of the characteristic depends on the outward heat transfer from the fuse element. DIN VDE 0636 specifies tolerance-dependent time/current ranges within which the characteristic curves of the fuse must lie. Deviations of  $\pm 10\%$  are permissible in the direction of the current axis. With Siemens LV HRC fuse links of operational class gG, the deviations work out at less than  $\pm 5\%$ , a mark of our outstanding production accuracy. For currents up to approx.  $20 I_n$ , the melting time/current characteristic curves are the same as the breaking time characteristic curves. In the case of higher short-circuit currents, the two characteristic curves move apart, influenced by the respective arc quenching time.

The difference between both lines (= arc quenching time) also depends on the power factor, the operational voltage and the breaking current.

The Siemens characteristic curves show the mean virtual melting time characteristic curves recorded at an ambient temperature of  $(20 \pm 5)^\circ\text{C}$ . They do not apply to preloaded fuse links.

### Virtual time $t_v$

The virtual time is the time span calculated when an  $I^2t$  value is divided by the square of the prospective current:

$$t_v = \frac{\int i^2 dt}{I_p^2}$$

The time/current characteristic curve specifies the prospective current  $I_p$  and the virtual melting time  $t_{vs}$ .

### Prospective short-circuit current $I_p$


The prospective short-circuit current is the rms value of the line-frequency AC component, or the value of direct current to be expected in the event of a short-circuit occurring downstream of the fuse, were the fuse to be replaced by a component of negligible impedance.

### Let-through current characteristic curves

The let-through current characteristic curve specifies the value of the let-through current at 50 Hz as a function of the prospective current.

The let-through current  $I_c$  is the maximum instantaneous value of the current reached during a switching operation of a fuse.

The fuse element of the fuse links melts so quickly at very high currents that the surge short-circuit current  $I_p$  is prevented from occurring. The highest instantaneous value of the current reached during the breaking cycle is called the let-through current  $I_c$ . The current limits are specified in the current limiting diagrams, otherwise known as let-through current diagrams.

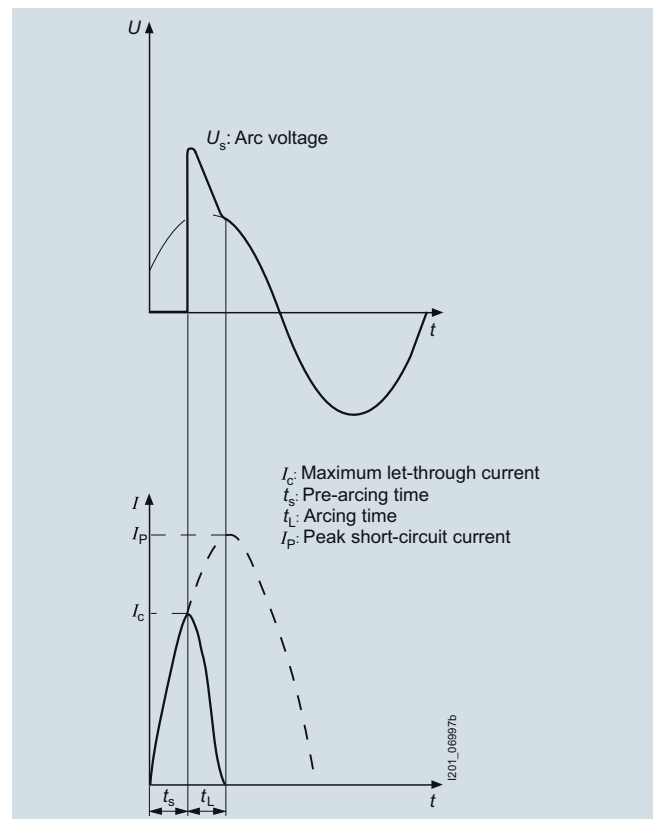

Oscillograph of a short-circuit current breaking operation through a fuse link


# Fuse Systems

## Introduction

### Current limiting

As well as a fail-safe rated breaking capacity, the current-limiting effect of a fuse link is of key importance for the cost effectiveness of a system. In the event of short-circuit breaking by a fuse, the short-circuit current continues to flow through the network until the fuse link is switched off. However, the short-circuit current is only limited by the system impedance.

The simultaneous melting of all the bottlenecks of a fuse element produce a sequence of tiny partial arcs that ensure a fast breaking operation with strong current limiting. The current limitation is also strongly influenced by the production quality of the fuse – which in the case of Siemens fuses is extremely high. For example, an LV HRC fuse link, size 2 (224 A) limits a short-circuit current with a possible rms value of approximately 50 kA to a let-through current with a peak value of approx. 18 kA. This strong current limitation provides constant protection for the system against excessive loads.

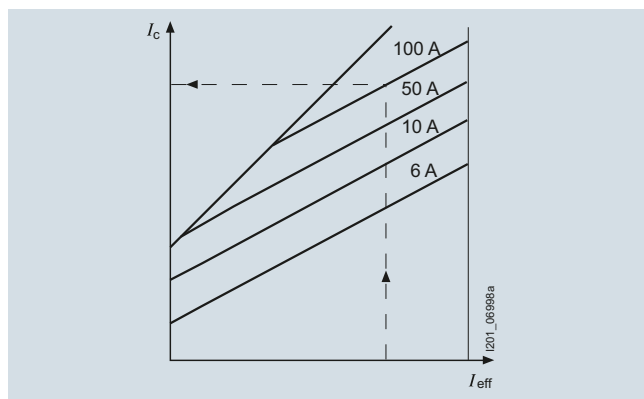

Current limiting diagram  
Let-through current diagram of LV HRC fuse links, size 00  
Operational class gL/gG  
Rated currents 6 A, 10 A, 50 A, 100 A

### Legend

- $t_{VS}$  = Virtual melting time
- $I_C$  = Max. let-through current
- $I_{rms}$  = rms value of the prospective short-circuit current
- $I^2t_s$  = Melting  $I^2t$  value
- $I^2t_a$  = Breaking  $I^2t$  value
- $I_n$  = Rated current
- $P_v$  = Rated power dissipation
- $\Delta\theta$  = Temperature rise
- $k_A$  = Correction factor for  $I^2t$  value
- $U_w$  = Recovery voltage
- $\hat{U}_s$  = Peak arc voltage
- $I_p$  = Peak short-circuit current
- ① = Peak short-circuit current with largest DC component
- ② = Peak short-circuit current without DC component
- $U$  = Voltage
- $i$  = Current
- $t_s$  = Melting time
- $t_L$  = Arc quenching time

### Rated power dissipation

Rated power dissipation is the power loss during the load of a fuse link with its rated current under prescribed conditions.

The cost effectiveness of a fuse depends largely on the rated power dissipation (power loss). This should be as low as possible and have low self-heating. However, when assessing the power loss of a fuse, it must also be taken into account that there is a physical dependence between the rated breaking capacity and the rated power dissipation. On the one hand, fuse elements need to be very thick in order to achieve the lowest possible resistance value, on the other, a high rated breaking capacity requires the thinnest possible fuse elements in order to achieve reliable arc quenching.

Siemens fuses have the lowest possible rated power dissipation while also providing the highest possible load breaking reliability.

These values lie far below the limit values specified in the regulations. This means a low temperature rise, reliable breaking capacity and high cost effectiveness.

### $I^2t$ value

The  $I^2t$  value (joule integral) is the integral of the current squared over a specific time interval:

$$I^2t = \int_{t_0}^{t_1} i^2 dt$$

Specifies the  $I^2t$  values for the melting process ( $I^2t_s$ ) and for the breaking cycle ( $I^2t_a$ , – sum of melting and quenching  $I^2t$  value). The melting  $I^2t$  value, also known as the total  $I^2t$  value or breaking  $I^2t$  value, is particularly important when dimensioning SITOR semiconductor fuses. This value depends on the voltage and is specified with the rated voltage.

### Peak arc voltage $\hat{U}_s$

The peak arc voltage is the maximum value of the voltage that occurs at the connections of the fuse link during the arc quenching time.

### Residual value factor RV

The residual value factor is a reduction factor for determining the permissible load period of the fuse link with currents that exceed the permissible load current  $I_n'$  (see rated current  $I_n$ ). This factor is applied when dimensioning SITOR semiconductor fuses.

### Varying load factor VL

The varying load factor is a reduction factor for the rated current with varying load states. This factor is applied when dimensioning SITOR semiconductor fuses.


### Recovery voltage $U_w$

The recovery voltage (rms value) is the voltage that occurs at the connections of a fuse link after the power is cut off.

## More information

### Load capability with increased ambient temperature

The time/current characteristic curve of the NEOZED/DIAZED and LV HRC fuse links is based on an ambient temperature of  $20\text{ °C} \pm 5\text{ °C}$  in accordance with DIN VDE 0636. When used in higher ambient temperatures (see diagram) a reduced load-carrying capacity must be planned for. At an ambient temperature of  $50\text{ °C}$ , for example, an LV HRC fuse link should be dimensioned for only 90 % of the rated current. While the short-circuit behavior is not influenced by an increased ambient temperature, it is influenced by overload and operation at rated value.

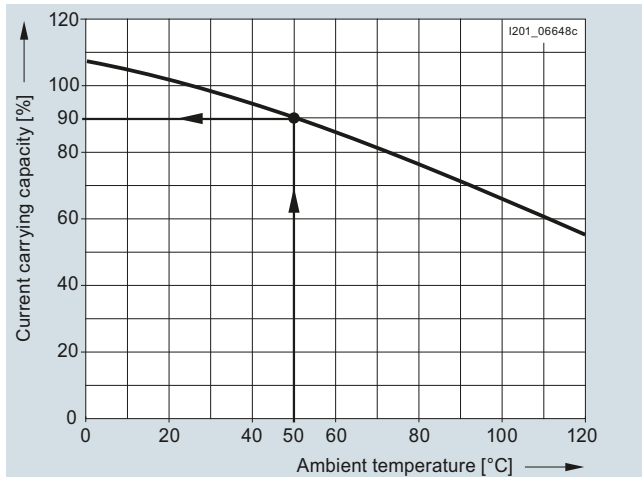

Influence of the ambient temperature on the load capability of NEOZED/DIAZED and LV HRC fuses of operational class gG with natural convection in the distribution board.

### Assignment of cable and line protection

When gG fuses are assigned for cable and line protection against overloading, the following conditions must be met in order to comply with DIN VDE 0100 Part 430:

- (1)  $I_B = I_n = I_z$  (rated current rule)
- (2)  $I_2 = 1.45 \times I_z$  (tripping rule)

$I_B$ : Operational current of electrical circuit

$I_n$ : Rated current of selected protective device

$I_z$ : Permissible current carrying capacity of the cable or line under specified operating conditions

$I_2$ : Tripping current of the protective device under specified operating conditions ("high test current").

These days, the factor 1.45 has become an internationally accepted compromise of the protection and utilization ratio of a line, taking into account the breaking response of the protective device (e.g. fuse).

In compliance with the supplementary requirements for DIN VDE 0636, Siemens fuse links of operational class gG comply with the following condition:

"Load breaking switching with  $I_2 = 1.45 \times I_n$  during conventional test duration under special test conditions in accordance with the aforementioned supplementary requirements of DIN VDE 0636".

This therefore permits direct assignment.

## Fuse Systems

### NEOZED Fuse Systems

#### NEOZED fuse links

##### Overview

The NEOZED fuse system is primarily used in distribution technology and industrial switchgear assemblies. The system is easy to use and is also approved for domestic installation.

The MINIZED switch disconnectors are primarily used in switchgear assemblies and control engineering. They are approved for switching loads as well as for safe switching in the event of short circuits. The MINIZED D02 is also suitable for use upstream of the meter in household applications in compliance with the recommendations of VDEW according to TAB 2007.

Due to its compact design, the MINIZED D01 fuse switch disconnector is primarily used in control engineering.

The NEOZED fuse bases are the most cost-effective solution for using NEOZED fuses. All NEOZED bases must be fed from the bottom to ensure that the threaded ring is insulated during removal of the fuse link. The terminals of the NEOZED bases are available in different versions and designs to support the various installation methods.



Fuse bases D01 with terminal version BB

- Incoming feeders, clamp-type terminal B
- Outgoing feeders, clamp-type terminal B



Fuse bases D02, with terminal version KS

- Incoming feeders, screw head contact K
- Outgoing feeders, saddle terminal S



Fuse bases D02, with terminal version SS

- Incoming feeders, saddle terminal S
- Outgoing feeders, saddle terminal S

**Technical specifications**

|                                                                                                                                       |                 | NEOZED fuse links<br>5SE2                                       |                                                           |                                                                                          |            |           |                                                  |                                             |   |
|---------------------------------------------------------------------------------------------------------------------------------------|-----------------|-----------------------------------------------------------------|-----------------------------------------------------------|------------------------------------------------------------------------------------------|------------|-----------|--------------------------------------------------|---------------------------------------------|---|
| Standards                                                                                                                             |                 | IEC 60269-3; DIN VDE 0636-3                                     |                                                           |                                                                                          |            |           |                                                  |                                             |   |
| Operational class                                                                                                                     |                 | gG                                                              |                                                           |                                                                                          |            |           |                                                  |                                             |   |
| Rated voltage $U_n$                                                                                                                   | V AC            | 400                                                             |                                                           |                                                                                          |            |           |                                                  |                                             |   |
|                                                                                                                                       | V DC            | 250                                                             |                                                           |                                                                                          |            |           |                                                  |                                             |   |
| Rated current $I_n$                                                                                                                   | A               | 2 ... 100                                                       |                                                           |                                                                                          |            |           |                                                  |                                             |   |
| Rated breaking capacity                                                                                                               | kA AC           | 50                                                              |                                                           |                                                                                          |            |           |                                                  |                                             |   |
|                                                                                                                                       | kA DC           | 8                                                               |                                                           |                                                                                          |            |           |                                                  |                                             |   |
| Non-interchangeability                                                                                                                |                 | Using adapter sleeves                                           |                                                           |                                                                                          |            |           |                                                  |                                             |   |
| Resistance to climate                                                                                                                 |                 | °C<br>Up to 45 at 95 % rel. humidity                            |                                                           |                                                                                          |            |           |                                                  |                                             |   |
| Ambient temperature                                                                                                                   |                 | °C<br>-5 to +40, humidity 90 % at 20                            |                                                           |                                                                                          |            |           |                                                  |                                             |   |
|                                                                                                                                       |                 | MINIZED<br>switch dis-<br>connectors<br>D02<br>5SG71            | MINIZED fuse<br>switch discon-<br>nectors<br>D01<br>5SG76 | Fuse bases,<br>made of ceramic<br>D01<br>5SG15<br>5SG55D02<br>5SG16<br>5SG56D03<br>5SG18 |            |           | Comfort<br>bases<br>D01/02<br>5SG1.01<br>5SG5.01 | Fuse bases<br>5SG1.30<br>5SG1.31<br>5SG5.30 |   |
| Standards                                                                                                                             |                 | DIN VDE 0638;<br>EN 60947-3<br>(VDE 0660-107)<br>IEC/EN 60947-3 |                                                           | IEC 60269-3; DIN VDE 0636-3                                                              |            |           |                                                  |                                             |   |
| Main switch characteristic,<br>EN 60204-1                                                                                             |                 | Yes                                                             | --                                                        | --                                                                                       |            |           |                                                  |                                             |   |
| Insulation characteristic<br>EN 60664-1                                                                                               |                 | Yes                                                             | --                                                        | --                                                                                       |            |           |                                                  |                                             |   |
| Rated voltage $U_n$<br>• 1P<br>• 2P in series                                                                                         | V AC            | 230/400, 240/415                                                |                                                           | 400                                                                                      |            |           |                                                  |                                             |   |
|                                                                                                                                       | V DC            | 65                                                              | 48                                                        | 250                                                                                      |            |           |                                                  |                                             |   |
|                                                                                                                                       | V DC            | 130                                                             | 110                                                       | 250                                                                                      |            |           |                                                  |                                             |   |
| Rated current $I_n$                                                                                                                   | A               | 63                                                              | 16                                                        | 16                                                                                       | 63         | 100       | 16/63                                            | 16/63                                       |   |
| Rated insulation voltage                                                                                                              | V AC            | 500                                                             | 400                                                       | --                                                                                       |            |           |                                                  |                                             |   |
| Rated impulse withstand voltage                                                                                                       | KV AC           | 6                                                               | 2.5                                                       | --                                                                                       |            |           |                                                  |                                             |   |
| Overvoltage category                                                                                                                  |                 | IV                                                              | IV                                                        | --                                                                                       |            |           |                                                  |                                             |   |
| Utilization category acc. to VDE 0638<br>• AC-22                                                                                      |                 | A                                                               | 63                                                        | 16                                                                                       | --         |           |                                                  |                                             |   |
| Utilization category acc. to EN 60947-3                                                                                               |                 |                                                                 |                                                           |                                                                                          |            |           |                                                  |                                             |   |
| • AC-22 A<br>• AC-22 B<br>• AC-23 B<br>• DC-22 B                                                                                      | A               | --                                                              | 16                                                        | --                                                                                       |            |           |                                                  |                                             |   |
|                                                                                                                                       | A               | 63                                                              | --                                                        | --                                                                                       |            |           |                                                  |                                             |   |
|                                                                                                                                       | A               | 35                                                              | --                                                        | --                                                                                       |            |           |                                                  |                                             |   |
|                                                                                                                                       | A               | 63                                                              | --                                                        | --                                                                                       |            |           |                                                  |                                             |   |
| Sealable<br>When switched on                                                                                                          |                 | Yes                                                             |                                                           | Yes, with sealable screw caps                                                            |            |           |                                                  |                                             |   |
| Mounting position                                                                                                                     |                 | Any, preferably vertical                                        |                                                           |                                                                                          |            |           |                                                  |                                             |   |
| Reduction factor of $I_n$ with 18 pole<br>• Side-by-side mounting<br>• On top of one another, with vertical standard<br>mounting rail |                 | 0.9<br>0.87                                                     | --<br>--                                                  |                                                                                          |            |           |                                                  |                                             |   |
| Degree of protection acc. to IEC 60529                                                                                                |                 | IP20, with connected conductors <sup>1)</sup>                   |                                                           |                                                                                          |            |           |                                                  |                                             |   |
| Terminals<br>With touch protection acc. to BGV A3                                                                                     |                 | Yes                                                             |                                                           | No                                                                                       |            |           | Yes                                              |                                             |   |
| Ambient temperature                                                                                                                   |                 | °C<br>-5 to +40, humidity 90 % at 20                            |                                                           |                                                                                          |            |           |                                                  |                                             |   |
| Terminal versions                                                                                                                     |                 | --                                                              | --                                                        | B                                                                                        | K, S       | K/S       | --                                               | --                                          |   |
| Conductor cross-sections                                                                                                              |                 |                                                                 |                                                           |                                                                                          |            |           |                                                  |                                             |   |
| • Solid and stranded<br>• Flexible, with end sleeve<br>• Finely stranded, with end sleeve                                             | mm <sup>2</sup> | 1.5 ... 35                                                      | 1.5 ... 16                                                | 1.5 ... 4                                                                                | 1.5 ... 25 | 10 ... 50 | 0.75 ... 35                                      | 1.5 ... 35                                  |   |
|                                                                                                                                       | mm <sup>2</sup> | 1.5 ... 35                                                      | 1.5                                                       | 1.5                                                                                      | 1.5        | 10        | --                                               | --                                          |   |
|                                                                                                                                       | mm <sup>2</sup> | --                                                              | --                                                        | 0.75 ... 25                                                                              | --         | --        | --                                               | --                                          |   |
| Tightening torque                                                                                                                     |                 | Nm                                                              | 2.5 ... 3                                                 | 2.5                                                                                      | 1.2        | 2         | 3.5/2.5                                          | 3.5                                         | 3 |

<sup>1)</sup> Degree of protection IP20 is tested according to regulations using a straight test finger (from the front), with the device mounted and equipped with a cover, housing or some other enclosure.


## Fuse Systems

### NEOZED Fuse Systems


#### NEOZED fuse links

#### Dimensional drawings


##### 5SG71.3 MINIZED D02 switch disconnectors, with draw-out technology

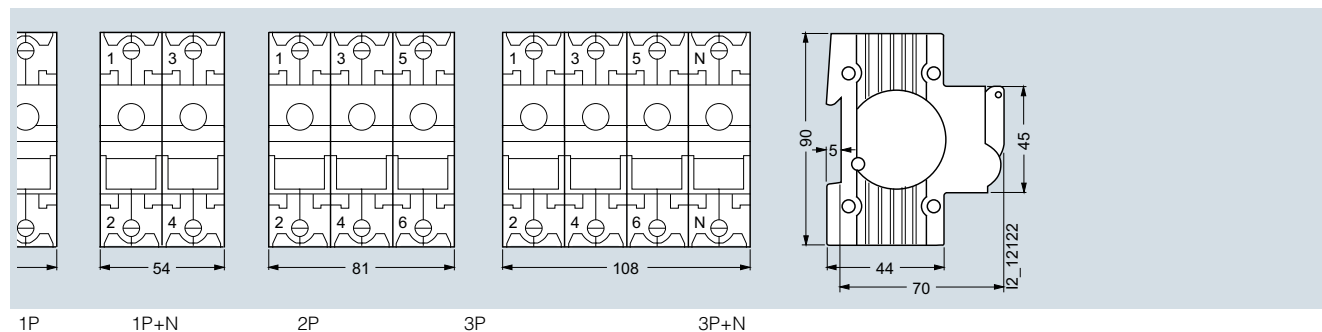

##### Locking cap for MINIZED D02 switch disconnectors

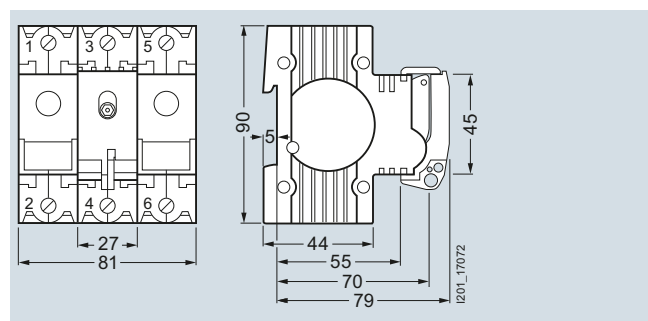


##### 5SG76 MINIZED D01 fuse switch disconnectors, with draw-out technology

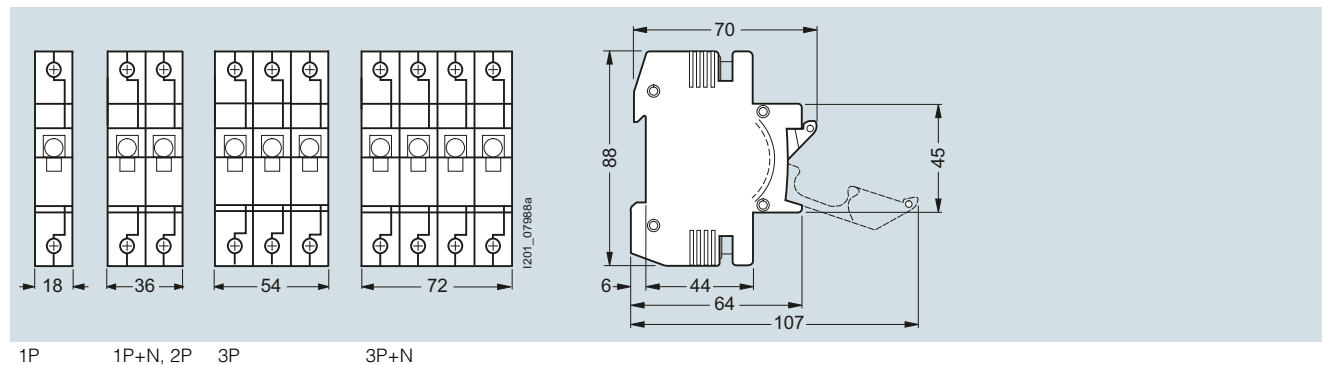


##### Fuse bases with touch protection BGV A3 (VBG4), molded plastic

Sizes D01/D02, with combined terminal, can be busbar mounted

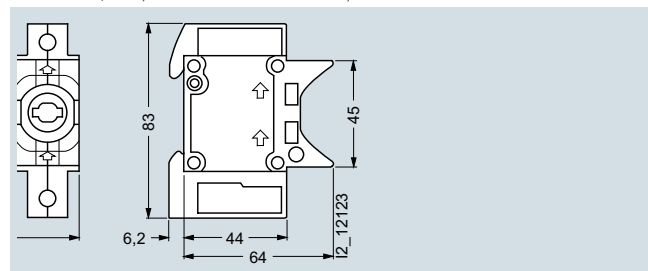

5SG1301, 5SG1701  
5SG5301, 5SG5701


With cover

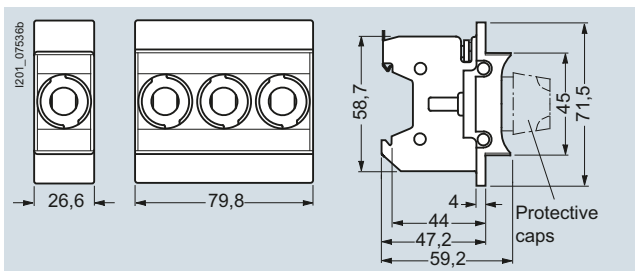

5SG1330, 5SG1331, 5SG1730, 5SG1731  
5SG5330, 5SG5730

### NEOZED fuse bases made of ceramic

Sizes D01/D02/D03

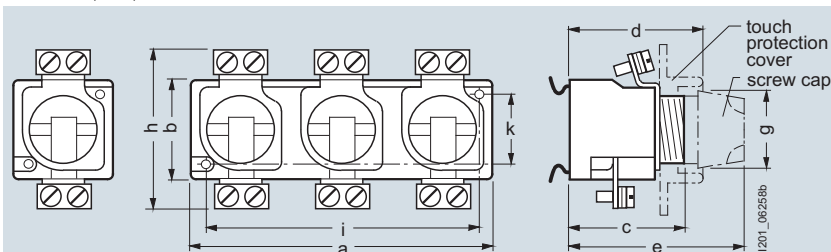

5SG15

5SG55

| Type                   | Version | Size | Connection type | Dimensions |    |    |      |    |                            |    |    |    |
|------------------------|---------|------|-----------------|------------|----|----|------|----|----------------------------|----|----|----|
|                        |         |      |                 | a          | b  | c  | d    | e  | g<br>Not sealed/<br>sealed | h  | i  | k  |
| Snap-on with cover     |         |      |                 |            |    |    |      |    |                            |    |    |    |
| 5SG1553                | 1-pole  | D01  | BB              | 26.8       | 36 | 40 | 56   | 70 | 23/26.5                    | 54 | -- | -- |
| 5SG1653                |         | D02  | SS              | 26.8       | 36 | 41 | 56   | 70 | 23/26.5                    | 59 | -- | -- |
| 5SG1693                |         | D02  | KS              | 26.8       | 36 | 41 | 56   | 70 | 23/26.5                    | 60 | -- | -- |
| 5SG5553                | 3-pole  | D01  | BB              | 80.8       | 36 | 40 | 56   | 70 | 23/26.5                    | 54 | -- | -- |
| 5SG5653                |         | D02  | SS              | 80.8       | 36 | 41 | 56   | 70 | 23/26.5                    | 59 | -- | -- |
| 5SG5693                |         | D02  | KS              | 80.8       | 36 | 41 | 56   | 70 | 23/26.5                    | 60 | -- | -- |
| Snap-on without cover  |         |      |                 |            |    |    |      |    |                            |    |    |    |
| 5SG1595                | 1-pole  | D01  | BB              | 26.8       | 36 | 40 | 56   | 70 | 23/26.5                    | 54 | -- | -- |
| 5SG1655                |         | D02  | SS              | 26.8       | 36 | 41 | 56   | 70 | 23/26.5                    | 59 | -- | -- |
| 5SG1695                |         | D02  | KS              | 26.8       | 36 | 41 | 56   | 70 | 23/26.5                    | 60 | -- | -- |
| 5SG1812                | 3-pole  | D03  | KS              | 44.9       | 50 | 44 | 54.5 | 76 | 44                         | 86 | -- | -- |
| 5SG5555                |         | D01  | BB              | 80.8       | 36 | 40 | 56   | 70 | 23/26.5                    | 54 | -- | -- |
| 5SG5655                |         | D02  | SS              | 80.8       | 36 | 41 | 56   | 70 | 23/26.5                    | 59 | -- | -- |
| 5SG5695                |         | D02  | KS              | 80.8       | 36 | 41 | 56   | 70 | 23/26.5                    | 60 | -- | -- |
| Screw-on without cover |         |      |                 |            |    |    |      |    |                            |    |    |    |
| 5SG1590                | 1-pole  | D01  | BB              | 26.8       | 36 | 40 | 56   | 70 | 23/26.5                    | 54 | 20 | 22 |
| 5SG1650                |         | D02  | SS              | 26.8       | 36 | 41 | 56   | 70 | 23/26.5                    | 59 | 20 | 22 |
| 5SG1810                |         | D03  | KS              | 44.9       | 50 | 46 | 54.5 | 76 | 44                         | 86 | 32 | 32 |
| 5SG5550                | 3-pole  | D01  | BB              | 80.8       | 36 | 40 | 56   | 70 | 23/26.5                    | 54 | 74 | 22 |
| 5SG5650                |         | D02  | SS              | 80.8       | 36 | 41 | 56   | 70 | 23/26.5                    | 59 | 74 | 22 |
| 5SG5690                |         | D02  | KS              | 80.8       | 36 | 41 | 56   | 70 | 23/26.5                    | 60 | 74 | 22 |

#### Legend


Connection type:

K = Screw head contact  
B = Clamp-type terminal  
S = Saddle terminal

BB = Clamp-type terminal at incoming feeder  
Clamp-type terminal at outgoing feeder  
SS = Saddle terminal at incoming feeder  
Saddle terminal at outgoing feeder  
KS = Screw head contact at incoming feeder  
Saddle terminal at outgoing feeder


### NEOZED covers made of molded plastic

NEOZED covers for NEOZED fuse bases, made of molded plastic

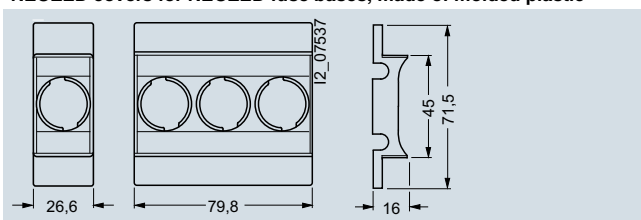


5SH5244 (A1) 5SH5245 (A2)


### NEOZED covers for NEOZED fuse bases, made of ceramic

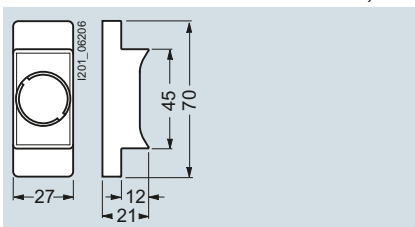

5SH5251 (A4) and 5SH5253 (A10)

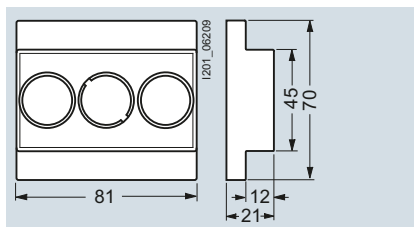

5SH5252 (A5) and 5SH5254 (A11)

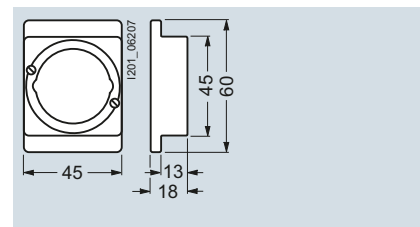


5SH5233 (A6)

## Fuse Systems

### NEOZED Fuse Systems

#### NEOZED fuse links

##### NEOZED screw caps

| 5SH4                                                                              | Type    | Size | Sealable | For mounting depth | Dimensions |      |
|-----------------------------------------------------------------------------------|---------|------|----------|--------------------|------------|------|
|                                                                                   |         |      |          |                    | a          | b    |
|  | 5SH4116 | D01  | --       | 70                 | 27.5       | 24   |
|                                                                                   | 5SH4163 | D02  | --       | 70                 | 27.5       | 24   |
|                                                                                   | 5SH4316 | D01  | ✓        | 70                 | 33         | 26.5 |
|                                                                                   | 5SH4363 | D02  | ✓        | 76                 | 33         | 26.5 |
|                                                                                   | 5SH4100 | D03  | --       | 70                 | 37         | 44   |
|                                                                                   | 5SH4317 | D01  | --       | 70                 | 29.5       | 25   |
|                                                                                   | 5SH4362 | D02  | --       | 70                 | 30.5       | 25   |




##### NEOZED fuse links

| Size    | $I_n$<br>A | Size/thread | Rated current in A | Dimension<br>$d_{2 \text{ min}}$ | Dimension<br>$d_3$ | Dimension<br>$d_{4 \text{ max}}$ | Dimension<br>h |
|---------|------------|-------------|--------------------|----------------------------------|--------------------|----------------------------------|----------------|
|         |            |             |                    |                                  |                    |                                  |                |
| D01/E14 | 2 ... 16   | D01/E14     | 2 ... 16           | 9.8                              | 11                 | 6                                | 36             |
| D02/E18 | 20 ... 63  | D02/E18     | 20 ... 63          | 13.8                             | 15.3               | 10                               | 36             |
| D03/M30 | 80 ... 100 | D03/M30     | 80 ... 100         | 20.8                             | 22.5               | 36                               | 43             |



## Circuit diagrams

### Graphical symbols

#### 5SG71.3 MINIZED D02 switch disconnectors, with draw-out technology

|                                                                                     |                                                                                     |                                                                                     |                                                                                      |                                                                                       |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |  |
| 5SG7113                                                                             | 5SG7153                                                                             | 5SG7123                                                                             | 5SG7133<br>5SG7133-8BA25<br>5SG7133-8BA35<br>5SG7133-8BA50                           | 5SG7163                                                                               |
| 1P                                                                                  | 1P+N                                                                                | 2P                                                                                  | 3P                                                                                   | 3P+N                                                                                  |

#### 5SG76 MINIZED D01 fuse switch disconnectors, with draw-out technology

|                                                                                     |                                                                                     |                                                                                     |                                                                                      |                                                                                       |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |  |
| 5SG7610                                                                             | 5SG7650                                                                             | 5SG7620                                                                             | 5SG7630                                                                              | 5SG7660                                                                               |
| 1P                                                                                  | 1P+N                                                                                | 2P                                                                                  | 3P                                                                                   | 3P+N                                                                                  |

#### NEOZED fuse bases/fuses in general


|                                                                                     |                                                                                     |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |
| 5SG1                                                                                | 5SG5                                                                                |
| 1P                                                                                  | 3P                                                                                  |

### Characteristic curves

#### Series 5SE2

Sizes: D01, D02, D03  
 Operational class: gG  
 Rated voltage: 400 V AC/250 V DC  
 Rated current: 2 ... 100 A

#### Time/current characteristics diagram

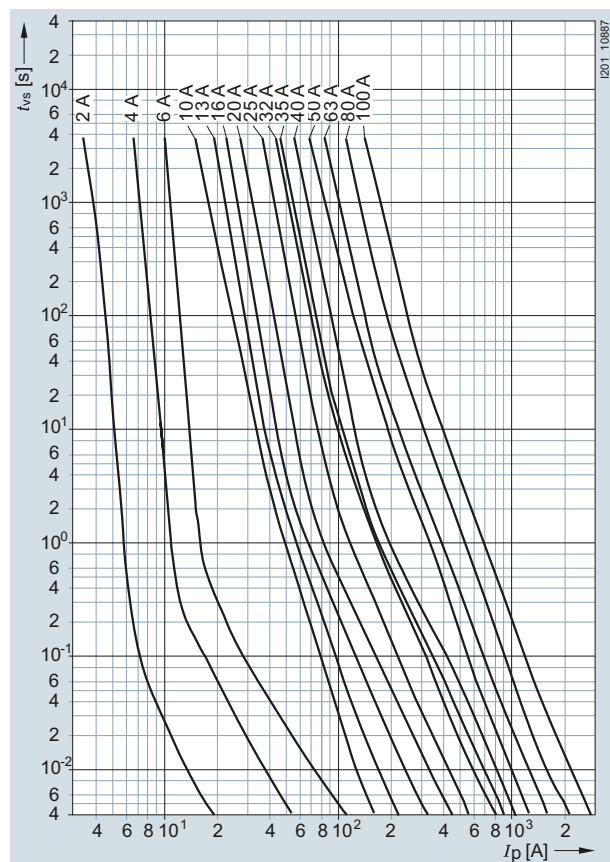

#### Melting $I^2t$ values diagram


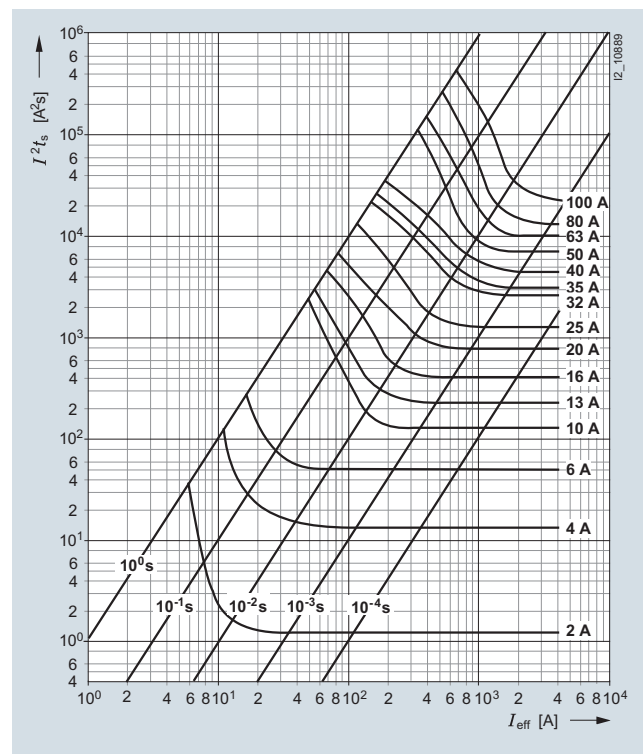


Table see page 14.

#### Current limiting diagram

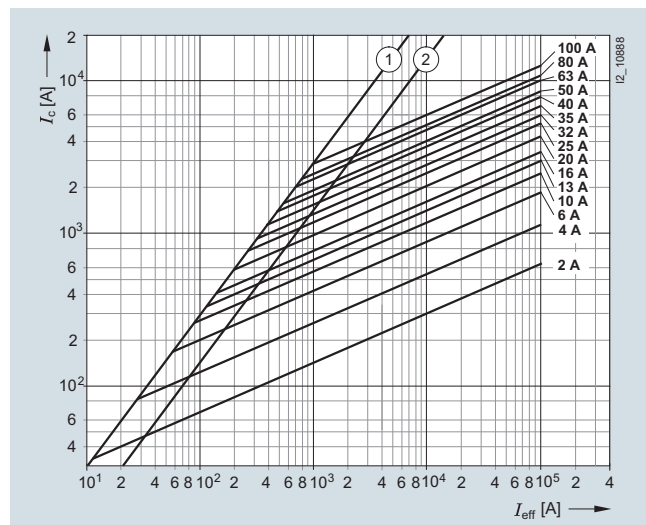

- ① Peak short-circuit current with largest DC component
- ② Peak short-circuit current without DC component

## Fuse Systems

### NEOZED Fuse Systems

#### NEOZED fuse links

##### Series 5SE2

Sizes: D01, D02, D03  
 Operational class: gG  
 Rated voltage: 400 V AC/250 V DC  
 Rated current: 2 ... 100 A

| Type       | $I_n$ | $P_v$ | $\Delta\theta$ | $I^2t_s$<br>1 ms | 4 ms             | $I^2t_a$<br>230 V AC<br>( $t \leq 4$ ms) | 400 V AC         |
|------------|-------|-------|----------------|------------------|------------------|------------------------------------------|------------------|
|            | A     | W     | K              | A <sup>2</sup> s | A <sup>2</sup> s | A <sup>2</sup> s                         | A <sup>2</sup> s |
| 5SE2302    | 2     | 1.6   | 19             | 1.2              | 1.4              | 2.9                                      | 3.9              |
| 5SE2304    | 4     | 1.3   | 14             | 12.5             | 13.6             | 22                                       | 30               |
| 5SE2306    | 6     | 1.7   | 19             | 46.7             | 48               | 58                                       | 75               |
| 5SE2310    | 10    | 1.3   | 16             | 120              | 136              | 220                                      | 280              |
| 5SE2013-2A | 13    | 2.0   | 23             | 220              | 244              | 290                                      | 370              |
| 5SE2316    | 16    | 2.1   | 24             | 375              | 410              | 675                                      | 890              |
| 5SE2320    | 20    | 2.4   | 26             | 740              | 810              | 1250                                     | 1650             |
| 5SE2325    | 25    | 3.2   | 33             | 1210             | 1300             | 1900                                     | 2600             |
| 5SE2332    | 32    | 3.6   | 34             | 2560             | 2800             | 4300                                     | 5500             |
| 5SE2335    | 35    | 3.8   | 36             | 3060             | 3500             | 5100                                     | 6500             |
| 5SE2340    | 40    | 4.0   | 37             | 4320             | 4800             | 7900                                     | 9500             |
| 5SE2350    | 50    | 4.2   | 38             | 6750             | 7400             | 10500                                    | 13000            |
| 5SE2363    | 63    | 5.3   | 45             | 10000            | 10900            | 16000                                    | 20500            |
| 5SE2280    | 80    | 5.3   | 43             | 13000            | 15400            | 25000                                    | 34500            |
| 5SE2300    | 100   | 6.4   | 47             | 22100            | 30000            | 46000                                    | 60000            |

## Overview

The DIAZED fuse system is one of the oldest fuse systems in the world. It was developed by Siemens as far back as 1906. It is still the standard fuse system in many countries to this day. It is particularly widely used in the harsh environments of industrial applications.

The series is available with rated voltages from 500 V to 750 V.


All DIAZED bases must be fed from the bottom to ensure an insulated threaded ring when the fuse link is being removed. Reliable contact of the fuse links is only ensured when used together with DIAZED screw adapters.

The terminals of the DIAZED bases are available in different versions and designs to support the various installation methods.

The high-performing EZR bus-mounting system for screw fixing is an outstanding feature. The busbars, which are particularly suited for bus-mounting bases, have a load capacity of up to 150 A with lateral infeed.

DIAZED stands for **D**iametral gestuftes **z**weiteiliges Sicherungs-**e**system mit **E**disongewinde (diametral two-step fuse system with Edison screw).

## Benefits

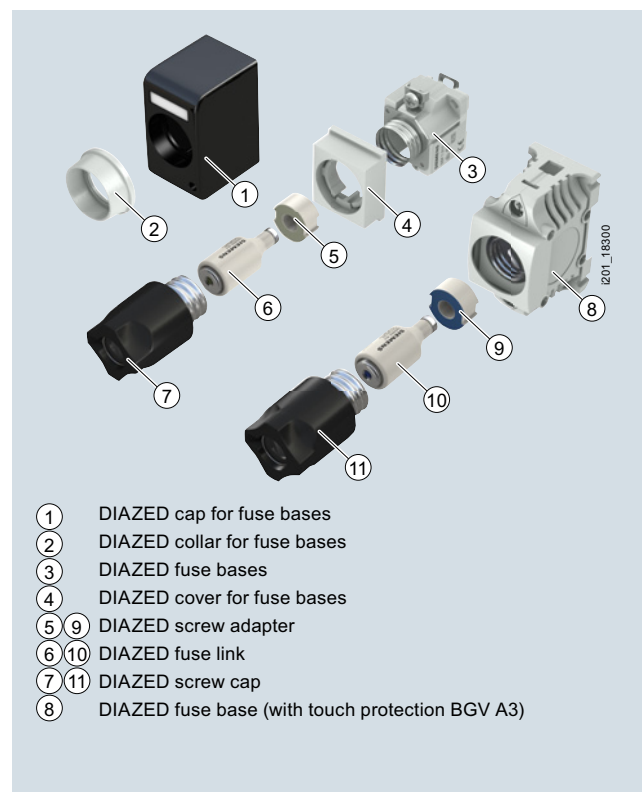

DIII fuse bases with terminal version BS

- Outgoing feeders (top), saddle terminal S
- Incoming feeders (bottom), clamp-type terminal B



NDZ fuse bases with terminal version KK

- Outgoing feeders (top), screw head contact K
- Incoming feeders (bottom), screw head contact K



DIII fuse bases with terminal version BB

- Outgoing feeders (top), clamp-type terminal B
- Incoming feeders (bottom), clamp-type terminal B



DIII fuse bases with terminal version SS

- Outgoing feeders (top), saddle terminal S
- Incoming feeders (bottom), saddle terminal S

# Fuse Systems

## DIAZED fuse systems

### Technical specifications

| 5SA, 5SB, 5SC, 5SD                    |                                    |                                                                                     |
|---------------------------------------|------------------------------------|-------------------------------------------------------------------------------------|
| <b>Standards</b>                      |                                    | IEC 60269-3; DIN VDE 0635; DIN VDE 0636-3; CEE 16                                   |
| <b>Operational class</b>              | Acc. to IEC 60269;<br>DIN VDE 0636 | gG                                                                                  |
| <b>Characteristic</b>                 | Acc. to DIN VDE 0635               | Slow and quick                                                                      |
| <b>Rated voltage <math>U_n</math></b> | V AC<br>V DC                       | 500, 690, 750<br>500, 600, 750                                                      |
| <b>Rated current <math>I_n</math></b> | A                                  | 2 ... 100                                                                           |
| <b>Rated breaking capacity</b>        | kA AC<br>kA DC                     | 50, 40 at E16<br>8, 1.6 at E16                                                      |
| <b>Overvoltage category</b>           |                                    | III<br>II (DIAZED fuse bases made of molded plastic for use at 690 V AC / 600 V DC) |
| <b>Mounting position</b>              |                                    | Any, preferably vertical                                                            |
| <b>Non-interchangeability</b>         |                                    | Using screw adapter or adapter sleeves                                              |
| <b>Degree of protection</b>           | Acc. to IEC 60529                  | IP20, with connected conductors <sup>1)</sup>                                       |
| <b>Resistance to climate</b>          | °C                                 | Up to 45, at 95 % rel. humidity                                                     |
| <b>Ambient temperature</b>            | °C                                 | -5 to +40, humidity 90 % at 20                                                      |


<sup>1)</sup> Degree of protection IP20 is tested according to regulations using a straight test finger (from the front), with the device mounted and equipped with a cover, housing or some other enclosure.

|                             |                 | Terminal version |      |     |     |      |      |     |     |      |
|-----------------------------|-----------------|------------------|------|-----|-----|------|------|-----|-----|------|
|                             |                 | B                |      | K   |     | S    |      | R   |     |      |
| Size                        |                 | DII              | DIII | NDz | DII | DIII | DIII | DIV | DII | DIII |
| Conductor cross-sections    |                 |                  |      |     |     |      |      |     |     |      |
| • Rigid, min.               | mm <sup>2</sup> | 1.5              | 2.5  | 1.0 | 1.5 | 2.5  | 2.5  | 10  | 1.5 | 1.5  |
| • Rigid, max.               | mm <sup>2</sup> | 10               | 25   | 6   | 10  | 25   | 25   | 50  | 35  | 35   |
| • Flexible, with end sleeve | mm <sup>2</sup> | 10               | 25   | 6   | 10  | 25   | 25   | 50  | 35  | 35   |
| Tightening torque           |                 |                  |      |     |     |      |      |     |     |      |
| • Screw M4                  | Nm              | 1.2              |      |     |     |      |      |     | --  |      |
| • Screw M5                  | Nm              | 2.0              |      |     |     |      |      |     | --  |      |
| • Screw M6                  | Nm              | 2.5              |      |     |     |      |      |     | 3.0 |      |
| • Screw M8                  | Nm              | 3.5              |      |     |     |      |      |     | --  |      |


## Dimensional drawings

## DIAZED fuse links


5SA1, 5SA2




5SB1, 5SB2




5SB3, 5SB4



5SC1, 5SC2



5SD6, 5SD8



| Size/thread        | TNDz/E16, NDz/E16 |   |   |    |    |    |    |
|--------------------|-------------------|---|---|----|----|----|----|
| Rated current in A | 2                 | 4 | 6 | 10 | 16 | 20 | 25 |
| Dimension d        | 6                 | 6 | 6 | 8  | 10 | 12 | 14 |

| Size/thread        | DII/E27 |   |   |    |    |    |    |
|--------------------|---------|---|---|----|----|----|----|
| Rated current in A | 2       | 4 | 6 | 10 | 16 | 20 | 25 |
| Dimension d        | 6       | 6 | 6 | 8  | 10 | 12 | 14 |

| Size/thread        | DIII/E33 |    |    |    |
|--------------------|----------|----|----|----|
| Rated current in A | 32       | 35 | 50 | 63 |
| Dimension d        | 16       | 16 | 18 | 20 |

| Size/thread        | DIV/R1¼" |     |
|--------------------|----------|-----|
| Rated current in A | 80       | 100 |
| Dimension d        | 5        | 7   |


| Size/thread        | DIII/E33 |   |   |    |    |    |    |    |    |    |
|--------------------|----------|---|---|----|----|----|----|----|----|----|
| Rated current in A | 2        | 4 | 6 | 10 | 16 | 20 | 25 | 35 | 50 | 63 |
| Dimension d        | 6        | 6 | 6 | 8  | 10 | 12 | 14 | 16 | 18 | 20 |

## Fuse Systems

### DIAZED fuse systems


#### DIAZED fuse bases made of ceramic

5SF1

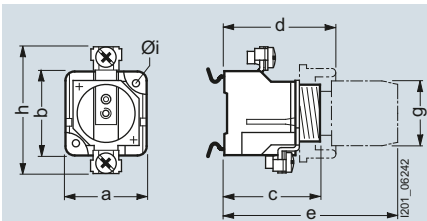


| Version<br>Type                            | Connection<br>type | Dimensions |    |      |    |     |    |     |     |
|--------------------------------------------|--------------------|------------|----|------|----|-----|----|-----|-----|
|                                            |                    | a          | b  | c    | d  | e   | Øg | h   | Øi  |
| NDz/25 A<br>5SF1012                        | KK                 | 29         | 49 | 44.6 | 55 | 75  | 32 | 49  | --  |
| DII/25 A<br>5SF1005<br>5SF1024             | BB                 | 38.4       | 41 | 46.6 | 53 | 83  | 34 | 63  | --  |
|                                            | BB                 | 38.4       | 41 | 46.6 | 53 | 83  | 34 | 63  | 4.3 |
| DIII/63 A<br>5SF1205<br>5SF1215<br>5SF1224 | BS                 | 45.5       | 46 | 47   | 54 | 83  | 43 | 78  | --  |
|                                            | SS                 | 45.5       | 46 | 47   | 54 | 83  | 43 | 78  | --  |
|                                            | BS                 | 45.5       | 46 | 47   | 54 | 83  | 43 | 78  | 4.3 |
| DIV/100 A<br>5SF1401                       | Flat terminal      | 68         | 68 | --   | 79 | 110 | 65 | 116 | 6.5 |

5SF4230

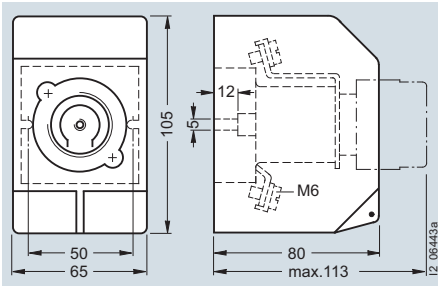

#### DIAZED fuse bases made of molded plastic


5SF1, 5SF5

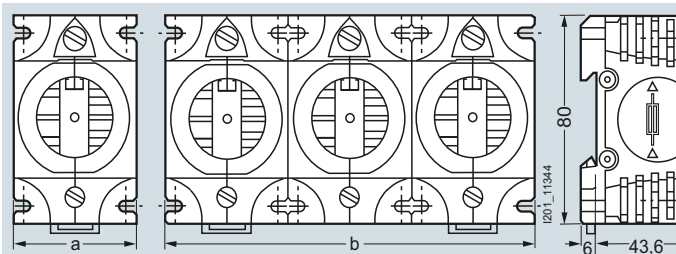


| Type    | Dimensions |     |
|---------|------------|-----|
|         | a          | b   |
| 5SF1060 | 40         | --  |
| 5SF1260 | 50         | --  |
| 5SF5068 | --         | 120 |
| 5SF5268 | --         | 150 |

**DIAZED EZR bus-mounting bases**


5SF6005

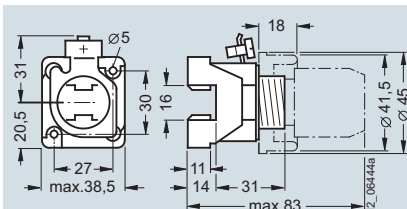


5SF6205

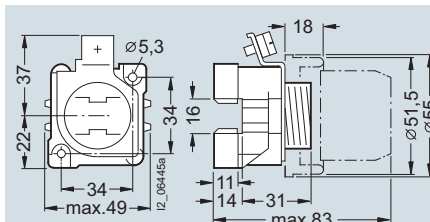**DIAZED screw caps/cover rings made of molded plastic/ceramic****Screw caps**

5SH1

**Cover rings**


5SH3



| Size/thread | Screw caps |                       | Cover rings |                       |
|-------------|------------|-----------------------|-------------|-----------------------|
|             | Type       | Dimensions<br>a    Øb | Type        | Dimensions<br>a    Øb |
| NDz/E16     | 5SH1112    | 36    24              |             |                       |
|             | 5SH1221    | 42    33              | 5SH3401     | 17.5    39.5          |
| DII/E27     | 5SH112     | 45.5    34            | 5SH332      | 17.5    41.5          |
|             | 5SH122     | 43    39              |             |                       |
| DIII/E33    | 5SH1231    | 42    40              | 5SH3411     | 17.5    49.5          |
|             | 5SH113     | 45.5    43            | 5SH334      | 19    51.5            |
|             | 5SH123     | 47    45              |             |                       |
|             | 5SH1161    | 48    48              |             |                       |
|             | 5SH1170    | 68    43              |             |                       |

**DIAZED caps made of molded plastic**

5SH2

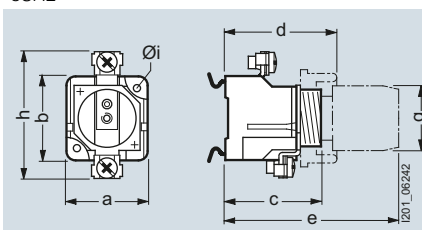

| Size/thread | Type   | Dimensions       |                  |                  |                  |
|-------------|--------|------------------|------------------|------------------|------------------|
|             |        | a <sub>max</sub> | b <sub>max</sub> | c <sub>max</sub> | d <sub>max</sub> |
| NDz/E16     | 5SH201 | 33               | 68               | 51.7             | 75               |
| DII/E27     | 5SH202 | 43               | 74.7             | 53.6             | 83               |
| DIII/E33    | 5SH222 | 51               | 90.5             | 53.6             | 83               |

# Fuse Systems


## DIAZED fuse systems

### Characteristic curves


#### Series 5SA2

Size: E16  
 Characteristics: Slow  
 Rated voltage: 500 V AC/500 V DC  
 Rated current: 2 ... 25 A

#### Time/current characteristics diagram

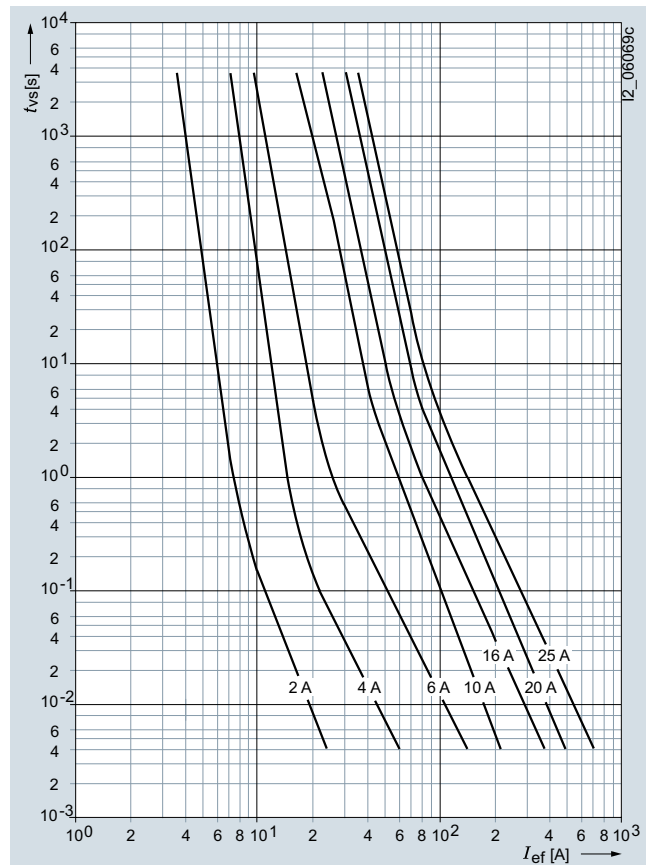


#### Current limiting diagram

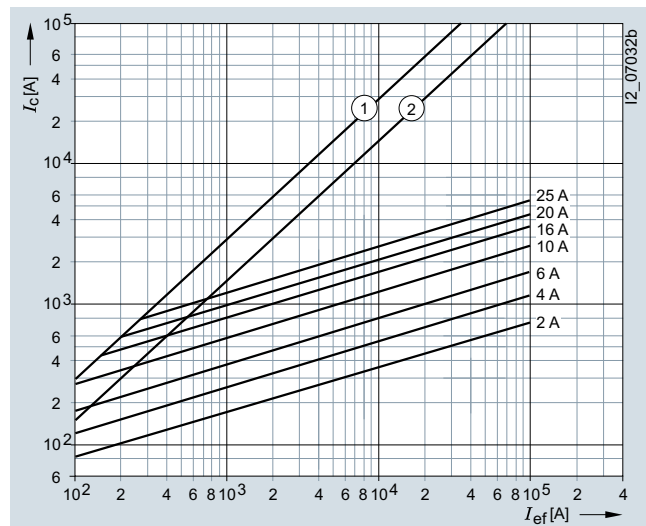

- ① Peak short-circuit current with largest DC component  
 ② Peak short-circuit current without DC component

#### Melting $I^2t$ values diagram


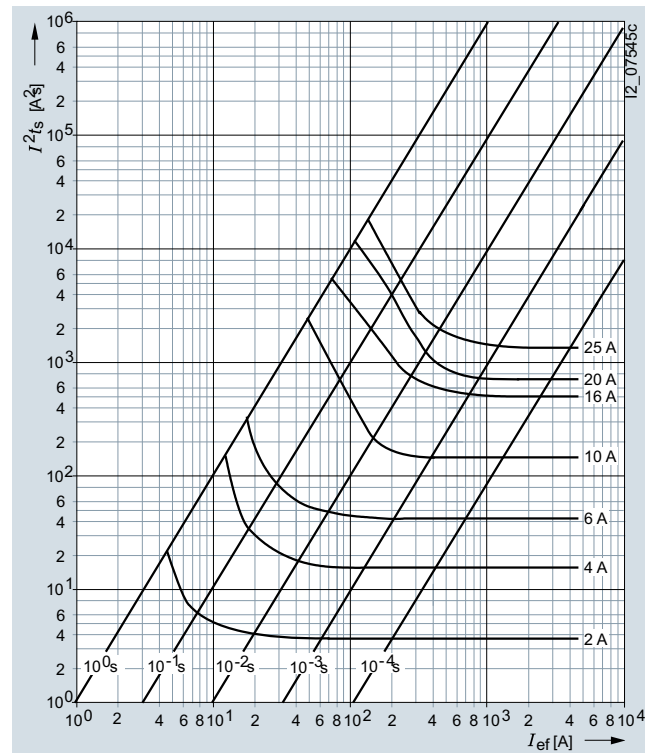


| Type   | $I_n$<br>A | $P_v$<br>W | $\Delta\theta$<br>K | $I^2t_s$<br>1 ms<br>A <sup>2</sup> s | 4 ms<br>A <sup>2</sup> s |
|--------|------------|------------|---------------------|--------------------------------------|--------------------------|
| 5SA211 | 2          | 0.85       | 15                  | 1.2                                  | 2.3                      |
| 5SA221 | 4          | 1.3        | 17                  | 8.5                                  | 13                       |
| 5SA231 | 6          | 1.9        | 14                  | 40                                   | 80                       |
| 5SA251 | 10         | 1.4        | 17                  | 200                                  | 190                      |
| 5SA261 | 16         | 2.4        | 30                  | 290                                  | 550                      |
| 5SA271 | 20         | 2.6        | 36                  | 470                                  | 1990                     |
| 5SA281 | 25         | 3.4        | 34                  | 1000                                 | 2090                     |


| Type   | $I^2t_a$<br>230 V AC<br>A <sup>2</sup> s | 320 V AC<br>A <sup>2</sup> s | 500 V AC<br>A <sup>2</sup> s |
|--------|------------------------------------------|------------------------------|------------------------------|
| 5SA211 | 6.6                                      | 7.8                          | 0.7                          |
| 5SA221 | 22                                       | 26                           | 34                           |
| 5SA231 | 66                                       | 76                           | 100                          |
| 5SA251 | 240                                      | 270                          | 340                          |
| 5SA261 | 890                                      | 950                          | 1090                         |
| 5SA271 | 1200                                     | 1350                         | 1620                         |
| 5SA281 | 2400                                     | 2600                         | 3450                         |

**Series 5SB2, 5SB4, 5SC2**

Size: DII, DIII, DIV  
 Operational class: gG  
 Rated voltage: 500 V AC/500 V DC  
 Rated current: 2 ... 100 A

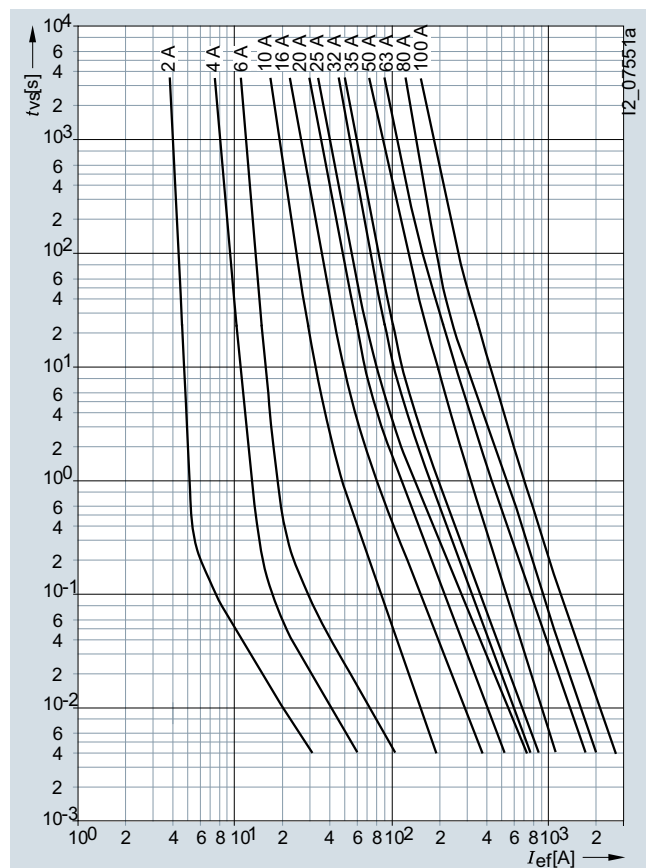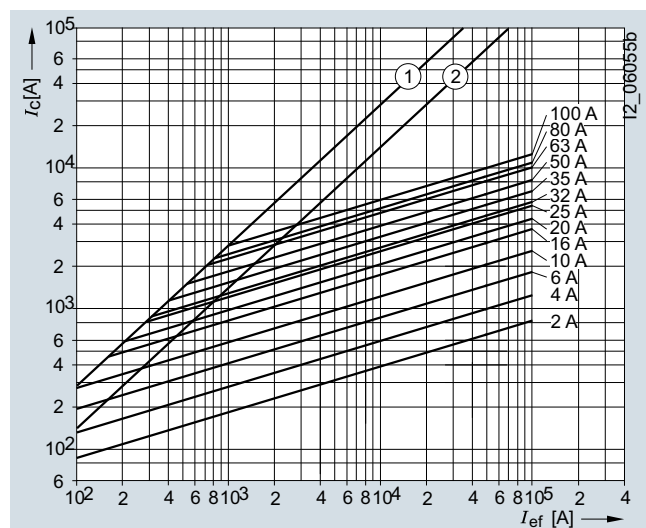**Time/current characteristics diagram****Current limiting diagram**

- ① Peak short-circuit current with largest DC component  
 ② Peak short-circuit current without DC component

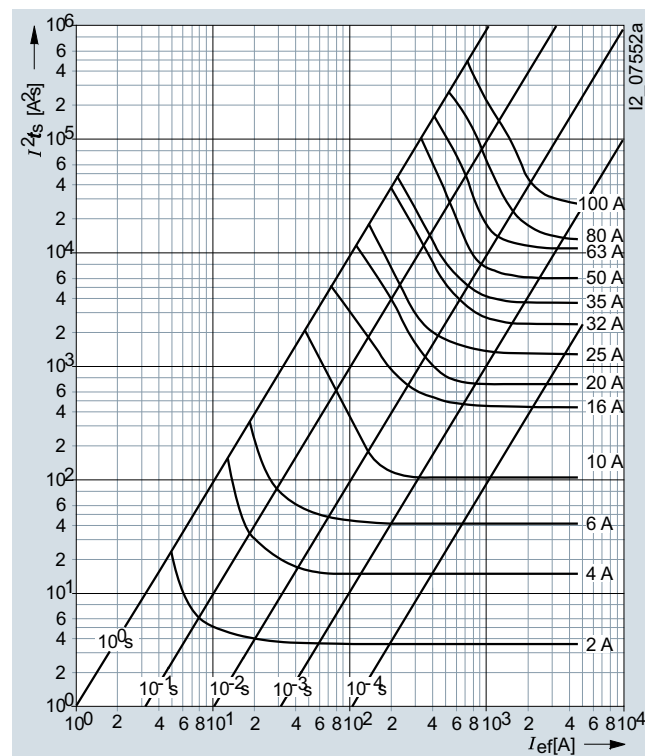**Melting  $I^2t$  values diagram**

| Type    | $I_n$<br>A | $P_V$<br>W | $\Delta\theta$<br>K | $I^2t_s$<br>1 ms<br>A <sup>2</sup> s | $I^2t_s$<br>4 ms<br>A <sup>2</sup> s |
|---------|------------|------------|---------------------|--------------------------------------|--------------------------------------|
| 5SB211  | 2          | 2.6        | 15                  | 3.7                                  | 3.9                                  |
| 5SB221  | 4          | 2.0        | 13                  | 15                                   | 16                                   |
| 5SB231  | 6          | 2.2        | 14                  | 42                                   | 45                                   |
| 5SB251  | 10         | 1.6        | 20                  | 120                                  | 140                                  |
| 5SB261  | 16         | 2.4        | 23                  | 500                                  | 580                                  |
| 5SB271  | 20         | 2.6        | 26                  | 750                                  | 1100                                 |
| 5SB281  | 25         | 3.4        | 38                  | 1600                                 | 2000                                 |
| 5SB4010 | 32         | 3.6        | 23                  | 2300                                 | 2500                                 |
| 5SB411  | 35         | 3.7        | 25                  | 3450                                 | 3000                                 |
| 5SB421  | 50         | 5.7        | 41                  | 6500                                 | 5200                                 |
| 5SB431  | 63         | 6.9        | 48                  | 11000                                | 12000                                |
| 5SC211  | 80         | 7.5        | 33                  | 14600                                | 16400                                |
| 5SC221  | 100        | 8.8        | 46                  | 28600                                | 30000                                |

| Type    | $I^2t_a$<br>230 V AC<br>A <sup>2</sup> s | $I^2t_a$<br>320 V AC<br>A <sup>2</sup> s | $I^2t_a$<br>500 V AC<br>A <sup>2</sup> s |
|---------|------------------------------------------|------------------------------------------|------------------------------------------|
| 5SB211  | 6.6                                      | 8.8                                      | 10.7                                     |
| 5SB221  | 22                                       | 28                                       | 34                                       |
| 5SB231  | 66                                       | 85                                       | 100                                      |
| 5SB251  | 240                                      | 300                                      | 340                                      |
| 5SB261  | 890                                      | 1060                                     | 1090                                     |
| 5SB271  | 1200                                     | 1450                                     | 1620                                     |
| 5SB281  | 2400                                     | 3150                                     | 3450                                     |
| 5SB4010 | 3450                                     | 4150                                     | 4850                                     |
| 5SB411  | 5200                                     | 6200                                     | 7200                                     |
| 5SB421  | 9750                                     | 12350                                    | 14500                                    |
| 5SB431  | 16500                                    | 22200                                    | 26500                                    |
| 5SC211  | 23000                                    | 28500                                    | 32500                                    |
| 5SC221  | 44000                                    | 56000                                    | 65000                                    |


# Fuse Systems

## DIAZED fuse systems


### Series 5SD8

Size: DIII  
Operational class: gG  
Rated voltage: 690 V AC/600 V DC  
Rated current: 2 ... 63 A


#### Time/current characteristics diagram

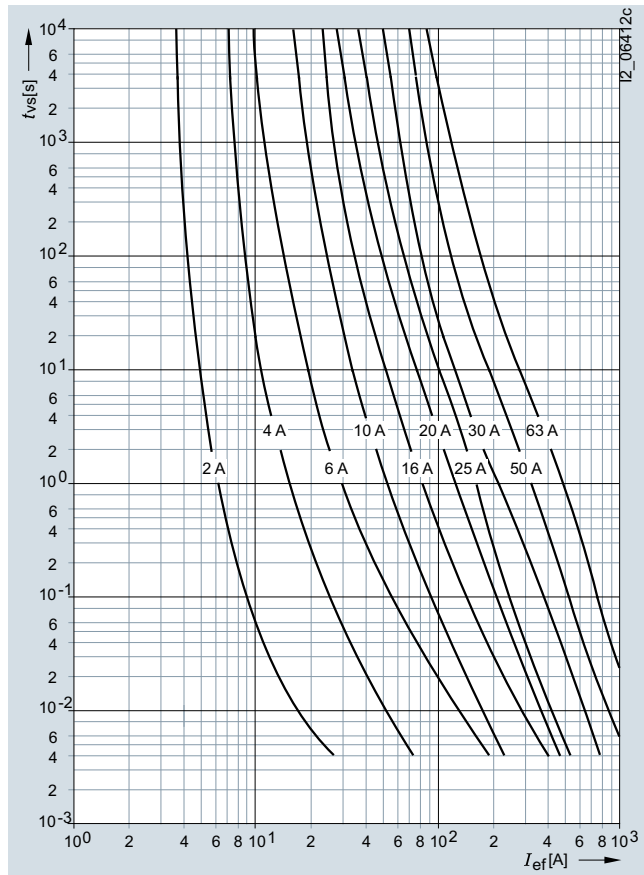

#### Melting $I^2t$ values diagram

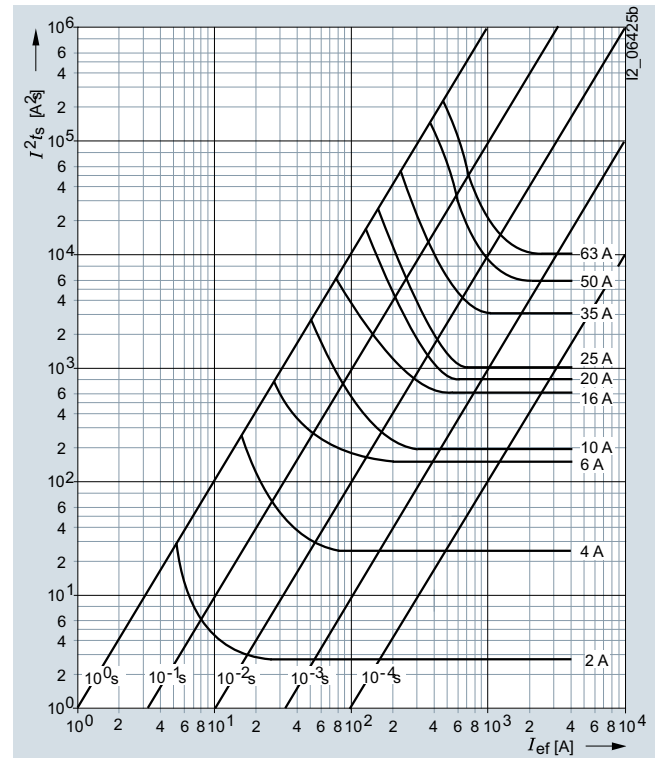

#### Current limiting diagram



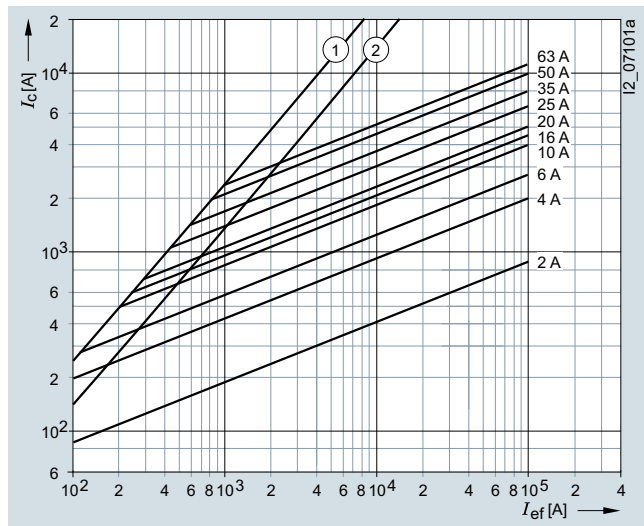


- ① Peak short-circuit current with largest DC component
- ② Peak short-circuit current without DC component

| Type    | $I_n$<br>A | $P_v$<br>W | $I^2t_s$<br>4 ms<br>A <sup>2</sup> s | $I^2t_a$<br>242 V AC<br>A <sup>2</sup> s |
|---------|------------|------------|--------------------------------------|------------------------------------------|
| 5SD8002 | 2          | 1          | 4.4                                  | 7                                        |
| 5SD8004 | 4          | 1.2        | 40                                   | 62                                       |
| 5SD8006 | 6          | 1.6        | 88                                   | 140                                      |
| 5SD8010 | 10         | 1.4        | 240                                  | 380                                      |
| 5SD8016 | 16         | 1.8        | 380                                  | 600                                      |
| 5SD8020 | 20         | 2          | 750                                  | 1200                                     |
| 5SD8025 | 25         | 2.3        | 2000                                 | 3200                                     |
| 5SD8035 | 35         | 3.1        | 3300                                 | 5100                                     |
| 5SD8050 | 50         | 4.6        | 7000                                 | 11000                                    |
| 5SD8063 | 63         | 5.5        | 9500                                 | 15000                                    |

**Series 5SD6**

Size: DIII  
 Operational class: Quick (railway network protection)  
 Rated voltage: 750 V AC/750 V DC  
 Rated current: 2 ... 63 A

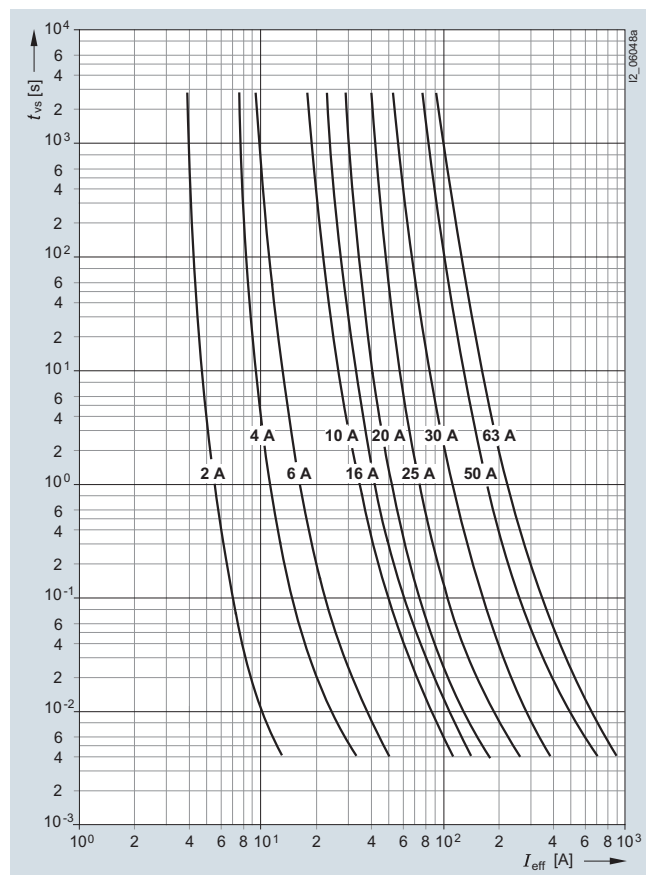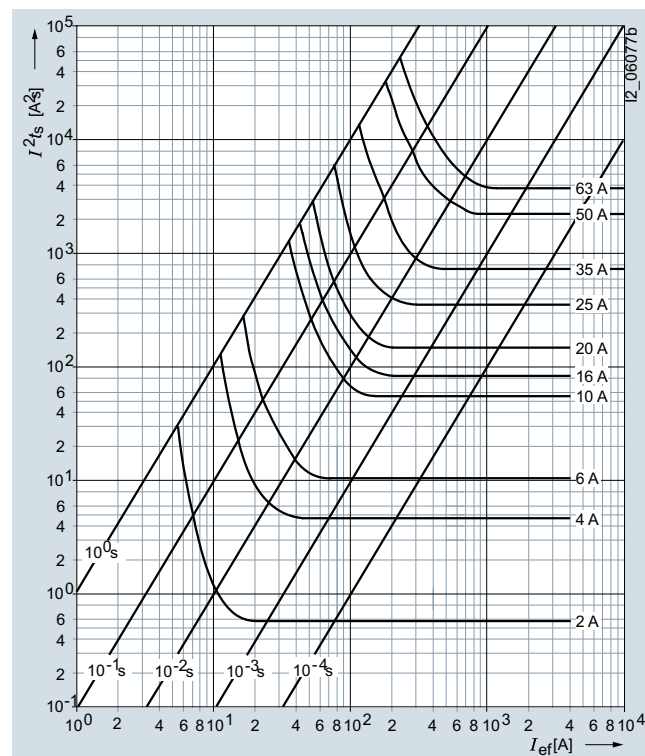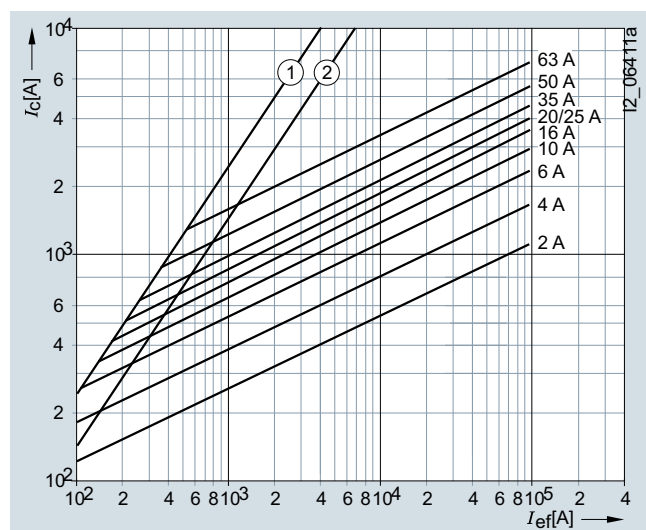**Time/current characteristics diagram****Melting  $I^2t$  values diagram****Current limiting diagram**

- ① Peak short-circuit current with largest DC component  
 ② Peak short-circuit current without DC component

| Type   | $I_n$<br>A | $P_v$<br>W | $I^2t_s$<br>4 ms<br>A <sup>2</sup> s | $I^2t_a$<br>500 V AC<br>A <sup>2</sup> s |
|--------|------------|------------|--------------------------------------|------------------------------------------|
| 5SD601 | 2          | 2.8        | 0.7                                  | 2                                        |
| 5SD602 | 4          | 4          | 4.5                                  | 13                                       |
| 5SD603 | 6          | 4.8        | 10                                   | 29                                       |
| 5SD604 | 10         | 4.8        | 50                                   | 135                                      |
| 5SD605 | 16         | 5.9        | 78                                   | 220                                      |
| 5SD606 | 20         | 6.3        | 125                                  | 380                                      |
| 5SD607 | 25         | 8.3        | 265                                  | 800                                      |
| 5SD608 | 35         | 13         | 550                                  | 1600                                     |
| 5SD610 | 50         | 16.5       | 1800                                 | 5500                                     |
| 5SD611 | 63         | 18         | 3100                                 | 9600                                     |

## Fuse Systems

### Cylindrical Fuse Systems

#### Cylindrical fuse links and cylindrical fuse holders

##### Overview

Cylindrical fuses are standard in Europe. There are a range of different cylindrical fuse links and holders that comply with the standards IEC 60269-1, -2 and -3, and which are suitable for use in industrial applications. In South West Europe they are also approved for use in residential buildings.

The cylindrical fuse holders are also approved according to UL 512. The cylindrical fuse holders are tested and approved as fuse disconnectors according to the switching device standard IEC 60947-3. They are not suitable for switching loads.

Cylindrical fuse holders can be supplied with or without signal detectors. In the case of devices with signal detector, a small electronic device with LED is located behind an inspection window in the plug-in module. If the inserted fuse link is tripped, this is indicated by the LED flashing.

The switching state of the fuse holder can be signaled over a laterally retrofitted auxiliary switch, which enables the integration of the fuses in the automation process.

##### Benefits

- Devices with pole number 1P+N are available in a single modular width. This reduces the footprint by 50 %
- The sliding catch for type ranges 8 x 32 mm and 10 x 38 mm enables the removal of individual devices from the assembly
- Space for a spare fuse in the plug-in module enables the fast replacement of fuses. This saves time and money and increases system availability
- A flashing LED signals that a fuse link has been tripped. This enables fast detection during runtime

##### Technical specifications


|                         |         | Cylindrical fuse links                                                            |            |          |           |            |          |            |
|-------------------------|---------|-----------------------------------------------------------------------------------|------------|----------|-----------|------------|----------|------------|
|                         |         | 3NW63..                                                                           | 3NW60..    | 3NW61..  | 3NW62..   | 3NW80..    | 3NW81..  | 3NW82..    |
| Size                    | mm × mm | 8 × 32                                                                            | 10 × 38    | 14 × 51  | 22 × 58   | 10 × 38    | 14 × 51  | 22 × 58    |
| Standards               |         | IEC 60269-1, -2, -3; NF C 60-200; NF C 63-210, -211; NBN C 63269-2, CEI 32-4, -12 |            |          |           |            |          |            |
| Operational class       |         | gG                                                                                |            |          |           | aM         |          |            |
| Rated voltages $U_n$    | V AC    | 400                                                                               | 400 or 500 |          |           |            |          |            |
| Rated current $I_n$     | A       | 2 ... 20                                                                          | 0.5 ... 32 | 4 ... 50 | 8 ... 100 | 0.5 ... 32 | 2 ... 50 | 10 ... 100 |
| Rated breaking capacity |         |                                                                                   |            |          |           |            |          |            |
| • 500 V versions        | kA AC   | --                                                                                | 120        | 100      |           | 120        | 100      |            |
| • 400 V versions        | kA AC   | 20                                                                                | 120        | 20       |           | 120        | 20       |            |
| Mounting position       |         | Any, preferably vertical                                                          |            |          |           |            |          |            |

|                                                                                     |                                | Cylindrical fuse holders                                                                       |                                                                                                                                                                            |                                                                                                                                                                                |          |
|-------------------------------------------------------------------------------------|--------------------------------|------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
|                                                                                     |                                | 3NW73..                                                                                        | 3NW70..                                                                                                                                                                    | 3NW71..                                                                                                                                                                        | 3NW72..  |
| Size                                                                                | mm × mm                        | 8 × 32                                                                                         | 10 × 38                                                                                                                                                                    | 14 × 51                                                                                                                                                                        | 22 × 58  |
| Standards                                                                           |                                | IEC 60269-1, -2, -3; NF C 60-200, NF C 63-210, -211; NBN C 63269-2-1; CEI 32-4, -12; UL 4248-1 |                                                                                                                                                                            |                                                                                                                                                                                |          |
| Approvals                                                                           | Acc. to UL<br>Acc. to CSA      | --<br>--                                                                                       | <br> | <br> | --<br>-- |
| Rated voltage $U_n$                                                                 | V AC<br>Acc. to UL/CSA<br>V AC | 400<br>400                                                                                     | 690<br>600                                                                                                                                                                 |                                                                                                                                                                                |          |
| Rated current $I_n$                                                                 | A AC                           | 20                                                                                             | 32                                                                                                                                                                         | 50                                                                                                                                                                             | 100      |
| Rated breaking capacity                                                             | kA                             | 20                                                                                             | 100                                                                                                                                                                        |                                                                                                                                                                                |          |
| Breaking capacity                                                                   |                                | AC-20B (switching without load), DC-20B                                                        |                                                                                                                                                                            |                                                                                                                                                                                |          |
| • Utilization category                                                              |                                |                                                                                                |                                                                                                                                                                            |                                                                                                                                                                                |          |
| No-voltage changing of fuse links                                                   |                                | Yes                                                                                            |                                                                                                                                                                            |                                                                                                                                                                                |          |
| Sealable when installed                                                             |                                | Yes                                                                                            |                                                                                                                                                                            |                                                                                                                                                                                |          |
| Mounting position                                                                   |                                | Any, preferably vertical                                                                       |                                                                                                                                                                            |                                                                                                                                                                                |          |
| Degree of protection                                                                | Acc. to IEC 60529              | IP20, with connected conductors <sup>1)</sup>                                                  |                                                                                                                                                                            |                                                                                                                                                                                |          |
| Terminals with touch protection according to BGV A3 at incoming and outgoing feeder |                                | Yes                                                                                            |                                                                                                                                                                            |                                                                                                                                                                                |          |
| Ambient temperature                                                                 | °C                             | -5 to +40, humidity 90 % at +20                                                                |                                                                                                                                                                            |                                                                                                                                                                                |          |
| Conductor cross-sections                                                            |                                |                                                                                                |                                                                                                                                                                            |                                                                                                                                                                                |          |
| • Rigid                                                                             | mm <sup>2</sup>                | 0.5 ... 10                                                                                     |                                                                                                                                                                            | 2.5 ... 10                                                                                                                                                                     | 4 ... 10 |
| • Stranded                                                                          | mm <sup>2</sup>                | 0.5 ... 10                                                                                     |                                                                                                                                                                            | 2.5 ... 25                                                                                                                                                                     | 4 ... 50 |
| • Finely stranded, with end sleeve                                                  | mm <sup>2</sup>                | 0.5 ... 10 <sup>2)</sup>                                                                       |                                                                                                                                                                            | 2.5 ... 16                                                                                                                                                                     | 4 ... 35 |
| • AWG (American Wire Gauge)                                                         | AWG                            | --                                                                                             | 10 ... 20                                                                                                                                                                  | 6 ... 10                                                                                                                                                                       | --       |
| Tightening torque                                                                   | Nm                             | 1.2                                                                                            |                                                                                                                                                                            | 2.0                                                                                                                                                                            | 2.5      |


<sup>1)</sup> Degree of protection IP20 is tested according to regulations using a straight test finger (from the front), with the device mounted and equipped with a cover, housing or some other enclosure.

<sup>2)</sup> Max. cross-section 10 mm<sup>2</sup> with K28 crimper from Klauke.


### Dimensional drawings




Size  
8 × 32 mm




10 × 38 mm




14 × 51 mm




22 × 58 mm

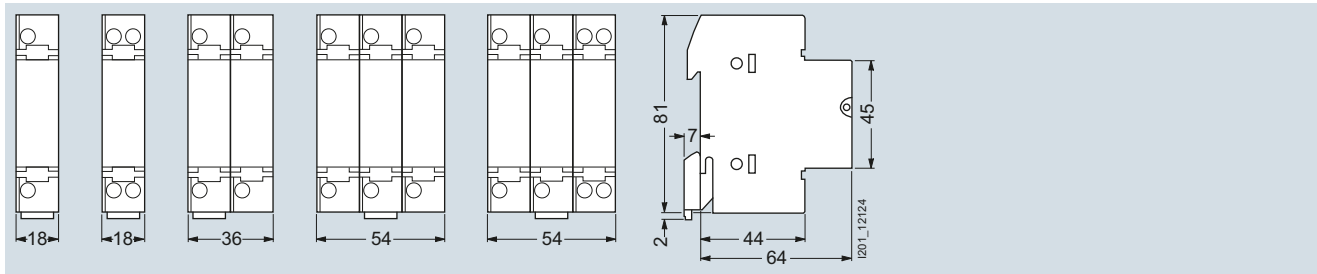

3NW70, 3NW73  
1P 1P + N 2P 3P 3P+N

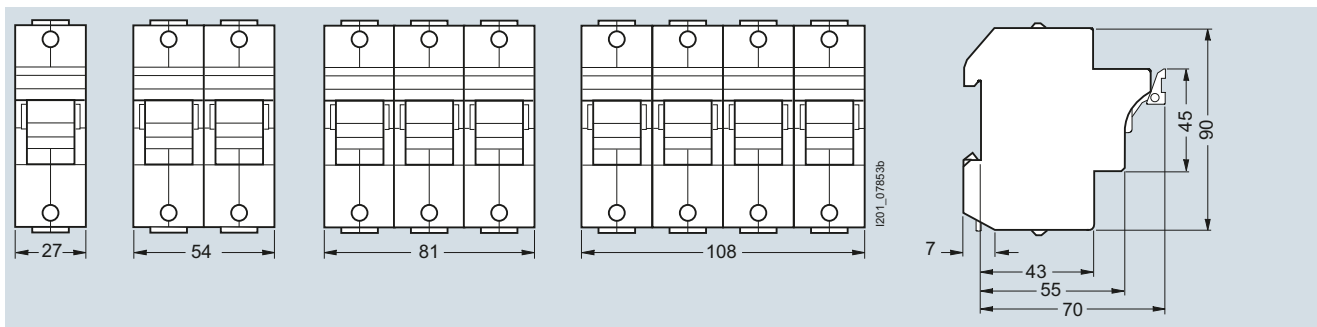


3NW71  
1P 1P+N/2P 3P 3P+N

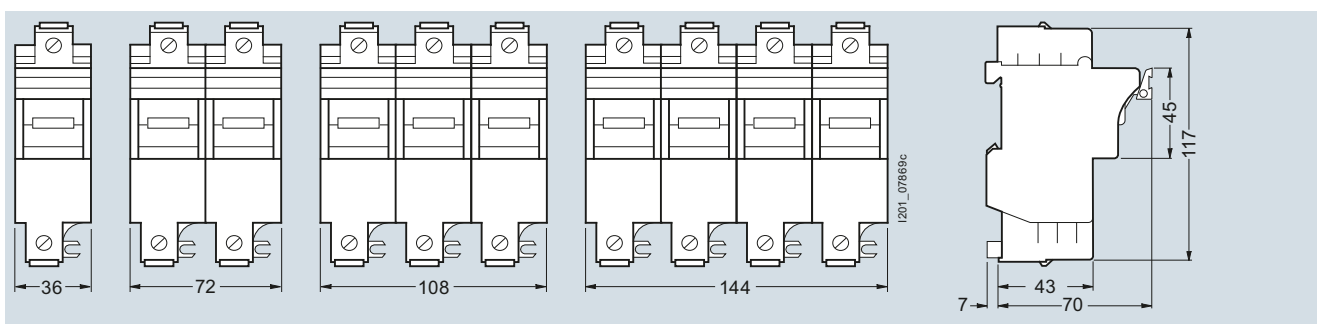


3NW72  
1P 1P+N/2P 3P 3P+N

### Auxiliary switches

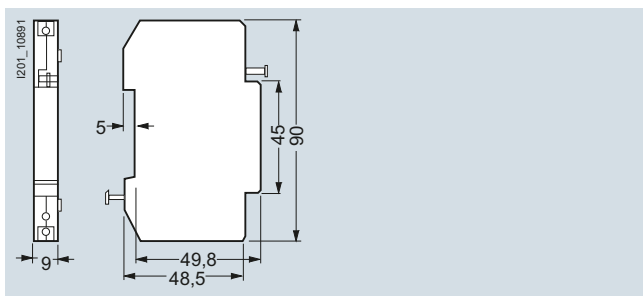

3NW7901  
3NW7902

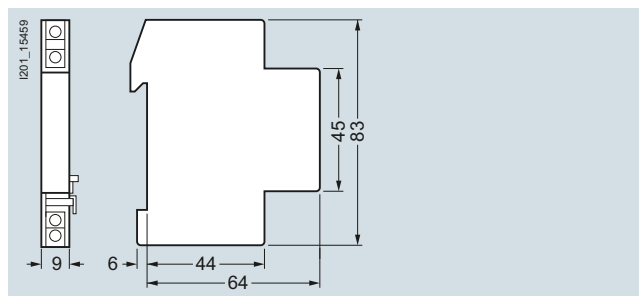

3NW7903


## Fuse Systems

### Cylindrical Fuse Systems


#### Cylindrical fuse links and cylindrical fuse holders

##### Circuit diagrams


###### Graphical symbols




1P




1P+N



2P





3P



3P+N

###### Auxiliary switches

3NW7901  
3NW7902


3NW7903

### Characteristic curves


#### 3NW60 series

Size: 10 × 38 mm  
 Operational class: gG  
 Rated voltage: 500 V AC (0.5 ... 25 A),  
 400 V AC (32 A)  
 Rated current: 2 ... 32 A


#### Time/current characteristics diagram

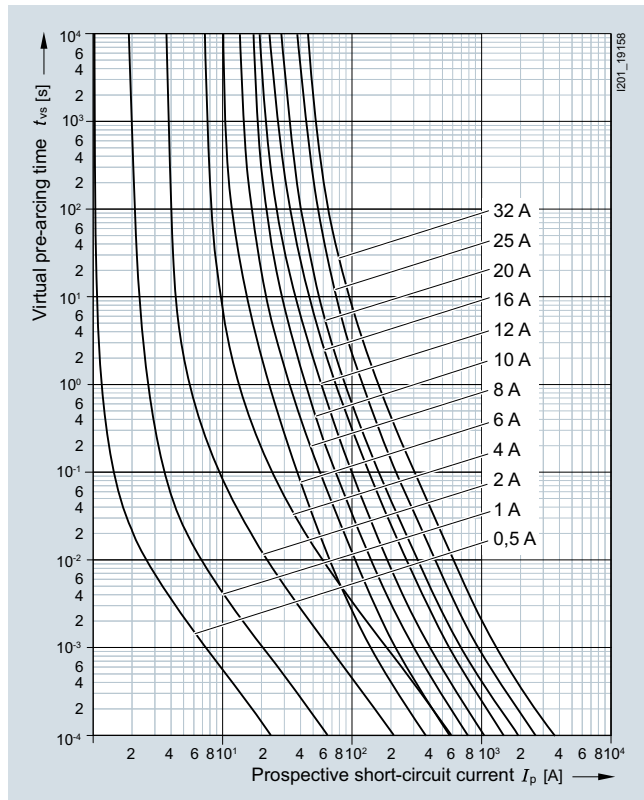

#### Current limiting diagram

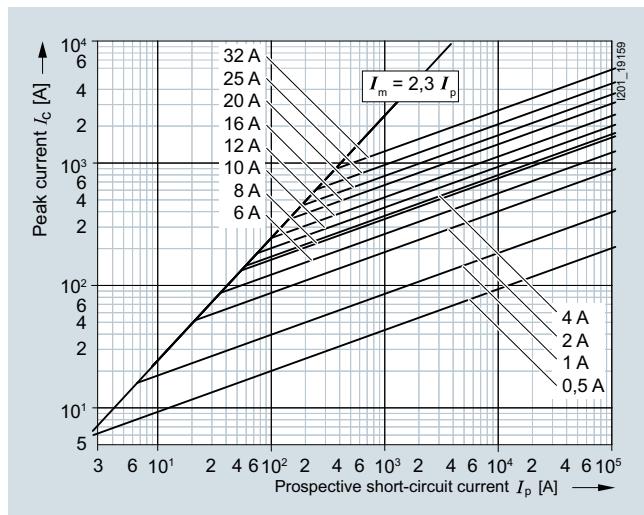

#### Melting $I^2t$ values diagram

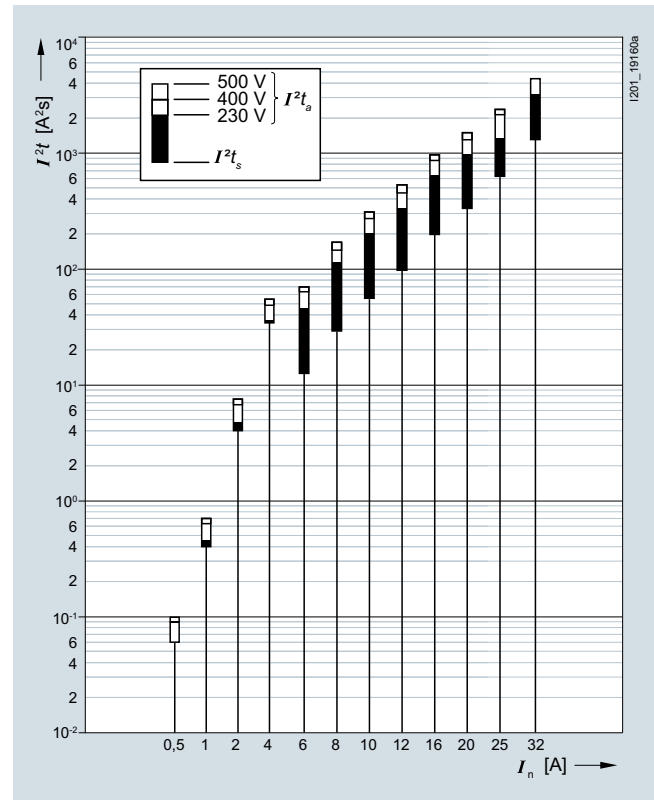

| Type      | $I_n$<br>A | $P_v$<br>W | $\Delta\theta$<br>K | $I^2t_s$<br>1 ms<br>A <sup>2</sup> s | $I^2t_a$<br>230 V AC<br>A <sup>2</sup> s | 400 V AC<br>A <sup>2</sup> s | 500 V AC<br>A <sup>2</sup> s |
|-----------|------------|------------|---------------------|--------------------------------------|------------------------------------------|------------------------------|------------------------------|
| 3NW6000-1 | 0.5        | 0.07       | On req.             | 0.06                                 | 0.06                                     | 0.09                         | 0.10                         |
| 3NW6011-1 | 1          | 0.45       | On req.             | 0.50                                 | 0.45                                     | 0.63                         | 0.7                          |
| 3NW6002-1 | 2          | 0.50       | On req.             | 4                                    | 4.80                                     | 6.80                         | 7.50                         |
| 3NW6004-1 | 4          | 0.85       | On req.             | 34                                   | 35.70                                    | 49.50                        | 55                           |
| 3NW6001-1 | 6          | 0.95       | On req.             | 12.5                                 | 45.50                                    | 63                           | 70                           |
| 3NW6008-1 | 8          | 1.15       | On req.             | 29                                   | 10                                       | 153                          | 170                          |
| 3NW6003-1 | 10         | 1.30       | On req.             | 56                                   | 201                                      | 279                          | 310                          |
| 3NW6006-1 | 12         | 1.40       | On req.             | 99                                   | 344                                      | 477                          | 530                          |
| 3NW6005-1 | 16         | 1.90       | On req.             | 199                                  | 630                                      | 873                          | 970                          |
| 3NW6007-1 | 20         | 2.40       | On req.             | 333                                  | 975                                      | 1350                         | 1500                         |
| 3NW6010-1 | 25         | 2.70       | On req.             | 619                                  | 1560                                     | 2160                         | 2400                         |
| 3NW6012-1 | 32         | 2.80       | On req.             | 1331                                 | 3250                                     | 4500                         | --                           |

- ① Peak short-circuit current with largest DC component
- ② Peak short-circuit current without DC component

## Fuse Systems


### Cylindrical Fuse Systems

#### Cylindrical fuse links and cylindrical fuse holders


##### 3NW61series

Size: 14 × 51 mm  
 Operational class: gG  
 Rated voltage: 500 V AC (4 ... 40 A),  
 400 V AC (50 A)  
 Rated current: 4 ... 50 A

##### Time/current characteristics diagram

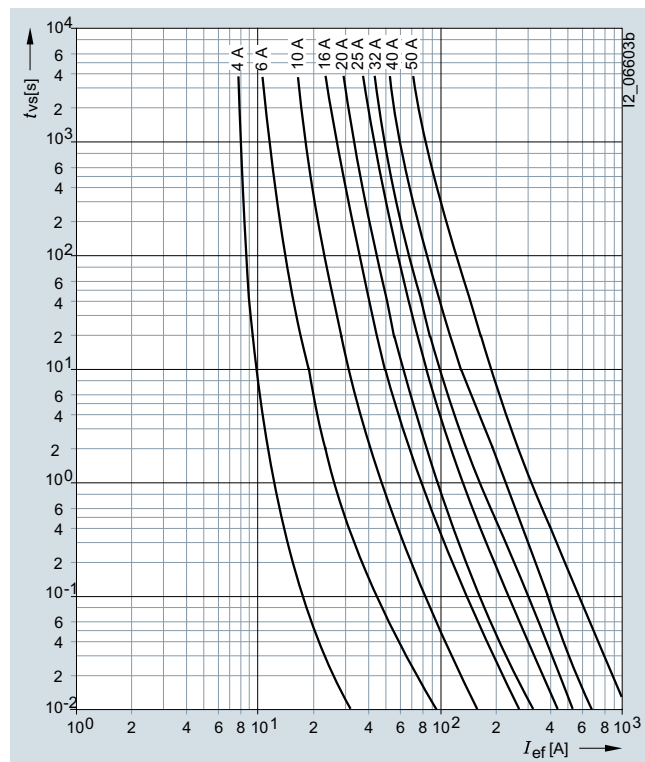


##### Current limiting diagram

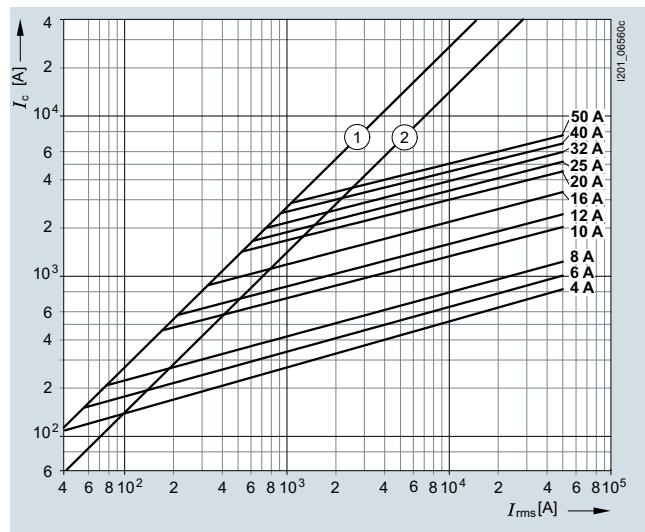

- ① Peak short-circuit current with largest DC component  
 ② Peak short-circuit current without DC component



##### Melting $I^2t$ values diagram

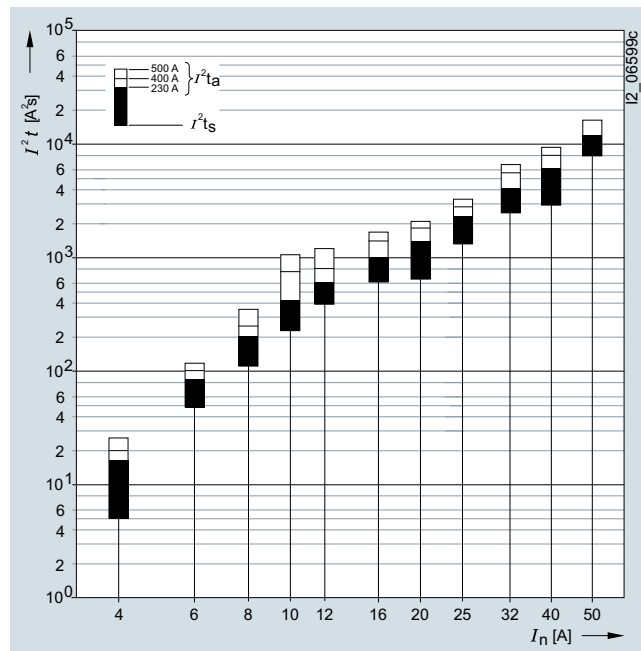


| Type      | $I_n$<br>A | $P_v$<br>W | $\Delta\theta$<br>K | $I^2t_s$<br>1 ms<br>A <sup>2</sup> s | $I^2t_a$<br>230 V AC<br>A <sup>2</sup> s | 400 V AC<br>A <sup>2</sup> s | 500 V AC<br>A <sup>2</sup> s |
|-----------|------------|------------|---------------------|--------------------------------------|------------------------------------------|------------------------------|------------------------------|
| 3NW6104-1 | 4          | 1.9        | 19                  | 5                                    | 16                                       | 20                           | 26                           |
| 3NW6101-1 | 6          | 2.5        | 25                  | 48                                   | 85                                       | 100                          | 120                          |
| 3NW6108-1 | 8          | 2.4        | 18                  | 110                                  | 200                                      | 250                          | 350                          |
| 3NW6103-1 | 10         | 0.8        | 12                  | 230                                  | 420                                      | 750                          | 1050                         |
| 3NW6106-1 | 12         | 1.0        | 16                  | 390                                  | 600                                      | 800                          | 1200                         |
| 3NW6105-1 | 16         | 1.6        | 27                  | 600                                  | 1000                                     | 1400                         | 1700                         |
| 3NW6107-1 | 20         | 2.3        | 32.5                | 670                                  | 1400                                     | 1800                         | 2100                         |
| 3NW6110-1 | 25         | 2.2        | 31.5                | 1300                                 | 2300                                     | 2800                         | 3200                         |
| 3NW6112-1 | 32         | 3.2        | 39.5                | 2500                                 | 4100                                     | 5500                         | 6500                         |
| 3NW6117-1 | 40         | 4.5        | 48                  | 3600                                 | 6100                                     | 8000                         | 9200                         |
| 3NW6120-1 | 50         | 4.8        | 55                  | 8000                                 | 12200                                    | 16000                        | --                           |

**3NW62 series**

Size: 22 × 58 mm  
 Operational class: gG  
 Rated voltage: 500 V AC (8 ... 80 A),  
 400 V AC (100 A)  
 Rated current: 8 ... 100 A

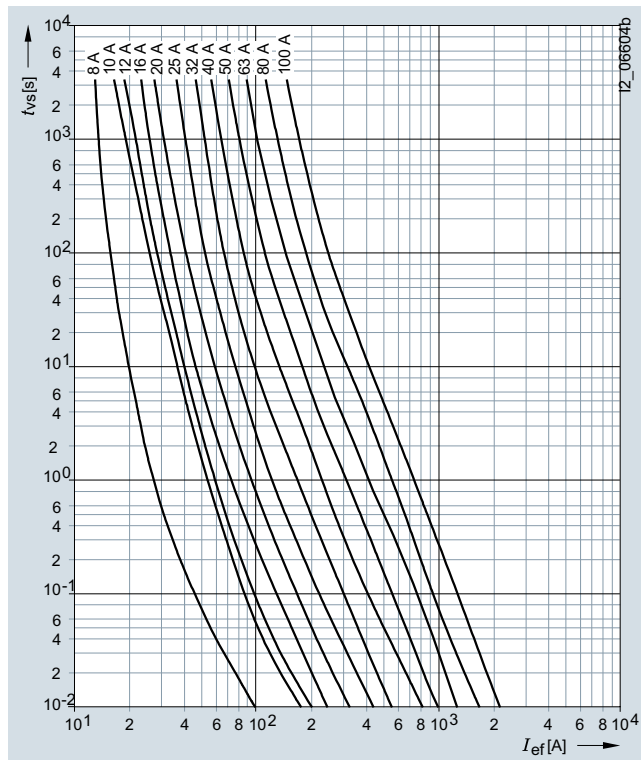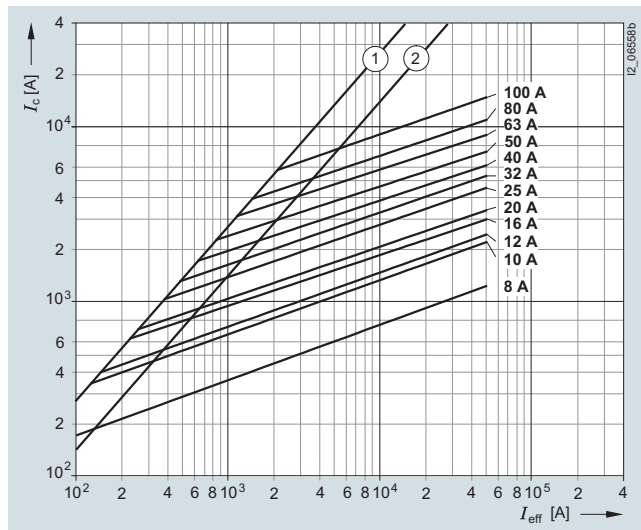**Time/current characteristics diagram****Current limiting diagram**

- ① Peak short-circuit current with largest DC component  
 ② Peak short-circuit current without DC component

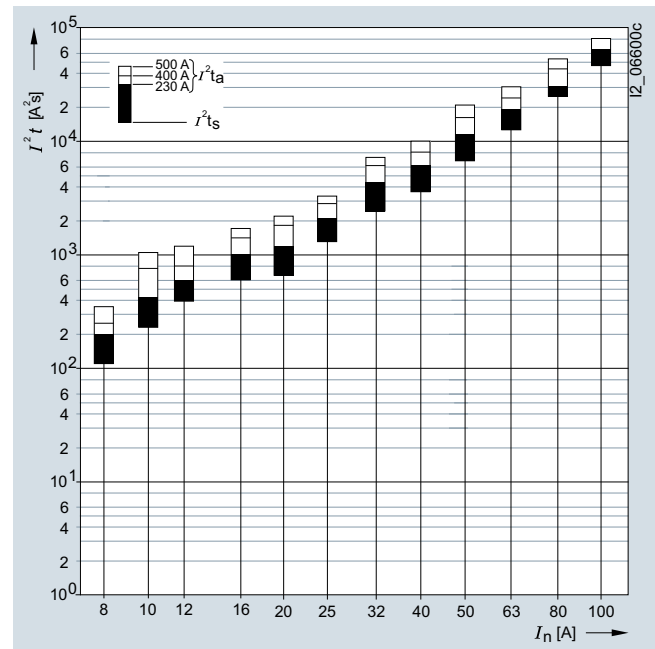**Melting  $I^2t$  values diagram**

| Type      | $I_n$<br>A | $P_v$<br>W | $\Delta\theta$<br>K | $I^2t_s$<br>1 ms<br>A <sup>2</sup> s | $I^2t_a$<br>230 V AC<br>A <sup>2</sup> s | 400 V AC<br>A <sup>2</sup> s | 500 V AC<br>A <sup>2</sup> s |
|-----------|------------|------------|---------------------|--------------------------------------|------------------------------------------|------------------------------|------------------------------|
| 3NW6208-1 | 8          | 2.5        | 15                  | 110                                  | 200                                      | 170                          | 350                          |
| 3NW6203-1 | 10         | 0.9        | 10.5                | 230                                  | 420                                      | 760                          | 1050                         |
| 3NW6206-1 | 12         | 1.1        | 12                  | 390                                  | 600                                      | 800                          | 1200                         |
| 3NW6205-1 | 16         | 1.6        | 14.5                | 600                                  | 1000                                     | 1400                         | 1700                         |
| 3NW6207-1 | 20         | 2.4        | 22.5                | 670                                  | 1200                                     | 1800                         | 2200                         |
| 3NW6210-1 | 25         | 2.7        | 24                  | 1300                                 | 2100                                     | 2800                         | 3300                         |
| 3NW6212-1 | 32         | 3.2        | 28                  | 2450                                 | 4400                                     | 6100                         | 7200                         |
| 3NW6217-1 | 40         | 4.9        | 35                  | 3600                                 | 6200                                     | 8000                         | 10000                        |
| 3NW6220-1 | 50         | 5.9        | 46                  | 6800                                 | 11400                                    | 16200                        | 20600                        |
| 3NW6222-1 | 63         | 6.8        | 48                  | 12500                                | 18800                                    | 24000                        | 30000                        |
| 3NW6224-1 | 80         | 7.5        | 48                  | 24700                                | 30500                                    | 43000                        | 52500                        |
| 3NW6230-1 | 100        | 8.4        | 55                  | 46000                                | 64700                                    | 80000                        | --                           |

## Fuse Systems


### Cylindrical Fuse Systems

#### Cylindrical fuse links and cylindrical fuse holders


##### 3NW630.-1 series

Size: 8 × 32 mm  
 Operational class: gG  
 Rated voltage: 400 V AC  
 Rated current: 2 ... 20 A

##### Time/current characteristics diagram

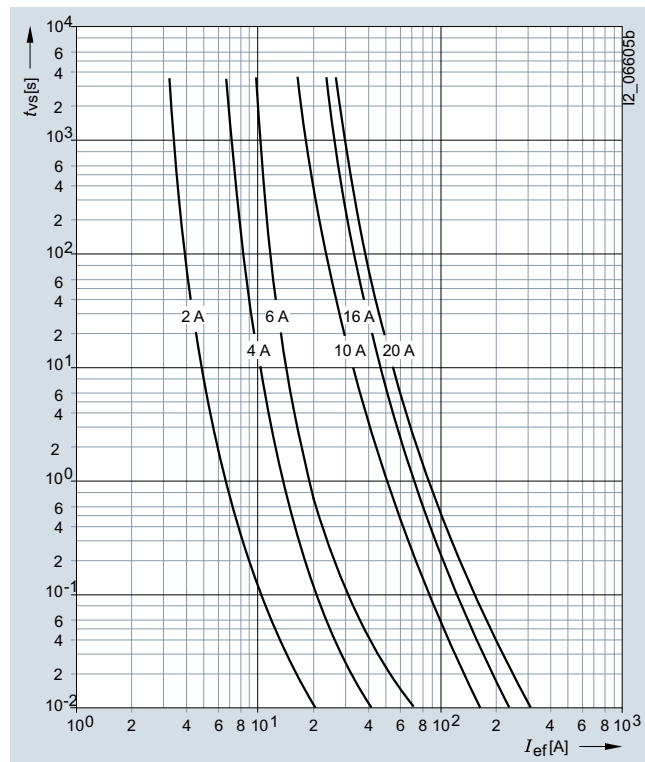


##### Current limiting diagram

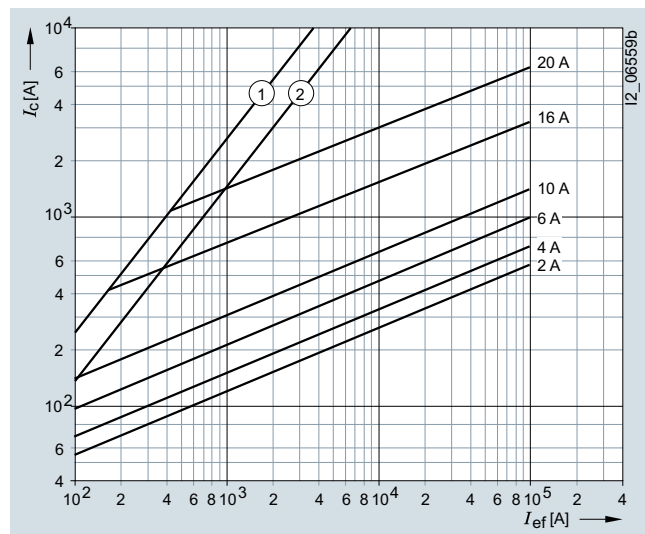

- ① Peak short-circuit current with largest DC component  
 ② Peak short-circuit current without DC component

##### Melting $I^2t$ values diagram

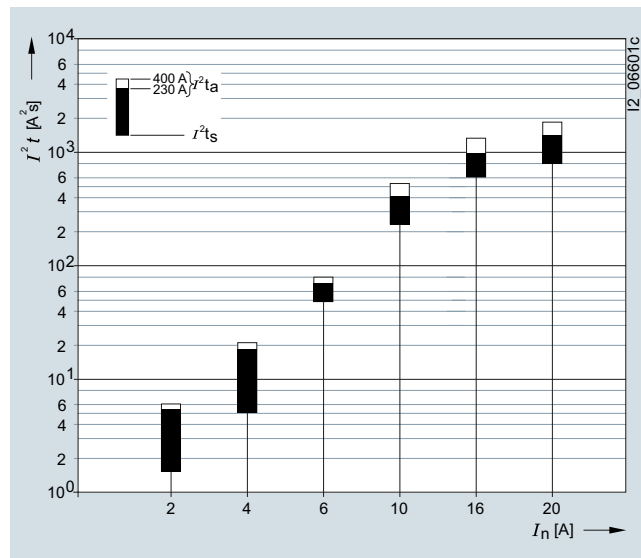

| Type      | $I_n$<br>A | $P_v$<br>W | $\Delta\theta$<br>K | $I^2t_s$<br>1 ms<br>$A^2s$ | $I^2t_a$<br>400 V AC<br>$A^2s$ |
|-----------|------------|------------|---------------------|----------------------------|--------------------------------|
| 3NW6302-1 | 2          | 2          | 27                  | 1.6                        | 6                              |
| 3NW6304-1 | 4          | 1.5        | 19                  | 5                          | 21                             |
| 3NW6301-1 | 6          | 1.5        | 20.5                | 48                         | 85                             |
| 3NW6303-1 | 10         | 0.7        | 15                  | 230                        | 530                            |
| 3NW6305-1 | 16         | 1.1        | 29                  | 600                        | 1400                           |
| 3NW6307-1 | 20         | 1.7        | 34.5                | 790                        | 1800                           |

## Fuse Systems


### Cylindrical Fuse Systems

#### Cylindrical fuse links and cylindrical fuse holders


#### 3NW8 series

Size: 10 × 38 mm, 14 × 51 mm, 22 × 58 mm  
 Operational class: aM  
 Rated voltage: 500 V AC,  
 400 V AC (3NW8120-1, 3NW8230-1)  
 Rated current: 0.5 ... 100 A

Time/current characteristics diagram

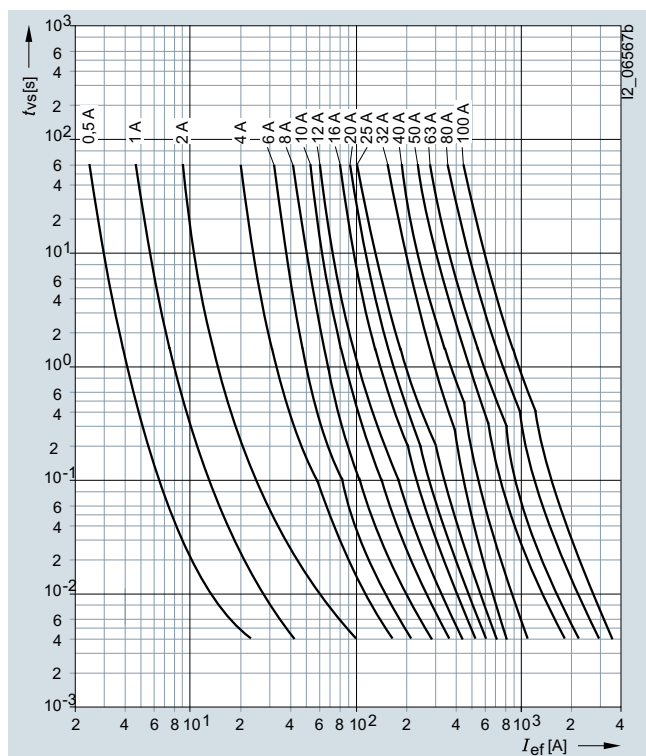


Current limiting diagram

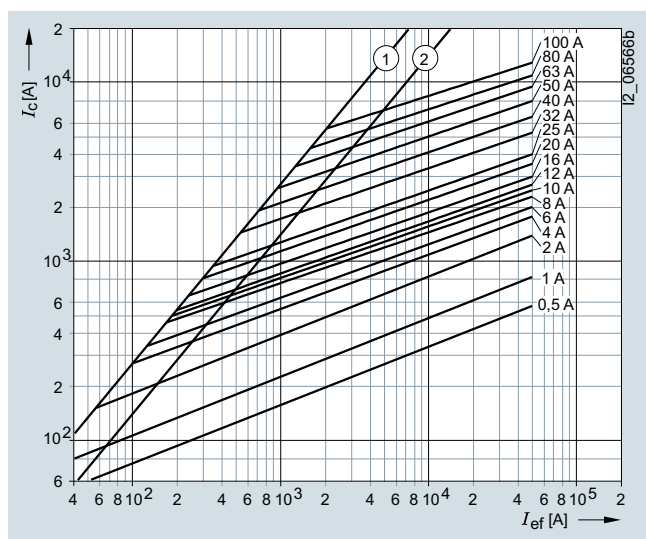

- ① Peak short-circuit current with largest DC component  
 ② Peak short-circuit current without DC component

Melting  $I^2t$  values diagram

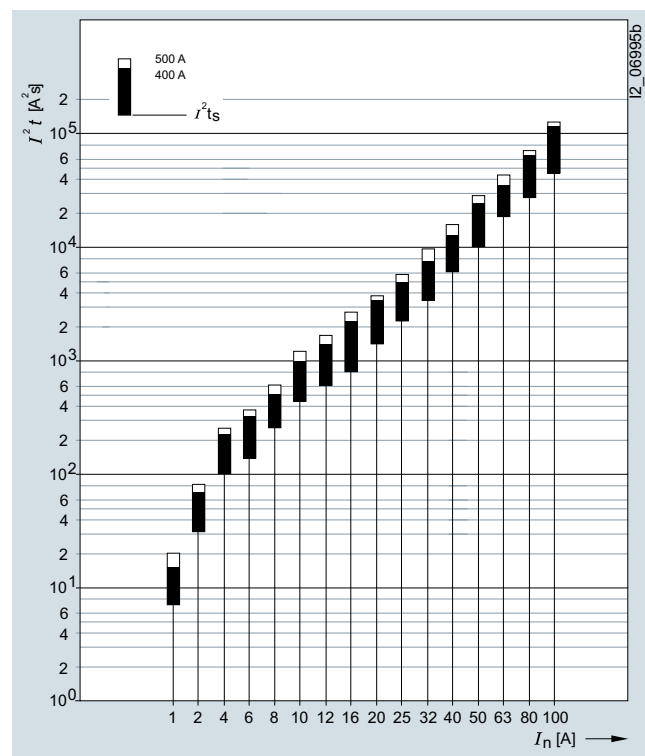

| Type      | Size mm | BK | $I_n$ A | $U_n$ V | $P_v$ W  |
|-----------|---------|----|---------|---------|----------|
| 3NW8000-1 | 10 x 38 | aM | 0.5     | 500     | 0.1      |
| 3NW8011-1 |         |    | 1       |         | 0.1      |
| 3NW8002-1 |         |    | 2       |         | 0.1      |
| 3NW8004-1 |         |    | 4       |         | 0.3      |
| 3NW8001-1 | 14 x 51 |    | 6       | 400     | 0.4      |
| 3NW8008-1 |         |    | 8       |         | 0.6      |
| 3NW8003-1 |         |    | 10      |         | 0.6      |
| 3NW8006-1 |         |    | 12      |         | 0.8      |
| 3NW8005-1 |         |    | 165     |         | 0.9      |
| 3NW8007-1 |         |    | 20      |         | 1.1      |
| 3NW8010-1 |         |    | 25      |         | 1.2      |
| 3NW8012-1 |         |    | 32      |         | 1.8      |
| 3NW8102-1 |         |    | 2       | 690     | 1        |
| 3NW8104-1 |         |    | 4       |         | 0.3      |
| 3NW8101-1 |         |    | 6       |         | 0.3      |
| 3NW8108-1 |         |    | 8       |         | 0.5      |
| 3NW8103-1 | 22 x 58 |    | 10      |         | 0.6      |
| 3NW8106-1 |         |    | 12      |         | 0.6      |
| 3NW8105-1 |         |    | 16      |         | 1        |
| 3NW8107-1 |         |    | 20      |         | 1        |
| 3NW8110-1 |         |    | 25      | 500     | 1.3      |
| 3NW8112-1 |         |    | 32      |         | 1.9      |
| 3NW8117-1 |         |    | 40      |         | 2        |
| 3NW8120-1 |         |    | 50      |         | 3.7      |
| 3NW8208-1 |         |    | 8       | 690     | No info. |
| 3NW8203-1 |         |    | 10      |         | No info. |
| 3NW8206-1 |         |    | 12      |         | No info. |
| 3NW8205-1 |         |    | 16      |         | 0.9      |
| 3NW8207-1 |         |    | 20      |         | 1.1      |
| 3NW8210-1 |         |    | 25      |         | 1.4      |
| 3NW8212-1 |         |    | 32      |         | 2        |
| 3NW8217-1 |         |    | 40      |         | 2.5      |
| 3NW8220-1 |         |    | 50      | 500     | 2.6      |
| 3NW8222-1 |         |    | 63      |         | 4.1      |
| 3NW8224-1 |         |    | 80      |         | 4.9      |
| 3NW8230-1 |         |    | 100     |         | 5.6      |

## Fuse Systems

### Cylindrical Fuse Systems

#### Fuse holders in size 10 x 38 mm and Class CC

##### Overview

A key feature of our three-pole fuse holders is their ultra compact design. With a width of only 45 mm, they are ideal for use with fused motor starter combinations. Because the contactor and the fuse holder have the same 45 mm width, they are easy to mount on top of one another. The strong current-limiting fuses ensure a type 2 protection level (coordination according to IEC 60947-4, no damage protection) for the contactor.

The UL version has an SCCR value of 200 kA. The accessories are generally UL-certified.

Customers can mount an auxiliary switch which signals the switching state or prevents the fuse holder from switching off under load by interrupting the contactor control, thus increasing safety for the operator and process. Busbars and a matching three-phase feeder terminal complete the product range.

##### Benefits

- Compact design, especially for motor starter combinations
- For IEC fuses of size 10 x 38 mm up to 32 A and Class CC UL fuses up to 30 A
- Meets the requirements of UL 508 with regard to clearances
- UL-approved microswitches, busbars and adapters for 60 mm busbar systems
- Optical signal detector for fast fault locating



Compact cylindrical fuse holder Class CC with signal detector and mounted auxiliary switch



Installation configuration of a cylindrical fuse holder and a SIRIUS contactor on busbar device adapter for the 60 mm busbar system

### Technical specifications

|                                                                                |                   | Cylindrical fuse holders<br>3NW70...-1                                                                   | Fuse holders<br>3NW75...-1HG                                                                               |
|--------------------------------------------------------------------------------|-------------------|----------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|
| Size                                                                           | mm x mm           | 10 x 38                                                                                                  | Class CC                                                                                                   |
| Standards                                                                      |                   | IEC 60269; UL4248-1; CSA                                                                                 | UL4248-1; CSA                                                                                              |
| Approvals                                                                      |                   |  UL File Number E171267 |  UL File Number E171267 |
| Rated voltage $U_n$                                                            | V AC              | 690                                                                                                      | 600                                                                                                        |
| Rated current $I_n$                                                            | A AC              | 32                                                                                                       | 30                                                                                                         |
| Rated short-circuit strength                                                   | kA                | 120 (at 500 V)<br>80 (at 690 V)                                                                          | 200                                                                                                        |
| Breaking capacity                                                              |                   |                                                                                                          |                                                                                                            |
| • Utilization category                                                         |                   | AC-20B (switching without load)                                                                          | --                                                                                                         |
| Rated impulse withstand voltage                                                | kV                | 6                                                                                                        |                                                                                                            |
| Overvoltage category                                                           |                   | III                                                                                                      |                                                                                                            |
| Pollution degree                                                               |                   | 2                                                                                                        |                                                                                                            |
| Max. power dissipation of the fuse link                                        | W                 | 3                                                                                                        |                                                                                                            |
| No-voltage changing of fuse links                                              | °C                | -5 to +40, humidity 90 % at +20                                                                          |                                                                                                            |
| Sealable when installed                                                        |                   | Yes                                                                                                      |                                                                                                            |
| Lockable with padlock                                                          |                   | Yes                                                                                                      |                                                                                                            |
| Mounting position                                                              |                   | Any, preferably vertical                                                                                 |                                                                                                            |
| Current direction                                                              |                   | Any                                                                                                      |                                                                                                            |
| Degree of protection                                                           | Acc. to IEC 60529 | IP20, with connected conductors <sup>1)</sup>                                                            |                                                                                                            |
| Terminals with touch protection acc. to BGV A3 at incoming and outgoing feeder |                   | Yes                                                                                                      |                                                                                                            |
| Ambient temperature                                                            | °C                | -5 to +40, humidity 90 % at +20                                                                          |                                                                                                            |
| Conductor cross-sections                                                       |                   |                                                                                                          |                                                                                                            |
| • Finely stranded, with end sleeve                                             | mm <sup>2</sup>   | 1 ... 4                                                                                                  |                                                                                                            |
| • AWG cables (American Wire Gauge)                                             | AWG               | 18 ... 10                                                                                                |                                                                                                            |
| Tightening torque                                                              | Nm                | 1.5                                                                                                      |                                                                                                            |
|                                                                                | lb.in             | 13                                                                                                       |                                                                                                            |
|                                                                                |                   | PZ2                                                                                                      |                                                                                                            |
| • Terminal screws                                                              |                   |                                                                                                          |                                                                                                            |

<sup>1)</sup> Degree of protection IP20 is tested according to regulations using a straight test finger (from the front), with the device mounted and equipped with a cover, housing or some other enclosure.

|                      |      | Auxiliary switches<br>3NW7903-1                                                                                                                                                                        |       |     |      |       |     |     |            |
|----------------------|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|-----|------|-------|-----|-----|------------|
| Standards            |      | IEC 60947                                                                                                                                                                                              |       |     |      |       |     |     |            |
| Approvals            |      |   UL 508, UL File Number E334003 |       |     |      |       |     |     |            |
| Utilization category |      | AC-12                                                                                                                                                                                                  | DC-13 |     |      | AC-15 |     |     | Acc. to UL |
| Rated voltage $U_n$  | V AC | 250                                                                                                                                                                                                    | --    | --  | --   | 24    | 120 | 240 | 240        |
|                      | V DC | --                                                                                                                                                                                                     | 24    | 120 | 240  | --    | --  | --  | --         |
| Rated current $I_n$  | A    | 5                                                                                                                                                                                                      | 2     | 0.5 | 0.25 | 4     | 3   | 1.5 | 5          |

|                                          |      | Busbars<br>5ST260.                                                                                                    |              |
|------------------------------------------|------|-----------------------------------------------------------------------------------------------------------------------|--------------|
| For cylindrical fuse holders             |      | 3NW70...-1                                                                                                            | 3NW75...-1HG |
| Pin spacing                              | mm   | 15                                                                                                                    |              |
| Standards                                |      | EN 609741 (VDE 0660-100), IEC 60947-1:2004, UL 508, CSA 22.2                                                          |              |
| Approvals                                |      |  UL 4248-1, UL File Number E337131 |              |
| Busbar material                          |      | E-Cu 58 F25                                                                                                           |              |
| Partition material                       |      | PA66-V0                                                                                                               |              |
| Lamp wire resistance/1.5 mm <sup>2</sup> | °C   | 960                                                                                                                   |              |
| Insulation coordination                  |      | Overvoltage category III, degree of pollution 2                                                                       |              |
| Rated operating voltage $U_n$            |      |                                                                                                                       |              |
| • Acc. to UL                             | V AC | --                                                                                                                    | 600          |
| • Acc. to IEC                            | V AC | 690                                                                                                                   | --           |
| Maximum busbar current $I_n$             |      |                                                                                                                       |              |
| • Acc. to UL                             | A    | --                                                                                                                    | 65           |
| • Acc. to IEC                            | A    | 80                                                                                                                    | --           |


## Fuse Systems

### Cylindrical Fuse Systems


#### Fuse holders in size 10 x 38 mm and Class CC

|                                                                    |                 | <b>Terminals</b>                                |              |
|--------------------------------------------------------------------|-----------------|-------------------------------------------------|--------------|
|                                                                    |                 | <b>5ST2600</b>                                  |              |
| <b>For cylindrical fuse holders</b>                                |                 | 3NW70...-1                                      | 3NW75...-1HG |
| <b>Pin spacing</b>                                                 | mm              | 15                                              |              |
| <b>Standards</b>                                                   |                 | IEC 60999:2000, UL 508                          |              |
| <b>Approvals</b>                                                   |                 | UL, UL 4248-1, UL File Number E337131           |              |
| <b>Enclosure/cover material</b>                                    |                 | PA66-V0                                         |              |
| <b>Lamp wire resistance/1 mm<sup>2</sup></b>                       | °C              | 960                                             |              |
| <b>Temperature resistance PA66-V0, HDT B ISO 179, UL 94-V0/1.5</b> | °C              | 200                                             |              |
| <b>Insulation coordination</b>                                     |                 | Overvoltage category III, degree of pollution 2 |              |
| <b>Maximum operating voltage <math>U_{max}</math></b>              |                 |                                                 |              |
| • Acc. to UL                                                       | V AC            | --                                              | 600          |
| • Acc. to IEC                                                      | V AC            | 690                                             | --           |
| <b>Maximum electrical load <math>I_{max}</math></b>                |                 |                                                 |              |
| • Acc. to UL                                                       | A               | --                                              | 65           |
| • Acc. to IEC                                                      | A               | 80                                              | --           |
| <b>Rated current <math>I_n</math></b>                              | A               | 63                                              |              |
| <b>Conductor cross-sections</b>                                    |                 |                                                 |              |
| • Solid/stranded                                                   | mm <sup>2</sup> | 2.5 ... 35                                      |              |
| • Finely stranded, with end sleeve                                 | mm <sup>2</sup> | 2.5 ... 25                                      |              |
| <b>Tightening torque of clamping screw</b>                         | Nm              | 2.5 ... 3.5                                     |              |


### Dimensional drawings

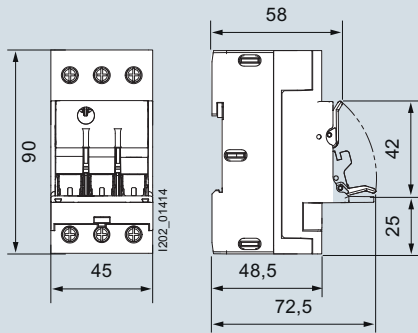

3NW703.-1  
3NW753.-1HG

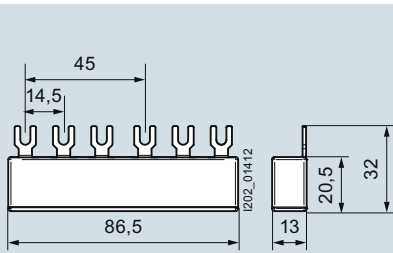


5ST260.




5ST2600

### Circuit diagrams

#### Circuit diagrams



3NW703.-1  
3NW753.-1HG



3NW7903-1

# Fuse Systems

## Class CC fuse systems

### Overview

Class CC fuses are used for "branch circuit protection".

The enclosed fuse holders are designed and tested to comply with the US National Electrical Code NEC 210.20(A). This means that when subject to continuous operation, only 80 % of the rated current is permissible as operational current.

An operational current of 100 % of the rated current (30 A) is only permissible short-time.

The devices are prepared for the inscription labels of the ALPHA FIX terminal blocks 8WH8120-7AA15 and 8WH8120-7XA05.

There are three different series:

- Characteristic: slow 3NW1...-0HG  
For the protection of control transformers, reactors, inductances. Significantly slower than the minimum requirements specified by UL for Class CC Fuses of 12 s at  $2 \times I_n$ .

- Characteristic: quick 3NW2...-0HG  
For a wide range of applications, for the protection of lighting installations, heating, control systems.
- Characteristic: slow, current-limiting 3NW3...-0HG  
Slow for overloads and quick for short circuits. High current limitation for the protection of motor circuits.

#### Note:

For class CC compact fuse holders for motor starter combinations, see [page 32](#).

### Benefits


- For switchgear assemblies and machine manufacturers who export their systems to the USA or Canada
- Easier export due to UL and CSA approvals for typical applications
- Modern design with touch protection to BGV A3 ensures safe installation.

### Technical specifications


| Class CC fuse holders<br>3NW75.3-0HG                                                                                  |                                                                      |                        |
|-----------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------|------------------------|
| <b>Standards Approvals</b>                                                                                            | UL 4248-1; CSA C22.2<br>UL 4248-1; UL File Number E171267; CSA C22.2 |                        |
| <b>Rated voltage <math>U_n</math></b>                                                                                 | V AC                                                                 | 600                    |
| <b>Rated current <math>I_n</math></b>                                                                                 | A                                                                    | 30                     |
| <b>Rated conditional short-circuit current</b>                                                                        | kA                                                                   | 200                    |
| <b>Breaking capacity</b><br>• Utilization category                                                                    | AC-20B (switching without load)                                      |                        |
| <b>Max. power dissipation</b> of the fuse link<br>• With cable, 6 mm <sup>2</sup><br>• With cable, 10 mm <sup>2</sup> | W<br>W                                                               | 3<br>4.3               |
| <b>Rated impulse withstand voltage</b>                                                                                | kV                                                                   | 6                      |
| <b>Overvoltage category</b>                                                                                           | II                                                                   |                        |
| <b>Pollution degree</b>                                                                                               | 2                                                                    |                        |
| <b>No-voltage changing of fuse links</b>                                                                              | Yes                                                                  |                        |
| <b>Sealable when installed</b>                                                                                        | Yes                                                                  |                        |
| <b>Mounting position</b>                                                                                              | Any                                                                  |                        |
| <b>Current direction</b>                                                                                              | Any                                                                  |                        |
| <b>Degree of protection acc. to IEC 60529</b>                                                                         | IP20                                                                 |                        |
| <b>Terminals with touch protection acc. to BGV A3 at incoming and outgoing feeder</b>                                 | Yes                                                                  |                        |
| <b>Ambient temperature</b>                                                                                            | °C                                                                   | 45                     |
| <b>Conductor cross-sections</b><br>• Solid and stranded<br>• AWG conductor cross-section, solid and stranded          | mm <sup>2</sup><br>AWG                                               | 1.5 ... 16<br>15 ... 5 |
| <b>Tightening torque</b>                                                                                              | Nm                                                                   | 2.5 (22 lb.in)         |

| Class CC fuse links            |                                                                    |             |             |                                         |
|--------------------------------|--------------------------------------------------------------------|-------------|-------------|-----------------------------------------|
|                                |                                                                    | 3NW1...-0HG | 3NW2...-0HG | 3NW3...-0HG                             |
| <b>Standards Approvals</b>     | UL 248-4; CSA C22.2<br>UL 248-4; UL File Number E258218; CSA C22.2 |             |             |                                         |
| <b>Characteristic</b>          |                                                                    | Slow        | Quick       | Slow, current limiting                  |
| <b>Rated voltage</b>           | V AC                                                               | 600         | 600         | 600                                     |
|                                | V DC                                                               | --          | --          | 150 (3 ... 15 A)<br>300 (< 3 A, > 15 A) |
| <b>Rated breaking capacity</b> | kA AC                                                              | 200         |             |                                         |

## Dimensional drawings



3NW1...-OHG  
3NW2...-OHG  
3NW3...-OHG

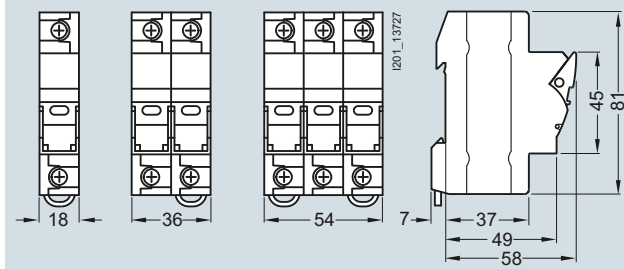

3NW75.3-OHG


# Fuse Systems

## Class CC fuse systems

### Characteristic curves


#### 3NW1...-0HG series

##### Time/current characteristics diagram

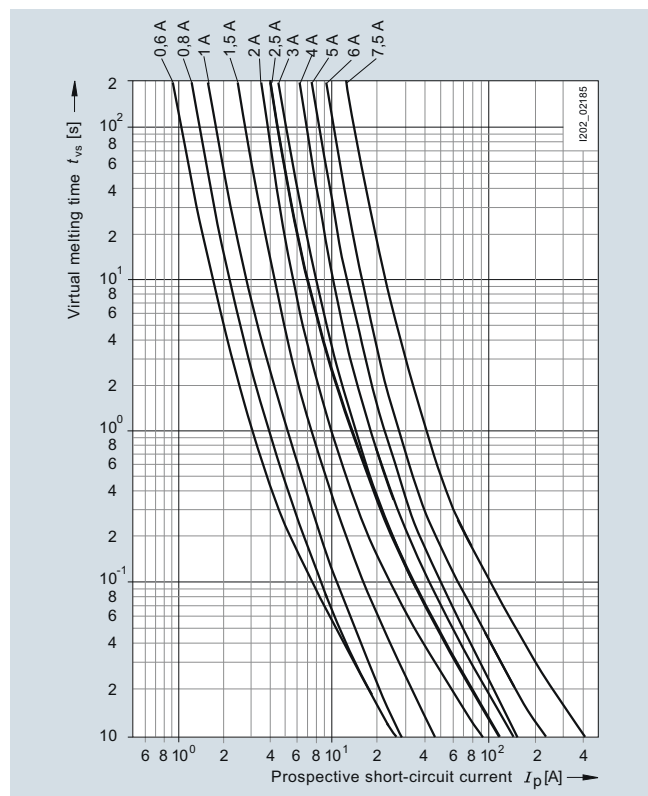


#### 3NW2...-0HG series

##### Time/current characteristics diagram

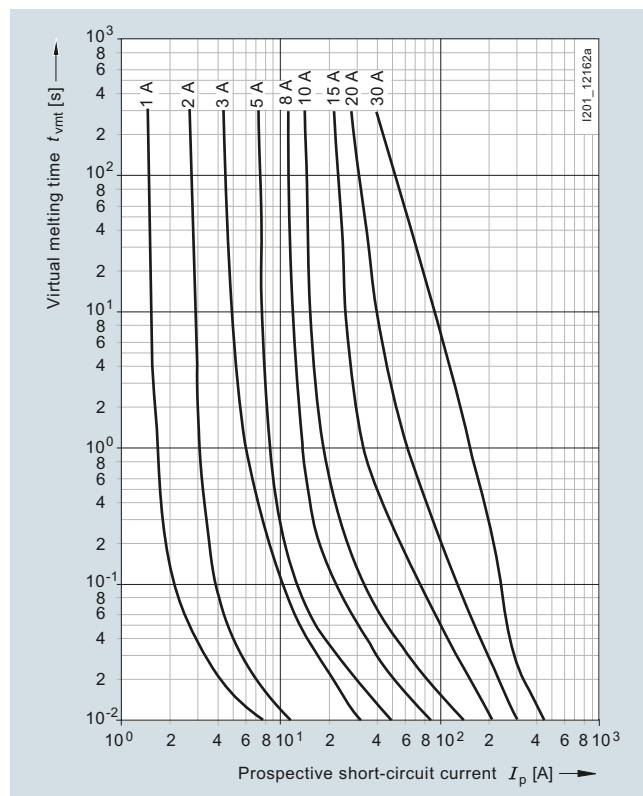


#### 3NW1...-0HG series


##### Time/current characteristics diagram

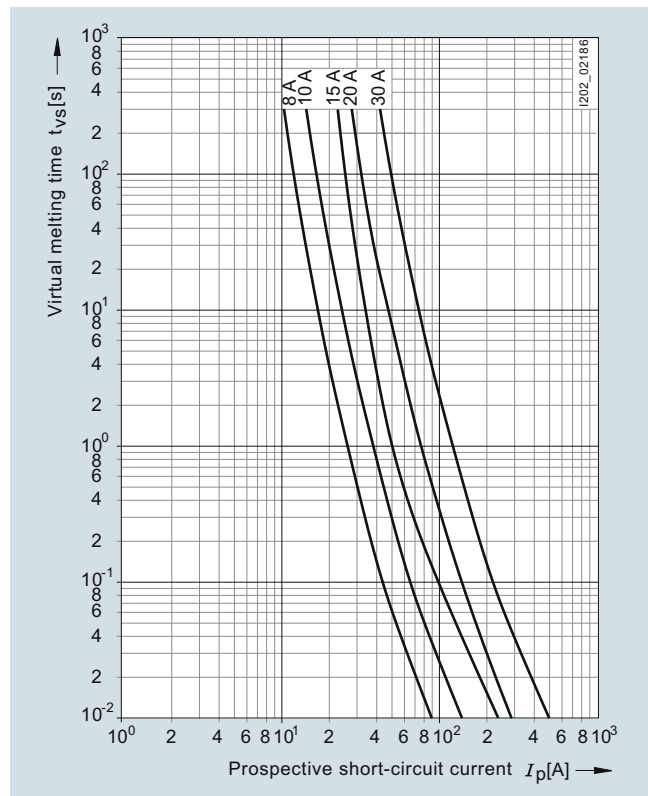

#### 3NW3...-0HG series

##### Time/current characteristics diagram

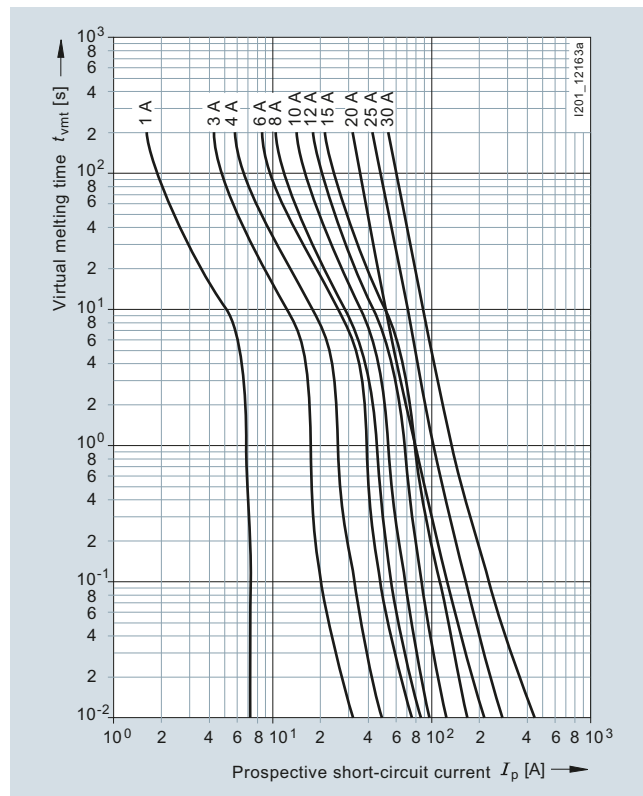

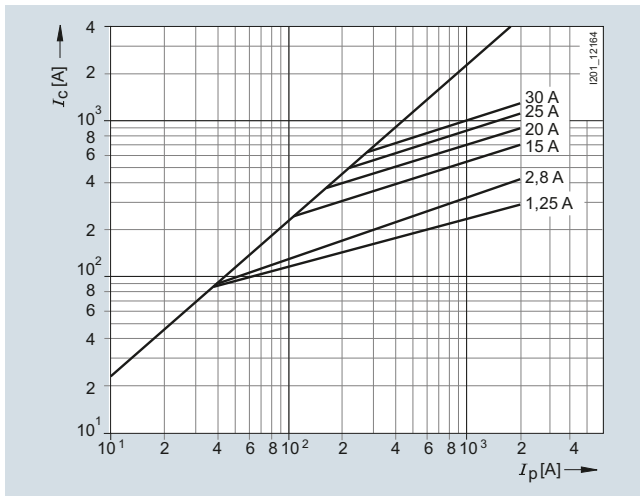**3NW3...-OHG series****Current limiting diagram**

## Fuse Systems


### Busbar systems

#### Overview


Busbars with pin-type connections can be used for NEOZED safety switching devices and fuse bases. Busbars in 10 mm<sup>2</sup> and 16 mm<sup>2</sup> versions are available.

Busbars with fork plugs are used for the most frequently used NEOZED fuse bases made of ceramic.


#### Benefits

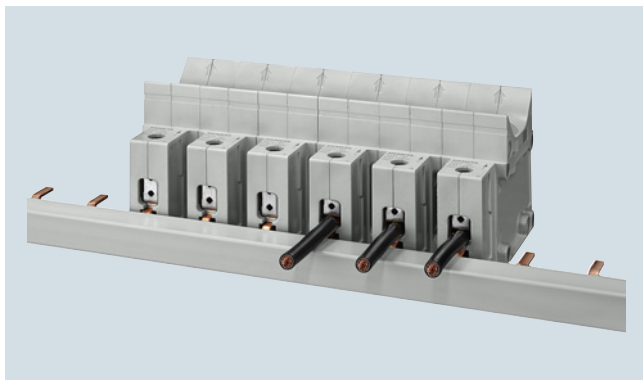


- Clear and visible conductor connection that can be easily checked when using the NEOZED D02 comfort base and which facilitates cable entry

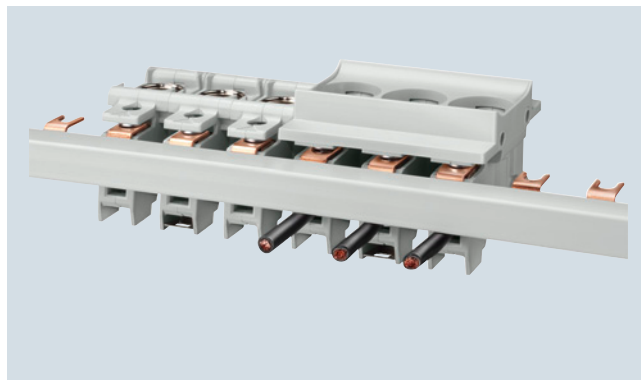


- Bus-mounting of NEOZED fuse bases made of molded plastic on 3-phase busbar with fork plug, which can be cut to length

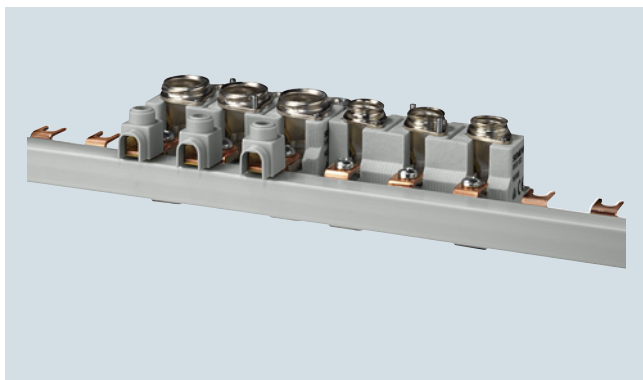


- Bus-mounting of NEOZED fuse bases made of ceramic on 3-phase busbar with fork plug, which can be cut to length

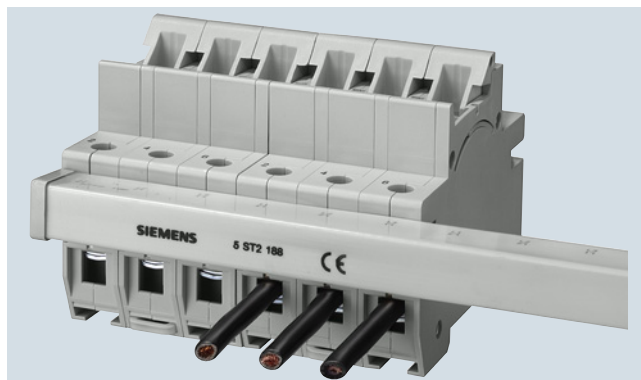


- Bus-mounting of MINIZED D01 fuse switch disconnectors on 3-phase busbar with fork plug, can be cut to length

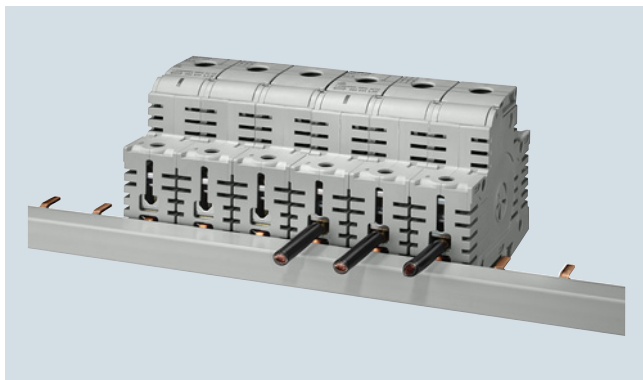


- Clear and visible conductor connection that can be easily checked when using MINIZED D02 switch disconnectors. This facilitates cable entry and saves time

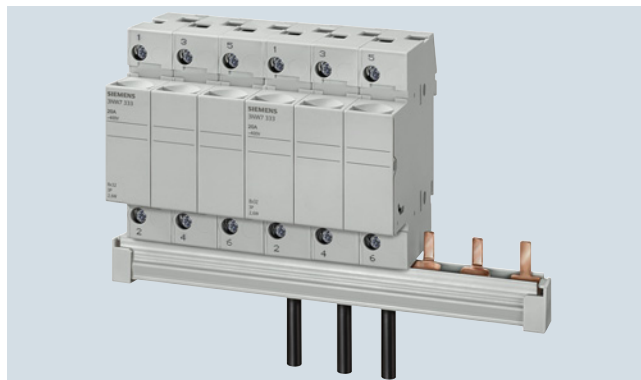

- Bus-mounting of cylindrical fuse holders 8 × 32 mm and 10 × 38 mm with three-phase pin busbar that can be cut to length

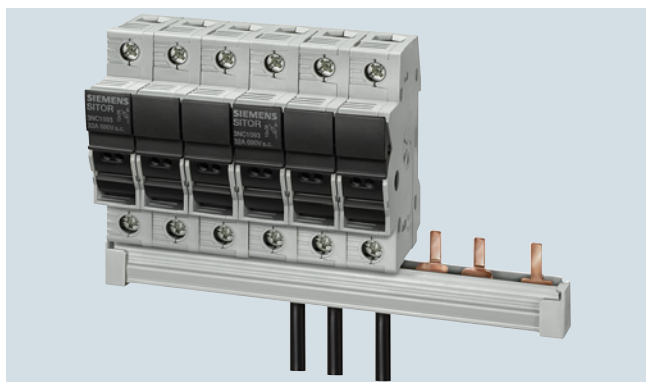

- Bus-mounting of SITOR cylindrical fuse holders 10 mm x 38 mm with the same terminal connection as Class CC fuse holders with 3-phase pin busbar that can be cut to length

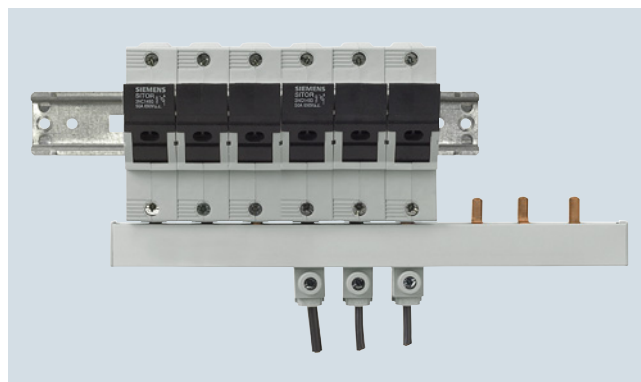

- Bus mounting with infeed through a connection terminal directly on the fuse holder up to a conductor cross-section of 25 mm²

### Technical specifications

|                                                                    |                        | 5ST, 5SH                                                                                                           |
|--------------------------------------------------------------------|------------------------|--------------------------------------------------------------------------------------------------------------------|
| <b>Standards</b>                                                   |                        | EN 60439-1 (VDE 0660-500): 2005-01                                                                                 |
| <b>Busbar material</b>                                             |                        | SF-Cu F 24                                                                                                         |
| <b>Partition material</b>                                          |                        | Plastic Cycloy 3600, heat-resistant above 90 °C, flame-retardant, self-extinguishing, free of dioxins and halogens |
| <b>Rated operational voltage <math>U_c</math></b>                  | V AC                   | 400                                                                                                                |
| <b>Rated current <math>I_n</math></b>                              |                        |                                                                                                                    |
| • Cross-section 10 mm²                                             | A                      | 63                                                                                                                 |
| • Cross-section 16 mm²                                             | A                      | 80                                                                                                                 |
| <b>Rated impulse withstand voltage <math>U_{imp}</math></b>        | kV                     | 4                                                                                                                  |
| <b>Test pulse voltage (1.2/50)</b>                                 | kV                     | 6.2                                                                                                                |
| <b>Rated conditional short-circuit current <math>I_{cc}</math></b> | kA                     | 25                                                                                                                 |
| <b>Resistance to climate</b>                                       |                        |                                                                                                                    |
| • Constant atmosphere                                              | Acc. to DIN 50015      | 23/83; 40/92; 55/20                                                                                                |
| • Humid heat                                                       | Acc. to IEC 60068-2-30 | 28 cycles                                                                                                          |
| <b>Insulation coordination</b>                                     |                        |                                                                                                                    |
| • Overvoltage category                                             |                        | III                                                                                                                |
| • Pollution degree                                                 |                        | 2                                                                                                                  |
| <b>Maximum busbar current <math>I_S</math> per phase</b>           |                        |                                                                                                                    |
| • Infeed at the start of the busbar                                |                        |                                                                                                                    |
| - Cross-section 10 mm²                                             | A                      | 63                                                                                                                 |
| - Cross-section 16 mm²                                             | A                      | 80                                                                                                                 |
| • Infeed at the center of the busbar                               |                        |                                                                                                                    |
| - Cross-section 10 mm²                                             | A                      | 100                                                                                                                |
| - Cross-section 16 mm²                                             | A                      | 130                                                                                                                |


## Fuse Systems

### Busbar systems


#### 5ST37...-HG busbars acc. to UL 508

|                                                          |                        | 5ST37...-0HG                                | 5ST37...-2HG | 5ST3770-0HG            | 5ST3770-1HG            |
|----------------------------------------------------------|------------------------|---------------------------------------------|--------------|------------------------|------------------------|
| <b>Standards</b>                                         |                        | UL 508, CSA C22.2 No. 14-M 95               |              |                        |                        |
| <b>Approvals</b>                                         |                        | UL 508 File No. E328403<br>CSA              |              |                        |                        |
| <b>Operational voltage</b>                               |                        |                                             |              |                        |                        |
| • Acc. to IEC                                            | V AC                   | 690                                         |              |                        |                        |
| • Acc. to UL 489                                         | V AC                   | 600                                         |              |                        |                        |
| <b>Rated conditional short-circuit current</b>           | kA                     | 10 (RMS symmetrical 600 V for three cycles) |              |                        |                        |
| • Dielectric strength                                    | kV/mm                  | 25                                          |              |                        |                        |
| • Surge strength                                         | kV                     | > 9.5                                       |              |                        |                        |
| <b>Rated current</b>                                     | A                      | --                                          | --           | 115                    |                        |
| <b>Maximum busbar current <math>I_S</math> per phase</b> |                        |                                             |              |                        |                        |
| • Infeed at the start of the busbar                      | A                      | 80                                          | 100          | --                     | --                     |
| • Infeed at the center of the busbar                     | A                      | 160                                         | 200          | --                     | --                     |
| <b>Insulation coordination</b>                           |                        |                                             |              |                        |                        |
| • Overvoltage category                                   |                        | III                                         |              |                        |                        |
| • Pollution degree                                       |                        | 2                                           |              |                        |                        |
| <b>Busbar cross-section</b>                              | mm <sup>2</sup> Cu     | 18                                          | 25           | --                     | --                     |
| <b>Infeed</b>                                            |                        | Any                                         |              |                        |                        |
| <b>Conductor cross-sections</b>                          | AWG<br>mm <sup>2</sup> | --<br>--                                    | --<br>--     | 10 ... 1/0<br>6 ... 35 | 14 ... 1<br>1.5 ... 50 |
| <b>Terminals</b>                                         |                        |                                             |              |                        |                        |
| • Terminal tightening torque                             | Nm<br>lbs/in           | --<br>--                                    | --<br>--     | 5<br>50                | 3.5<br>35              |

#### Infeed at the start of the busbar

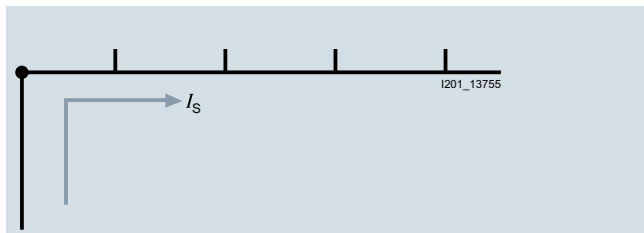

#### Infeed along the busbar or midpoint infeed

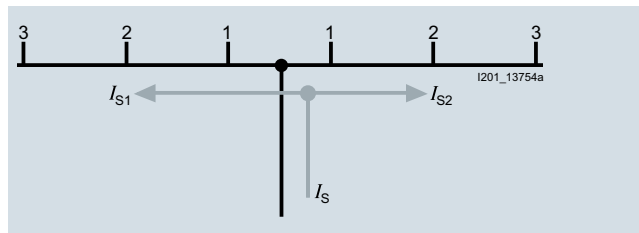


The sum of the output current per branch must not be greater than the busbar current  $I_{S1,2}/\text{phase}$ .

## Dimensional drawings


## 5ST37

## Pin spacing in MW (modular width; 1 MW = 18 mm)


Dimensions of side views in mm (approx.)

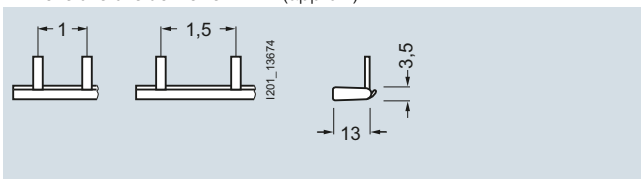

5ST3700 5ST3703  
5ST3701  
Single-phase Single-phase

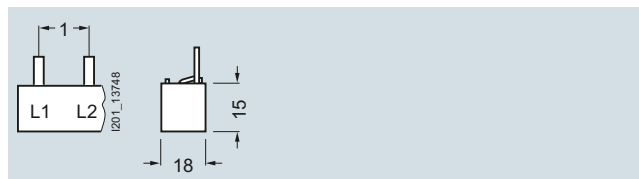

5ST3704  
5ST3705  
Two-phase

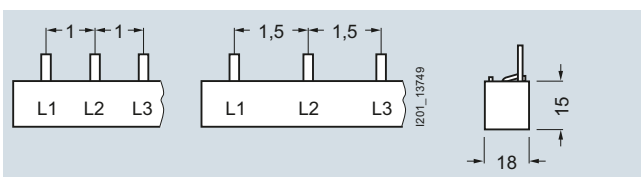


5ST3708 5ST3714  
5ST3710  
Three-phase Three-phase

## 5ST2


## Fork spacing in MW (modular width; 1 MW = 18 mm)

Dimensions of side views in mm (approx.)

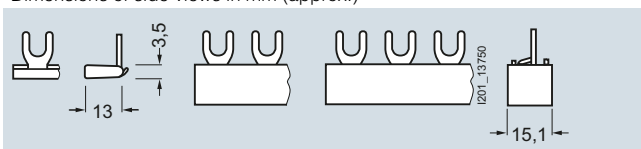


5ST2186 5ST2187 5ST2188  
5ST2190 5ST2191 5ST2192  
Single-phase Two-phase Three-phase

## Busbars for DIAZED EZR fuse bases

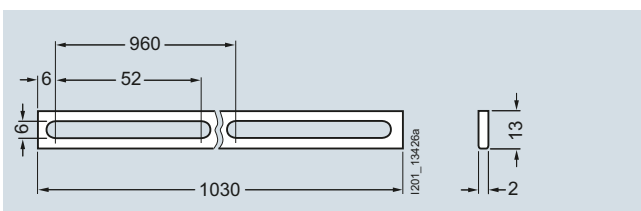


5SH3500

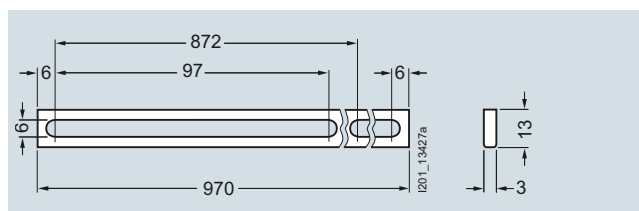


5SH3501

## 5SH5


## Fork spacing in MW (modular width; 1 MW = 18 mm), dimensions of side views in mm (approx.)

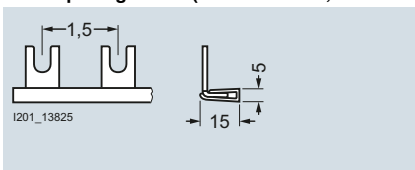

5SH5517

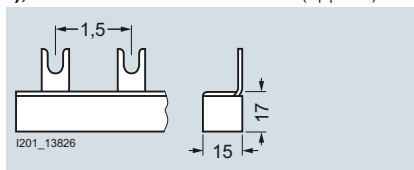

5SH5320

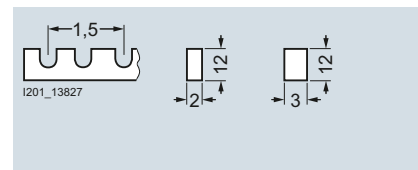

5SH5321 5SH5322

## Fuse Systems


### Busbar systems

#### 5ST37 . . . HG busbars acc. to UL 508


##### 5ST37

##### Pin spacing in MW (modular width; 1 MW = 18 mm)


Dimensions of side views in mm (approx.)




5ST3701-0HG 5ST3703-0HG




5ST3705-0HG

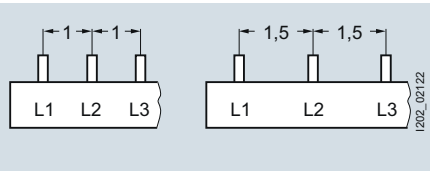


5ST3710-0HG 5ST3714-0HG




5ST3701-2HG




5ST3705-2HG




5ST3710-2HG




5ST3748-0HG



5ST3750-0HG



5ST3770-0HG




5ST3770-1HG

##### 5ST36 touch protection covers

##### Pin spacing in MW (modular width; 1 MW = 18 mm)

Dimensions of side views in mm (approx.)

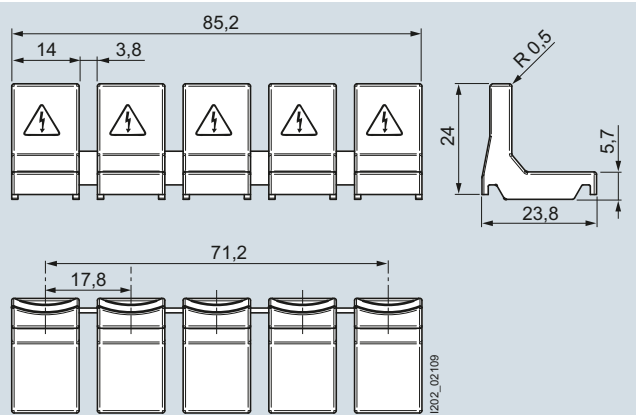

5ST3655-0HG

### Overview

LV HRC fuse systems (NH type) are used for installation systems in non-residential, commercial and industrial buildings as well as in switchgear assemblies of power utilities. They therefore protect essential building parts and systems.

LV HRC fuse systems (NH type) are fuse systems designed for operation by experts. There are no constructional requirements for non-interchangeability of rated current and touch protection.

The components and auxiliary equipment are designed in such a way as to ensure the safe replacement of LV HRC fuse systems or isolation of systems.

LV HRC fuse links are available in the sizes 000, 00, 0, 1, 2, 3, 4 and 4a.


LV HRC fuse links are available in the following operational classes:

- gG for cable and line protection
- aM for short-circuit protection of switching devices in motor circuits
- gR or aR for protection of power semiconductors
- gS: The new gS operational class combines cable and line protection with semiconductor protection

LV HRC fuse links of size 000 can also be used in LV HRC fuse bases, LV HRC fuse switch disconnectors, LV HRC fuse strips as well as LV HRC in-line fuse switch disconnectors of size 00.

The fuse links 300 A, 355 A and 425 A comply with the standard but do not have the VDE mark.

### LV HRC components:

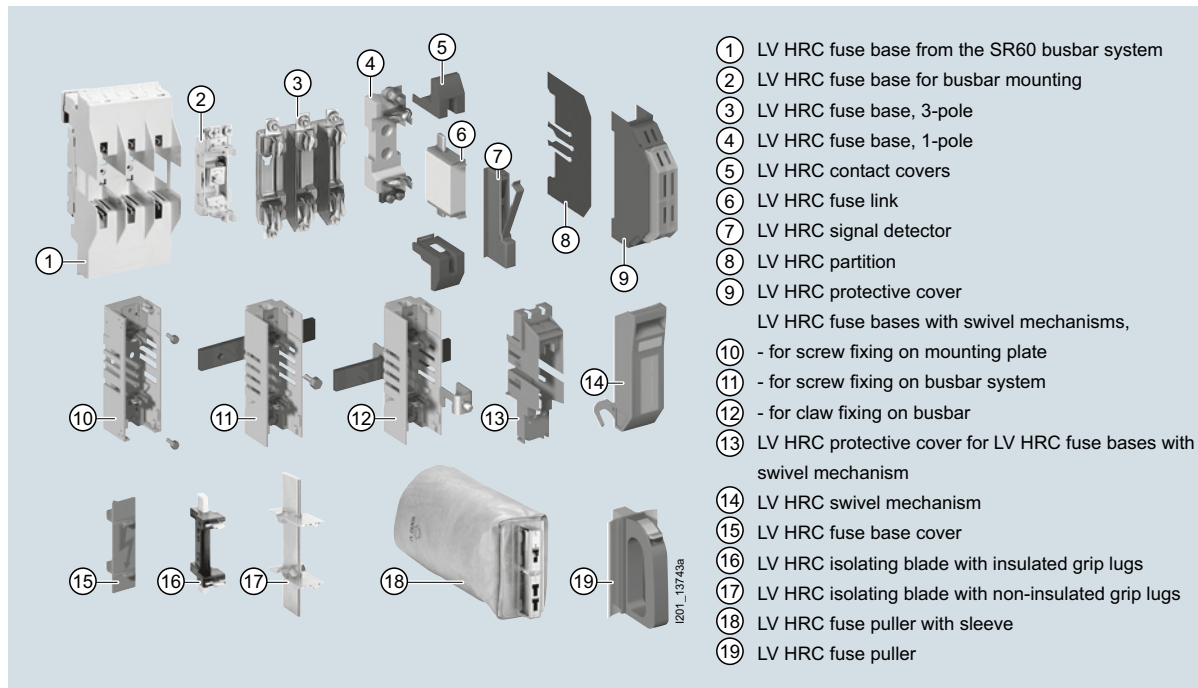

## Fuse Systems

### 3NA, 3ND LV HRC Fuse Systems

#### LV HRC fuse links

#### Technical specifications

|                               |       | LV HRC fuse links                                                                                |                                              |                      |                        |                   | Operational class<br>aM |
|-------------------------------|-------|--------------------------------------------------------------------------------------------------|----------------------------------------------|----------------------|------------------------|-------------------|-------------------------|
|                               |       | Operational class                                                                                |                                              |                      |                        |                   |                         |
|                               |       | gG                                                                                               |                                              |                      |                        |                   |                         |
|                               |       | 3NA6...-4<br>3NA6...-4KK<br>3NA383.-8                                                            | 3NA6...<br>3NA6...-7<br>3NA7...<br>3NA7...-7 | 3NA3...<br>3NA3...-7 | 3NA6...-6<br>3NA7...-6 | 3NA3...-6         | 3ND1<br>3ND2            |
| Standards                     |       | IEC 60269-1, -2; EN 60269-1; DIN VDE 0636                                                        |                                              |                      |                        |                   |                         |
| Approvals                     |       | DIN VDE 0636-2; CSA 22.2 No.106, File Number 016325_0_00 (CSA approval of fuses 500 V for 600 V) |                                              |                      |                        |                   |                         |
| Rated voltage $U_n$           |       |                                                                                                  |                                              |                      |                        |                   |                         |
| • Sizes 000 and 00            | V AC  | 400                                                                                              | 500                                          | 500                  | 690 <sup>1)</sup>      | 690 <sup>1)</sup> | 500                     |
|                               | V DC  | --                                                                                               | 250                                          | 250                  | 250                    | 250               | --                      |
| • Sizes 1 and 2               | V AC  | 400                                                                                              | 500                                          | 500                  | 690 <sup>1)</sup>      | 690 <sup>1)</sup> | 690                     |
|                               | V DC  | --                                                                                               | 440                                          | 440                  | 440                    | 440               | --                      |
| • Size 3                      | V AC  | --                                                                                               | --                                           | 500                  | --                     | 690 <sup>1)</sup> | 690                     |
|                               | V DC  | --                                                                                               | --                                           | 440                  | --                     | 440               | --                      |
| • Sizes 4 and 4a (IEC design) | V AC  | --                                                                                               | --                                           | 500                  | --                     | --                | --                      |
|                               | V DC  | --                                                                                               | --                                           | 440                  | --                     | --                | --                      |
| Rated current $I_n$           | A     | 10 ... 400                                                                                       | 2 ... 400                                    | 2 ... 1250           | 2 ... 315              | 2 ... 500         | 6 ... 630               |
| Rated breaking capacity       | kA AC | 120                                                                                              |                                              |                      |                        |                   |                         |
|                               | kA DC | --                                                                                               | 25                                           |                      |                        |                   | --                      |
| Contact pins                  |       | Non-corroding, silver-plated                                                                     |                                              |                      |                        |                   |                         |
| Resistance to climate         |       | °C                                                                                               | -20 ... +50 at 95% relative humidity         |                      |                        |                   |                         |


<sup>1)</sup> Manufacturer's confirmation for 690 V +10 % rated voltage available on request.

### Characteristic curves


#### 3NA30 series

Size: 0  
Operational class: gG  
Rated voltage: 500 V AC/440 V DC  
Rated current: 6 ... 160 A

#### Time/current characteristics diagram

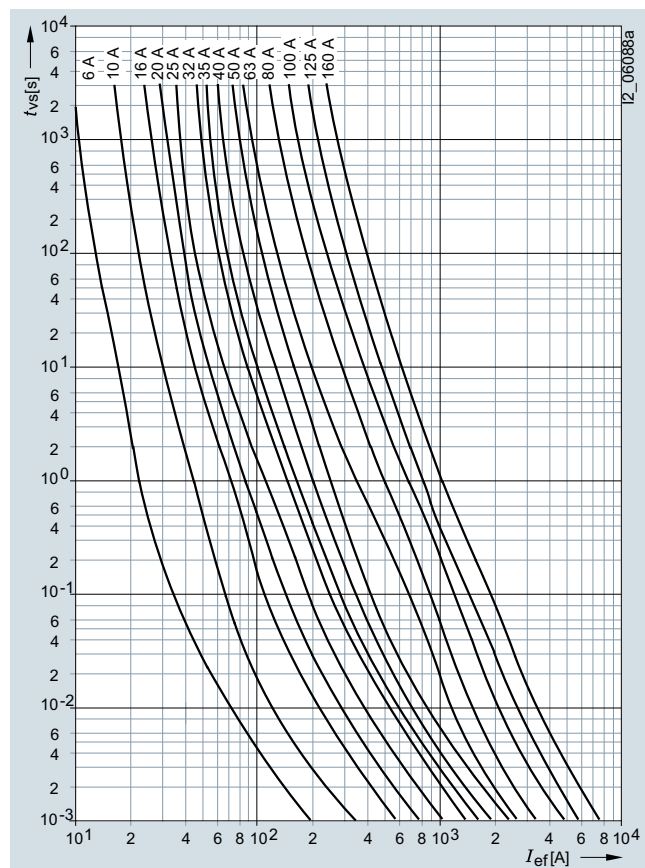


#### Current limiting diagram

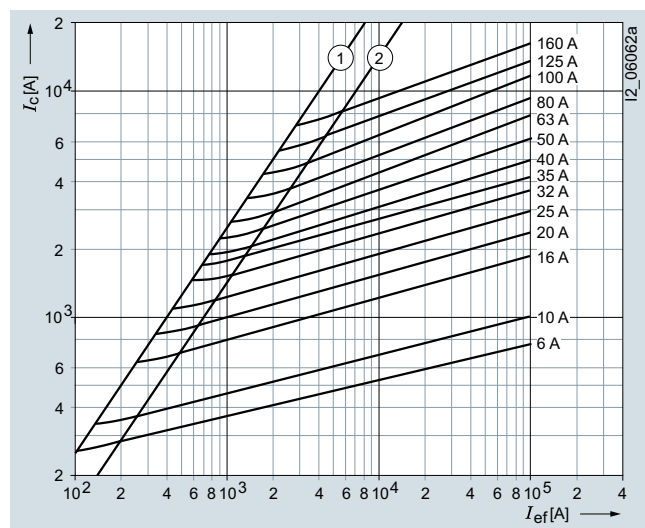

- ① Peak short-circuit current with largest DC component  
② Peak short-circuit current without DC component

#### Melting $I^2t$ values diagram

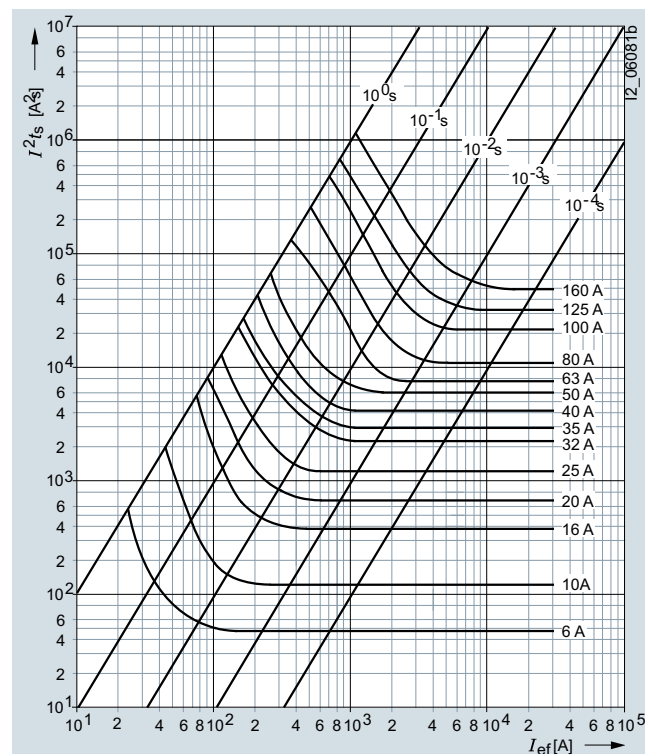

| Type    | $I_n$<br>A | $P_v$<br>W | $\Delta\theta$<br>K | $I^2t_s$<br>1 ms<br>A <sup>2</sup> s | $I^2t_s$<br>4 ms<br>A <sup>2</sup> s |
|---------|------------|------------|---------------------|--------------------------------------|--------------------------------------|
| 3NA3001 | 6          | 1.5        | 6                   | 46                                   | 50                                   |
| 3NA3003 | 10         | 1          | 9                   | 120                                  | 130                                  |
| 3NA3005 | 16         | 1.9        | 11                  | 370                                  | 420                                  |
| 3NA3007 | 20         | 2.3        | 13                  | 670                                  | 750                                  |
| 3NA3010 | 25         | 2.7        | 15                  | 1200                                 | 1380                                 |
| 3NA3012 | 32         | 3          | 13                  | 2200                                 | 2400                                 |
| 3NA3014 | 35         | 3          | 17                  | 3000                                 | 3300                                 |
| 3NA3017 | 40         | 3.4        | 17                  | 4000                                 | 4500                                 |
| 3NA3020 | 50         | 4.5        | 24                  | 6000                                 | 6800                                 |
| 3NA3022 | 63         | 5.8        | 27                  | 7700                                 | 9800                                 |
| 3NA3024 | 80         | 7          | 34                  | 12000                                | 16000                                |
| 3NA3030 | 100        | 8.2        | 37                  | 24000                                | 30600                                |
| 3NA3032 | 125        | 10.2       | 38                  | 36000                                | 50000                                |
| 3NA3036 | 160        | 13.5       | 44                  | 58000                                | 85000                                |

| Type    | $I^2t_a$<br>230 V AC<br>A <sup>2</sup> s | 400 V AC<br>A <sup>2</sup> s | 500 V AC<br>A <sup>2</sup> s |
|---------|------------------------------------------|------------------------------|------------------------------|
| 3NA3001 | 80                                       | 110                          | 150                          |
| 3NA3003 | 180                                      | 265                          | 370                          |
| 3NA3005 | 580                                      | 750                          | 1000                         |
| 3NA3007 | 1000                                     | 1370                         | 1900                         |
| 3NA3010 | 1800                                     | 2340                         | 3300                         |
| 3NA3012 | 3400                                     | 4550                         | 6400                         |
| 3NA3014 | 4900                                     | 6750                         | 9300                         |
| 3NA3017 | 6100                                     | 8700                         | 12100                        |
| 3NA3020 | 9100                                     | 11600                        | 16000                        |
| 3NA3022 | 14200                                    | 19000                        | 26500                        |
| 3NA3024 | 23100                                    | 30700                        | 43000                        |
| 3NA3030 | 40800                                    | 56200                        | 80000                        |
| 3NA3032 | 70000                                    | 91300                        | 130000                       |
| 3NA3036 | 120000                                   | 158000                       | 223000                       |

## Fuse Systems


### 3NA, 3ND LV HRC Fuse Systems

#### LV HRC fuse links


##### 3NA31, 3NA61, 3NA71 series

Size: 1  
Operational class: gG  
Rated voltage: 500 V AC/440 V DC  
Rated current: 16 ... 250 A

##### Time/current characteristics diagram

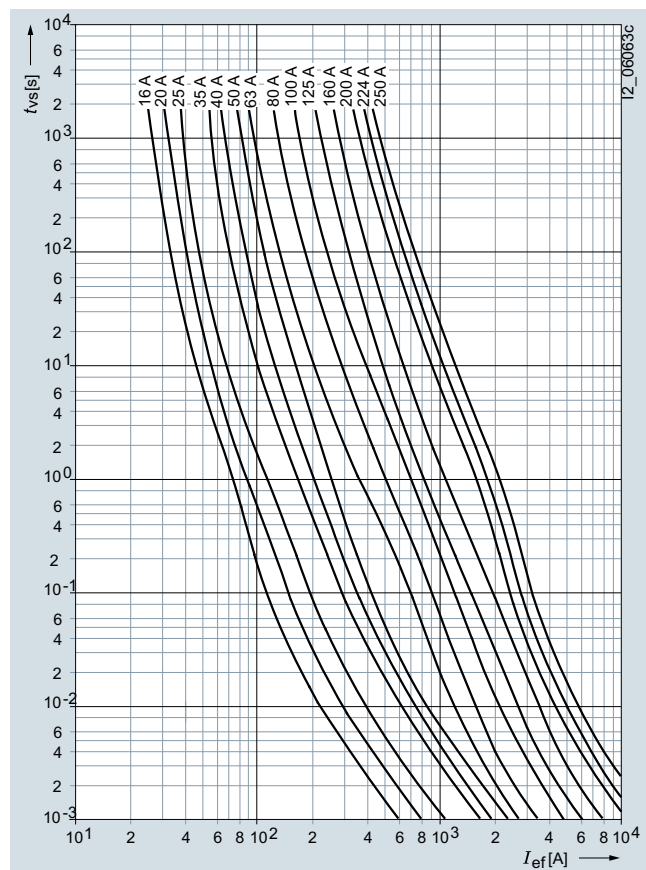


##### Current limiting diagram

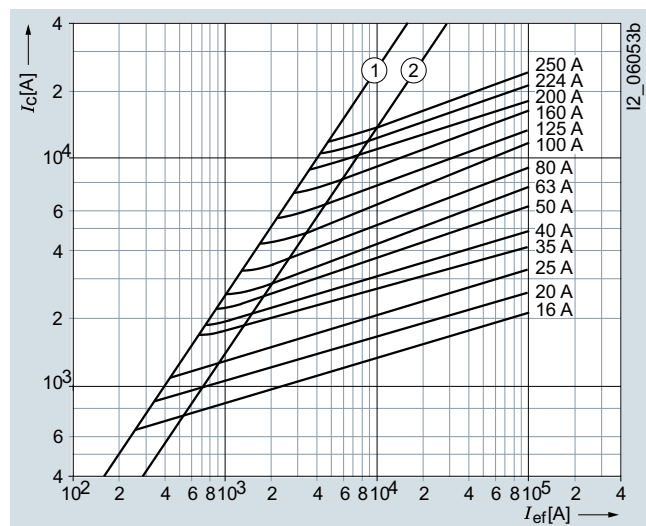

- ① Peak short-circuit current with largest DC component  
② Peak short-circuit current without DC component

##### Melting $I^2t$ values diagram


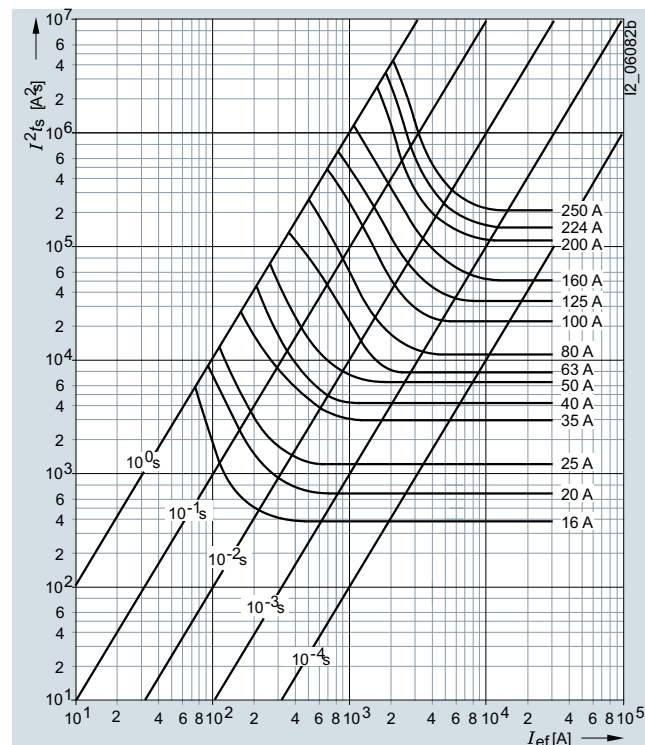


| Type                      | $I_n$ | $P_v$ | $\Delta\theta$ | $I^2t_s$                 |                          |
|---------------------------|-------|-------|----------------|--------------------------|--------------------------|
|                           | A     | W     | K              | 1 ms<br>A <sup>2</sup> s | 4 ms<br>A <sup>2</sup> s |
| 3NA3105, 3NA6105, 3NA7105 | 16    | 2.1   | 8              | 370                      | 420                      |
| 3NA3107, 3NA6107, 3NA7107 | 20    | 2.4   | 10             | 670                      | 750                      |
| 3NA3110, 3NA6110, 3NA7110 | 25    | 2.8   | 11             | 1200                     | 1380                     |
| 3NA3114, 3NA6114, 3NA7114 | 35    | 3.2   | 16             | 3000                     | 3300                     |
| 3NA3117, 3NA6117, 3NA7117 | 40    | 3.6   | 16             | 4000                     | 4500                     |
| 3NA3120, 3NA6120, 3NA7120 | 50    | 4.6   | 20             | 6000                     | 6800                     |
| 3NA3122, 3NA6122, 3NA7122 | 63    | 6     | 21             | 7700                     | 9800                     |
| 3NA3124, 3NA6124, 3NA7124 | 80    | 7.5   | 29             | 12000                    | 16000                    |
| 3NA3130, 3NA6130, 3NA7130 | 100   | 8.9   | 30             | 24000                    | 30600                    |
| 3NA3132, 3NA6132, 3NA7132 | 125   | 10.7  | 31             | 36000                    | 50000                    |
| 3NA3136, 3NA6136, 3NA7136 | 160   | 13.9  | 34             | 58000                    | 85000                    |
| 3NA3140, 3NA6140, 3NA7140 | 200   | 15    | 36             | 115000                   | 135000                   |
| 3NA3142, 3NA6142, 3NA7142 | 224   | 16.1  | 37             | 145000                   | 170000                   |
| 3NA3144, 3NA6144, 3NA7144 | 250   | 17.3  | 39             | 205000                   | 230000                   |


| Type                      | $I^2t_a$                     |                              |                              |
|---------------------------|------------------------------|------------------------------|------------------------------|
|                           | 230 V AC<br>A <sup>2</sup> s | 400 V AC<br>A <sup>2</sup> s | 500 V AC<br>A <sup>2</sup> s |
| 3NA3105, 3NA6105, 3NA7105 | 580                          | 750                          | 1000                         |
| 3NA3107, 3NA6107, 3NA7107 | 1000                         | 1370                         | 1900                         |
| 3NA3110, 3NA6110, 3NA7110 | 1800                         | 2340                         | 3300                         |
| 3NA3114, 3NA6114, 3NA7114 | 4900                         | 6750                         | 9300                         |
| 3NA3117, 3NA6117, 3NA7117 | 6100                         | 8700                         | 12100                        |
| 3NA3120, 3NA6120, 3NA7120 | 9100                         | 11600                        | 16000                        |
| 3NA3122, 3NA6122, 3NA7122 | 14200                        | 19000                        | 26500                        |
| 3NA3124, 3NA6124, 3NA7124 | 23100                        | 30700                        | 43000                        |
| 3NA3130, 3NA6130, 3NA7130 | 40800                        | 56200                        | 80000                        |
| 3NA3132, 3NA6132, 3NA7132 | 70000                        | 91300                        | 130000                       |
| 3NA3136, 3NA6136, 3NA7136 | 120000                       | 158000                       | 223000                       |
| 3NA3140, 3NA6140, 3NA7140 | 218000                       | 285000                       | 400000                       |
| 3NA3142, 3NA6142, 3NA7142 | 299000                       | 392000                       | 550000                       |
| 3NA3144, 3NA6144, 3NA7144 | 420000                       | 551000                       | 780000                       |

**3NA31...-6, 3NA61...-6, 3NA71...-6 series**

Size: 1  
 Operational class: gG  
 Rated voltage: 690 V AC<sup>1)</sup>/440 V DC  
 Rated current: 50 ... 200 A

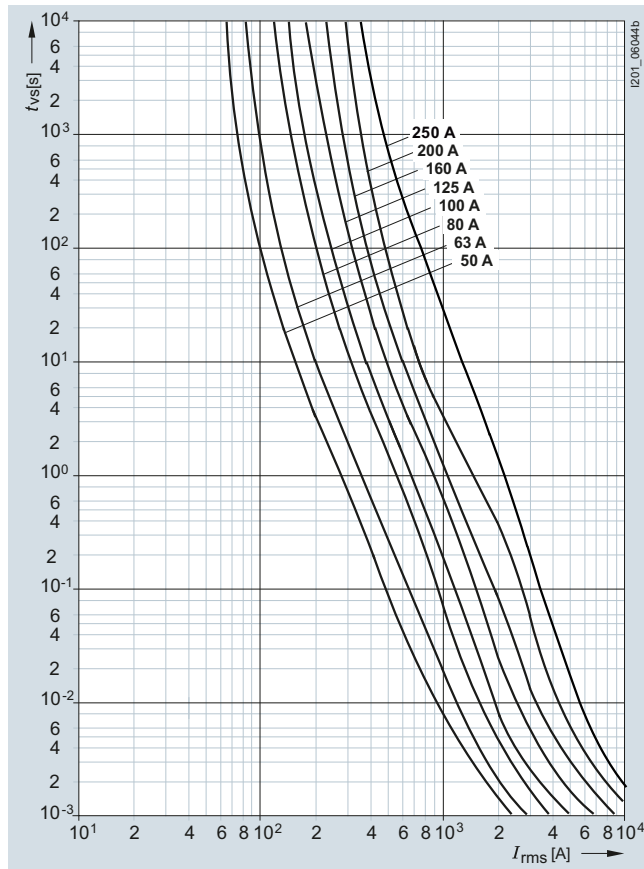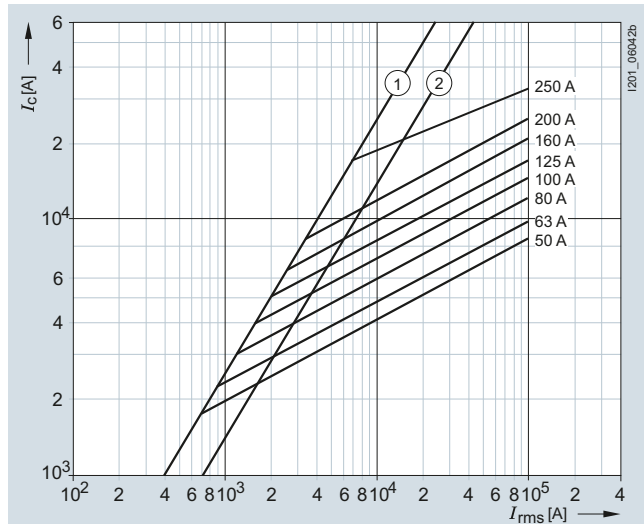**Time/current characteristics diagram****Current limiting diagram**

- ① Peak short-circuit current with largest DC component  
 ② Peak short-circuit current without DC component

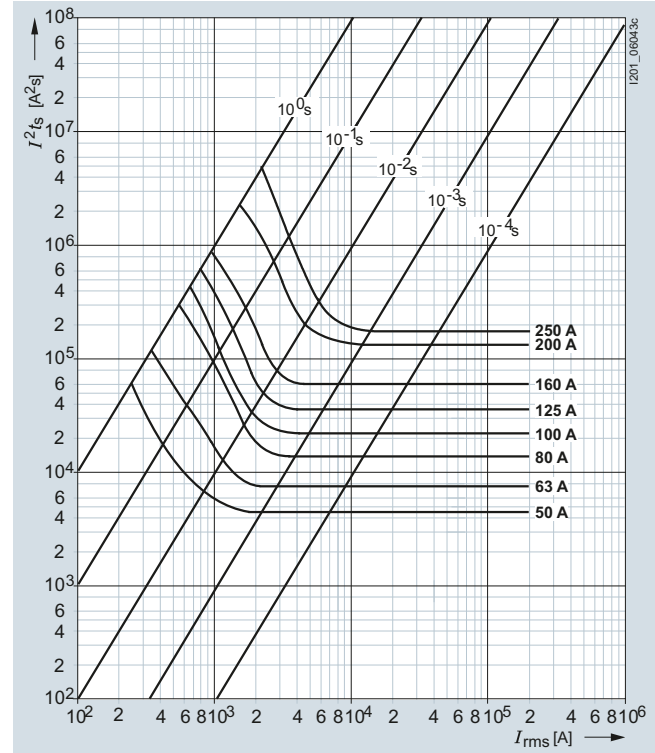**Melting  $I^2t_s$  values diagram**

| Type                            | $I_n$ | $P_v$ | $\Delta\theta$ | $I^2t_s$                 |                          |
|---------------------------------|-------|-------|----------------|--------------------------|--------------------------|
|                                 | A     | W     | K              | 1 ms<br>A <sup>2</sup> s | 4 ms<br>A <sup>2</sup> s |
| 3NA3120-6, 3NA6120-6, 3NA7120-6 | 50    | 6.7   | 21             | 440                      | 7400                     |
| 3NA3122-6, 3NA6122-6, 3NA7122-6 | 63    | 7.6   | 22             | 7600                     | 10100                    |
| 3NA3124-6, 3NA6124-6, 3NA7124-6 | 80    | 6.7   | 22             | 13500                    | 17000                    |
| 3NA3130-6, 3NA6130-6, 3NA7130-6 | 100   | 8.7   | 28             | 21200                    | 30500                    |
| 3NA3132-6, 3NA6132-6, 3NA7132-6 | 125   | 10.5  | 29             | 36000                    | 50000                    |
| 3NA3136-6, 3NA6136-6, 3NA7136-6 | 160   | 13.8  | 33             | 58000                    | 85000                    |
| 3NA3140-6, 3NA6140-6, 3NA7140-6 | 200   | 16.6  | 35             | 132000                   | 144000                   |

| Type                            | $I^2t_a$                     |                              |                              |
|---------------------------------|------------------------------|------------------------------|------------------------------|
|                                 | 230 V AC<br>A <sup>2</sup> s | 400 V AC<br>A <sup>2</sup> s | 690 V AC<br>A <sup>2</sup> s |
| 3NA3120-6, 3NA6120-6, 3NA7120-6 | 9100                         | 11200                        | 1900                         |
| 3NA3122-6, 3NA6122-6, 3NA7122-6 | 13600                        | 17000                        | 24000                        |
| 3NA3124-6, 3NA6124-6, 3NA7124-6 | 24300                        | 32000                        | 55000                        |
| 3NA3130-6, 3NA6130-6, 3NA7130-6 | 42400                        | 52000                        | 75000                        |
| 3NA3132-6, 3NA6132-6, 3NA7132-6 | 69500                        | 82200                        | 130000                       |
| 3NA3136-6, 3NA6136-6, 3NA7136-6 | 120000                       | 155000                       | 223000                       |
| 3NA3140-6, 3NA6140-6, 3NA7140-6 | 211000                       | 240000                       | 360000                       |

<sup>1)</sup> Manufacturer's confirmation for 690 V +10 % rated voltage available on request.

## Fuse Systems


### 3NA, 3ND LV HRC Fuse Systems

#### LV HRC fuse links


##### 3NA32, 3NA62, 3NA72 series

Size: 2  
Operational class: gG  
Rated voltage: 500 V AC/440 V DC  
Rated current: 35 ... 400 A

##### Time/current characteristics diagram

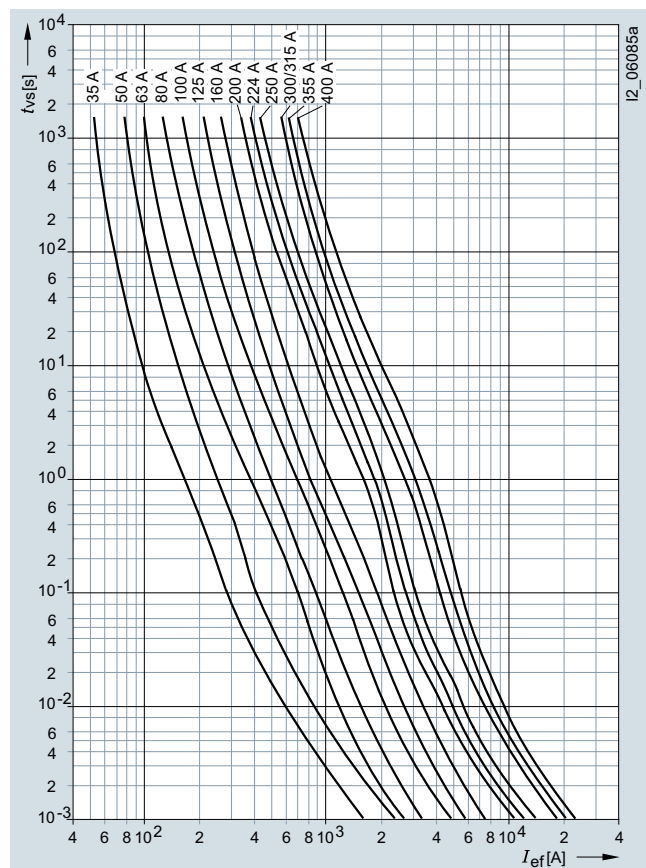


##### Current limiting diagram

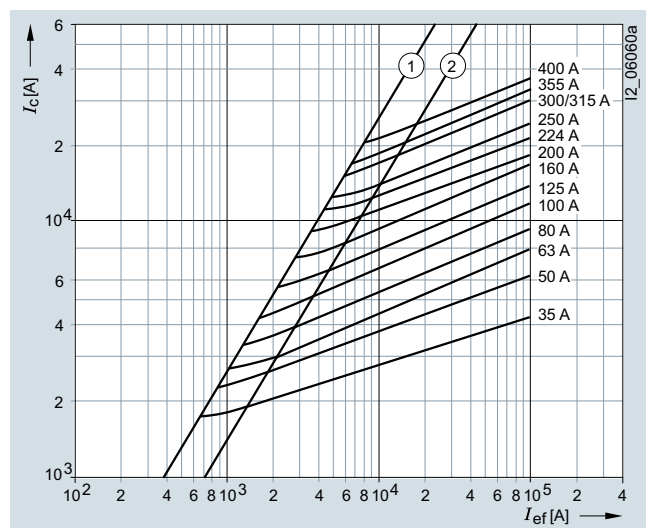

- ① Peak short-circuit current with largest DC component  
② Peak short-circuit current without DC component

##### Melting $I^2t$ values diagram


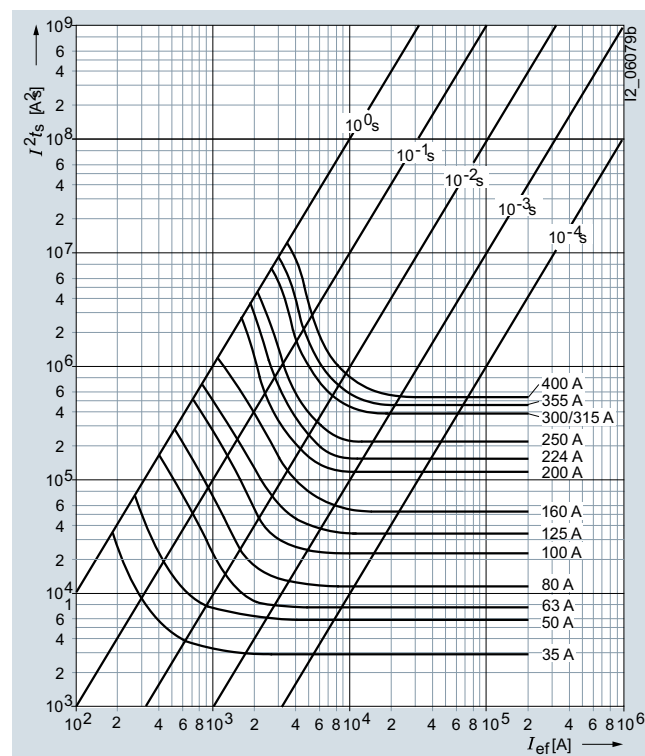


| Type                      | $I_n$<br>A | $P_v$<br>W | $\Delta\theta$<br>K | $I^2t_s$                 |                          |
|---------------------------|------------|------------|---------------------|--------------------------|--------------------------|
|                           |            |            |                     | 1 ms<br>A <sup>2</sup> s | 4 ms<br>A <sup>2</sup> s |
| 3NA3214, 3NA6214, 3NA7214 | 35         | 3.2        | 12                  | 3000                     | 3300                     |
| 3NA3220, 3NA6220, 3NA7220 | 50         | 4.7        | 16                  | 6000                     | 6800                     |
| 3NA3222, 3NA6222, 3NA7222 | 63         | 5.9        | 16                  | 7700                     | 9800                     |
| 3NA3224, 3NA6224, 3NA7224 | 80         | 6.8        | 21                  | 12000                    | 16000                    |
| 3NA3230, 3NA6230, 3NA7230 | 100        | 7.4        | 22                  | 24000                    | 30600                    |
| 3NA3232, 3NA6232, 3NA7232 | 125        | 9.8        | 27                  | 36000                    | 50000                    |
| 3NA3236, 3NA6236, 3NA7236 | 160        | 12.6       | 34                  | 58000                    | 85000                    |
| 3NA3240, 3NA6240, 3NA7240 | 200        | 14.9       | 33                  | 115000                   | 135000                   |
| 3NA3242, 3NA6242, 3NA7242 | 224        | 15.4       | 31                  | 145000                   | 170000                   |
| 3NA3244, 3NA6244, 3NA7244 | 250        | 17.9       | 38                  | 205000                   | 230000                   |
| 3NA3250, 3NA6250          | 300        | 19.4       | 34                  | 361000                   | 433000                   |
| 3NA3252, 3NA6252, 3NA7252 | 315        | 21.4       | 35                  | 361000                   | 433000                   |
| 3NA3254, 3NA6254          | 355        | 26.0       | 49                  | 441000                   | 538000                   |
| 3NA3260, 3NA6260, 3NA7260 | 400        | 27.5       | 52                  | 529000                   | 676000                   |


| Type                      | $I^2t_a$                     |                              |                              |
|---------------------------|------------------------------|------------------------------|------------------------------|
|                           | 230 V AC<br>A <sup>2</sup> s | 400 V AC<br>A <sup>2</sup> s | 500 V AC<br>A <sup>2</sup> s |
| 3NA3214, 3NA6214, 3NA7214 | 4900                         | 6750                         | 9300                         |
| 3NA3220, 3NA6220, 3NA7220 | 9100                         | 11600                        | 16000                        |
| 3NA3222, 3NA6222, 3NA7222 | 14200                        | 19000                        | 26500                        |
| 3NA3224, 3NA6224, 3NA7224 | 23100                        | 30700                        | 43000                        |
| 3NA3230, 3NA6230, 3NA7230 | 40800                        | 56200                        | 80000                        |
| 3NA3232, 3NA6232, 3NA7232 | 70000                        | 91300                        | 130000                       |
| 3NA3236, 3NA6236, 3NA7236 | 120000                       | 158000                       | 223000                       |
| 3NA3240, 3NA6240, 3NA7240 | 218000                       | 285000                       | 400000                       |
| 3NA3242, 3NA6242, 3NA7242 | 299000                       | 392000                       | 550000                       |
| 3NA3244, 3NA6244, 3NA7244 | 420000                       | 551000                       | 780000                       |
| 3NA3250, 3NA6250          | 670000                       | 901000                       | 1275000                      |
| 3NA3252, 3NA6252, 3NA7252 | 670000                       | 901000                       | 1275000                      |
| 3NA3254, 3NA6254          | 800000                       | 1060000                      | 1500000                      |
| 3NA3260, 3NA6260, 3NA7260 | 1155000                      | 1515000                      | 2150000                      |

**3NA32..-6, 3NA62..-6, 3NA72..-6 series**

Size: 2  
 Operational class: gG  
 Rated voltage: 690 V AC<sup>1)</sup>/440 V DC  
 Rated current: 80 ... 315 A

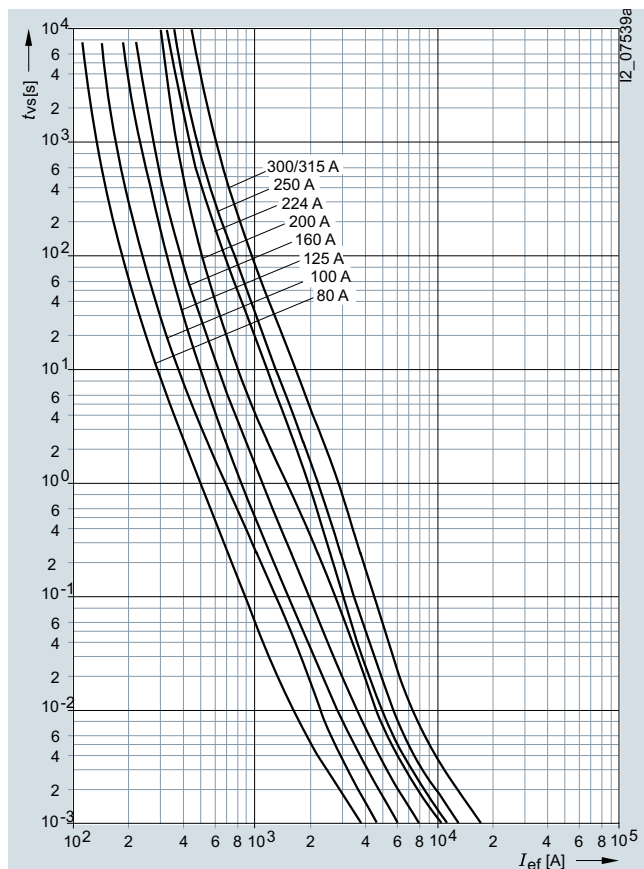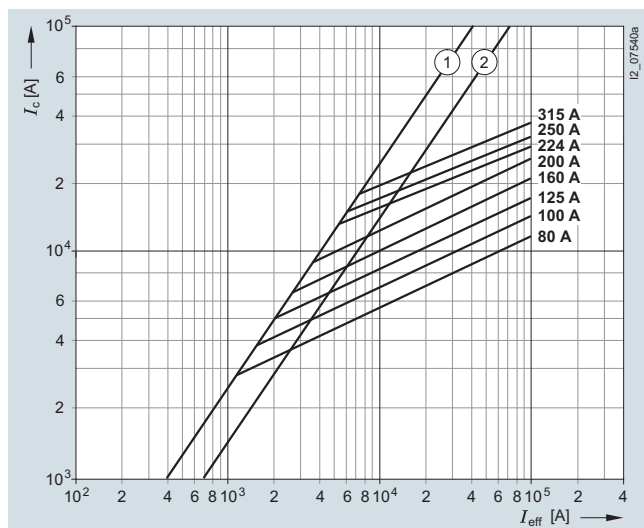**Time/current characteristics diagram****Current limiting diagram**

- ① Peak short-circuit current with largest DC component  
 ② Peak short-circuit current without DC component

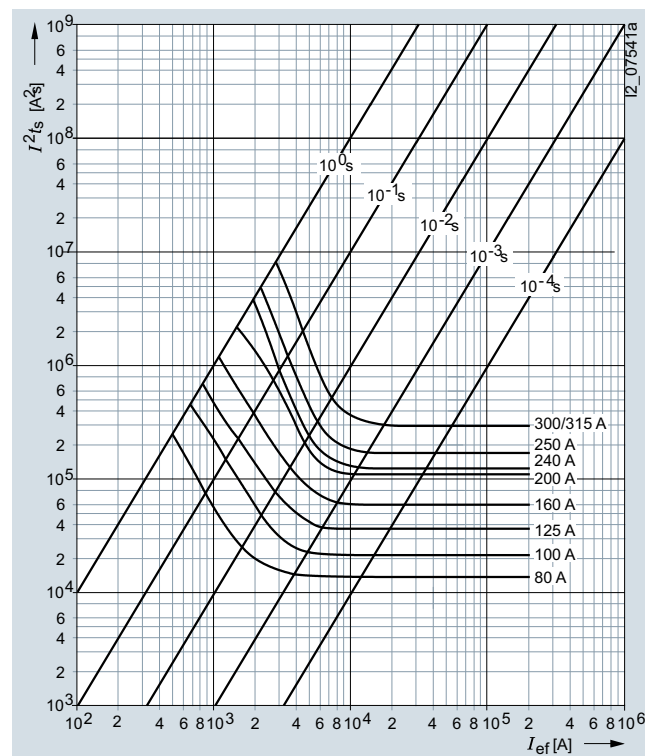**Melting  $I^2t$  values diagram**

| Type                            | $I_n$ | $P_v$ | $\Delta\theta$ | $I^2t_s$                 |                          |
|---------------------------------|-------|-------|----------------|--------------------------|--------------------------|
|                                 | A     | W     | K              | 1 ms<br>A <sup>2</sup> s | 4 ms<br>A <sup>2</sup> s |
| 3NA3224-6, 3NA6224-6, 3NA7224-6 | 80    | 6.6   | 22             | 13500                    | 17000                    |
| 3NA3230-6, 3NA6230-6, 3NA7230-6 | 100   | 8.5   | 26             | 21200                    | 30500                    |
| 3NA3232-6, 3NA6232-6, 3NA7232-6 | 125   | 9.8   | 29             | 36000                    | 50000                    |
| 3NA3236-6, 3NA6236-6, 3NA7236-6 | 160   | 13.3  | 31             | 58000                    | 85000                    |
| 3NA3240-6, 3NA6240-6, 3NA7240-6 | 200   | 16.1  | 33             | 132000                   | 144000                   |
| 3NA3242-6, 3NA6242-6, 3NA7242-6 | 224   | 19.9  | 38             | 125000                   | 162000                   |
| 3NA3244-6, 3NA6244-6, 3NA7244-6 | 250   | 23    | 44             | 180000                   | 215000                   |
| 3NA3250-6, 3NA6250-6, 3NA7250-6 | 300   | 25.6  | 38             | 300000                   | 380000                   |
| 3NA3252-6, 3NA6252-6, 3NA7252-6 | 315   | 28.2  | 42             | 300000                   | 380000                   |

| Type                            | $I^2t_a$                     | 400 V AC         | 690 V AC         |
|---------------------------------|------------------------------|------------------|------------------|
|                                 | 230 V AC<br>A <sup>2</sup> s | A <sup>2</sup> s | A <sup>2</sup> s |
| 3NA3224-6, 3NA6224-6, 3NA7224-6 | 24300                        | 32000            | 55000            |
| 3NA3230-6, 3NA6230-6, 3NA7230-6 | 42400                        | 52000            | 75000            |
| 3NA3232-6, 3NA6232-6, 3NA7232-6 | 69500                        | 82200            | 130000           |
| 3NA3236-6, 3NA6236-6, 3NA7236-6 | 120000                       | 155000           | 223000           |
| 3NA3240-6, 3NA6240-6, 3NA7240-6 | 211000                       | 240000           | 360000           |
| 3NA3242-6, 3NA6242-6, 3NA7242-6 | 300000                       | 300000           | 450000           |
| 3NA3244-6, 3NA6244-6, 3NA7244-6 | 453000                       | 350000           | 525000           |
| 3NA3250-6, 3NA6250-6, 3NA7250-6 | 480000                       | 625000           | 940000           |
| 3NA3252-6, 3NA6252-6, 3NA7252-6 | 480000                       | 625000           | 940000           |

<sup>1)</sup> Manufacturer's confirmation for 690 V + 10 % rated voltage available on request.

## Fuse Systems


### 3NA, 3ND LV HRC Fuse Systems

#### LV HRC fuse links


##### 3NA33 series

Size: 3  
 Operational class: gG  
 Rated voltage: 500 V AC/440 V DC  
 Rated current: 200 ... 630 A

##### Time/current characteristics diagram

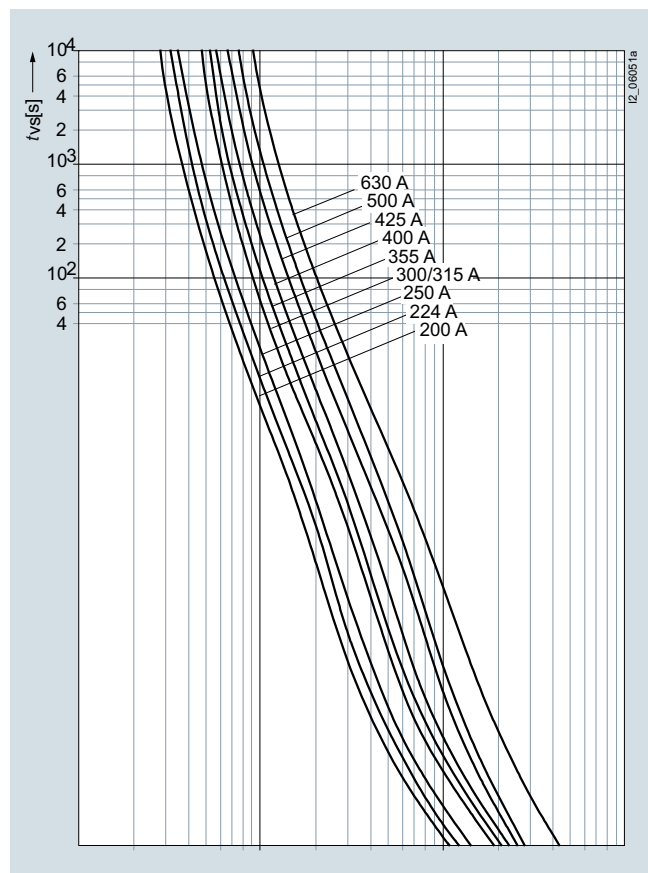


##### Current limiting diagram

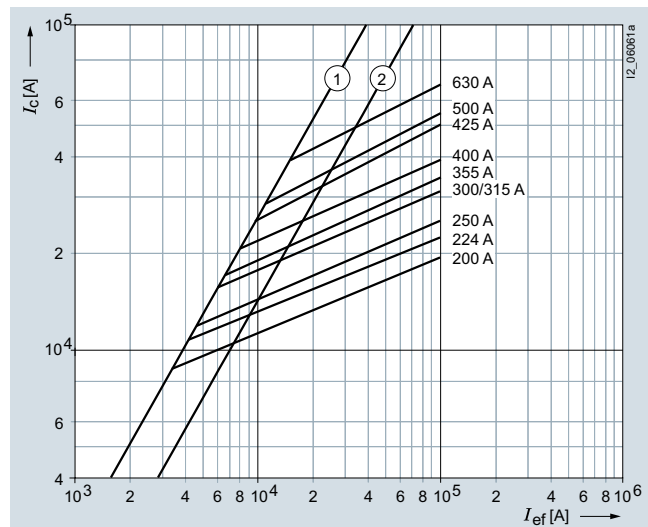

- ① Peak short-circuit current with largest DC component  
 ② Peak short-circuit current without DC component

##### Melting $I^2t$ values diagram


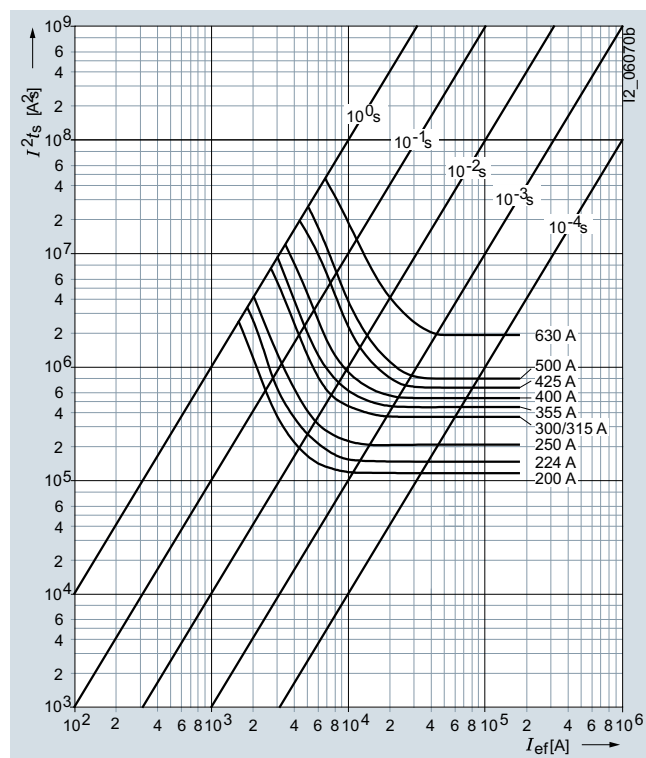


| Type    | $I_n$<br>A | $P_v$<br>W | $\Delta\theta$<br>K | $I^2t_s$<br>1 ms<br>A <sup>2</sup> s | 4 ms<br>A <sup>2</sup> s |
|---------|------------|------------|---------------------|--------------------------------------|--------------------------|
| 3NA3340 | 200        | 14.9       | 32                  | 115000                               | 135000                   |
| 3NA3342 | 224        | 15.4       | 31                  | 145000                               | 170000                   |
| 3NA3344 | 250        | 17.9       | 36                  | 205000                               | 230000                   |
| 3NA3350 | 300        | 19.4       | 19                  | 361000                               | 433000                   |
| 3NA3352 | 315        | 21.4       | 22                  | 361000                               | 433000                   |
| 3NA3354 | 355        | 26.0       | 26                  | 441000                               | 538000                   |
| 3NA3360 | 400        | 27.5       | 28                  | 529000                               | 676000                   |
| 3NA3362 | 425        | 26.5       | 34                  | 650000                               | 970000                   |
| 3NA3365 | 500        | 36.5       | 41                  | 785000                               | 1270000                  |
| 3NA3372 | 630        | 44.0       | 50                  | 1900000                              | 2700000                  |


| Type    | $I^2t_a$<br>230 V AC<br>A <sup>2</sup> s | 400 V AC<br>A <sup>2</sup> s | 500 V AC<br>A <sup>2</sup> s |
|---------|------------------------------------------|------------------------------|------------------------------|
| 3NA3340 | 218000                                   | 285000                       | 400000                       |
| 3NA3342 | 299000                                   | 392000                       | 550000                       |
| 3NA3344 | 420000                                   | 551000                       | 780000                       |
| 3NA3350 | 670000                                   | 901000                       | 1275000                      |
| 3NA3352 | 670000                                   | 901000                       | 1275000                      |
| 3NA3354 | 800000                                   | 1060000                      | 1500000                      |
| 3NA3360 | 1155000                                  | 1515000                      | 2150000                      |
| 3NA3362 | 1515000                                  | 1856000                      | 2270000                      |
| 3NA3365 | 1915000                                  | 2260000                      | 2700000                      |
| 3NA3372 | 3630000                                  | 4340000                      | 5400000                      |

**3NA33...-6 series**

Size: 3  
 Operational class: gG  
 Rated voltage: 690 V AC<sup>1)</sup>/440 V DC  
 Rated current: 250 ... 500 A

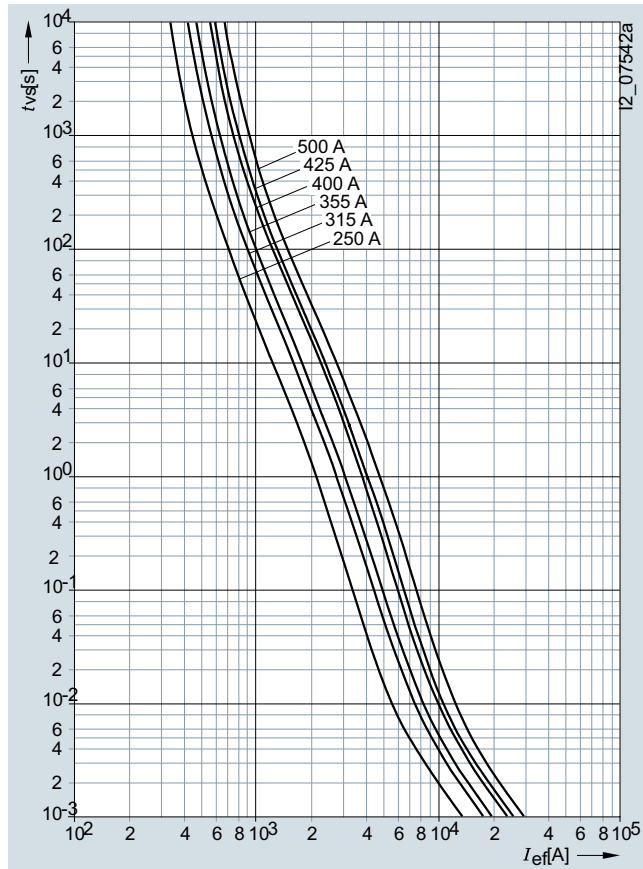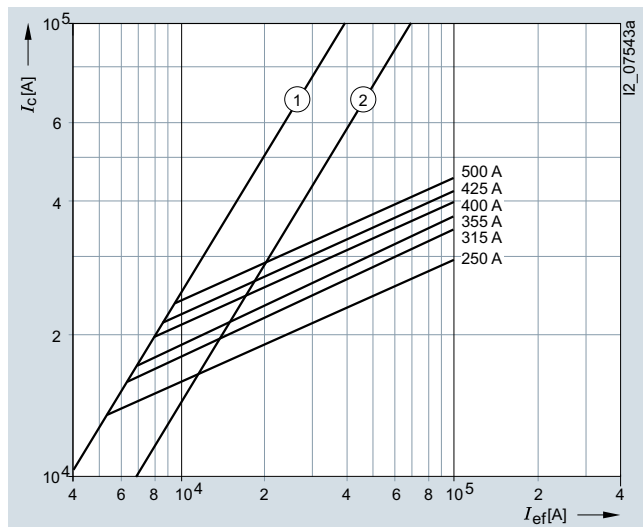**Time/current characteristics diagram****Current limiting diagram**

- ① Peak short-circuit current with largest DC component  
 ② Peak short-circuit current without DC component

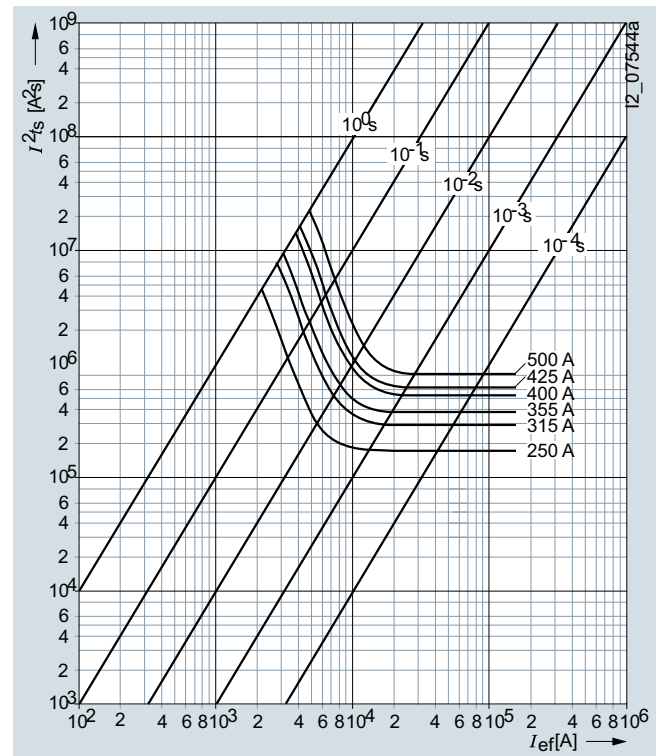**Melting  $I^2t$  values diagram**

| Type      | $I_n$<br>A | $P_v$<br>W | $\Delta\theta$<br>K | $I^2t_s$<br>1 ms<br>A <sup>2</sup> s | 4 ms<br>A <sup>2</sup> s |
|-----------|------------|------------|---------------------|--------------------------------------|--------------------------|
| 3NA3344-6 | 250        | 23         | 44                  | 180000                               | 215000                   |
| 3NA3352-6 | 315        | 28.2       | 42                  | 300000                               | 380000                   |
| 3NA3354-6 | 355        | 32.5       | 40                  | 380000                               | 470000                   |
| 3NA3360-6 | 400        | 33.2       | 42                  | 540000                               | 675000                   |
| 3NA3362-6 | 425        | 35.3       | 44                  | 625000                               | 765000                   |
| 3NA3365-6 | 500        | 43.5       | 52                  | 810000                               | 1000000                  |

| Type      | $I^2t_a$<br>230 V AC<br>A <sup>2</sup> s | 400 V AC<br>A <sup>2</sup> s | 690 V AC<br>A <sup>2</sup> s |
|-----------|------------------------------------------|------------------------------|------------------------------|
| 3NA3344-6 | 453000                                   | 350000                       | 525000                       |
| 3NA3352-6 | 480000                                   | 625000                       | 940000                       |
| 3NA3354-6 | 585000                                   | 760000                       | 1150000                      |
| 3NA3360-6 | 847000                                   | 1100000                      | 1650000                      |
| 3NA3362-6 | 925000                                   | 1200000                      | 1800000                      |
| 3NA3365-6 | 1300000                                  | 1700000                      | 2500000                      |

<sup>1)</sup> Manufacturer's confirmation for 690 V + 10 % rated voltage available on request.

## Fuse Systems


### 3NA, 3ND LV HRC Fuse Systems

#### LV HRC fuse links


##### 3NA34 series

Size: 4 (IEC design)  
 Operational class: gG  
 Rated voltage: 500 V AC/440 V DC  
 Rated current: 630 ... 1250 A

##### Time/current characteristics diagram

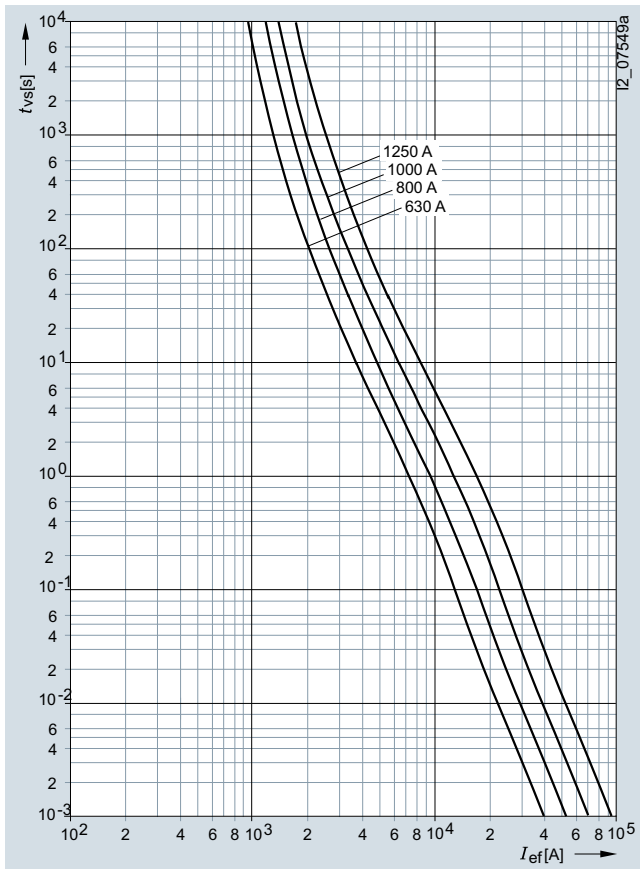


##### Current limiting diagram

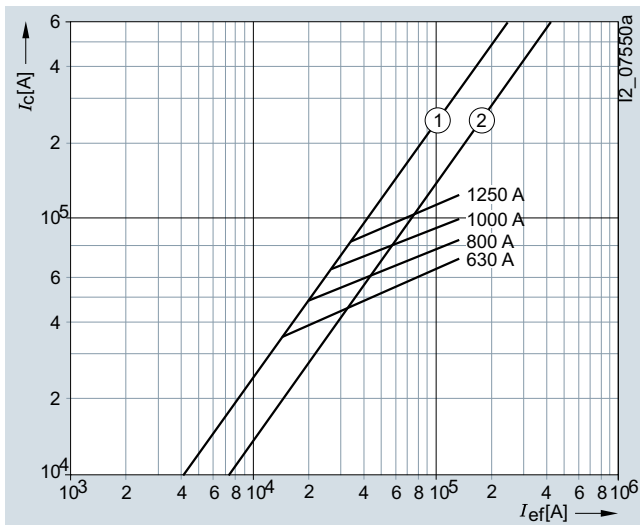

- ① Peak short-circuit current with largest DC component  
 ② Peak short-circuit current without DC component

##### Melting $I^2t$ values diagram


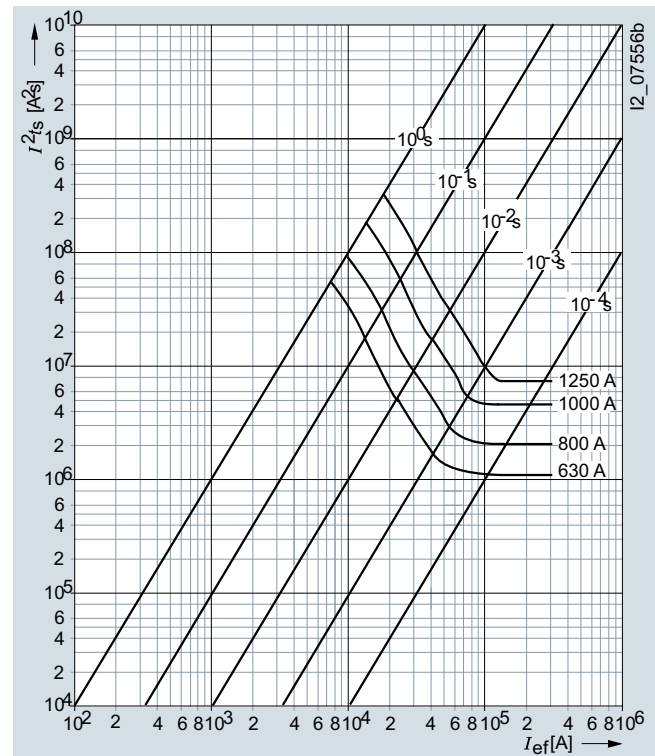


| Type    | $I_n$<br>A | $P_v$<br>W | $\Delta\theta$<br>K | $I^2t_s$<br>1 ms<br>A <sup>2</sup> s | $I^2t_s$<br>4 ms<br>A <sup>2</sup> s |
|---------|------------|------------|---------------------|--------------------------------------|--------------------------------------|
| 3NA3472 | 630        | 47         | 37                  | 1900000                              | 2700000                              |
| 3NA3475 | 800        | 59         | 43                  | 3480000                              | 5620000                              |
| 3NA3480 | 1000       | 74         | 56                  | 7920000                              | 10400000                             |
| 3NA3482 | 1250       | 99         | 65                  | 11880000                             | 18200000                             |


| Type    | $I^2t_a$<br>230 V AC<br>A <sup>2</sup> s | $I^2t_a$<br>400 V AC<br>A <sup>2</sup> s | $I^2t_a$<br>500 V AC<br>A <sup>2</sup> s |
|---------|------------------------------------------|------------------------------------------|------------------------------------------|
| 3NA3472 | 3630000                                  | 4340000                                  | 5400000                                  |
| 3NA3475 | 7210000                                  | 8510000                                  | 10400000                                 |
| 3NA3480 | 13600000                                 | 16200000                                 | 19000000                                 |
| 3NA3482 | 23900000                                 | 29100000                                 | 34800000                                 |

**3NA36 series**

Size: 4a  
 Operational class: gG  
 Rated voltage: 500 V AC/440 V DC  
 Rated current: 500 ... 1250 A

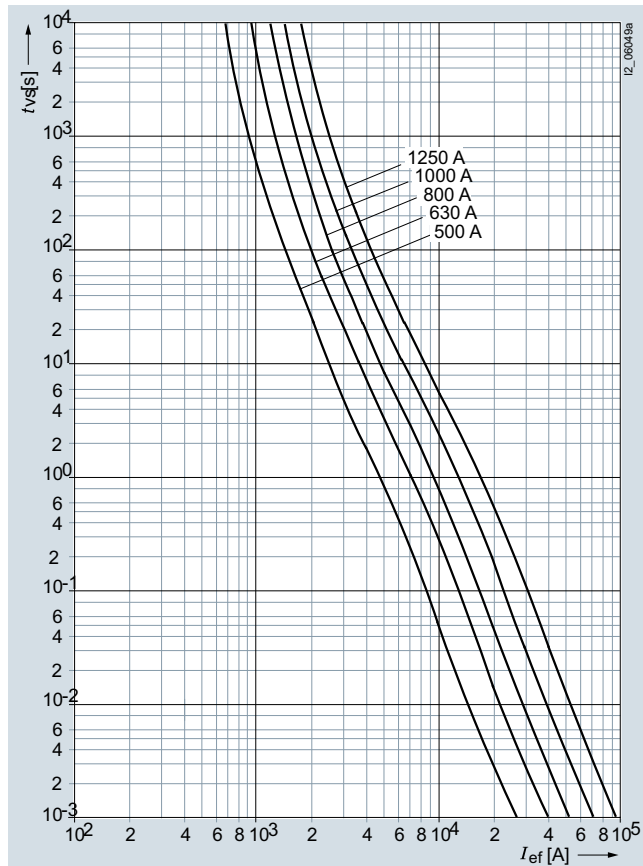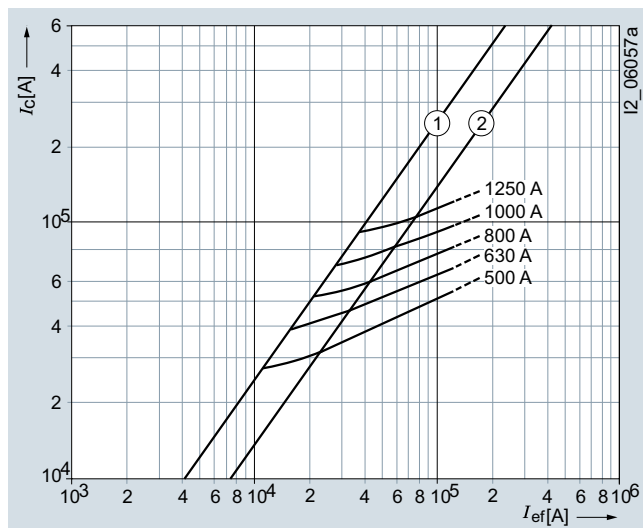**Time/current characteristics diagram****Current limiting diagram**

- ① Peak short-circuit current with largest DC component  
 ② Peak short-circuit current without DC component

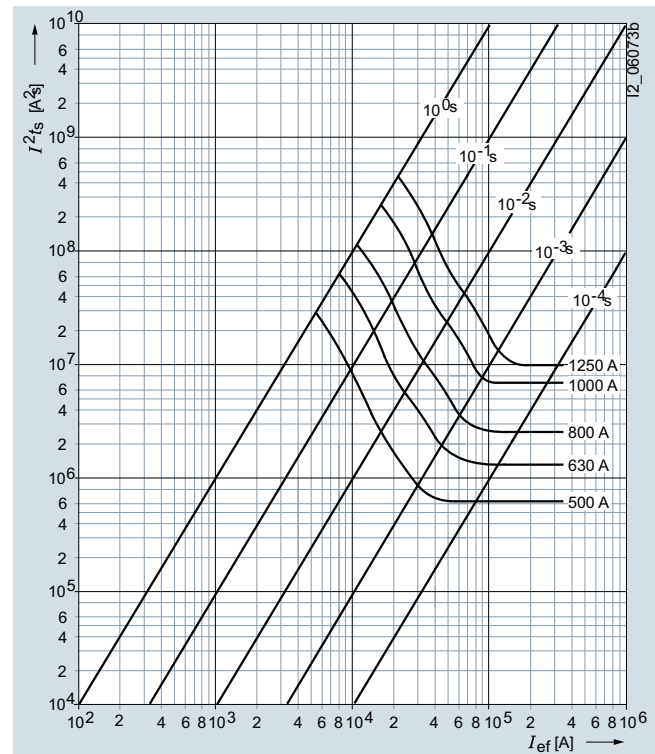**Melting  $I^2t$  values diagram**

| Type    | $I_n$<br>A | $P_v$<br>W | $\Delta\theta$<br>K | $I^2t_s$<br>1 ms<br>A <sup>2</sup> s | $I^2t_s$<br>4 ms<br>A <sup>2</sup> s |
|---------|------------|------------|---------------------|--------------------------------------|--------------------------------------|
| 3NA3665 | 500        | 43         | 30                  | 785000                               | 1270000                              |
| 3NA3672 | 630        | 47         | 37                  | 1900000                              | 2700000                              |
| 3NA3675 | 800        | 59         | 43                  | 3480000                              | 5620000                              |
| 3NA3680 | 1000       | 74         | 56                  | 7920000                              | 10400000                             |
| 3NA3682 | 1250       | 99         | 65                  | 11880000                             | 18200000                             |

| Type    | $I^2t_a$<br>230 V AC<br>A <sup>2</sup> s | 400 V AC<br>A <sup>2</sup> s | 500 V AC<br>A <sup>2</sup> s |
|---------|------------------------------------------|------------------------------|------------------------------|
| 3NA3665 | 1915000                                  | 2260000                      | 2700000                      |
| 3NA3672 | 3630000                                  | 4340000                      | 5400000                      |
| 3NA3675 | 7210000                                  | 8510000                      | 10400000                     |
| 3NA3680 | 13600000                                 | 16200000                     | 19000000                     |
| 3NA3682 | 23900000                                 | 29100000                     | 34800000                     |

## Fuse Systems


### 3NA, 3ND LV HRC Fuse Systems

#### LV HRC fuse links

##### 3NA38, 3NA68, 3NA78 series

Size: 000, 00  
 Operational class: gG  
 Rated voltage: 500 V AC/250 V DC  
 Rated current: 2 ... 160 A

##### Time/current characteristics diagram

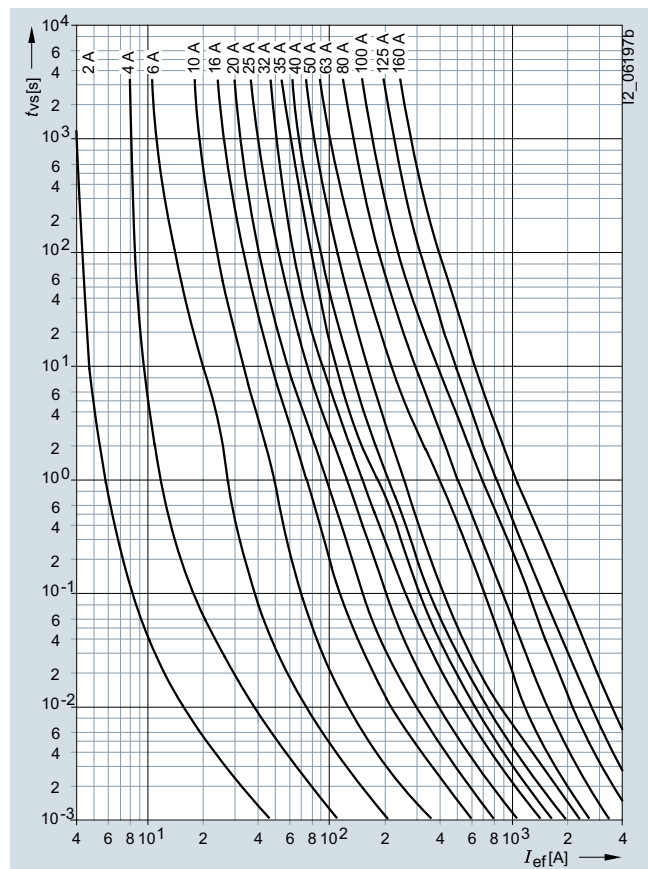

##### Melting $I^2t$ values diagram


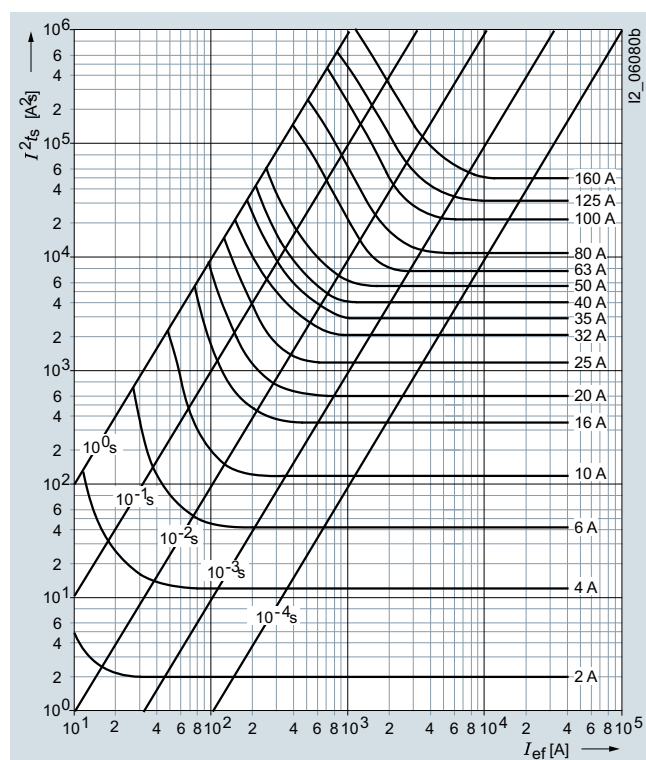


Table see page 57.

##### Current limiting diagram

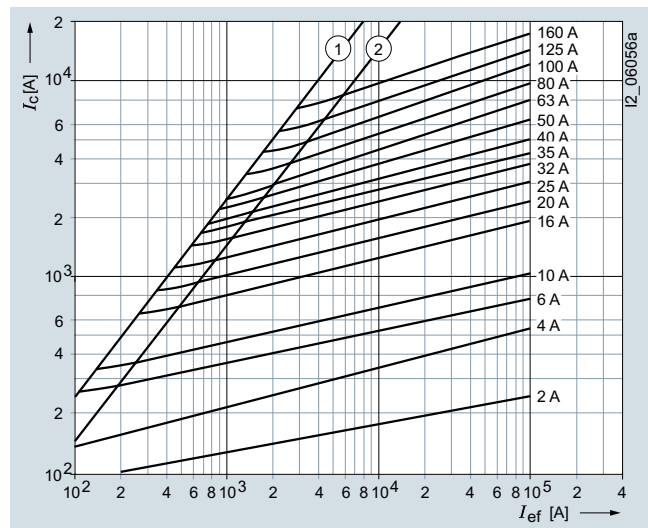

- ① Peak short-circuit current with largest DC component
- ② Peak short-circuit current without DC component

**3NA38, 3NA68, 3NA78 series**

Size: 000, 00  
 Operational class: gG  
 Rated voltage: 500 V AC/250 V DC  
 Rated current: 2 ... 160 A

| Type                                                       | $I_n$ | $P_v$ | $\Delta 9$ | $I^2 t_s$                |                          | $I^2 t_a$                    |                              |                              |
|------------------------------------------------------------|-------|-------|------------|--------------------------|--------------------------|------------------------------|------------------------------|------------------------------|
|                                                            | A     | W     | K          | 1 ms<br>A <sup>2</sup> s | 4 ms<br>A <sup>2</sup> s | 230 V AC<br>A <sup>2</sup> s | 400 V AC<br>A <sup>2</sup> s | 500 V AC<br>A <sup>2</sup> s |
| 3NA3802, 3NA6802, 3NA7802                                  | 2     | 1.3   | 8          | 2                        | 2                        | 4                            | 6                            | 9                            |
| 3NA3804, 3NA6804, 3NA7804                                  | 4     | 0.9   | 6          | 11                       | 13                       | 18                           | 22                           | 27                           |
| 3NA3801, 3NA6801, 3NA7801                                  | 6     | 1.3   | 8          | 46                       | 50                       | 80                           | 110                          | 150                          |
| 3NA3803, 3NA6803, 3NA7803                                  | 10    | 1     | 8          | 120                      | 130                      | 180                          | 265                          | 370                          |
| 3NA3805, 3NA6805, 3NA7805                                  | 16    | 1.7   | 11         | 370                      | 420                      | 580                          | 750                          | 1000                         |
| 3NA3807, 3NA6807, 3NA7807                                  | 20    | 2     | 15         | 670                      | 750                      | 1000                         | 1370                         | 1900                         |
| 3NA3810, 3NA6810, 3NA7810                                  | 25    | 2.3   | 17         | 1200                     | 1380                     | 1800                         | 2340                         | 3300                         |
| 3NA3812, 3NA6812, 3NA7812                                  | 32    | 2.6   | 18         | 2200                     | 2400                     | 3400                         | 4550                         | 6400                         |
| 3NA3814, 3NA3814-7, 3NA6814, 3NA7814                       | 35    | 2.7   | 21         | 3000                     | 3300                     | 4900                         | 6750                         | 9300                         |
| 3NA3817, 3NA6817, 3NA7817                                  | 40    | 3.1   | 24         | 4000                     | 4500                     | 6100                         | 8700                         | 12100                        |
| 3NA3820, 3NA3820-7, 3NA6820, 3NA7820                       | 50    | 3.8   | 25         | 6000                     | 6800                     | 9100                         | 11600                        | 16000                        |
| 3NA3822, 3NA3822-7, 3NA6822, 3NA7822                       | 63    | 4.6   | 28         | 7700                     | 9800                     | 14200                        | 19000                        | 26500                        |
| 3NA3824, 3NA3824-7, 3NA6824, 3NA6824-7, 3NA7824, 3NA7824-7 | 80    | 5.8   | 33         | 12000                    | 16000                    | 23100                        | 30700                        | 43000                        |
| 3NA3830, 3NA3830-7, 3NA6830, 3NA6830-7, 3NA7830, 3NA7830-7 | 100   | 6.6   | 34         | 24000                    | 30600                    | 40800                        | 56200                        | 80000                        |
| 3NA3832, 3NA6832, 3NA7832                                  | 125   | 8.9   | 44         | 36000                    | 50000                    | 70000                        | 91300                        | 130000                       |
| 3NA3832-8                                                  | 125   | 7.2   | 30         | 46000                    | 45000                    | 97000                        | 117000                       | 134000                       |
| 3NA3836, 3NA6836, 3NA7836                                  | 160   | 11.3  | 52         | 58000                    | 85000                    | 120000                       | 158000                       | 223000                       |
| 3NA3836-8                                                  | 160   | 9     | 34         | 89000                    | 84800                    | 137000                       | 166000                       | --                           |

## Fuse Systems


### 3NA, 3ND LV HRC Fuse Systems

#### LV HRC fuse links


##### 3NA38..-6, 3NA68..-6, 3NA78..-6 series

Size: 000, 00  
 Operational class: gG  
 Rated voltage: 690 V AC<sup>1)</sup>/250 V DC  
 Rated current: 2 ... 100 A

#### Time/current characteristics diagram

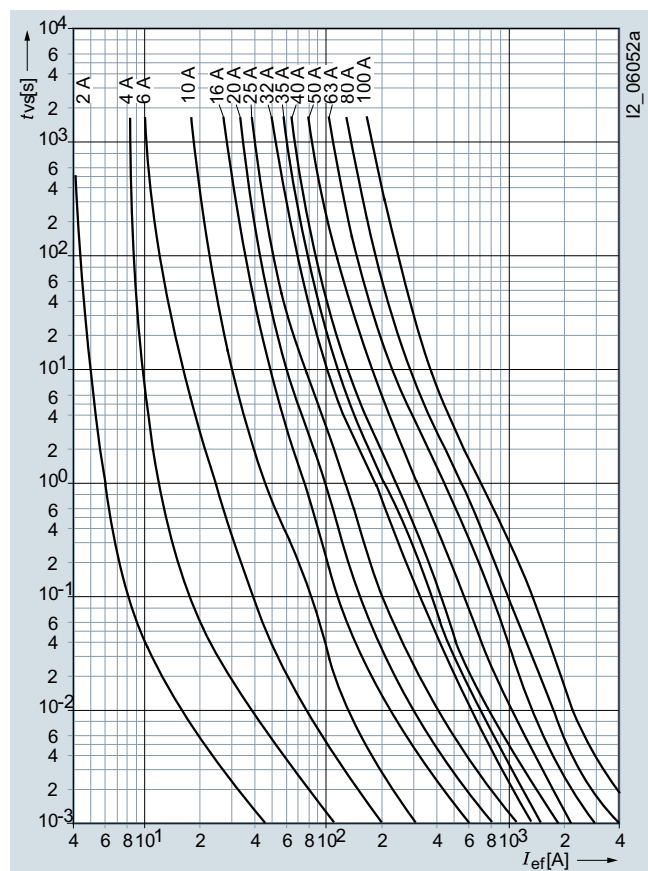


#### Melting $I^2t$ values diagram

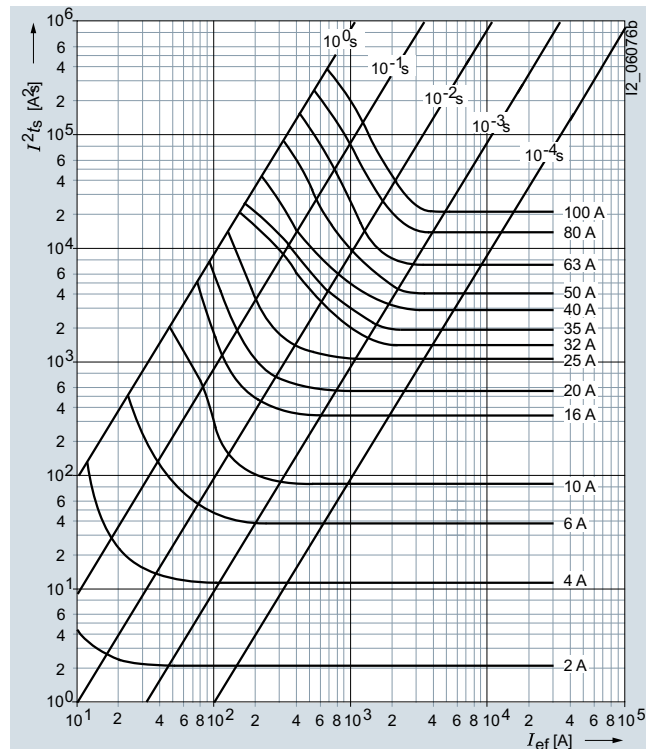

<sup>1)</sup> Manufacturer's confirmation for 690 V + 10 % rated voltage available on request.

#### Current limiting diagram

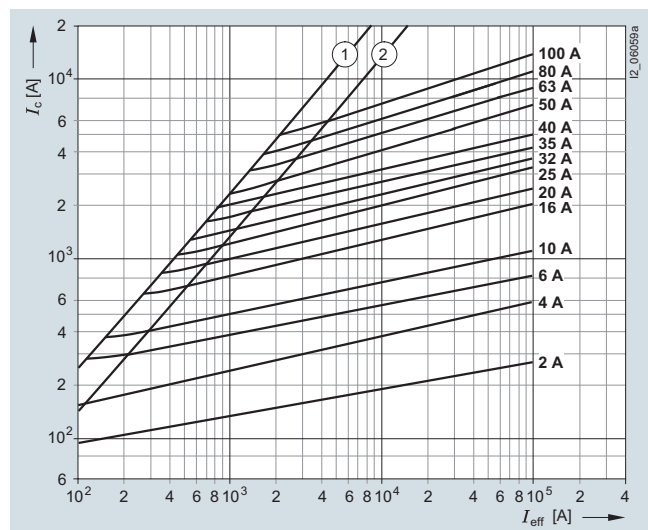

- ① Peak short-circuit current with largest DC component
- ② Peak short-circuit current without DC component

## Fuse Systems

### 3NA, 3ND LV HRC Fuse Systems

#### LV HRC fuse links

| Type                                  | $I_n$ | $P_v$ | $\Delta\theta$ | $I^2 t_s$                | $I^2 t_a$                | $I^2 t_a$                    | $I^2 t_a$                    | $I^2 t_a$                    |
|---------------------------------------|-------|-------|----------------|--------------------------|--------------------------|------------------------------|------------------------------|------------------------------|
|                                       | A     | W     | K              | 1 ms<br>A <sup>2</sup> s | 4 ms<br>A <sup>2</sup> s | 230 V AC<br>A <sup>2</sup> s | 400 V AC<br>A <sup>2</sup> s | 690 V AC<br>A <sup>2</sup> s |
| 3NA3802-6, 3NA6802-6, 3NA7802-6       | 2     | 1.3   | 8              | 2                        | 2                        | 4                            | 6                            | 9                            |
| 3NA3804-6, 3NA6804-6, 3NA7804-6       | 4     | 0.9   | 6              | 11                       | 13                       | 18                           | 22                           | 27                           |
| 3NA3801-6, 3NA6801-6, 3NA7801-6       | 6     | 1.3   | 8              | 36                       | 44                       | 80                           | 110                          | 150                          |
| 3NA3803-6, 3NA6803-6, 3NA7803-6       | 10    | 1     | 8              | 90                       | 120                      | 180                          | 265                          | 370                          |
| 3NA3805-6, 3NA6805-6, 3NA7805-6       | 16    | 1.7   | 11             | 330                      | 360                      | 580                          | 750                          | 1000                         |
| 3NA3807-6, 3NA6807-6, 3NA7807-6       | 20    | 2     | 15             | 570                      | 690                      | 1000                         | 1370                         | 1900                         |
| 3NA3810-6, 3NA6810-6, 3NA7810-6       | 25    | 2.3   | 17             | 1200                     | 1380                     | 1800                         | 2340                         | 3300                         |
| 3NA3812-6, 3NA6812-6, 3NA7812-6       | 32    | 3.1   | 19             | 1600                     | 2600                     | 3100                         | 4100                         | 5800                         |
| 3NA3814-6, 3NA6814-6, 3NA7814-6       | 35    | 3.6   | 23             | 2100                     | 3100                     | 4000                         | 5000                         | 7800                         |
| 3NA3817-6, 3NA6817-6, 3NA7817-6       | 40    | 3.6   | 18             | 3200                     | 4700                     | 6000                         | 8600                         | 12000                        |
| 3NA3817-6KJ, 3NA6817-6KJ, 3NA7817-6KJ | 40    | 3.8   | 18             | 3800                     | 4700                     | 6000                         | 8600                         | 15000                        |
| 3NA3820-6, 3NA6820-6, 3NA7820-6       | 50    | 4.9   | 28             | 4400                     | 7400                     | 9100                         | 11200                        | 19000                        |
| 3NA3820-6KJ, 3NA6820-6KJ, 3NA7820-6KJ | 50    | 4.9   | 28             | 5900                     | 7400                     | 9100                         | 11200                        | 19000                        |
| 3NA3822-6, 3NA6822-6, 3NA7822-6       | 63    | 5.7   | 33             | 7600                     | 10100                    | 13600                        | 17000                        | 24000                        |
| 3NA3824-6, 3NA6824-6, 3NA7824-6       | 80    | 6.7   | 38             | 13500                    | 17000                    | 24300                        | 32000                        | 55000                        |
| 3NA3830-6, 3NA6830-6, 3NA7830-6       | 100   | 9.1   | 40             | 21200                    | 30500                    | 42400                        | 52000                        | 75000                        |

## Fuse Systems


### 3NA, 3ND LV HRC Fuse Systems

#### LV HRC fuse links


##### 3NA61...-4 series

Size: 1  
 Operational class: gG  
 Rated voltage: 400 V AC  
 Rated current: 35 ... 250 A

##### Time/current characteristics diagram

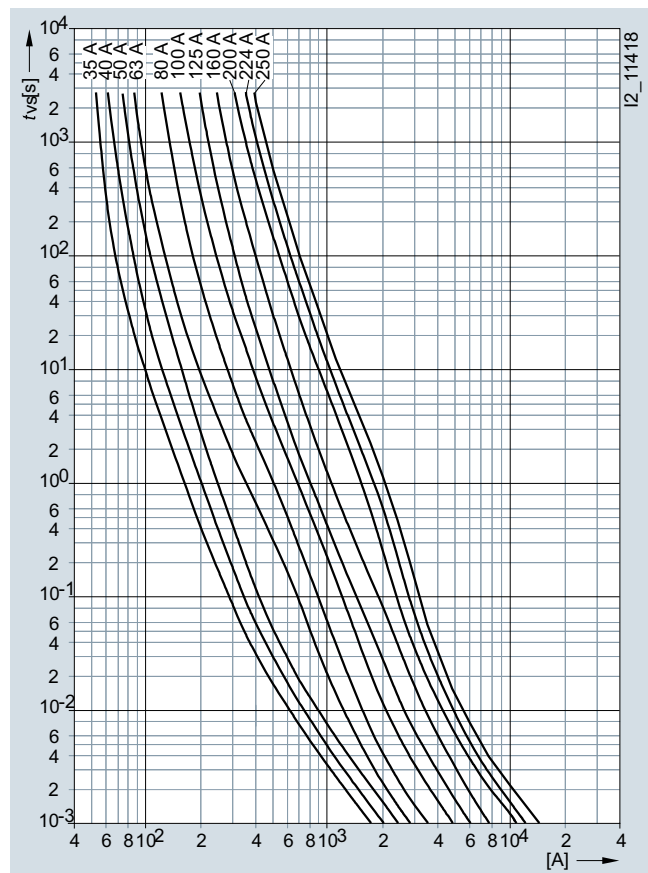


##### Current limiting diagram

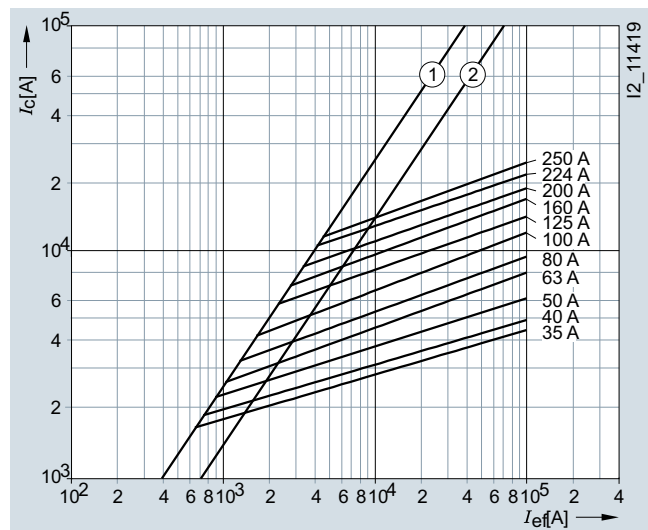

- ① Peak short-circuit current with largest DC component  
 ② Peak short-circuit current without DC component

##### Melting $I^2t$ values diagram


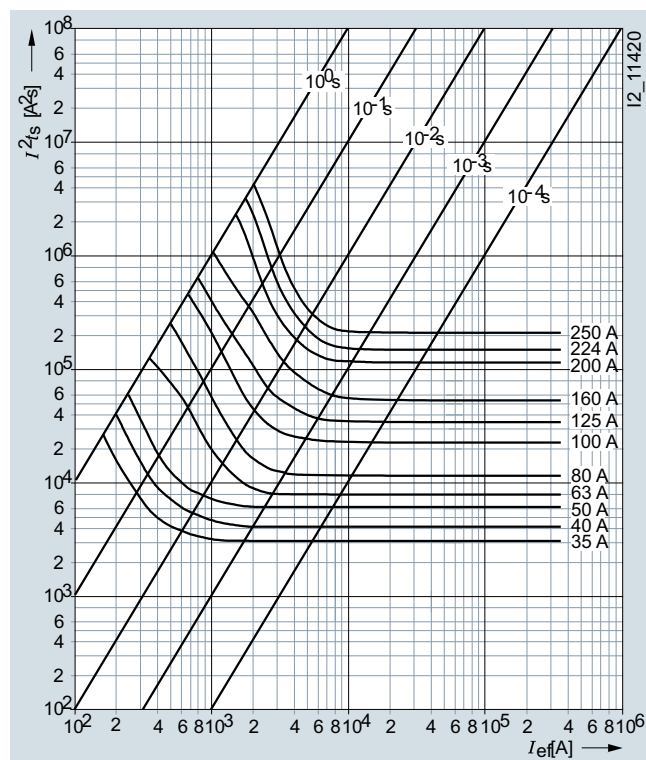


| Type      | $I_n$<br>A | $P_v$<br>W | $\Delta\theta$<br>K |
|-----------|------------|------------|---------------------|
| 3NA6114-4 | 35         | 3.2        | 16                  |
| 3NA6117-4 | 40         | 3.6        | 16                  |
| 3NA6120-4 | 50         | 4.6        | 20                  |
| 3NA6122-4 | 63         | 6.0        | 21                  |
| 3NA6124-4 | 80         | 7.5        | 29                  |
| 3NA6130-4 | 100        | 8.9        | 30                  |
| 3NA6132-4 | 125        | 10.7       | 31                  |
| 3NA6136-4 | 160        | 13.9       | 34                  |
| 3NA6140-4 | 200        | 15.0       | 36                  |
| 3NA6142-4 | 224        | 16.1       | 37                  |
| 3NA6144-4 | 250        | 17.3       | 39                  |


| Type      | $I^2t_s$<br>1 ms<br>A <sup>2</sup> s | $I^2t_s$<br>4 ms<br>A <sup>2</sup> s | $I^2t_a$<br>230 V AC<br>A <sup>2</sup> s | $I^2t_a$<br>400 V AC<br>A <sup>2</sup> s |
|-----------|--------------------------------------|--------------------------------------|------------------------------------------|------------------------------------------|
| 3NA6114-4 | 3000                                 | 3300                                 | 4900                                     | 6750                                     |
| 3NA6117-4 | 4000                                 | 4500                                 | 6100                                     | 8700                                     |
| 3NA6120-4 | 6000                                 | 6800                                 | 9100                                     | 11600                                    |
| 3NA6122-4 | 7700                                 | 9800                                 | 14200                                    | 19000                                    |
| 3NA6124-4 | 12000                                | 16000                                | 23100                                    | 30700                                    |
| 3NA6130-4 | 24000                                | 30600                                | 40800                                    | 56200                                    |
| 3NA6132-4 | 36000                                | 50000                                | 70000                                    | 91300                                    |
| 3NA6136-4 | 58000                                | 85000                                | 120000                                   | 158000                                   |
| 3NA6140-4 | 115000                               | 135000                               | 218000                                   | 285000                                   |
| 3NA6142-4 | 145000                               | 170000                               | 299000                                   | 392000                                   |
| 3NA6144-4 | 205000                               | 230000                               | 420000                                   | 551000                                   |

**3NA62...-4 series**

Size: 2  
 Operational class: gG  
 Rated voltage: 400 V AC  
 Rated current: 50 ... 400 A

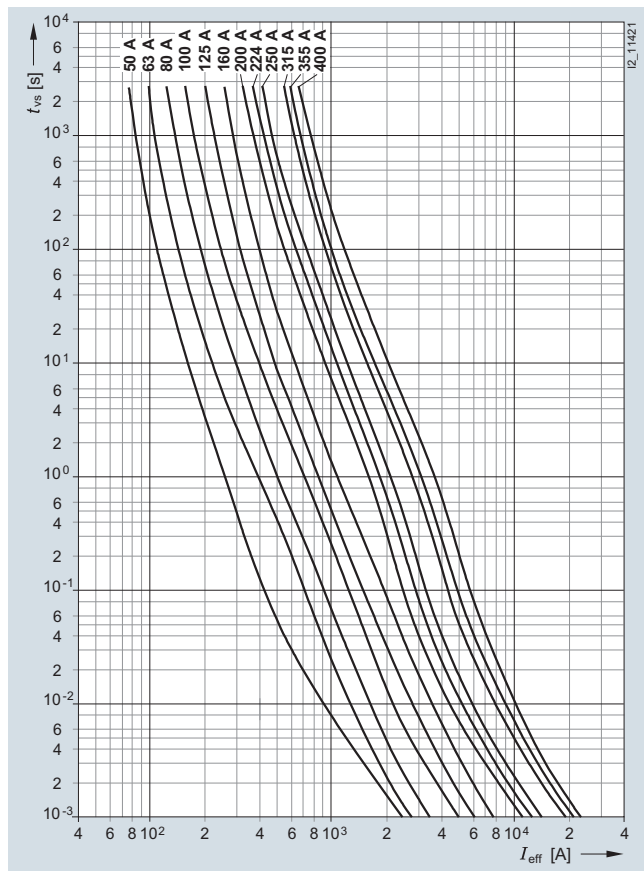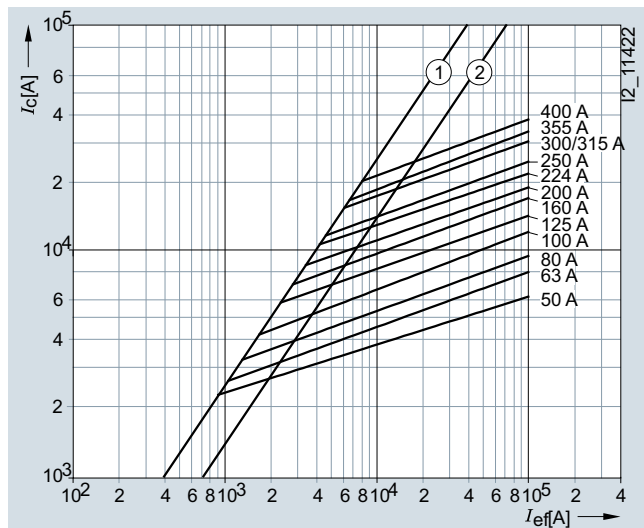**Time/current characteristics diagram****Current limiting diagram**

- ① Peak short-circuit current with largest DC component  
 ② Peak short-circuit current without DC component

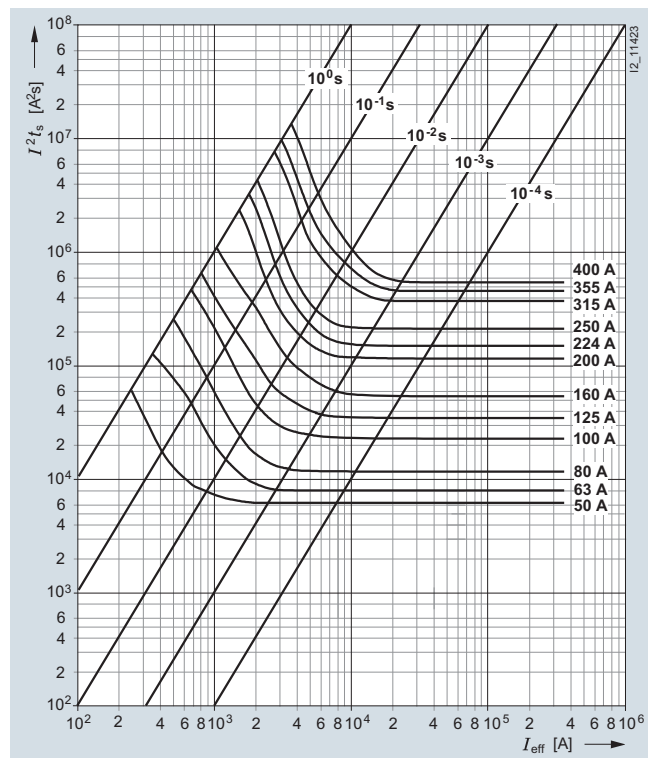**Melting  $I^2t$  values diagram**

| Type      | $I_n$<br>A | $P_v$<br>W | $\Delta\theta$<br>K |
|-----------|------------|------------|---------------------|
| 3NA6220-4 | 50         | 4.7        | 16                  |
| 3NA6222-4 | 63         | 5.9        | 16                  |
| 3NA6224-4 | 80         | 6.8        | 21                  |
| 3NA6230-4 | 100        | 7.4        | 22                  |
| 3NA6232-4 | 125        | 9.8        | 27                  |
| 3NA6236-4 | 160        | 12.6       | 34                  |
| 3NA6240-4 | 200        | 14.9       | 33                  |
| 3NA6242-4 | 224        | 15.4       | 31                  |
| 3NA6244-4 | 250        | 17.9       | 38                  |
| 3NA6250-4 | 300        | 19.4       | 34                  |
| 3NA6252-4 | 315        | 21.4       | 35                  |
| 3NA6254-4 | 355        | 26.0       | 49                  |
| 3NA6260-4 | 400        | 27.5       | 52                  |

| Type      | $I^2t_s$<br>1 ms<br>A^2s | $I^2t_s$<br>4 ms<br>A^2s | $I^2t_a$<br>230 V AC<br>A^2s | $I^2t_a$<br>400 V AC<br>A^2s |
|-----------|--------------------------|--------------------------|------------------------------|------------------------------|
| 3NA6220-4 | 6000                     | 6800                     | 9100                         | 11600                        |
| 3NA6222-4 | 7700                     | 9800                     | 14200                        | 19000                        |
| 3NA6224-4 | 12000                    | 16000                    | 23100                        | 30700                        |
| 3NA6230-4 | 24000                    | 30600                    | 40800                        | 56200                        |
| 3NA6232-4 | 36000                    | 50000                    | 70000                        | 91300                        |
| 3NA6236-4 | 58000                    | 85000                    | 120000                       | 158000                       |
| 3NA6240-4 | 115000                   | 135000                   | 218000                       | 285000                       |
| 3NA6242-4 | 145000                   | 170000                   | 299000                       | 392000                       |
| 3NA6244-4 | 205000                   | 230000                   | 420000                       | 551000                       |
| 3NA6250-4 | 361000                   | 433000                   | 670000                       | 901000                       |
| 3NA6252-4 | 361000                   | 433000                   | 670000                       | 901000                       |
| 3NA6254-4 | 441000                   | 538000                   | 800000                       | 1060000                      |
| 3NA6260-4 | 529000                   | 676000                   | 1155000                      | 1515000                      |

## Fuse Systems


### 3NA, 3ND LV HRC Fuse Systems

#### LV HRC fuse links


##### 3NA68...-4/-4KK series

Size: 000, 00  
 Operational class: gG  
 Rated voltage: 400 V AC  
 Rated current: 10 ... 160 A

##### Time/current characteristics diagram

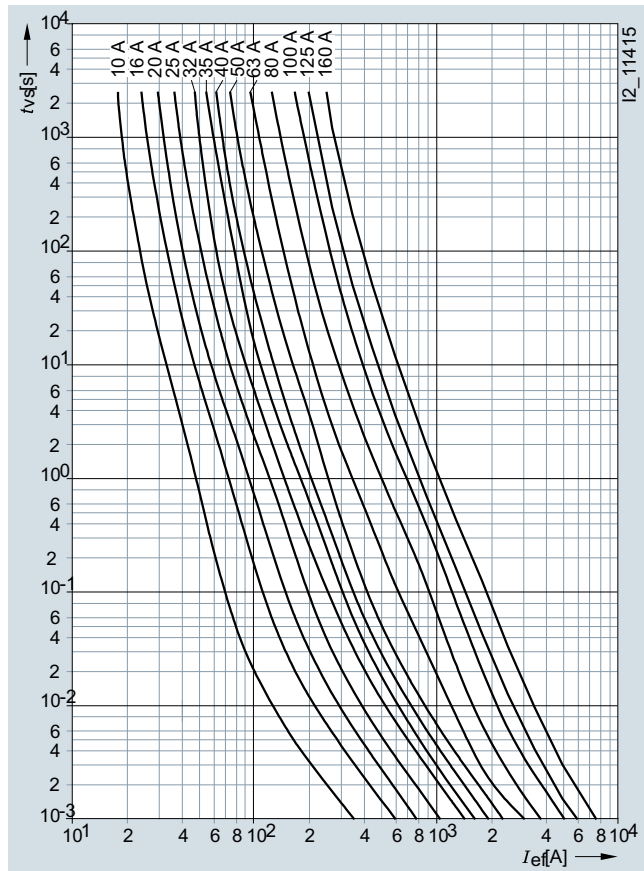


##### Current limiting diagram

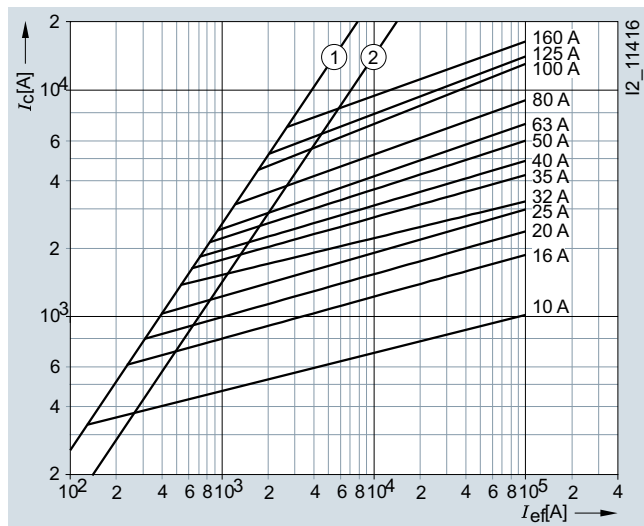

- ① Peak short-circuit current with largest DC component  
 ② Peak short-circuit current without DC component

##### Melting $I^2t$ values diagram



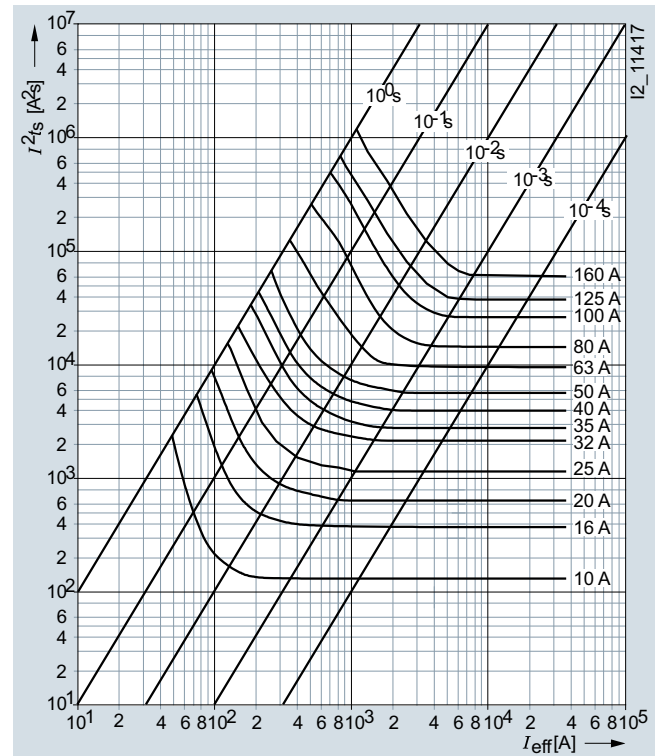


| Type                   | $I_n$<br>A | $P_v$<br>W | $\Delta\theta$<br>K | $I^2t_s$<br>1 ms<br>A <sup>2</sup> s | 4 ms<br>A <sup>2</sup> s |
|------------------------|------------|------------|---------------------|--------------------------------------|--------------------------|
| 3NA6803-4              | 10         | 1.0        | 8                   | 120                                  | 130                      |
| 3NA6805-4              | 16         | 1.7        | 11                  | 370                                  | 420                      |
| 3NA6807-4              | 20         | 2.0        | 15                  | 670                                  | 750                      |
| 3NA6810-4              | 25         | 2.3        | 17                  | 1200                                 | 1380                     |
| 3NA6812-4              | 32         | 2.6        | 18                  | 2200                                 | 2500                     |
| 3NA6814-4              | 35         | 2.7        | 21                  | 3000                                 | 3300                     |
| 3NA6817-4              | 40         | 3.1        | 24                  | 4000                                 | 4500                     |
| 3NA6820-4              | 50         | 3.8        | 25                  | 6000                                 | 6800                     |
| 3NA6822-4              | 63         | 3.9        | 23                  | 9300                                 | 10250                    |
| 3NA6824-4, 3NA6824-4KK | 80         | 4.9        | 26                  | 14200                                | 18300                    |
| 3NA6830-4, 3NA6830-4KK | 100        | 5.4        | 29                  | 25600                                | 33600                    |
| 3NA6832-4              | 125        | 8.9        | 44                  | 36000                                | 50000                    |
| 3NA6836-4              | 160        | 11.3       | 52                  | 58000                                | 85000                    |

| Type                   | $I^2t_a$<br>230 V AC<br>A <sup>2</sup> s | 400 V AC<br>A <sup>2</sup> s |
|------------------------|------------------------------------------|------------------------------|
| 3NA6803-4              | 180                                      | 265                          |
| 3NA6805-4              | 580                                      | 750                          |
| 3NA6807-4              | 1000                                     | 1370                         |
| 3NA6810-4              | 1800                                     | 2340                         |
| 3NA6812-4              | 3400                                     | 4550                         |
| 3NA6814-4              | 4900                                     | 6750                         |
| 3NA6817-4              | 6100                                     | 8700                         |
| 3NA6820-4              | 9100                                     | 11600                        |
| 3NA6822-4              | 12400                                    | 17900                        |
| 3NA6824-4, 3NA6824-4KK | 27000                                    | 38000                        |
| 3NA6830-4, 3NA6830-4KK | 48300                                    | 69200                        |
| 3NA6832-4              | 70000                                    | 91300                        |
| 3NA6836-4              | 120000                                   | 158000                       |

**3ND18 series**

Size: 000, 00  
 Operational class: aM  
 Rated voltage: 500 V AC  
 Rated current: 6 ... 160 A

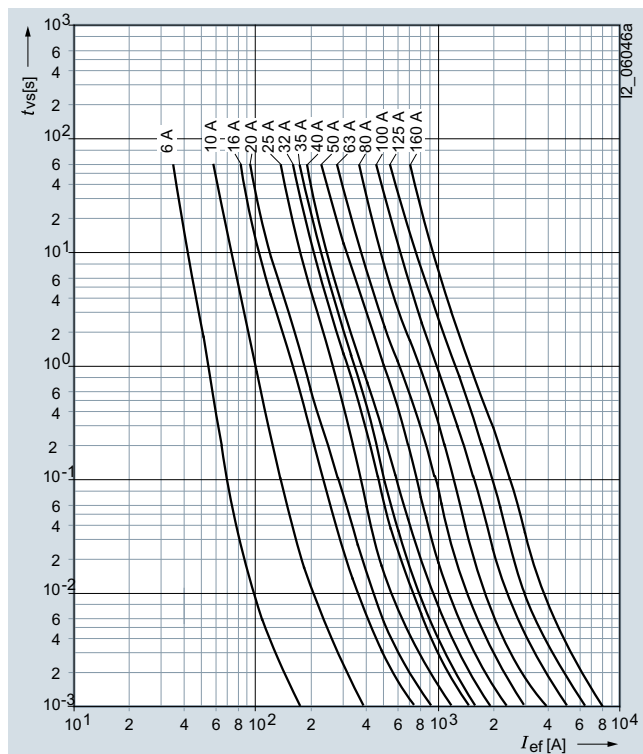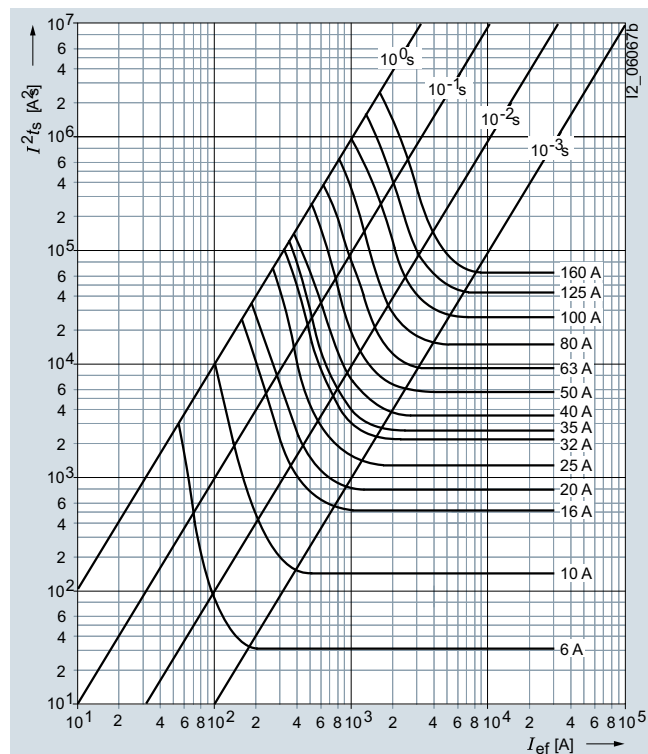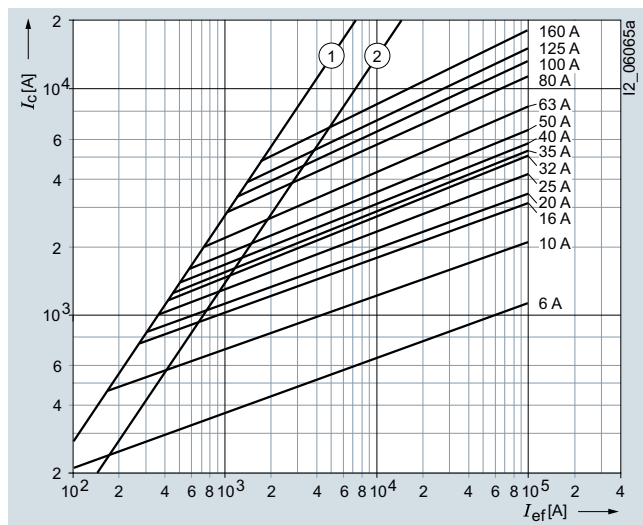**Time/current characteristics diagram****Melting  $I^2t$  values diagram****Current limiting diagram**

- ① Peak short-circuit current with largest DC component
- ② Peak short-circuit current without DC component

| Type               | $I_n$ | $P_v$ | $\Delta\theta$ | $I^2t_s$                 |                          |
|--------------------|-------|-------|----------------|--------------------------|--------------------------|
|                    | A     | W     | K              | 1 ms<br>A <sup>2</sup> s | 4 ms<br>A <sup>2</sup> s |
| 3ND1801            | 6     | 0.8   | 7              | 32                       | 55                       |
| 3ND1803            | 10    | 0.5   | 5              | 150                      | 260                      |
| 3ND1805            | 16    | 0.8   | 7              | 570                      | 800                      |
| 3ND1807            | 20    | 1     | 8              | 830                      | 1200                     |
| 3ND1810            | 25    | 1.2   | 9              | 1400                     | 2000                     |
| 3ND1812            | 32    | 1.5   | 10             | 2300                     | 3300                     |
| 3ND1814            | 35    | 1.8   | 11             | 2600                     | 3800                     |
| 3ND1817            | 40    | 2     | 12             | 3700                     | 5500                     |
| 3ND1820            | 50    | 2.4   | 14             | 5800                     | 8400                     |
| 3ND1822            | 63    | 3.3   | 17             | 9300                     | 13000                    |
| 3ND1824            | 80    | 4.5   | 20             | 15000                    | 21000                    |
| 3ND1830, 3ND1830-8 | 100   | 4.9   | 18             | 26000                    | 37000                    |
| 3ND1832            | 125   | 6.3   | 22             | 41000                    | 60000                    |
| 3ND1836            | 160   | 9.3   | 31             | 64000                    | 92000                    |

| Type               | $I^2t_a$                     |                              |                              |
|--------------------|------------------------------|------------------------------|------------------------------|
|                    | 230 V AC<br>A <sup>2</sup> s | 400 V AC<br>A <sup>2</sup> s | 500 V AC<br>A <sup>2</sup> s |
| 3ND1801            | 60                           | 75                           | 110                          |
| 3ND1803            | 280                          | 320                          | 430                          |
| 3ND1805            | 1000                         | 1300                         | 1600                         |
| 3ND1807            | 1300                         | 1600                         | 2200                         |
| 3ND1810            | 2200                         | 2800                         | 3300                         |
| 3ND1812            | 3800                         | 4500                         | 5400                         |
| 3ND1814            | 4200                         | 5100                         | 6300                         |
| 3ND1817            | 5700                         | 7200                         | 9300                         |
| 3ND1820            | 5200                         | 10500                        | 12500                        |
| 3ND1822            | 15000                        | 16500                        | 21000                        |
| 3ND1824            | 21500                        | 27000                        | 34000                        |
| 3ND1830, 3ND1830-8 | 44000                        | 56000                        | 76000                        |
| 3ND1832            | 76000                        | 98000                        | 135000                       |
| 3ND1836            | 105000                       | 130000                       | 170000                       |

## Fuse Systems


### 3NA, 3ND LV HRC Fuse Systems

#### LV HRC fuse links


##### 3ND13..., 3ND2 series

Size: 1, 2, 3  
 Operational class: aM  
 Rated voltage: 690 V AC  
 Rated current: 63 ... 630 A


##### Time/current characteristics diagram

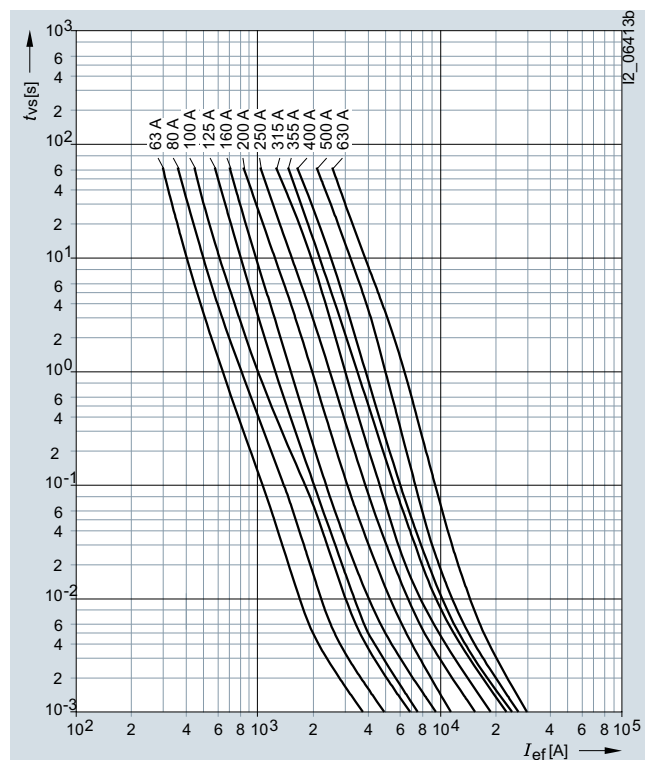

##### Melting $I^2t$ values diagram

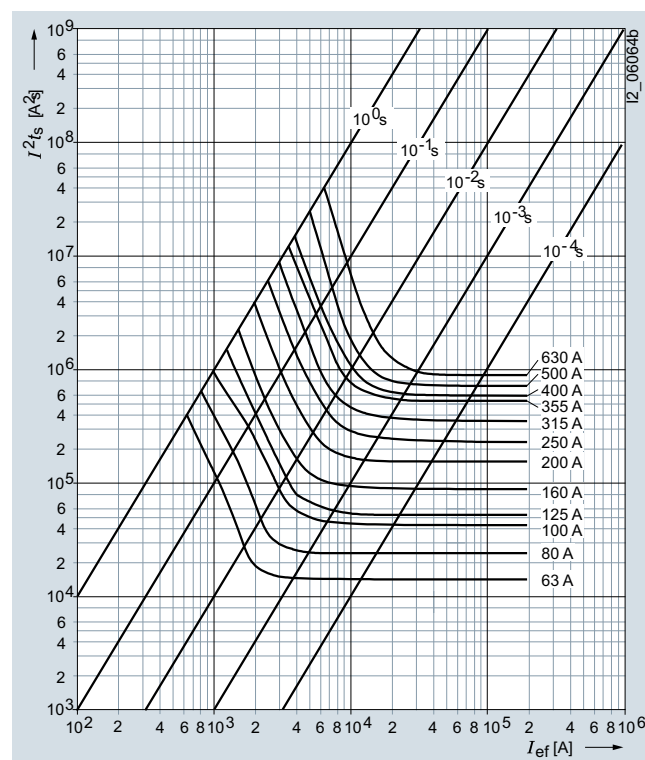

##### Current limiting diagram

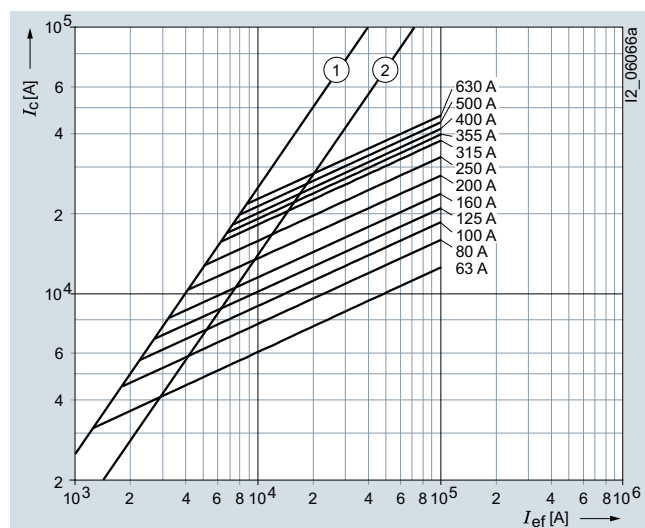

- ① Peak short-circuit current with largest DC component
- ② Peak short-circuit current without DC component

Table see page 65.

## Fuse Systems

### 3NA, 3ND LV HRC Fuse Systems

#### LV HRC fuse links

#### 3ND13..., 3ND2 series

Size: 1, 2, 3  
 Operational class: aM  
 Rated voltage: 690 V AC  
 Rated current: 63 ... 630 A

| Type    | $I_n$ | $P_v$ | $\Delta\theta$ | $I^2 t_s$                |                          | $I^2 t_a$                    |                              | 690 V AC<br>A <sup>2</sup> s |
|---------|-------|-------|----------------|--------------------------|--------------------------|------------------------------|------------------------------|------------------------------|
|         | A     | W     | K              | 1 ms<br>A <sup>2</sup> s | 4 ms<br>A <sup>2</sup> s | 230 V AC<br>A <sup>2</sup> s | 400 V AC<br>A <sup>2</sup> s |                              |
| 3ND2122 | 63    | 4     | 12.2           | 14000                    | 17700                    | 19300                        | 25600                        | 42000                        |
| 3ND2124 | 80    | 4.9   | 13             | 24200                    | 30800                    | 36500                        | 48000                        | 80000                        |
| 3ND2130 | 100   | 5.8   | 15             | 45600                    | 59000                    | 65000                        | 85000                        | 140000                       |
| 3ND2132 | 125   | 8.1   | 16.5           | 57000                    | 74300                    | 73000                        | 97000                        | 160000                       |
| 3ND2136 | 160   | 11.4  | 18             | 90000                    | 114000                   | 107000                       | 142000                       | 235000                       |
| 3ND2140 | 200   | 14.1  | 19.5           | 150000                   | 198000                   | 172000                       | 228000                       | 375000                       |
| 3ND2144 | 250   | 18    | 22             | 250000                   | 313000                   | 260000                       | 340000                       | 565000                       |
| 3ND2232 | 125   | 8.1   | 16.5           | 57000                    | 74300                    | 73000                        | 97000                        | 160000                       |
| 3ND2236 | 160   | 11.4  | 18             | 90000                    | 114000                   | 107000                       | 142000                       | 235000                       |
| 3ND2240 | 200   | 14.1  | 19.5           | 150000                   | 198000                   | 172000                       | 228000                       | 375000                       |
| 3ND2244 | 250   | 18    | 22             | 250000                   | 313000                   | 260000                       | 340000                       | 565000                       |
| 3ND2252 | 315   | 22.6  | 30             | 370000                   | 450000                   | 460000                       | 610000                       | 1000000                      |
| 3ND2254 | 355   | 24.7  | 29             | 540000                   | 643000                   | 645000                       | 855000                       | 1400000                      |
| 3ND2260 | 400   | 30.8  | 35             | 615000                   | 750000                   | 688000                       | 910000                       | 1500000                      |
| 3ND2352 | 315   | 22.6  | 30             | 370000                   | 450000                   | 460000                       | 610000                       | 1000000                      |
| 3ND2354 | 355   | 24.7  | 29             | 540000                   | 643000                   | 645000                       | 855000                       | 1400000                      |
| 3ND2360 | 400   | 30.8  | 26             | 615000                   | 750000                   | 688000                       | 910000                       | 1500000                      |
| 3ND1365 | 500   | 47    | 40             | 730000                   | 933000                   | 876000                       | 1095000                      | 1825000                      |
| 3ND1372 | 630   | 50    | 43             | 920000                   | 1375000                  | 1300000                      | 1800000                      | 2600000                      |

## Fuse Systems


### 3NA, 3ND LV HRC Fuse Systems

#### LV HRC fuse links


#### Dimensional drawings

#### LV HRC fuse links, operational class gG


Sizes 000 to 3 and 4a



Size 4 (IEC design)

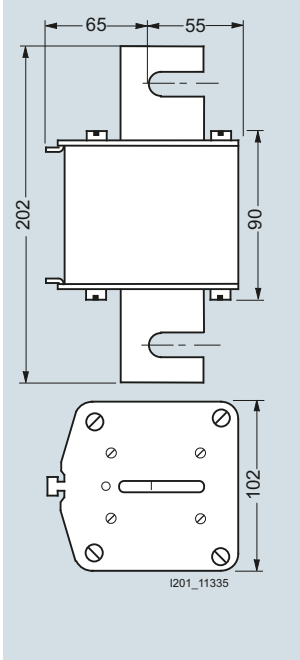

| Size | $I_n$        | $U_n$         | Type            | Dimensions           |       |       |       |       |
|------|--------------|---------------|-----------------|----------------------|-------|-------|-------|-------|
|      | A            | V             |                 | b                    | $h_1$ | $h_2$ | $t_1$ | $t_2$ |
| 000  | 2 ... 35     | 690 AC/250 DC | 3NA38..-6       | 21                   | 54    | 80    | 45    | 8     |
|      | 2 ... 160    | 500 AC        | 3NA38../-8      |                      |       |       |       |       |
|      | 2 ... 100    | 500 AC/250 DC | 3NA68..         |                      |       |       |       |       |
|      | 10 ... 100   | 400 AC        | 3NA68../-4      |                      |       |       |       |       |
|      | 2 ... 35     | 690 AC/250 DC | 3NA68../-6      |                      |       |       |       |       |
|      | 10 ... 100   | 500 AC/250 DC | 3NA78..         |                      |       |       |       |       |
| 00   | 2 ... 35     | 690 AC/250 DC | 3NA78../-6      | 30                   | 54    | 80    | 45    | 14    |
|      | 35 ... 160   | 500 AC/250 DC | 3NA38..         |                      |       |       |       |       |
|      | 40 ... 100   | 690 AC/250 DC | 3NA38../-6      |                      |       |       |       |       |
|      | 80 ... 160   | 500 AC/250 DC | 3NA68../-7      |                      |       |       |       |       |
|      | 80 ... 160   | 400 AC        | 3NA68../-4 (KK) |                      |       |       |       |       |
|      | 40 ... 100   | 690 AC/250 DC | 3NA68../-6      |                      |       |       |       |       |
| 0    | 80 ... 160   | 500 AC/250 DC | 3NA78../-7      | 30                   | 67    | 126   | 45    | 14    |
|      | 40 ... 100   | 690 AC/250 DC | 3NA78../-6      |                      |       |       |       |       |
|      | 6 ... 160    | 500 AC/440 DC | 3NA30..         |                      |       |       |       |       |
|      | 16 ... 160   | 500 AC/440 DC | 3NA31..         |                      | 75    | 137   | 50    | 15    |
|      | 50 ... 160   | 690 AC/440 DC | 3NA31../-6      |                      |       |       |       |       |
|      | 16 ... 160   | 500 AC/440 DC | 3NA61..         |                      |       |       |       |       |
| 1    | 35 ... 160   | 400 AC        | 3NA61../-4      |                      |       |       |       |       |
|      | 50 ... 160   | 690 AC/440 DC | 3NA61../-6      |                      |       |       |       |       |
|      | 16 ... 160   | 500 AC/440 DC | 3NA71..         |                      |       |       |       |       |
|      | 50 ... 160   | 690 AC/440 DC | 3NA71../-6      |                      |       |       |       |       |
|      | 200 ... 250  | 500 AC/440 DC | 3NA31..         | 47                   | 75    | 137   | 51    | 9     |
|      | 200          | 690 AC/440 DC | 3NA31../-6      |                      |       |       |       |       |
| 2    | 200 ... 250  | 500 AC/440 DC | 3NA61..         |                      |       |       |       |       |
|      | 200 ... 250  | 400 AC        | 3NA61../-4      |                      |       |       |       |       |
|      | 200          | 690 AC/440 DC | 3NA61../-6      |                      |       |       |       |       |
|      | 200 ... 250  | 500 AC/440 DC | 3NA71..         |                      |       |       |       |       |
|      | 200          | 690 AC/440 DC | 3NA71../-6      |                      |       |       |       |       |
|      | 35 ... 250   | 500 AC/440 DC | 3NA32..         | 47                   | 75    | 151   | 58    | 10    |
| 3    | 80 ... 200   | 690 AC/440 DC | 3NA32../-6      |                      |       |       |       |       |
|      | 35 ... 250   | 500 AC/440 DC | 3NA62..         |                      |       |       |       |       |
|      | 50 ... 250   | 400 AC        | 3NA62../-4      |                      |       |       |       |       |
|      | 80 ... 200   | 690 AC/440 DC | 3NA62../-6      |                      |       |       |       |       |
|      | 35 ... 250   | 500 AC/440 DC | 3NA72..         |                      |       |       |       |       |
| 4    | 80 ... 200   | 690 AC/440 DC | 3NA72../-6      |                      |       |       |       |       |
|      | 300 ... 400  | 500 AC/440 DC | 3NA32..         | 58                   | 74    | 151   | 59    | 13    |
|      | 224 ... 250  | 690 AC/440 DC | 3NA32../-6      |                      |       |       |       |       |
|      | 300 ... 400  | 500 AC/440 DC | 3NA62..         |                      |       |       |       |       |
|      | 300 ... 400  | 400 AC        | 3NA62../-4      |                      |       |       |       |       |
|      | 224 ... 315  | 690 AC/440 DC | 3NA62../-6      |                      |       |       |       |       |
| 4a   | 300 ... 400  | 500 AC/440 DC | 3NA72..         |                      |       |       |       |       |
|      | 224 ... 315  | 690 AC/440 DC | 3NA72../-6      |                      |       |       |       |       |
|      | 200 ... 400  | 500 AC/440 DC | 3NA33..         | 58                   | 74    | 151   | 71    | 13    |
|      | 250, 315     | 690 AC/440 DC | 3NA33../-6      |                      |       |       |       |       |
|      | 425 ... 630  | 500 AC/440 DC | 3NA33..         |                      |       |       |       |       |
|      | 355 ... 500  | 690 AC/440 DC | 3NA33../-6      | 71                   | 74    | 151   | 70    | 13    |
| 4    | 630 ... 1250 | 500 AC/440 DC | 3NA34..         | See adjacent drawing |       |       |       |       |
| 4a   | 500 ... 1250 | 500 AC/440 DC | 3NA36..         | 102                  | 97    | 201   | 95    | 20    |

**LV HRC fuse links, operational class aM****Sizes 000 to 3**

| Size       | $I_n$<br>A  | $U_n$<br>V | Type    | Dimensions |       |       |       |       |
|------------|-------------|------------|---------|------------|-------|-------|-------|-------|
|            |             |            |         | b          | $h_1$ | $h_2$ | $t_1$ | $t_2$ |
| <b>000</b> | 6 ... 80    | 500 AC     | 3ND18.. | 21         | 54    | 80    | 45    | 8     |
| <b>00</b>  | 100 ... 160 |            |         | 30         | 54    | 80    | 45    | 14    |
| <b>1</b>   | 63 ... 100  | 690 AC     | 3ND21.. | 30         | 75    | 137   | 50    | 15    |
|            | 125 ... 250 |            |         | 47         | 75    | 137   | 51    | 9     |
| <b>2</b>   | 125 ... 250 | 690 AC     | 3ND22.. | 47         | 75    | 151   | 58    | 10    |
|            | 315 ... 400 |            |         | 58         | 74    | 151   | 59    | 13    |
| <b>3</b>   | 315 ... 400 | 690 AC     | 3ND23.. | 58         | 74    | 151   | 71    | 13    |
|            | 500, 630    |            | 3ND13.. | 71         | 74    | 151   | 70    | 13    |

## Fuse Systems

### 3NA, 3ND LV HRC Fuse Systems

#### LV HRC signal detectors

##### Overview

LV HRC signal detectors are used for remotely indicating that the LV HRC fuse links have been tripped. Three different solutions are available:

- 3NX1021 signal detectors with signal detector link  
The LV HRC signal detectors with signal detector link support monitoring of LV HRC fuse links with non-insulated grip lugs of sizes 000 to 4 at 10 A or more. The signal detector link is connected in parallel to the fuse link. In the event of a fault, the LV HRC fuse links are released simultaneously with the LV HRC fuse detector link. A trip pin switches a floating micro-switch

- 3NX1024 signal detector tops


The signal detector top can be used with LV HRC fuse links, sizes 000, 00, 1 and 2, which are equipped with non-insulated grip lugs and have a front indicator or combination alarm. It is simply plugged into the grip lugs

- 5TT3170 fuse monitors

If a fuse is tripped, the front indicator springs open and switches a floating microswitch. This solution should not be used for safety-relevant systems. For this purpose, we recommend our electronic fuse monitors


##### Dimensional drawings

###### LV HRC signal detectors

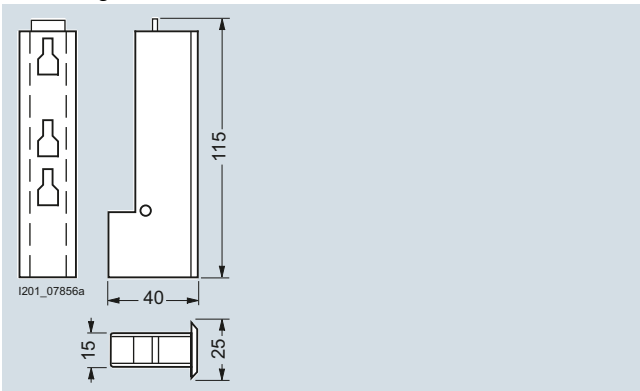


3NX1021

###### Signal detector links

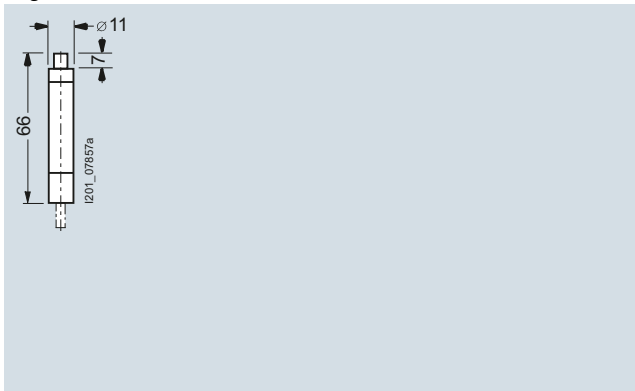


3NX1022, 3NX1023

###### Signal detector tops

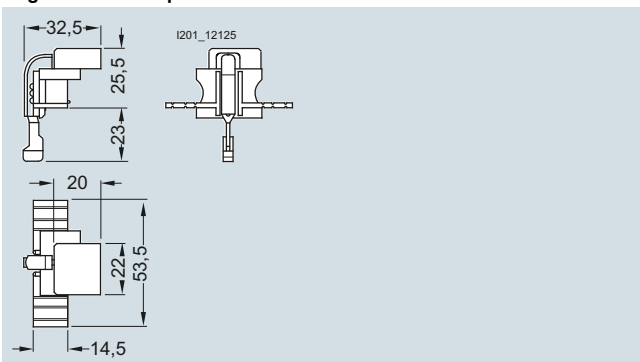

3NX1024

###### Fuse monitors

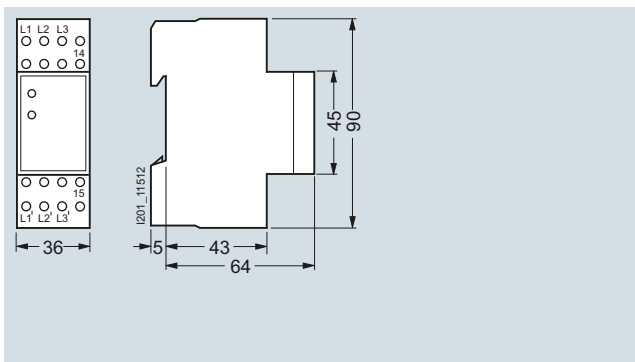


5TT3170


##### Circuit diagrams

###### Graphical symbols

###### LV HRC signal detectors Signal detector tops



###### Fuse monitors




### Overview

#### Terminals for all applications



Flat terminals with screws are suitable for connecting busbars or cable lugs. They have a torsion-proof screw connection with shim, spring washer and nut. When tightening the nut, always ensure compliance with the specified torque due to the considerable leverage effect.

The double busbar terminal differs from the flat terminal in that it supports connection of two busbars, one on the top and one at the bottom of the flat terminal.

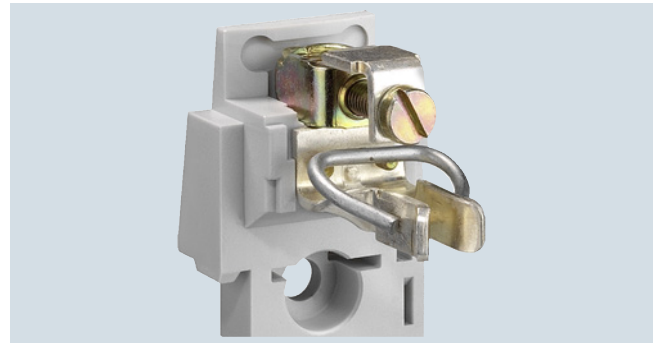

The modern box terminal ensures efficient and reliable connection to the conductors. They support connection of conductors with or without end sleeve.



With the flat terminal with nut, terminal lug of the nut is torsion-proof. When tightening the nut, the torque must be observed because of the considerable leverage effect.



Up to three conductors can be clamped to the terminal strip.



The plug-in terminal is equipped for connecting two conductors.



One conductor can be clamped to the saddle-type terminal.

## Fuse Systems

### 3NA, 3ND LV HRC Fuse Systems

#### LV HRC fuse bases and accessories

#### Technical specifications

|                                                |                 | LV HRC fuse bases, LV HRC bus-mounting bases                                                        |                   |     |     |     |      |
|------------------------------------------------|-----------------|-----------------------------------------------------------------------------------------------------|-------------------|-----|-----|-----|------|
| Size                                           |                 | 000/00                                                                                              | 0                 | 1   | 2   | 3   | 4    |
| <b>Standards</b>                               |                 | IEC 60269-1, -2; EN 60269-1; DIN VDE 0636-2, UL 4248-1 (only downstream from the branch protection) |                   |     |     |     |      |
| <b>Approvals</b>                               |                 | KEMA, UL File No: E171267-IZLT2                                                                     |                   |     |     |     |      |
| <b>Rated current <math>I_n</math></b>          | A               | 160                                                                                                 | 160               | 250 | 400 | 630 | 1250 |
| <b>Rated voltage <math>U_n</math></b>          | V AC            | 690 <sup>1)</sup>                                                                                   | 690 <sup>1)</sup> |     |     |     | 690  |
|                                                | V DC            | 250                                                                                                 | 440               |     |     |     | 440  |
| <b>Rated short-circuit strength</b>            | kA AC           | 120                                                                                                 |                   |     |     |     |      |
|                                                | kA DC           | 25                                                                                                  |                   |     |     |     |      |
| <b>Max. power dissipation of the fuse link</b> | W               | 12                                                                                                  | 25                | 32  | 45  | 60  | 90   |
| <b>Flat terminal</b>                           |                 |                                                                                                     |                   |     |     |     |      |
| Screw                                          |                 | M8                                                                                                  |                   | M10 |     | M12 |      |
| Nut                                            |                 | M8                                                                                                  | --                |     |     |     |      |
| Max. tightening torque                         | Nm              | 14                                                                                                  |                   | 38  |     |     | 65   |
| <b>Plug-in terminal</b>                        |                 |                                                                                                     |                   |     |     |     |      |
| Conductor cross-section                        | mm <sup>2</sup> | 2.5 ... 50                                                                                          |                   | --  |     |     |      |
| <b>Saddle-type terminal</b>                    |                 |                                                                                                     |                   |     |     |     |      |
| Conductor cross-section                        | mm <sup>2</sup> | 6 ... 70                                                                                            | --                |     |     |     |      |
| <b>Box terminal</b>                            |                 |                                                                                                     |                   |     |     |     |      |
| Conductor cross-section                        | mm <sup>2</sup> | 2.5 ... 50                                                                                          |                   |     |     |     |      |
| <b>Terminal strips</b>                         |                 |                                                                                                     |                   |     |     |     |      |
| Conductor cross-section, 3-wire                | mm <sup>2</sup> | 1.5 ... 16                                                                                          | --                |     |     |     |      |
| Max. torque for attachment of LV HRC fuse base | Nm              | 2                                                                                                   |                   | 2.5 |     |     | --   |


<sup>1)</sup> Extended rated voltage up to 1000 V (except LV HRC bus-mounting bases).

|                                                |      | LV HRC fuse bases with swivel mechanism |     |     |     |
|------------------------------------------------|------|-----------------------------------------|-----|-----|-----|
| Size                                           |      | 000/00                                  | 1   | 3   | 4a  |
| <b>Rated voltage <math>U_n</math></b>          | V AC | 690                                     |     |     |     |
|                                                | V DC | 440                                     |     |     |     |
| <b>Max. power dissipation of the fuse link</b> | W    | 12                                      | 32  | 48  | 110 |
| <b>Flat terminal</b>                           |      |                                         |     |     |     |
| Screw                                          |      | M8                                      | M10 | M12 | M16 |
| Nut                                            |      | M8                                      | --  |     |     |
| Max. tightening torque                         | Nm   | 14                                      | 38  |     | 65  |

### Dimensional drawings

#### LV HRC fuse bases made of molded plastic


Size 000/00, 1P

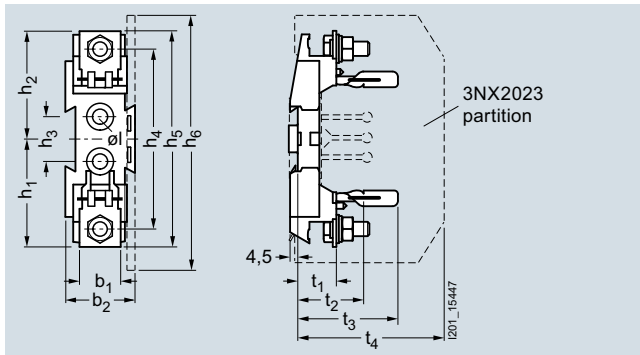

3NH3051 to 3NH3053


| Size   | $I_n$<br>A | Poles | Connections             | Type    | $b_1$ | $b_2$ | $h_1$ | $h_2$ | $h_3$ | $h_4$ | $h_5$ | $h_6$ | $\varnothing I$ | $t_1$ | $t_2$ | $t_3$ | $t_4$ |
|--------|------------|-------|-------------------------|---------|-------|-------|-------|-------|-------|-------|-------|-------|-----------------|-------|-------|-------|-------|
| 000/00 | 160        | 1P    | M8 flat terminal, screw | 3NH3051 | 23    | 39    | 61    | 61    | 25    | 101   | 121   | 139   | 7.5             | 26    | 42    | 61    | 86    |
|        |            |       | Saddle-type terminal    | 3NH3052 | --    | 39    | 60    | 60    | 25    | 108   | 120   | 139   | 7.5             | 26    | 42    | 61    | 86    |
|        |            |       | Box terminals           | 3NH3053 | --    | 39    | 59    | 50    | 25    | 99    | 117   | 139   | 7.5             | 23    | 39    | 61    | 86    |

#### LV HRC fuse bases made of ceramic

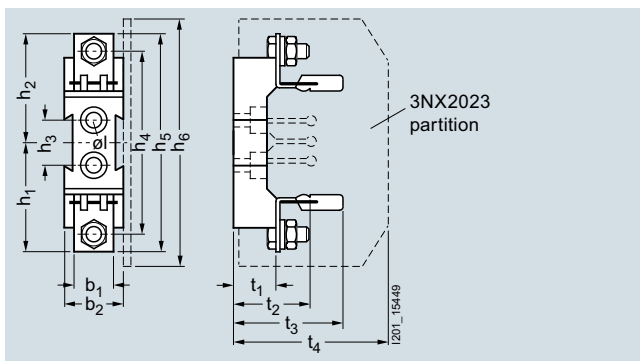Size 000/00  
1P

3NH303., 3NH3050

3P

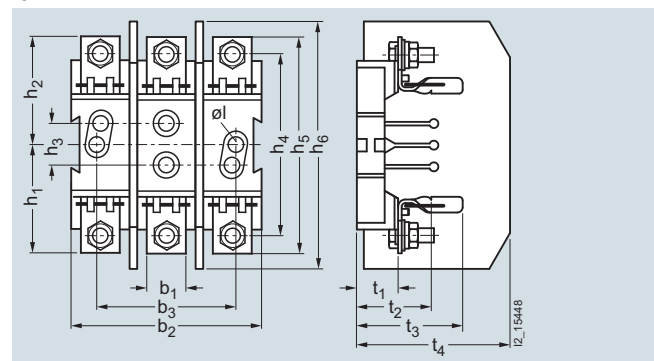

3NH403.


| Size   | $I_n$<br>A | Poles | Connections                    | Type    | $b_1$ | $b_2$ | $b_3$ | $h_1$ | $h_2$ | $h_3$ | $h_4$ | $h_5$ | $h_6$ | $\varnothing I$ | $t_1$ | $t_2$ | $t_3$ | $t_4$ |
|--------|------------|-------|--------------------------------|---------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-----------------|-------|-------|-------|-------|
| 000/00 | 160        | 1P    | Flat terminal, screw           | 3NH3030 | 23    | 34    | --    | 61    | 61    | 25    | 102   | 122   | 139   | 7.5             | 24    | 40    | 60    | 86    |
|        |            |       | M8 plug-in terminal            | 3NH3031 | 31    | 34    | --    | 64    | 64    | 25    | 102   | 128   | 139   | 7.5             | 24    | 40    | 60    | 86    |
|        |            |       | Saddle-type terminal           | 3NH3032 | 29    | 34    | --    | 61    | 61    | 25    | 109   | 122   | 139   | 7.5             | 24    | 40    | 60    | 86    |
|        |            |       | Flat terminal, terminal strip  | 3NH3035 | 26    | 34    | --    | 61    | 70    | 25    | 113   | 130   | 139   | 7.5             | 24    | 40    | 60    | 86    |
|        |            |       | Flat terminal, nut             | 3NH3038 | 23    | 34    | --    | 61    | 61    | 25    | 102   | 122   | 139   | 7.5             | 24    | 40    | 60    | 86    |
|        |            |       | Flat and saddle-type terminals | 3NH3050 | 29    | 34    | --    | 61    | 61    | 25    | 102   | 122   | 139   | 7.5             | 24    | 40    | 60    | 86    |
|        |            | 3P    | Flat terminal                  | 3NH4030 | 23    | 102   | 70    | 61    | 61    | 25    | 102   | 122   | 139   | 7.5             | 24    | 40    | 60    | 86    |
|        |            |       | M8 plug-in terminal            | 3NH4031 | 31    | 102   | 70    | 64    | 64    | 25    | 102   | 128   | 139   | 7.5             | 24    | 40    | 60    | 86    |
|        |            |       | Saddle-type terminal           | 3NH4032 | 29    | 102   | 70    | 61    | 61    | 25    | 102   | 122   | 139   | 7.5             | 24    | 40    | 60    | 86    |
|        |            |       | Flat terminal, terminal strip  | 3NH4035 | 26    | 102   | 70    | 61    | 70    | 25    | 113   | 130   | 139   | 7.5             | 24    | 40    | 60    | 86    |

## Fuse Systems

### 3NA, 3ND LV HRC Fuse Systems

#### LV HRC fuse bases and accessories


Size 0, 1P

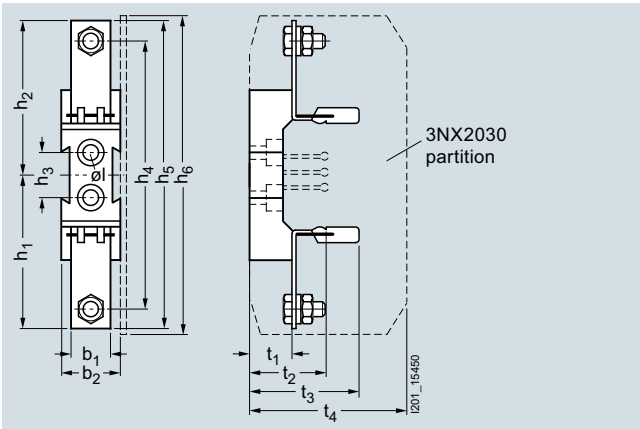

3NH312.


| Size | $I_n$<br>A | Poles | Connections      | Type    | $b_1$ | $b_2$ | $h_1$ | $h_2$ | $h_3$ | $h_4$ | $h_5$ | $h_6$ | $\varnothing I$ | $t_1$ | $t_2$ | $t_3$ | $t_4$ |
|------|------------|-------|------------------|---------|-------|-------|-------|-------|-------|-------|-------|-------|-----------------|-------|-------|-------|-------|
| 0    | 160        | 1P    | Flat terminal    | 3NH3120 | 23    | 38    | 87    | 87    | 25    | 150   | 173   | 179   | 7.5             | 24    | 40    | 60    | 88    |
|      |            |       | Plug-in terminal | 3NH3122 | 31    | 38    | 87    | 87    | 25    | 150   | 173   | 179   | 7.5             | 24    | 40    | 60    | 88    |

Size 1  
1P

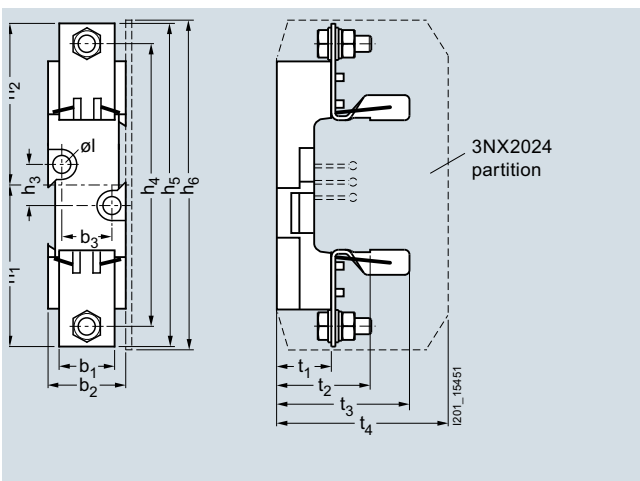

3NH32.0

3P

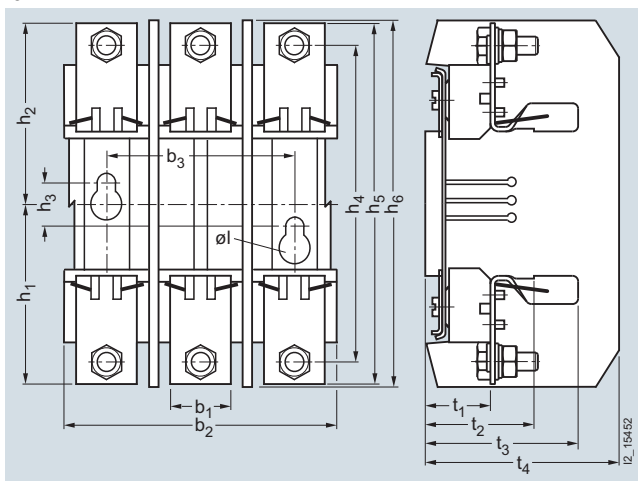

3NH4230


| Size | $I_n$<br>A | Poles | Connections            | Type    | $b_1$ | $b_2$ | $b_3$ | $h_1$ | $h_2$ | $h_3$ | $h_4$ | $h_5$ | $h_6$ | $\varnothing I$ | $t_1$ | $t_2$ | $t_3$ | $t_4$ |
|------|------------|-------|------------------------|---------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-----------------|-------|-------|-------|-------|
| 1    | 250        | 1P    | M10 flat terminal      | 3NH3230 | 35    | 49    | 30    | 101   | 101   | 25    | 177   | 202   | 203   | 10.5            | 35    | 55    | 84    | 107   |
|      |            |       | Double busbar terminal | 3NH3220 | 35    | 49    | 30    | 101   | 101   | 25    | 177   | 202   | 203   | 10.5            | 35    | 55    | 84    | 107   |
|      |            | 3P    | M10 flat terminal      | 3NH4230 | 35    | 146   | 111   | 101   | 101   | 25    | 177   | 202   | 203   | 10.5            | 35    | 55    | 84    | 107   |

# Fuse Systems

## 3NA, 3ND LV HRC Fuse Systems


### LV HRC fuse bases and accessories

**Size 2**  
**1P**

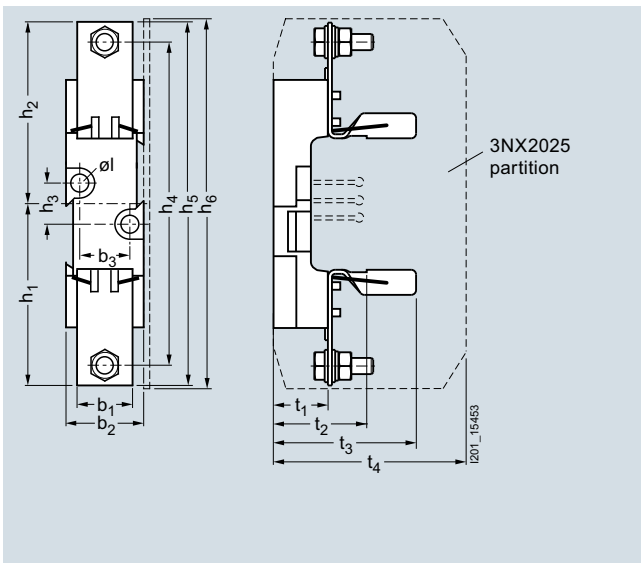

3NH33.0


**Size 3**  
**1P**

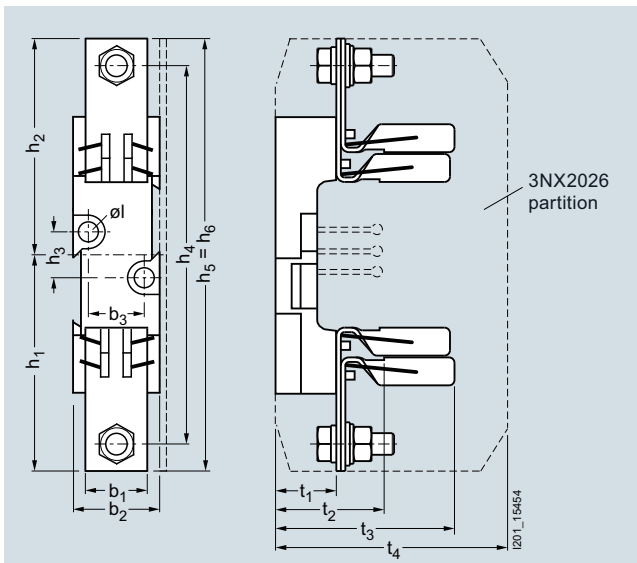

3NH34.0

| Size | $I_n$<br>A | Poles | Connections            | Type    | $b_1$ | $b_2$ | $b_3$ | $h_1$ | $h_2$ | $h_3$ | $h_4$ | $h_5$ | $h_6$ | $\varnothing l$ | $t_1$ | $t_2$ | $t_3$ | $t_4$ |
|------|------------|-------|------------------------|---------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-----------------|-------|-------|-------|-------|
| 2    | 400        | 1P    | M10 flat terminal      | 3NH3330 | 35    | 49    | 30    | 113   | 113   | 25    | 202   | 227   | 228   | 10.5            | 35    | 55    | 90    | 115   |
|      |            |       | Double busbar terminal | 3NH3320 | 35    | 49    | 30    | 113   | 113   | 25    | 202   | 227   | 228   | 10.5            | 35    | 55    | 90    | 115   |
| 3    | 630        | 1P    | M12 flat terminal      | 3NH3430 | 35    | 49    | 30    | 121   | 121   | 25    | 212   | 242   | 242   | 10.5            | 35    | 57    | 101   | 130   |
|      |            |       | Double busbar terminal | 3NH3420 | 35    | 49    | 30    | 121   | 121   | 25    | 212   | 242   | 242   | 10.5            | 35    | 57    | 101   | 130   |

**Size 4, 1P**

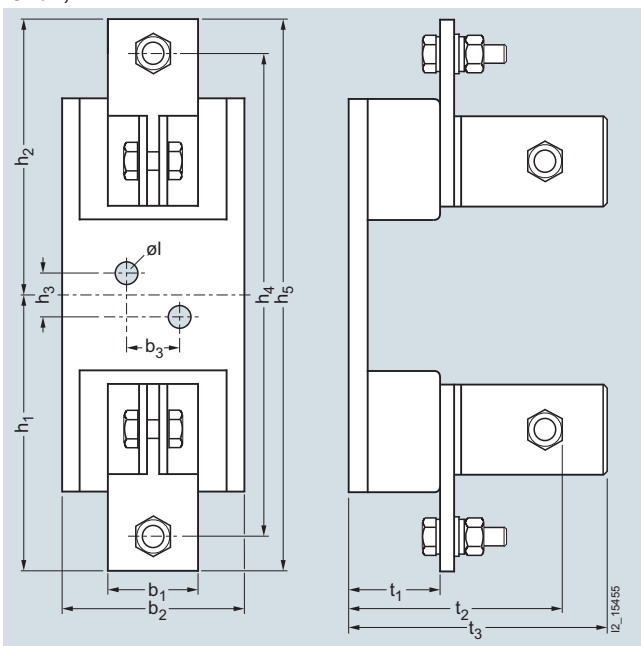

3NH3530

| Size            | $I_n$<br>A                                      | Poles | Connections       | Type    | $b_1$ | $b_2$ | $b_3$ | $h_1$ | $h_2$ | $h_3$ | $h_4$ | $h_5$ | $\varnothing l$ | $t_1$ | $t_2$ | $t_3$ |
|-----------------|-------------------------------------------------|-------|-------------------|---------|-------|-------|-------|-------|-------|-------|-------|-------|-----------------|-------|-------|-------|
| 4 <sup>1)</sup> | 1250                                            | 1P    | M12 flat terminal | 3NH3530 | 50    | 102   | 30    | 156   | 156   | 25    | 270   | 312   | 13              | 51    | 116   | 144   |
| 4a              | Can only be used in bases with swivel mechanism |       |                   |         |       |       |       |       |       |       |       |       |                 |       |       |       |

<sup>1)</sup> Size 4 LV HRC fuse links are also screwed onto the base.


## Fuse Systems

### 3NA, 3ND LV HRC Fuse Systems

#### LV HRC fuse bases and accessories

##### LV HRC fuse bases with swivel mechanism

Sizes 000/00, 1, 3 and 4a

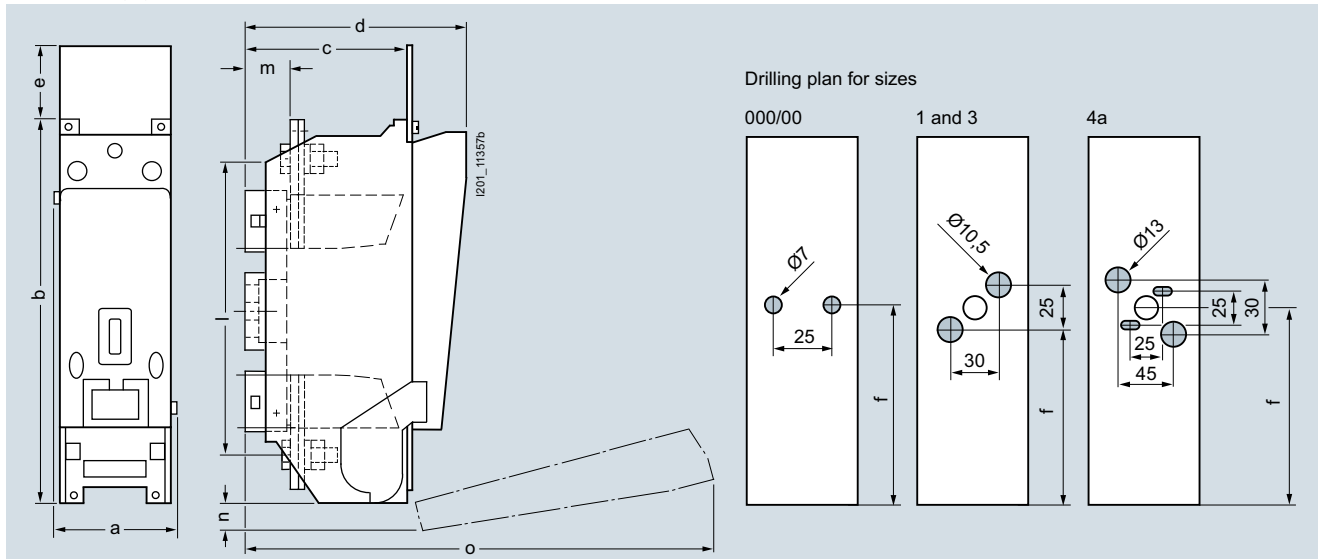


3NH703., 3NH723., 3NH733., 3NH7520

| Size   | $I_n$<br>A | Type                            | a   | b   | c   | d   | e  | f     | l     | m    | n  | o   |
|--------|------------|---------------------------------|-----|-----|-----|-----|----|-------|-------|------|----|-----|
| 000/00 | 160        | 3NH7030,<br>3NH7031,<br>3NH7032 | 49  | 149 | 45  | 86  |    | 79    | 120   | 17   | 20 |     |
| 1      | 250        | 3NH7230,<br>3NH7231,<br>3NH7232 | 69  | 230 | 68  | 119 |    | 102.5 | 177   | 25   | 38 |     |
| 3      | 630        | 3NH7330,<br>3NH7331,<br>3NH7332 | 91  | 270 | 96  | 147 |    | 122.5 | 220.5 | 30.5 | 35 |     |
| 4a     | 1250       | 3NH7520                         | 116 | 350 | 155 | 218 | 69 | 172.5 | 270   | 40   | 18 | 439 |

##### LV HRC contact covers for LV HRC fuse bases and LV HRC bus-mounting bases<sup>1)</sup>

Sizes 000/00 to 3

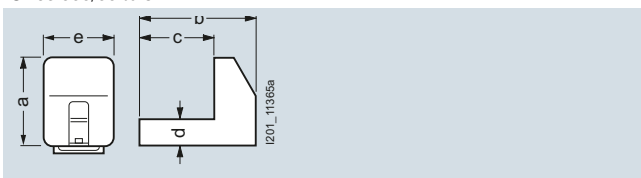

3NX3105 to 3NX3108, 3NX3114

| Size   | Type                  | a    | b    | c    | d    | e  |
|--------|-----------------------|------|------|------|------|----|
| 000/00 | 3NX3105 <sup>1)</sup> | 38   | 47.5 | 34   | 11.5 | 30 |
| 0      | 3NX3114               | 51.5 | 47.5 | 34   | 11.5 | 30 |
| 1      | 3NX3106               | 61.5 | 57   | 42.5 | 35   | 46 |
| 2      | 3NX3107               | 74   | 65   | 51   | 35   | 46 |
| 3      | 3NX3108               | 81.5 | 77.5 | 57.5 | 35   | 46 |

<sup>1)</sup> The 3NX3105 LV HRC contact covers can be used for both LV HRC fuse bases and LV HRC bus-mounting bases.


##### LV HRC contact covers for LV HRC bus-mounting bases



3NX3113 for the incoming terminal, dimensional drawing 3NX3105 for the outgoing terminal, [see dimensional drawing above](#)


##### 3NX3115 LV HRC protective covers, with 3NX3116 LV HRC covers

Size 000/00, degree of protection IP2X

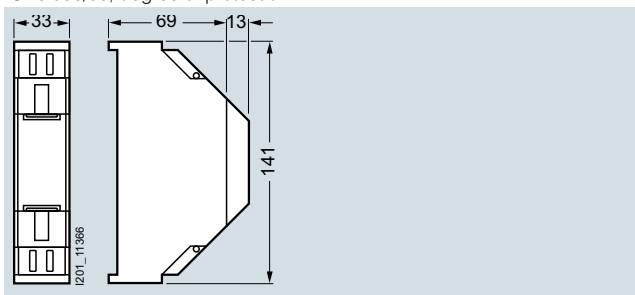


### LV HRC partitions for LV HRC fuse bases

Size 000/00

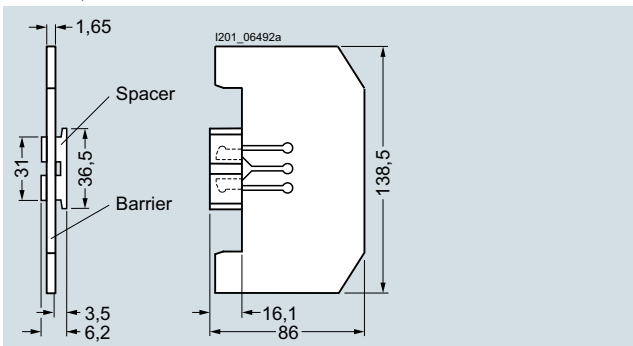

3NX2023

Sizes 0 to 3



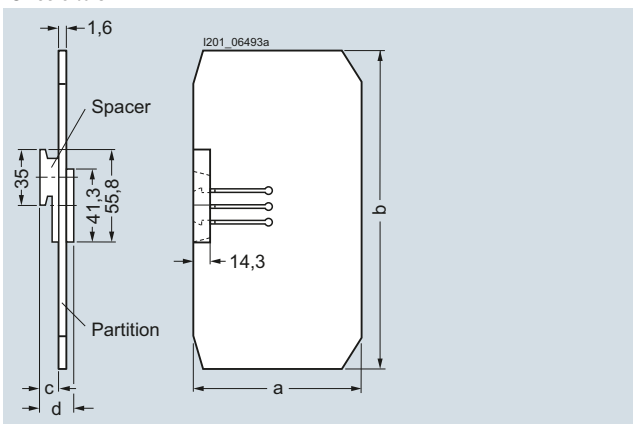


3NX2030, 3NX2024 to 3NX2026

| Size | Type    | a     | b     | c    | d    |
|------|---------|-------|-------|------|------|
| 0    | 3NX2030 | 87.6  | 178.5 | 7.7  | 12.3 |
| 1    | 3NX2024 | 107.3 | 202.5 | 7.7  | 12.3 |
| 2    | 3NX2025 | 115.3 | 227.5 | 14.2 | 25.1 |
| 3    | 3NX2026 | 129.8 | 242   | 20.2 | 37.2 |

### LV HRC partitions for LV HRC bus-mounting bases

Size 000/00

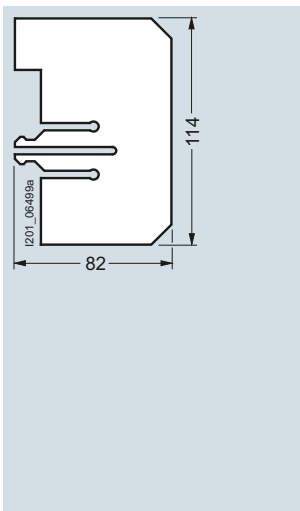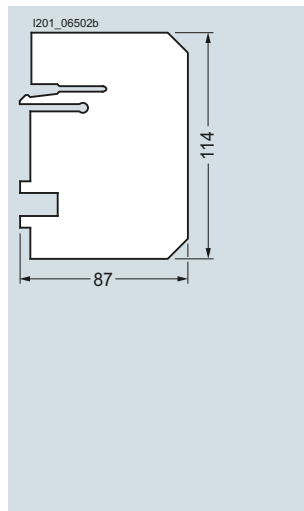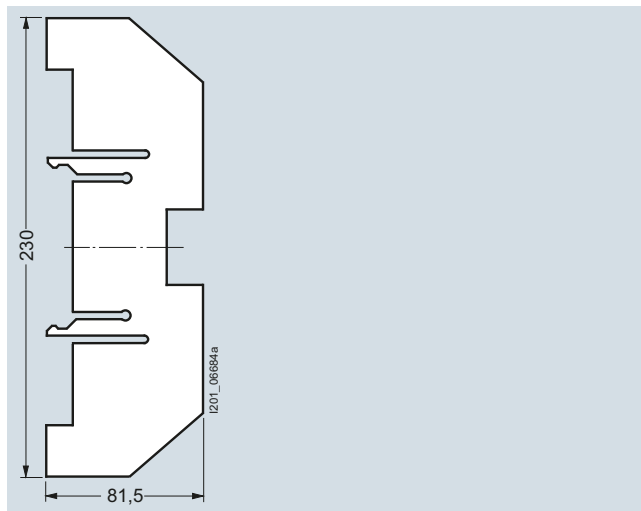
Phase barrier  
3NX2027End barrier  
3NX2028For LV HRC bus-mounting bases in tandem design  
3NX2031




### More information

#### Space requirements when installing LV HRC fuse bases


1 LV HRC fuse base, 3P

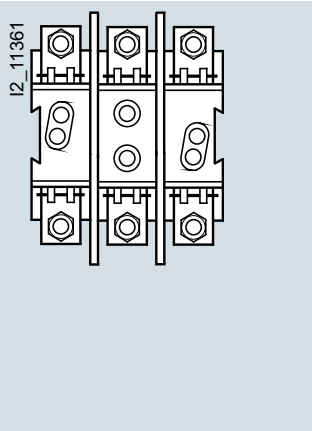

3 LV HRC fuse base, 1P

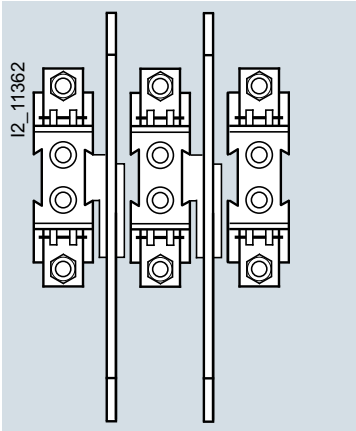

LV HRC partition

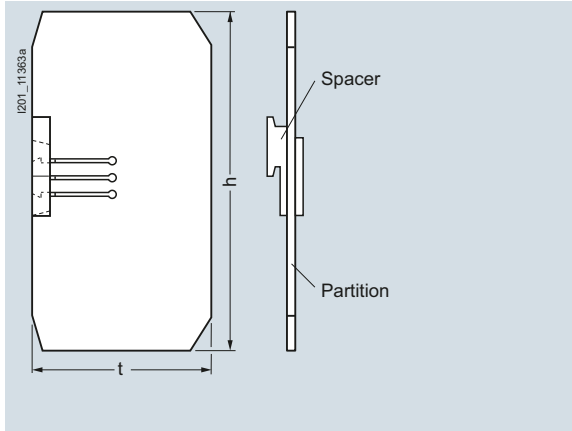

| Size   | Mounting width (mm) of LV HRC fuse bases                                 |                                             |                                               |                                             |                         | Mounting height (mm)                                 | Mounting depth (mm) |
|--------|--------------------------------------------------------------------------|---------------------------------------------|-----------------------------------------------|---------------------------------------------|-------------------------|------------------------------------------------------|---------------------|
|        | 1 unit, 3P                                                               |                                             | 3 units, 1P                                   |                                             | Distance through spacer | 3NX20.. partitions with matching bases <sup>1)</sup> |                     |
|        | Bases with phase barrier, without end barrier                            | Bases with phase barrier and 2 end barriers | Bases with phase barrier, without end barrier | Bases with phase barrier and 2 end barriers |                         | h                                                    | t                   |
| 000/00 | 102                                                                      | 106                                         | 100                                           | 104 <sup>2)</sup>                           | 2                       | 138                                                  | 86                  |
| 0      | --                                                                       | --                                          | 128                                           | 142                                         | 7                       | 178                                                  | 90                  |
| 1      | 163                                                                      | 177                                         | 158                                           | 172                                         | 7                       | 202                                                  | 110                 |
| 2      | --                                                                       | --                                          | 184                                           | 224                                         | 20 <sup>3)</sup>        | 227                                                  | 118                 |
| 3      | --                                                                       | --                                          | 208                                           | 272                                         | 32 <sup>3)</sup>        | 242                                                  | 132                 |
| 4      | Installation without barriers; for mounting, <a href="#">see page 75</a> |                                             |                                               |                                             |                         | Not available                                        |                     |
| 4a     | Can only be used in bases with swivel mechanism                          |                                             |                                               |                                             |                         | Not available                                        |                     |

<sup>1)</sup> This measurement specifies the required overall mounting depth with base d and the overall mounting height h.

<sup>2)</sup> Placing an additional base on the barrier and plug-on part does not increase the distance, rather the bases lie flat directly on top of one another.

<sup>3)</sup> If the bases are installed directly on a side wall in the distribution board, one spacer part can be broken off. This would reduce the distance measurement.

#### SITOR semiconductor fuses for 3NH bases:

3NH bases are generally suitable for all LV HRC type fuses. SITOR semiconductor fuses in LV HRC design can also be used, although it must be noted that, compared to cable and line protection fuses, these get much hotter during operation. The following table shows the permissible load currents of the SITOR semiconductor fuses for installation in 3NH. For this reason, the fuse must be operated below  $I_n$  when installed in a base (derating).

The values were determined using the conductor cross-sections specified in the table. If using smaller cross-sections, a considerably higher derating is required due to the lower heat dissipation.

For further information on the assignment of SITOR semiconductor fuses to the fuse bases and safety switching devices, please refer to the tables on [page 85 ff.](#)

## Fuse Systems

### SITOR Semiconductor Fuses

#### LV HRC design

##### Overview

SITOR semiconductor fuses protect power semiconductors from the effects of short circuits because the super quick-response disconnect characteristic is far quicker than with conventional LV HRC fuses. They protect high-quality devices and system components, such as converters with fuses in the input and the DC link, UPS systems and soft starters for motors.

Panel mounting requirements have given rise to various connection versions and designs.

The fuses with blade contacts comply with IEC 60269-2 and are suitable for installation in LV HRC fuse bases, in LV HRC fuse switch disconnectors and switch disconnectors with fuses. They also include fuses with slotted blade contacts for screw fixing with 110 mm mounting dimension, whose sizes are according to IEC 60269-4.

Fuses with slotted blade contacts for screw fixing with 80 mm or 110 mm mounting dimension are often screwed directly onto busbars for optimum heat dissipation. Even better heat transmission is provided by the compact fuses with M10 or M12 female thread, which are also mounted directly onto busbars.

Bolt-on links with 80 mm mounting dimension are another panel-mounting version for direct busbar mounting.

The fuses for SITOR thyristor sets, railway rectifiers or electrolysis systems were developed specially for these applications.

LV HRC bases suitable for use with SITOR semiconductor fuses and safety switching devices [can be found on page 69 ff.](#)

Fuse characteristics, configuration notes and the assignments of SITOR semiconductor fuses to the fuse bases and 3NP and 3KL safety switching devices can be found in the Configuration Manual, "Fuse Systems" at: [www.siemens.com/lowvoltage/manuals](http://www.siemens.com/lowvoltage/manuals)

The new size 3 type ranges have a round ceramic body instead of a square one. These series are characterized by small  $I^2t$  values with low power dissipation and high capability under alternating load. The dimensions and functional values correspond to the current standards IEC 60269-4/EN 60269-4 (VDE 0636-4).

##### Note:

The ordering data of the fuses are listed in ascending order of the rated voltage in the selection tables.

##### Benefits

- SITOR semiconductor fuses have a high varying load factor, which ensures a high level of operational safety and plant availability – even when subject to constant load change
- The use of SITOR semiconductor fuses in LV HRC bases or Siemens switch disconnectors has been tested with regard to heat dissipation and maximum current loading. This makes planning and dimensioning easier and prevents consequential damage
- Our high standard of quality ensures good compliance with the characteristic curve and accuracy. This ensures long-term protection of devices

##### Operational classes

Fuses are categorized according to function and operational classes. SITOR semiconductor fuses, in LV HRC design, are available in the following operational classes:

- aR: for the short-circuit protection of power semiconductors (partial range protection)
- gR: for the protection of power semiconductors (full range protection)
- gS: The operational class gS combines cable and line protection with semiconductor protection (full range protection)

##### Parallel-connected fuses

Parallel-connected fuses offer maximum current and energy limiting that is clearly better than in the case of comparable single fuses. They also fulfill the special requirements for UL-certified fuses according to which fuses must be connected in parallel at the factory. *Here is the original wording of the NEC document: 240.8 Fuses and circuit breakers shall be permitted to be connected in parallel where they are factory assembled in parallel and listed as a unit. Individual fuses, circuit breakers, or combinations thereof shall not otherwise be connected in parallel.*

### Application

#### Features

SITOR fuse links protect converter equipment against short circuits.

The power semiconductors used in these devices (diodes, thyristors, GTOs and others) require fast-switching elements for protection due to their low thermal capacity. SITOR fuse links (super quick-response fuse links for semiconductor protection) are ideal for this type of application.

The following types of short-circuit faults can occur:


- **Internal short circuit:**  
A faulty semiconductor device causes a short circuit within the power converter
- **External short circuit:**  
A fault in the load causes a short circuit on the output side of the power converter
- **Inverter shoot-through:**  
In the event of a failure of the chassis converter control system during inverter operation (commutation failure), the converter connection forms a short-circuit type connection between the DC and AC power supply system.

Fuse links can be arranged in a number of ways within the converter connection. A distinction is made between phase fuses in three-phase incoming feeders and, if applicable, DC fuses and branch fuses in the branches of the converter circuit (see adjacent diagrams). In the case of center tap connections, fuse links can only be arranged as phase fuses in three-phase incoming feeders.


When using SITOR fuse links of operational class aR, the overload protection of converter equipment, up to approx. 3.5 times the rated current of the fuse link, is taken from conventional protective devices (for example, thermally-delayed overload relays) or, in the case of controlled power converters, from the current limiter (exception: full range fuses).

SITOR fuse links of the 3NE1...-0 series with operational class gS are also suitable for overload and short-circuit protection of cables, lines and busbars. All other dual-function fuses of the SITOR series have a gR characteristic. Overload protection is ensured as long as the rated current of the SITOR fuse links of the series 3NE1...-0 is selected as  $I_n \leq I_Z$  (DIN VDE 0100 Part 430).

The rules of DIN VDE 0100 Part 430 must be applied when rating short-circuit protection for cables, lines and busbars.

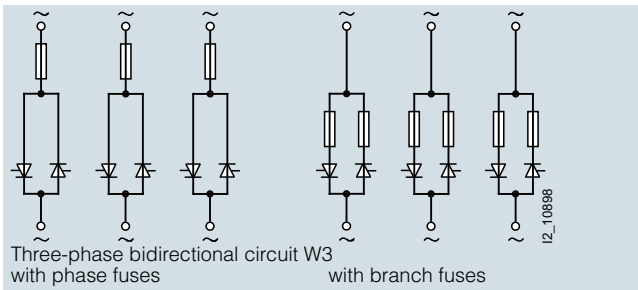

#### Configuration options

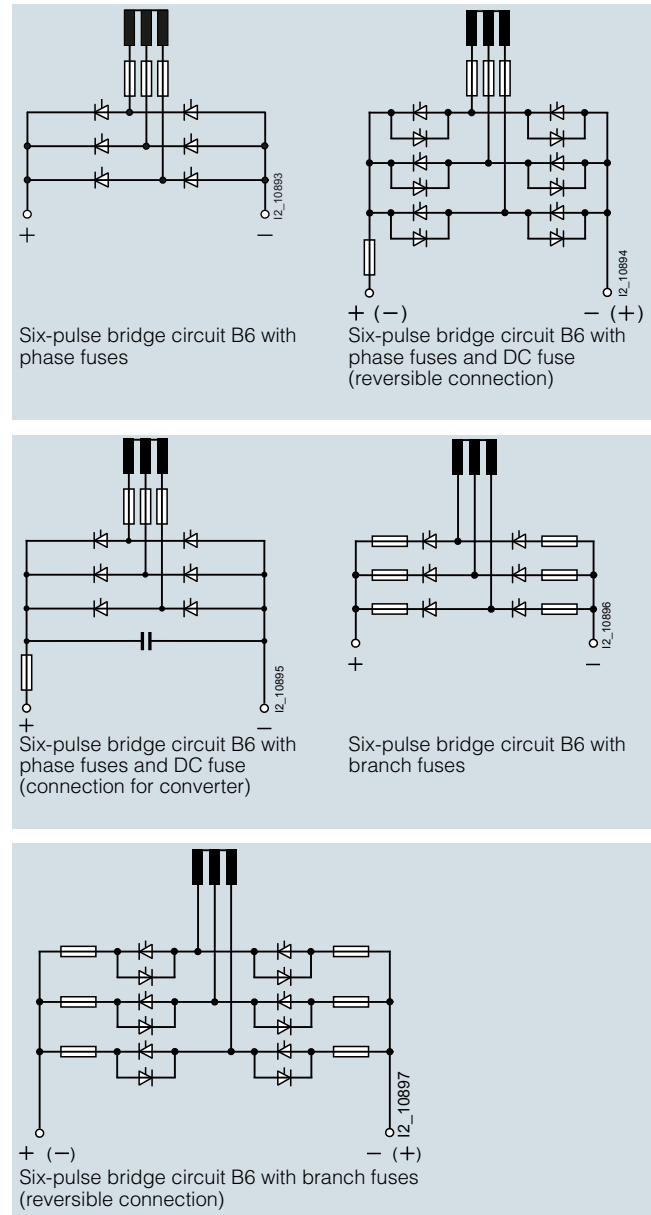

## Fuse Systems

### SITOR Semiconductor Fuses

#### LV HRC design

#### Technical specifications

| MLFB          | Operational class (IEC 60269) | Rated voltage $U_n$    | Rated breaking capacity $I_{1n}$ | Rated current $I_n$ | Melting $I^2t$ value $I^2t_s$ ( $t_{vs} = 1$ ms) | Breaking $I^2t$ value $I^2t_a$ at $U_n$ | Temperature rise at $I_n$ body center 2) | Power dissipation at $I_n$ 2) | Varying load factor VL |
|---------------|-------------------------------|------------------------|----------------------------------|---------------------|--------------------------------------------------|-----------------------------------------|------------------------------------------|-------------------------------|------------------------|
|               |                               | V AC / V DC            | kA                               | A                   | A <sup>2</sup> s                                 | A <sup>2</sup> s                        | K                                        | W                             |                        |
| 3NB1234-3KK20 | gR                            | --/900 <sup>15)</sup>  | 100                              | 400                 | 96000                                            | 240000 <sup>15)</sup>                   | 56                                       | 75                            | --                     |
| 3NB1126-4KK11 | aR                            | --/1250 <sup>15)</sup> | 100                              | 200                 | 10700                                            | 39000 <sup>15)</sup>                    | 53                                       | 50                            | --                     |
| 3NB1128-4KK11 | aR                            | --/1250 <sup>15)</sup> | 100                              | 250                 | 24500                                            | 80500 <sup>15)</sup>                    | 53                                       | 51                            | --                     |
| 3NB1231-4KK11 | aR                            | --/1250 <sup>15)</sup> | 100                              | 315                 | 41000                                            | 129000 <sup>15)</sup>                   | 55                                       | 63                            | --                     |
| 3NB1234-4KK11 | aR                            | --/1250 <sup>15)</sup> | 100                              | 400                 | 96000                                            | 290000 <sup>15)</sup>                   | 56                                       | 68                            | --                     |
| 3NB1337-4KK11 | aR                            | --/1250 <sup>15)</sup> | 100                              | 500                 | 195000                                           | 600000 <sup>15)</sup>                   | 55                                       | 89                            | --                     |
| 3NB1345-4KK11 | aR                            | --/1250 <sup>15)</sup> | 100                              | 800                 | 770000                                           | 1910000 <sup>15)</sup>                  | 76                                       | 135                           | --                     |
| 3NB2345-4KK16 | aR                            | --/1250 <sup>15)</sup> | 150                              | 800                 | 375000                                           | 1150000 <sup>15)</sup>                  | 74                                       | 160                           | --                     |
| 3NB2350-4KK16 | aR                            | --/1250 <sup>15)</sup> | 150                              | 1000                | 7870000                                          | 2250000 <sup>15)</sup>                  | 87                                       | 195                           | --                     |
| 3NB2355-4KK16 | aR                            | --/1250 <sup>15)</sup> | 150                              | 1400                | 2150000                                          | 5100000 <sup>15)</sup>                  | 89                                       | 250                           | --                     |
| 3NB2357-4KK16 | aR                            | --/1250 <sup>15)</sup> | 150                              | 1600                | 3500000                                          | 7450000 <sup>15)</sup>                  | 76                                       | 275                           | --                     |
| 3NB2364-4KK17 | aR                            | --/1250 <sup>15)</sup> | 150                              | 2100                | 5750000                                          | 1950000 <sup>15)</sup>                  | 77                                       | 365                           | --                     |
| 3NB2366-4KK17 | aR                            | --/1250 <sup>15)</sup> | 150                              | 2400                | 9050000                                          | 18100000 <sup>15)</sup>                 | 89                                       | 445                           | --                     |
| 3NB3350-1KK26 | gR                            | 690/ <sup>13)</sup>    | 100                              | 1000                | 298000                                           | 1400000                                 | 101                                      | 138                           | 1                      |
| 3NB3351-1KK26 | gR                            | 690/ <sup>13)</sup>    | 100                              | 1100                | 680000                                           | 3000000                                 | 96                                       | 110                           | 1                      |
| 3NB3352-1KK26 | gR                            | 690/ <sup>13)</sup>    | 100                              | 1250                | 897000                                           | 4100000                                 | 38                                       | 104                           | 1                      |
| 3NB3354-1KK26 | gR                            | 690/ <sup>13)</sup>    | 100                              | 1350                | 1100000                                          | 4800000                                 | 44                                       | 126                           | 1                      |
| 3NB3355-1KK26 | gR                            | 690/ <sup>13)</sup>    | 100                              | 1400                | 1150000                                          | 5200000                                 | 48                                       | 127                           | 1                      |
| 3NB3357-1KK26 | gR                            | 690/ <sup>13)</sup>    | 100                              | 1600                | 1550000                                          | 6900000                                 | 57                                       | 152                           | 1                      |
| 3NB3358-1KK26 | gR                            | 690/ <sup>13)</sup>    | 100                              | 1700                | 2370000                                          | 10000000                                | 57                                       | 143                           | 1                      |
| 3NB3358-1KK27 | gR                            | 690/ <sup>13)</sup>    | 100                              | 1700                | 1550000                                          | 6400000                                 | 64                                       | 179                           | 1                      |
| 3NB3362-1KK27 | gR                            | 690/ <sup>13)</sup>    | 100                              | 1900                | 1850000                                          | 8200000                                 | 70                                       | 196                           | 1                      |
| 3NC2423-0C    | gR                            | 500/ <sup>13)</sup>    | 50 <sup>14)</sup>                | 150 <sup>3)</sup>   | 7000                                             | 33000                                   | 26                                       | 35                            | 0.85                   |
| 3NC2423-3C    | gR                            | 500/ <sup>13)</sup>    | 50 <sup>14)</sup>                | 150 <sup>3)</sup>   | 7000                                             | 33000                                   | 26                                       | 35                            | 0.85                   |
| 3NC2425-0C    | gR                            | 500/ <sup>13)</sup>    | 50 <sup>14)</sup>                | 200 <sup>3)</sup>   | 13600                                            | 64000                                   | 25                                       | 40                            | 0.85                   |
| 3NC2425-3C    | gR                            | 500/ <sup>13)</sup>    | 50 <sup>14)</sup>                | 200 <sup>3)</sup>   | 13600                                            | 64000                                   | 25                                       | 40                            | 0.85                   |
| 3NC2427-0C    | gR                            | 500/ <sup>13)</sup>    | 50 <sup>14)</sup>                | 250 <sup>3)</sup>   | 21000                                            | 99000                                   | 30                                       | 50                            | 0.85                   |
| 3NC2427-3C    | gR                            | 500/ <sup>13)</sup>    | 50 <sup>14)</sup>                | 250 <sup>3)</sup>   | 21000                                            | 99000                                   | 30                                       | 50                            | 0.85                   |
| 3NC2428-0C    | gR                            | 500/ <sup>13)</sup>    | 50 <sup>14)</sup>                | 300 <sup>3)</sup>   | 28000                                            | 132000                                  | 40                                       | 65                            | 0.85                   |
| 3NC2428-3C    | gR                            | 500/ <sup>13)</sup>    | 50 <sup>14)</sup>                | 300 <sup>3)</sup>   | 28000                                            | 132000                                  | 40                                       | 65                            | 0.85                   |
| 3NC2431-0C    | gR                            | 500/ <sup>13)</sup>    | 50 <sup>14)</sup>                | 350 <sup>3)</sup>   | 53000                                            | 249000                                  | 35                                       | 60                            | 0.85                   |
| 3NC2431-3C    | gR                            | 500/ <sup>13)</sup>    | 50 <sup>14)</sup>                | 350 <sup>3)</sup>   | 53000                                            | 249000                                  | 35                                       | 60                            | 0.85                   |
| 3NC2432-0C    | aR                            | 500/ <sup>13)</sup>    | 50 <sup>14)</sup>                | 400 <sup>3)</sup>   | 83000                                            | 390000                                  | 30                                       | 50                            | 0.85                   |
| 3NC2432-3C    | aR                            | 500/ <sup>13)</sup>    | 50 <sup>14)</sup>                | 400 <sup>3)</sup>   | 83000                                            | 390000                                  | 30                                       | 50                            | 0.85                   |
| 3NC3236-1U    | aR                            | 690/ <sup>13)</sup>    | 100                              | 630                 | 32500                                            | 244000                                  | 120                                      | 120                           | 0.85                   |
| 3NC3236-6U    | aR                            | 690/ <sup>13)</sup>    | 100                              | 630                 | 32500                                            | 244000                                  | 125                                      | 125                           | 0.9                    |
| 3NC3237-1U    | aR                            | 690/ <sup>13)</sup>    | 100                              | 710                 | 46100                                            | 346000                                  | 125                                      | 130                           | 0.85                   |
| 3NC3237-6U    | aR                            | 690/ <sup>13)</sup>    | 100                              | 710                 | 46100                                            | 346000                                  | 125                                      | 130                           | 0.9                    |
| 3NC3238-1U    | aR                            | 690/ <sup>13)</sup>    | 100                              | 800                 | 66400                                            | 498000                                  | 125                                      | 135                           | 0.9                    |
| 3NC3238-6U    | aR                            | 690/ <sup>13)</sup>    | 100                              | 800                 | 66400                                            | 498000                                  | 120                                      | 135                           | 0.95                   |
| 3NC3240-1U    | aR                            | 690/ <sup>13)</sup>    | 100                              | 900                 | 90300                                            | 677000                                  | 130                                      | 145                           | 0.9                    |
| 3NC3240-6U    | aR                            | 690/ <sup>13)</sup>    | 100                              | 900                 | 90300                                            | 677000                                  | 125                                      | 140                           | 0.95                   |
| 3NC3241-1U    | aR                            | 690/ <sup>13)</sup>    | 100                              | 1000                | 130000                                           | 975000                                  | 125                                      | 155                           | 0.95                   |
| 3NC3241-6U    | aR                            | 690/ <sup>13)</sup>    | 100                              | 1000                | 130000                                           | 975000                                  | 120                                      | 145                           | 1                      |
| 3NC3242-1U    | aR                            | 690/ <sup>13)</sup>    | 100                              | 1100                | 184000                                           | 1382000                                 | 125                                      | 165                           | 0.95                   |
| 3NC3242-6U    | aR                            | 690/ <sup>13)</sup>    | 100                              | 1100                | 184000                                           | 1382000                                 | 115                                      | 150                           | 1                      |
| 3NC3243-1U    | aR                            | 690/ <sup>13)</sup>    | 100                              | 1250                | 265000                                           | 1990000                                 | 130                                      | 175                           | 0.95                   |
| 3NC3243-6U    | aR                            | 690/ <sup>13)</sup>    | 100                              | 1250                | 265000                                           | 1990000                                 | 110                                      | 155                           | 1                      |
| 3NC3244-1U    | aR                            | 500/ <sup>13)</sup>    | 100                              | 1400                | 382000                                           | 2100000                                 | 140                                      | 200                           | 0.95                   |
| 3NC3244-6U    | aR                            | 500/ <sup>13)</sup>    | 100                              | 1400                | 382000                                           | 2100000                                 | 115                                      | 175                           | 1                      |
| 3NC3245-1U    | aR                            | 500/ <sup>13)</sup>    | 100                              | 1600                | 520000                                           | 2860000                                 | 160                                      | 240                           | 0.9                    |
| 3NC3245-6U    | aR                            | 500/ <sup>13)</sup>    | 100                              | 1600                | 520000                                           | 2860000                                 | 120                                      | 195                           | 0.95                   |
| 3NC3336-1U    | aR                            | 1000/ <sup>13)</sup>   | 100                              | 630                 | 66400                                            | 418000                                  | 160                                      | 145                           | 0.85                   |
| 3NC3336-6U    | aR                            | 1000/ <sup>13)</sup>   | 100                              | 630                 | 66400                                            | 418000                                  | 140                                      | 130                           | 0.9                    |
| 3NC3337-1U    | aR                            | 1000/ <sup>13)</sup>   | 100                              | 710                 | 90300                                            | 569000                                  | 160                                      | 150                           | 0.85                   |
| 3NC3337-6U    | aR                            | 1000/ <sup>13)</sup>   | 100                              | 710                 | 90300                                            | 569000                                  | 140                                      | 140                           | 0.9                    |
| 3NC3338-1U    | aR                            | 1000/ <sup>13)</sup>   | 100                              | 800                 | 130000                                           | 819000                                  | 150                                      | 155                           | 0.85                   |
| 3NC3338-6U    | aR                            | 1000/ <sup>13)</sup>   | 100                              | 800                 | 130000                                           | 819000                                  | 130                                      | 150                           | 0.9                    |
| 3NC3340-1U    | aR                            | 1000/ <sup>13)</sup>   | 100                              | 900                 | 184000                                           | 1160000                                 | 145                                      | 165                           | 0.9                    |
| 3NC3340-6U    | aR                            | 1000/ <sup>13)</sup>   | 100                              | 900                 | 184000                                           | 1160000                                 | 130                                      | 160                           | 0.95                   |
| 3NC3341-1U    | aR                            | 1000/ <sup>13)</sup>   | 100                              | 1000                | 265000                                           | 1670000                                 | 140                                      | 170                           | 0.9                    |
| 3NC3341-6U    | aR                            | 1000/ <sup>13)</sup>   | 100                              | 1000                | 265000                                           | 1670000                                 | 125                                      | 165                           | 0.95                   |
| 3NC3342-1U    | aR                            | 800/ <sup>13)</sup>    | 100                              | 1100                | 382000                                           | 1910000                                 | 150                                      | 185                           | 0.9                    |
| 3NC3342-6U    | aR                            | 800/ <sup>13)</sup>    | 100                              | 1100                | 382000                                           | 1910000                                 | 130                                      | 175                           | 0.95                   |
| 3NC3343-1U    | aR                            | 800/ <sup>13)</sup>    | 100                              | 1250                | 520000                                           | 2600000                                 | 165                                      | 210                           | 0.9                    |
| 3NC3343-6U    | aR                            | 800/ <sup>13)</sup>    | 100                              | 1250                | 520000                                           | 2600000                                 | 135                                      | 185                           | 0.95                   |
| 3NC3430-1U    | aR                            | 1250/ <sup>13)</sup>   | 100                              | 315                 | 10600                                            | 72500                                   | 60                                       | 80                            | 0.95                   |
| 3NC3430-6U    | aR                            | 1250/ <sup>13)</sup>   | 100                              | 315                 | 10600                                            | 72500                                   | 60                                       | 80                            | 0.95                   |

For footnotes, see page 84.

# Fuse Systems

## SITOR Semiconductor Fuses

### LV HRC design

| MLFB                   | Operational class<br>(IEC 60269) | Rated voltage $U_n$   | Rated breaking capacity $I_{1n}$ | Rated current $I_n$ | Melting $I^2t$ value $I^2t_s$ ( $t_{vs} = 1$ ms) | Breaking $I^2t$ value $I^2t_a$ at $U_n$ | Temperature rise at $I_n$ body center | Power dissipation at $I_n$ | Varying load factor VL |
|------------------------|----------------------------------|-----------------------|----------------------------------|---------------------|--------------------------------------------------|-----------------------------------------|---------------------------------------|----------------------------|------------------------|
|                        |                                  | V AC / V DC           | kA                               | A                   | A <sup>2</sup> s                                 | A <sup>2</sup> s                        | K                                     | W                          |                        |
| 3NC3432-1U             | aR                               | 1250/ <sup>(13)</sup> | 100                              | 400                 | 23900                                            | 163000                                  | 95                                    | 95                         | 0.95                   |
| 3NC3432-6U             | aR                               | 1250/ <sup>(13)</sup> | 100                              | 400                 | 23900                                            | 163000                                  | 95                                    | 95                         | 0.95                   |
| 3NC3434-1U             | aR                               | 1250/ <sup>(13)</sup> | 100                              | 500                 | 42500                                            | 290000                                  | 115                                   | 115                        | 0.9                    |
| 3NC3434-6U             | aR                               | 1250/ <sup>(13)</sup> | 100                              | 500                 | 42500                                            | 290000                                  | 115                                   | 115                        | 0.9                    |
| 3NC3436-1U             | aR                               | 1250/ <sup>(13)</sup> | 100                              | 630                 | 96600                                            | 650000                                  | 120                                   | 120                        | 0.95                   |
| 3NC3436-6U             | aR                               | 1250/ <sup>(13)</sup> | 100                              | 630                 | 96600                                            | 650000                                  | 120                                   | 120                        | 0.95                   |
| 3NC3438-1U             | aR                               | 1100/ <sup>(13)</sup> | 100                              | 800                 | 184000                                           | 985000                                  | 115                                   | 145                        | 0.90                   |
| 3NC3438-6U             | aR                               | 1100/ <sup>(13)</sup> | 100                              | 800                 | 184000                                           | 985000                                  | 109                                   | 145                        | 0.95                   |
| 3NC5531 <sup>(4)</sup> | aR                               | 800/ <sup>(13)</sup>  | 50 <sup>(14)</sup>               | 350 <sup>(5)</sup>  | 66000                                            | 260000                                  | 200                                   | 80                         | 0.9                    |
| 3NC5838 <sup>(4)</sup> | aR                               | 1000/ <sup>(13)</sup> | 50 <sup>(14)</sup>               | 800 <sup>(5)</sup>  | 360000                                           | 1728000                                 | 130                                   | 170                        | 0.9                    |
| 3NC5840 <sup>(4)</sup> | aR                               | 1000/ <sup>(13)</sup> | 50 <sup>(14)</sup>               | 600 <sup>(5)</sup>  | 185000                                           | 888000                                  | 110                                   | 150                        | 0.9                    |
| 3NC5841 <sup>(4)</sup> | aR                               | 800/ <sup>(13)</sup>  | 50 <sup>(14)</sup>               | 630 <sup>(5)</sup>  | 185000                                           | 888000                                  | 110                                   | 145                        | 0.9                    |
| 3NC7327-2              | aR                               | 680/ <sup>(13)</sup>  | 50 <sup>(14)</sup>               | 250                 | 244000                                           | 635000                                  | 45                                    | 25                         | 0.9                    |
| 3NC7331-2              | aR                               | 680/ <sup>(13)</sup>  | 50 <sup>(14)</sup>               | 350                 | 550000                                           | 1430000                                 | 66                                    | 32                         | 0.9                    |
| 3NC8423-0C             | gR                               | 690/ <sup>(13)</sup>  | 50 <sup>(14)</sup>               | 150 <sup>(3)</sup>  | 1100                                             | 17600                                   | 33                                    | 40                         | 0.85                   |
| 3NC8423-3C             | gR                               | 690/ <sup>(13)</sup>  | 50 <sup>(14)</sup>               | 150 <sup>(3)</sup>  | 1100                                             | 17600                                   | 33                                    | 40                         | 0.85                   |
| 3NC8425-0C             | gR                               | 690/ <sup>(13)</sup>  | 50 <sup>(14)</sup>               | 200 <sup>(3)</sup>  | 2400                                             | 38400                                   | 46                                    | 55                         | 0.85                   |
| 3NC8425-3C             | gR                               | 690/ <sup>(13)</sup>  | 50 <sup>(14)</sup>               | 200 <sup>(3)</sup>  | 2400                                             | 38400                                   | 46                                    | 55                         | 0.85                   |
| 3NC8427-0C             | gR                               | 690/ <sup>(13)</sup>  | 50 <sup>(14)</sup>               | 250 <sup>(3)</sup>  | 4400                                             | 70400                                   | 95                                    | 72                         | 0.85                   |
| 3NC8427-3C             | gR                               | 690/ <sup>(13)</sup>  | 50 <sup>(14)</sup>               | 250 <sup>(3)</sup>  | 4400                                             | 70400                                   | 95                                    | 72                         | 0.85                   |
| 3NC8431-0C             | gR                               | 690/ <sup>(13)</sup>  | 50 <sup>(14)</sup>               | 350 <sup>(3)</sup>  | 11000                                            | 176000                                  | 65                                    | 95                         | 0.85                   |
| 3NC8431-3C             | gR                               | 690/ <sup>(13)</sup>  | 50 <sup>(14)</sup>               | 350 <sup>(3)</sup>  | 1000                                             | 176000                                  | 65                                    | 95                         | 0.85                   |
| 3NC8434-0C             | gR                               | 690/ <sup>(13)</sup>  | 50 <sup>(14)</sup>               | 500 <sup>(3)</sup>  | 28000                                            | 448000                                  | 75                                    | 130                        | 0.85                   |
| 3NC8434-3C             | gR                               | 690/ <sup>(13)</sup>  | 50 <sup>(14)</sup>               | 500 <sup>(3)</sup>  | 28000                                            | 448000                                  | 75                                    | 130                        | 0.85                   |
| 3NC8444-3C             | aR                               | 600/ <sup>(13)</sup>  | 50 <sup>(14)</sup>               | 1000                | 400000                                           | 2480000                                 | 110                                   | 140                        | 0.9                    |
| 3NE1020-2              | gR                               | 690/ <sup>(13)</sup>  | 100                              | 80                  | 780                                              | 5800                                    | 45                                    | 10                         | 1                      |
| 3NE1021-0              | gS                               | 690/ <sup>(13)</sup>  | 100                              | 100                 | 3100                                             | 33000                                   | 36                                    | 10                         | 1                      |
| 3NE1021-2              | gR                               | 690/ <sup>(13)</sup>  | 100                              | 100                 | 1490                                             | 11000                                   | 49                                    | 12                         | 1                      |
| 3NE1022-0              | gS                               | 690/ <sup>(13)</sup>  | 100                              | 125                 | 6000                                             | 63000                                   | 40                                    | 11                         | 1                      |
| 3NE1022-2              | gR                               | 690/ <sup>(13)</sup>  | 100                              | 125                 | 3115                                             | 23000                                   | 55                                    | 13                         | 1                      |
| 3NE1224-0              | gS                               | 690/ <sup>(13)</sup>  | 100                              | 160                 | 7400                                             | 60000                                   | 60                                    | 24                         | 1                      |
| 3NE1224-2              | gR                               | 690/ <sup>(13)</sup>  | 100                              | 160                 | 2650                                             | 18600                                   | 70                                    | 32                         | 1                      |
| 3NE1224-3              | gR                               | 690/ <sup>(13)</sup>  | 100                              | 160                 | 2650                                             | 18600                                   | 70                                    | 32                         | 1                      |
| 3NE1225-0              | gS                               | 690/ <sup>(13)</sup>  | 100                              | 200                 | 14500                                            | 100000                                  | 65                                    | 27                         | 1                      |
| 3NE1225-2              | gR                               | 690/ <sup>(13)</sup>  | 100                              | 200                 | 5645                                             | 51800                                   | 62                                    | 35                         | 1                      |
| 3NE1225-3              | gR                               | 690/ <sup>(13)</sup>  | 100                              | 200                 | 5645                                             | 51800                                   | 62                                    | 35                         | 1                      |
| 3NE1227-0              | gS                               | 690/ <sup>(13)</sup>  | 100                              | 250                 | 29500                                            | 200000                                  | 75                                    | 30                         | 1                      |
| 3NE1227-2              | gR                               | 690/ <sup>(13)</sup>  | 100                              | 250                 | 11520                                            | 80900                                   | 70                                    | 37                         | 1                      |
| 3NE1227-3              | gR                               | 690/ <sup>(13)</sup>  | 100                              | 250                 | 11520                                            | 80900                                   | 70                                    | 37                         | 1                      |
| 3NE1230-0              | gS                               | 690/ <sup>(13)</sup>  | 100                              | 315                 | 46100                                            | 310000                                  | 80                                    | 38                         | 1                      |
| 3NE1230-2              | gR                               | 690/ <sup>(13)</sup>  | 100                              | 315                 | 22580                                            | 168000                                  | 75                                    | 40                         | 1                      |
| 3NE1230-3              | gR                               | 690/ <sup>(13)</sup>  | 100                              | 315                 | 22580                                            | 168000                                  | 75                                    | 40                         | 1                      |
| 3NE1331-0              | gS                               | 690/ <sup>(13)</sup>  | 100                              | 350                 | 58000                                            | 430000                                  | 75                                    | 42                         | 1                      |
| 3NE1331-2              | gR                               | 690/ <sup>(13)</sup>  | 100                              | 350                 | 29500                                            | 177000                                  | 82                                    | 43                         | 1                      |
| 3NE1331-3              | gR                               | 690/ <sup>(13)</sup>  | 100                              | 350                 | 29500                                            | 177000                                  | 82                                    | 43                         | 1                      |
| 3NE1332-0              | gS                               | 690/ <sup>(13)</sup>  | 100                              | 400                 | 84000                                            | 590000                                  | 85                                    | 45                         | 1                      |
| 3NE1332-2              | gR                               | 690/ <sup>(13)</sup>  | 100                              | 400                 | 37300                                            | 177000                                  | 100                                   | 50                         | 1                      |
| 3NE1332-3              | gR                               | 690/ <sup>(13)</sup>  | 100                              | 400                 | 37300                                            | 177000                                  | 100                                   | 50                         | 1                      |
| 3NE1333-0              | gS                               | 690/ <sup>(13)</sup>  | 100                              | 450                 | 104000                                           | 750000                                  | 85                                    | 53                         | 1                      |
| 3NE1333-2              | gR                               | 690/ <sup>(13)</sup>  | 100                              | 450                 | 46100                                            | 276500                                  | 100                                   | 58                         | 1                      |
| 3NE1333-3              | gR                               | 690/ <sup>(13)</sup>  | 100                              | 450                 | 46100                                            | 276500                                  | 100                                   | 58                         | 1                      |
| 3NE1334-0              | gS                               | 690/ <sup>(13)</sup>  | 100                              | 500                 | 149000                                           | 950000                                  | 90                                    | 56                         | 1                      |
| 3NE1334-2              | gR                               | 690/ <sup>(13)</sup>  | 100                              | 500                 | 66400                                            | 398000                                  | 100                                   | 64                         | 1                      |
| 3NE1334-3              | gR                               | 690/ <sup>(13)</sup>  | 100                              | 500                 | 66400                                            | 398000                                  | 100                                   | 64                         | 1                      |
| 3NE1435-0              | gS                               | 690/ <sup>(13)</sup>  | 100                              | 560                 | 215000                                           | 1700000                                 | 65                                    | 50                         | 1                      |
| 3NE1435-2              | gR                               | 690/ <sup>(13)</sup>  | 100                              | 560                 | 130000                                           | 890000                                  | 80                                    | 60                         | 1                      |
| 3NE1436-3              | gR                               | 690/ <sup>(13)</sup>  | 100                              | 560                 | 130000                                           | 890000                                  | 80                                    | 60                         | 1                      |
| 3NE1436-0              | gS                               | 690/ <sup>(13)</sup>  | 100                              | 630                 | 293000                                           | 2350000                                 | 70                                    | 55                         | 1                      |
| 3NE1436-2              | gR                               | 690/ <sup>(13)</sup>  | 100                              | 630                 | 203000                                           | 1390000                                 | 82                                    | 60                         | 1                      |
| 3NE1436-3              | gR                               | 690/ <sup>(13)</sup>  | 100                              | 630                 | 203000                                           | 1390000                                 | 82                                    | 60                         | 1                      |
| 3NE1437-0              | gS                               | 690/ <sup>(13)</sup>  | 100                              | 710                 | 437000                                           | 3400000                                 | 68                                    | 58                         | 1                      |
| 3NE1437-1              | gR                               | 600/ <sup>(13)</sup>  | 100                              | 710                 | 321000                                           | 2460000                                 | 85                                    | 65                         | 1                      |
| 3NE1437-2              | gR                               | 690/ <sup>(13)</sup>  | 100                              | 710                 | 265000                                           | 1818000                                 | 90                                    | 72                         | 1                      |
| 3NE1437-3              | gR                               | 690/ <sup>(13)</sup>  | 100                              | 710                 | 265000                                           | 1818000                                 | 90                                    | 72                         | 1                      |

For footnotes, see page 84.

## Fuse Systems

### SITOR Semiconductor Fuses

#### LV HRC design

| MLFB          | Operational class<br>(IEC 60269) | Rated voltage $U_n$ | Rated breaking capacity $I_{1n}$ | Rated current $I_n$ | Melting $I^2t$ value $I^2t_s$ ( $t_{vs} = 1$ ms) | Breaking $I^2t$ value $I^2t_a$ at $U_n$ | Temperature rise at $I_n$ body center | Power dissipation at $I_n$ | Varying load factor VL |
|---------------|----------------------------------|---------------------|----------------------------------|---------------------|--------------------------------------------------|-----------------------------------------|---------------------------------------|----------------------------|------------------------|
|               |                                  | V AC / V DC         | kA                               | A                   | A <sup>2</sup> s                                 | A <sup>2</sup> s                        | K                                     | W                          |                        |
| 3NE3201-OMK   | gR                               | 1000/600            | 50/50                            | 32                  | 45                                               | 4500                                    | 32                                    | 9                          | On request             |
| 3NE3202-OMK   | gR                               | 1000/600            | 50/50                            | 40                  | 75                                               | 6000                                    | 35                                    | 13                         | On request             |
| 3NE3217-OMK   | gR                               | 1000/600            | 50/50                            | 50                  | 110                                              | 8000                                    | 45                                    | 18                         | On request             |
| 3NE3218-OMK   | gR                               | 1000/600            | 50/50                            | 63                  | 170                                              | 9000                                    | 62                                    | 25                         | On request             |
| 3NE3234-OMK08 | aR                               | 1000/600            | 50/50                            | 500                 | 46000                                            | 500000                                  | 100                                   | 105                        | On request             |
| 3NE3235-OMK08 | aR                               | 1000/600            | 50/50                            | 550                 | 68000                                            | 700000                                  | 107                                   | 110                        | On request             |
| 3NE3236-OMK08 | aR                               | 1000/600            | 50/50                            | 630                 | 90000                                            | 850.000                                 | 110                                   | 127                        | On request             |
| 3NE5302-OMK06 | gR                               | 1800/1100           | 30/45                            | 40                  | 45                                               | 900                                     | 45                                    | 26                         | On request             |
| 3NE5317-OMK06 | gR                               | 1800/1100           | 30/45                            | 50                  | 100                                              | 1800                                    | 45                                    | 27                         | On request             |
| 3NE5318-OMK06 | gR                               | 1800/1100           | 30/45                            | 63                  | 200                                              | 3100                                    | 55                                    | 34                         | On request             |
| 3NE5320-OMK06 | aR                               | 1800/1100           | 30/45                            | 80                  | 300                                              | 3900                                    | 58                                    | 42                         | On request             |
| 3NE5321-OMK06 | aR                               | 1800/1100           | 30/45                            | 100                 | 550                                              | 8700                                    | 58                                    | 45                         | On request             |
| 3NE5322-OMK06 | aR                               | 1800/1100           | 30/45                            | 125                 | 900                                              | 11800                                   | 68                                    | 59                         | On request             |
| 3NE5324-OMK06 | aR                               | 1800/1100           | 30/45                            | 160                 | 2500                                             | 37000                                   | 62                                    | 54                         | On request             |
| 3NE5325-OMK06 | aR                               | 1800/1100           | 30/45                            | 200                 | 6000                                             | 70000                                   | 62                                    | 56                         | On request             |
| 3NE5327-OMK06 | aR                               | 1800/1100           | 30/45                            | 250                 | 15000                                            | 165000                                  | 62                                    | 59                         | On request             |
| 3NE5330-OMK06 | aR                               | 1800/1100           | 30/45                            | 315                 | 28000                                            | 250000                                  | 66                                    | 76                         | On request             |
| 3NE5332-OMK06 | aR                               | 1500/1000           | 30/45                            | 400                 | 58000                                            | 470000                                  | 72                                    | 89                         | On request             |
| 3NE5334-OMK06 | aR                               | 1500/1000           | 30/45                            | 500                 | 110000                                           | 800000                                  | 81                                    | 109                        | On request             |
| 3NE5336-OMK06 | aR                               | 1500/1000           | 30/45                            | 630                 | 170000                                           | 1100000                                 | 88                                    | 163                        | On request             |
| 3NE5336-OMK66 | aR                               | 1500/1000           | 30/45                            | 630                 | 170000                                           | 1100000                                 | 85                                    | 163                        | On request             |
| 3NE8221-OMK   | aR                               | 690/440             | 100/50                           | 100                 | 540                                              | 3200                                    | 55                                    | 25                         | On request             |
| 3NE8222-OMK   | aR                               | 690/440             | 100/50                           | 125                 | 1000                                             | 6000                                    | 57                                    | 28.0                       | On request             |
| 3NE8224-OMK   | aR                               | 690/440             | 100/50                           | 160                 | 1800                                             | 10500                                   | 68                                    | 35.0                       | On request             |
| 3NE8225-OMK   | aR                               | 690/440             | 100/50                           | 200                 | 3000                                             | 17500                                   | 69                                    | 42                         | On request             |
| 3NE8227-OMK   | aR                               | 690/440             | 100/50                           | 250                 | 5000                                             | 28.500                                  | 77                                    | 53.5                       | On request             |
| 3NE8230-OMK   | aR                               | 690/440             | 100/50                           | 315                 | 19200                                            | 120000                                  | 65                                    | 68                         | On request             |
| 3NE8331-OMK   | aR                               | 690/440             | 100/50                           | 350                 | 17500                                            | 83500                                   | 55                                    | 68.6                       | On request             |
| 3NE8332-OMK   | aR                               | 690/440             | 100/50                           | 400                 | 27200                                            | 136000                                  | 60                                    | 72.8                       | On request             |
| 3NE8333-OMK   | aR                               | 690/440             | 100/50                           | 450                 | 38000                                            | 207000                                  | 58                                    | 80.1                       | On request             |
| 3NE8334-OMK   | aR                               | 690/440             | 100/50                           | 500                 | 59000                                            | 318000                                  | 58                                    | 77.5                       | On request             |
| 3NE8335-OMK   | aR                               | 690/440             | 100/50                           | 550                 | 76000                                            | 399000                                  | 65                                    | 86.4                       | On request             |
| 3NE8336-OMK   | aR                               | 690/440             | 100/50                           | 630                 | 122000                                           | 740000                                  | 67                                    | 90.7                       | On request             |
| 3NE8801-OMK   | gR                               | 690/440             | 100/50                           | 32                  | 40                                               | 350                                     | 53                                    | 10.5                       | On request             |
| 3NE8802-OMK   | gR                               | 690/440             | 100/50                           | 40                  | 50                                               | 480                                     | 53                                    | 12                         | On request             |
| 3NE8810-OMK   | gR                               | 690/440             | 100/50                           | 6                   | 1.5                                              | 37                                      | 17                                    | 2.7                        | On request             |
| 3NE8812-OMK   | gR                               | 690/440             | 100/50                           | 10                  | 4                                                | 50                                      | 30                                    | 4.5                        | On request             |
| 3NE8813-OMK   | gR                               | 690/440             | 100/50                           | 16                  | 8.5                                              | 73                                      | 38                                    | 6.7                        | On request             |
| 3NE8814-OMK   | gR                               | 690/440             | 100/50                           | 20                  | 15                                               | 90                                      | 45                                    | 8                          | On request             |
| 3NE8815-OMK   | gR                               | 690/440             | 100/50                           | 25                  | 25                                               | 150                                     | 40                                    | 8.1                        | On request             |
| 3NE8817-OMK   | gR                               | 690/440             | 100/50                           | 50                  | 65                                               | 1050                                    | 65                                    | 14.5                       | On request             |
| 3NE8818-OMK   | gR                               | 690/440             | 100/50                           | 63                  | 90                                               | 1960                                    | 74                                    | 23.0                       | On request             |
| 3NE8820-OMK   | aR                               | 690/440             | 100/50                           | 80                  | 450                                              | 2,200                                   | 70                                    | 23.3                       | On request             |
| 3NE8821-OMK   | aR                               | 690/440             | 100/50                           | 100                 | 820                                              | 3,650                                   | 73                                    | 27                         | On request             |
| 3NE8822-OMK   | aR                               | 690/440             | 100/50                           | 125                 | 1700                                             | 7,800                                   | 60                                    | 30                         | On request             |
| 3NE8824-OMK   | aR                               | 500/440             | 100/50                           | 160                 | 3300                                             | 14000                                   | 70                                    | 34                         | On request             |
| 3NE9330-OMK07 | aR                               | -/3000              | -/45                             | 315                 | 65000                                            | 300000                                  | 95                                    | 245                        | On request             |
| 3NE1438-0     | gS                               | 690/ <sup>13</sup>  | 100                              | 800                 | 723000                                           | 5000000                                 | 70                                    | 58                         | 1                      |
| 3NE1438-1     | gR                               | 600/ <sup>13</sup>  | 100                              | 800                 | 437000                                           | 3350000                                 | 95                                    | 72                         | 1                      |
| 3NE1438-2     | gR                               | 690/ <sup>13</sup>  | 100                              | 800                 | 361000                                           | 2475000                                 | 95                                    | 84                         | 1                      |
| 3NE1438-3     | gR                               | 690/ <sup>13</sup>  | 100                              | 800                 | 361000                                           | 2475000                                 | 95                                    | 84                         | 1                      |
| 3NE1447-2     | gR                               | 690/ <sup>13</sup>  | 100                              | 670                 | 240000                                           | 1640000                                 | 90                                    | 64                         | 1                      |
| 3NE1447-3     | gR                               | 690/ <sup>13</sup>  | 100                              | 670                 | 240000                                           | 1640000                                 | 90                                    | 64                         | 1                      |
| 3NE1448-2     | gR                               | 690/ <sup>13</sup>  | 100                              | 850                 | 520000                                           | 3640000                                 | 95                                    | 76                         | 1                      |
| 3NE1448-3     | gR                               | 690/ <sup>13</sup>  | 100                              | 850                 | 520000                                           | 3640000                                 | 95                                    | 76                         | 1                      |
| 3NE1802-0     | gS                               | 690/ <sup>13</sup>  | 100                              | 40                  | 295                                              | 3000                                    | 30                                    | 3                          | 1                      |
| 3NE1803-0     | gS                               | 690/ <sup>13</sup>  | 100                              | 35                  | 166                                              | 1700                                    | 35                                    | 3.5                        | 1                      |
| 3NE1813-0     | gS                               | 690/ <sup>13</sup>  | 100                              | 16                  | 18                                               | 200                                     | 25                                    | 4                          | 1                      |
| 3NE1814-0     | gS                               | 690/ <sup>13</sup>  | 100                              | 20                  | 41                                               | 430                                     | 25                                    | 5                          | 1                      |
| 3NE1815-0     | gS                               | 690/ <sup>13</sup>  | 100                              | 25                  | 74                                               | 780                                     | 30                                    | 5                          | 1                      |
| 3NE1817-0     | gS                               | 690/ <sup>13</sup>  | 100                              | 50                  | 461                                              | 4400                                    | 35                                    | 6                          | 1                      |
| 3NE1818-0     | gS                               | 690/ <sup>13</sup>  | 100                              | 63                  | 903                                              | 9000                                    | 40                                    | 7                          | 1                      |
| 3NE1820-0     | gS                               | 690/ <sup>13</sup>  | 100                              | 80                  | 1843                                             | 18000                                   | 40                                    | 8                          | 1                      |
| 3NE3221       | aR                               | 1000/ <sup>13</sup> | 100                              | 100                 | 665                                              | 4800                                    | 65                                    | 28                         | 0.95                   |
| 3NE3222       | aR                               | 1000/ <sup>13</sup> | 100                              | 125                 | 1040                                             | 7200                                    | 70                                    | 36                         | 0.95                   |
| 3NE3224       | aR                               | 1000/ <sup>13</sup> | 100                              | 160                 | 1850                                             | 13000                                   | 90                                    | 42                         | 1                      |
| 3NE3225       | aR                               | 1000/ <sup>13</sup> | 100                              | 200                 | 4150                                             | 30000                                   | 80                                    | 42                         | 1                      |
| 3NE3227       | aR                               | 1000/ <sup>13</sup> | 100                              | 250                 | 6650                                             | 48000                                   | 90                                    | 50                         | 1                      |
| 3NE3230-0B    | aR                               | 1000/ <sup>13</sup> | 100                              | 315                 | 13400                                            | 80000                                   | 100                                   | 60                         | 0.95                   |
| 3NE3231       | aR                               | 1000/ <sup>13</sup> | 100                              | 350                 | 16600                                            | 100000                                  | 120                                   | 75                         | 0.9                    |
| 3NE3232-0B    | aR                               | 1000/ <sup>13</sup> | 100                              | 400                 | 22600                                            | 135000                                  | 140                                   | 85                         | 0.9                    |
| 3NE3233       | aR                               | 1000/ <sup>13</sup> | 100                              | 450                 | 29500                                            | 175000                                  | 130                                   | 95                         | 0.9                    |

For footnotes, see page 84.

# Fuse Systems

## SITOR Semiconductor Fuses

### LV HRC design

| MLFB                      | Operational class<br>(IEC 60269) | Rated voltage $U_n$ | Rated breaking capacity $I_{1n}$ | Rated current $I_n$ | Melting $I^2t$ value $I^2t_s$ ( $t_{vs} = 1 \text{ ms}$ ) | Breaking $I^2t$ value $I^2t_a$ at $U_n$ | Temperature rise at $I_n$ body center | Power dissipation at $I_n$ | Varying load factor VL |
|---------------------------|----------------------------------|---------------------|----------------------------------|---------------------|-----------------------------------------------------------|-----------------------------------------|---------------------------------------|----------------------------|------------------------|
|                           |                                  | V AC / V DC         | kA                               | A                   | A <sup>2</sup> s                                          | A <sup>2</sup> s                        | K                                     | W                          |                        |
| 3NE3332-0B                | aR                               | 1000/ <sup>13</sup> | 100                              | 400                 | 22600                                                     | 135000                                  | 120                                   | 80                         | 1                      |
| 3NE3333                   | aR                               | 1000/ <sup>13</sup> | 100                              | 450                 | 29500                                                     | 75000                                   | 125                                   | 90                         | 1                      |
| 3NE3334-0B                | aR                               | 1000/ <sup>13</sup> | 100                              | 500                 | 46100                                                     | 260000                                  | 115                                   | 90                         | 1                      |
| 3NE3335                   | aR                               | 1000/ <sup>13</sup> | 100                              | 560                 | 66500                                                     | 60000                                   | 120                                   | 95                         | 1                      |
| 3NE3336                   | aR                               | 1000/ <sup>13</sup> | 100                              | 630                 | 104000                                                    | 600000                                  | 110                                   | 100                        | 1                      |
| 3NE3337-8                 | aR                               | 900/ <sup>13</sup>  | 100                              | 710                 | 149000                                                    | 800000                                  | 125                                   | 105                        | 1                      |
| 3NE3338-8                 | aR                               | 800/ <sup>13</sup>  | 100                              | 800                 | 184000                                                    | 850000                                  | 140                                   | 130                        | 0.95                   |
| 3NE3340-8                 | aR                               | 690/ <sup>13</sup>  | 100                              | 900                 | 223000                                                    | 920000                                  | 160                                   | 165                        | 0.95                   |
| 3NE3421-0C                | aR                               | 1000/ <sup>13</sup> | 50 <sup>14</sup>                 | 100                 | 1800                                                      | 13500                                   | 45                                    | 25                         | 1                      |
| 3NE3430-0C                | aR                               | 1000/ <sup>13</sup> | 50 <sup>14</sup>                 | 315                 | 29000                                                     | 218000                                  | 120                                   | 80                         | 1                      |
| 3NE3432-0C                | aR                               | 1000/ <sup>13</sup> | 50 <sup>14</sup>                 | 400                 | 48500                                                     | 364000                                  | 130                                   | 110                        | 1                      |
| 3NE3434-0C                | aR                               | 1000/ <sup>13</sup> | 50 <sup>14</sup>                 | 500                 | 116000                                                    | 870000                                  | 120                                   | 95                         | 1                      |
| 3NE3525-5 <sup>6)</sup>   | aR                               | 1000/ <sup>13</sup> | 50 <sup>14</sup>                 | 200 <sup>7)</sup>   | 7150                                                      | 44000                                   | 75                                    | 50                         | 0.85                   |
| 3NE3535-5 <sup>6)</sup>   | aR                               | 1000/ <sup>13</sup> | 50 <sup>14</sup>                 | 450 <sup>7)</sup>   | 64500                                                     | 395000                                  | 130                                   | 90                         | 0.85                   |
| 3NE3626-0C                | aR                               | 1000/ <sup>13</sup> | 50 <sup>14</sup>                 | 224                 | 7200                                                      | 54000                                   | 140                                   | 85                         | 1                      |
| 3NE3635-0C                | aR                               | 1000/ <sup>13</sup> | 50 <sup>14</sup>                 | 450                 | 65000                                                     | 488000                                  | 150                                   | 110                        | 1                      |
| 3NE3635-6                 | aR                               | 1000/ <sup>13</sup> | 50 <sup>14</sup>                 | 450                 | 65000                                                     | 488000                                  | 150                                   | 110                        | 1                      |
| 3NE3636-0C                | aR                               | 1000/ <sup>13</sup> | 50 <sup>14</sup>                 | 630                 | 170000                                                    | 1280000                                 | 136                                   | 132                        | 1                      |
| 3NE3637-0C                | aR                               | 1000/ <sup>13</sup> | 50 <sup>14</sup>                 | 710                 | 260000                                                    | 1950000                                 | 170                                   | 145                        | 1                      |
| 3NE3637-1C <sup>8)</sup>  | aR                               | 1000/ <sup>13</sup> | 50 <sup>14</sup>                 | 710                 | 260000                                                    | 1950000                                 | 170                                   | 145                        | 1                      |
| 3NE4101                   | gR                               | 1000/ <sup>13</sup> | 100                              | 32                  | 40                                                        | 280                                     | 45                                    | 12                         | 0.9                    |
| 3NE4102                   | gR                               | 1000/ <sup>13</sup> | 100                              | 40                  | 75                                                        | 500                                     | 50                                    | 13                         | 0.9                    |
| 3NE4117                   | gR                               | 1000/ <sup>13</sup> | 100                              | 50                  | 120                                                       | 800                                     | 65                                    | 16                         | 0.9                    |
| 3NE4117-5                 | gR                               | 1000/ <sup>13</sup> | 50 <sup>14</sup>                 | 50                  | 135                                                       | 1100                                    | 95                                    | 20                         | 0.85                   |
| 3NE4118                   | aR                               | 1000/ <sup>13</sup> | 100                              | 63                  | 230                                                       | 1500                                    | 78                                    | 20                         | 0.9                    |
| 3NE4120                   | aR                               | 1000/ <sup>13</sup> | 100                              | 80                  | 450                                                       | 3000                                    | 82                                    | 22                         | 0.9                    |
| 3NE4121                   | aR                               | 1000/ <sup>13</sup> | 100                              | 100                 | 900                                                       | 6000                                    | 85                                    | 24                         | 0.9                    |
| 3NE4121-5                 | aR                               | 1000/ <sup>13</sup> | 50 <sup>14</sup>                 | 100                 | 900                                                       | 7400                                    | 135                                   | 35                         | 0.85                   |
| 3NE4122                   | aR                               | 1000/ <sup>13</sup> | 100                              | 125                 | 1800                                                      | 14000                                   | 100                                   | 30                         | 0.9                    |
| 3NE4124                   | aR                               | 1000/ <sup>13</sup> | 100                              | 160                 | 3600                                                      | 29000                                   | 120                                   | 35                         | 0.9                    |
| 3NE4146-5                 | aR                               | 800/ <sup>13</sup>  | 50 <sup>14</sup>                 | 170                 | 7370                                                      | 60500                                   | 142                                   | 43                         | 0.85                   |
| 3NE4327-0B                | aR                               | 800/ <sup>13</sup>  | 50 <sup>14</sup>                 | 250                 | 3600                                                      | 29700                                   | 175                                   | 105                        | 0.85                   |
| 3NE4327-6B <sup>6)</sup>  | aR                               | 800/ <sup>13</sup>  | 50 <sup>14</sup>                 | 250                 | 3600                                                      | 29700                                   | 175                                   | 105                        | 0.85                   |
| 3NE4330-0B                | aR                               | 800/ <sup>13</sup>  | 50 <sup>14</sup>                 | 315                 | 7400                                                      | 60700                                   | 170                                   | 120                        | 0.85                   |
| 3NE4330-6B <sup>6)</sup>  | aR                               | 800/ <sup>13</sup>  | 50 <sup>14</sup>                 | 315                 | 7400                                                      | 60700                                   | 170                                   | 120                        | 0.85                   |
| 3NE4333-0B                | aR                               | 800/ <sup>13</sup>  | 50 <sup>14</sup>                 | 450                 | 29400                                                     | 191000                                  | 190                                   | 140                        | 0.85                   |
| 3NE4333-6B <sup>6)</sup>  | aR                               | 800/ <sup>13</sup>  | 50 <sup>14</sup>                 | 450                 | 29400                                                     | 191000                                  | 190                                   | 140                        | 0.85                   |
| 3NE4334-0B                | aR                               | 800/ <sup>13</sup>  | 50 <sup>14</sup>                 | 500                 | 42500                                                     | 276000                                  | 195                                   | 155                        | 0.85                   |
| 3NE4334-6B <sup>6)</sup>  | aR                               | 800/ <sup>13</sup>  | 50 <sup>14</sup>                 | 500                 | 42500                                                     | 276000                                  | 195                                   | 155                        | 0.85                   |
| 3NE4337                   | aR                               | 800/ <sup>13</sup>  | 50 <sup>14</sup>                 | 710                 | 142000                                                    | 923000                                  | 170                                   | 155                        | 0.95                   |
| 3NE4337-6 <sup>6)</sup>   | aR                               | 800/ <sup>13</sup>  | 50 <sup>14</sup>                 | 710                 | 142000                                                    | 923000                                  | 170                                   | 155                        | 0.95                   |
| 3NE5424-0C                | aR                               | 1500/ <sup>13</sup> | 50 <sup>14</sup>                 | 160                 | 7200                                                      | 54000                                   | 75                                    | 56                         | 1                      |
| 3NE5426-0C                | aR                               | 1500/ <sup>13</sup> | 50 <sup>14</sup>                 | 224                 | 18400                                                     | 138000                                  | 100                                   | 80                         | 1                      |
| 3NE5430-0C                | aR                               | 1500/ <sup>13</sup> | 50 <sup>14</sup>                 | 315                 | 41500                                                     | 11000                                   | 125                                   | 115                        | 1                      |
| 3NE5431-0C                | aR                               | 1500/ <sup>13</sup> | 50 <sup>14</sup>                 | 350                 | 57000                                                     | 428000                                  | 150                                   | 135                        | 1                      |
| 3NE5433-0C                | aR                               | 1500/ <sup>13</sup> | 50 <sup>14</sup>                 | 450                 | 116000                                                    | 870000                                  | 150                                   | 145                        | 0.95                   |
| 3NE5433-1C <sup>11)</sup> | aR                               | 1500/ <sup>13</sup> | 50 <sup>14</sup>                 | 450                 | 116000                                                    | 870000                                  | 150                                   | 145                        | 0.95                   |
| 3NE5627-0C                | aR                               | 1500/ <sup>13</sup> | 50 <sup>14</sup>                 | 250                 | 11200                                                     | 84000                                   | 170                                   | 130                        | 1                      |
| 3NE5633-0C                | aR                               | 1500/ <sup>13</sup> | 50 <sup>14</sup>                 | 450                 | 78500                                                     | 590000                                  | 170                                   | 160                        | 1                      |
| 3NE5643-0C                | aR                               | 1500/ <sup>13</sup> | 50 <sup>14</sup>                 | 600                 | 260000                                                    | 1950000                                 | 160                                   | 145                        | 1                      |
| 3NE6437                   | aR                               | 900/ <sup>13</sup>  | 50 <sup>14</sup>                 | 710 <sup>9)</sup>   | 100000                                                    | 620000                                  | 80                                    | 150                        | 0.9                    |
| 3NE6437-7                 | aR                               | 900/ <sup>13</sup>  | 50 <sup>14</sup>                 | 710 <sup>10)</sup>  | 100000                                                    | 620000                                  | 110                                   | 150                        | 0.9                    |
| 3NE6444                   | aR                               | 900/ <sup>13</sup>  | 50 <sup>14</sup>                 | 900 <sup>9)</sup>   | 400000                                                    | 1920000                                 | 80                                    | 170                        | 0.9                    |
| 3NE7425-0U                | aR                               | 2000/ <sup>13</sup> | 100                              | 200                 | 18400                                                     | 138000                                  | 85                                    | 75                         | 1                      |
| 3NE7427-0U                | aR                               | 2000/ <sup>13</sup> | 100                              | 250                 | 29000                                                     | 218000                                  | 110                                   | 110                        | 1                      |
| 3NE7431-0U                | aR                               | 2000/ <sup>13</sup> | 100                              | 350                 | 74000                                                     | 555000                                  | 105                                   | 120                        | 1                      |
| 3NE7432-0U                | aR                               | 2000/ <sup>13</sup> | 100                              | 400                 | 116000                                                    | 870000                                  | 130                                   | 150                        | 1                      |
| 3NE7633-0U                | aR                               | 2000/ <sup>13</sup> | 100                              | 450                 | 128000                                                    | 960000                                  | 165                                   | 160                        | 1                      |
| 3NE7633-1U <sup>11)</sup> | aR                               | 2000/ <sup>13</sup> | 100                              | 450                 | 128000                                                    | 960000                                  | 165                                   | 160                        | 1                      |
| 3NE7636-0U                | aR                               | 2000/ <sup>13</sup> | 100                              | 630                 | 260000                                                    | 1950000                                 | 200                                   | 220                        | 1                      |
| 3NE7636-1U <sup>11)</sup> | aR                               | 2000/ <sup>13</sup> | 100                              | 630                 | 260000                                                    | 1950000                                 | 200                                   | 220                        | 1                      |
| 3NE7637-1U <sup>11)</sup> | aR                               | 2000/ <sup>13</sup> | 100                              | 710                 | 415000                                                    | 3110000                                 | 230                                   | 275                        | 1                      |
| 3NE7648-1U <sup>11)</sup> | aR                               | 2000/ <sup>13</sup> | 100                              | 525                 | 149000                                                    | 1120000                                 | 210                                   | 210                        | 1                      |
| 3NE8003-1                 | gR                               | 690/ <sup>13</sup>  | 100                              | 35                  | 70                                                        | 400                                     | 45                                    | 9                          | 0.95                   |
| 3NE8015-1                 | gR                               | 690/ <sup>13</sup>  | 100                              | 25                  | 30                                                        | 180                                     | 35                                    | 7                          | 0.95                   |
| 3NE8017-1                 | gR                               | 690/ <sup>13</sup>  | 100                              | 50                  | 120                                                       | 700                                     | 65                                    | 14                         | 0.9                    |
| 3NE8018-1                 | gR                               | 690/ <sup>13</sup>  | 100                              | 63                  | 260                                                       | 1400                                    | 70                                    | 16                         | 0.95                   |
| 3NE8020-1                 | aR                               | 690/ <sup>13</sup>  | 100                              | 80                  | 450                                                       | 2400                                    | 80                                    | 19                         | 0.95                   |
| 3NE8021-1                 | aR                               | 690/ <sup>13</sup>  | 100                              | 100                 | 850                                                       | 4200                                    | 90                                    | 22                         | 0.95                   |
| 3NE8022-1                 | aR                               | 690/ <sup>13</sup>  | 100                              | 125                 | 1400                                                      | 6500                                    | 110                                   | 28                         | 0.95                   |
| 3NE8024-1                 | aR                               | 690/ <sup>13</sup>  | 100                              | 160                 | 2800                                                      | 13000                                   | 130                                   | 38                         | 0.95                   |

For footnotes, see page 84.

## Fuse Systems

### SITOR Semiconductor Fuses

#### LV HRC design

| MLFB                      | Operational class<br>(IEC 60269) | Rated voltage $U_n$    | Rated breaking capacity $I_{1n}$ | Rated current $I_n$ | Melting $I^2t$ value $I^2t_s$ ( $t_{VS} = 1 \text{ ms}$ ) | Breaking $I^2t$ value $I^2t_a$ at $U_n$ | Temperature rise at $I_n$ body center | Power dissipation at $I_n$ | Varying load factor VL |
|---------------------------|----------------------------------|------------------------|----------------------------------|---------------------|-----------------------------------------------------------|-----------------------------------------|---------------------------------------|----------------------------|------------------------|
|                           |                                  | V AC / V DC            | kA                               | A                   | A <sup>2</sup> s                                          | A <sup>2</sup> s                        | K                                     | W                          |                        |
| 3NE8701-1                 | gR                               | 690/700 <sup>12)</sup> | 50 <sup>14)</sup>                | 32                  | 40                                                        | 285                                     | 45                                    | 10                         | 0.9                    |
| 3NE8702-1                 | gR                               | 690/700 <sup>12)</sup> | 50 <sup>14)</sup>                | 40                  | 69                                                        | 490                                     | 55                                    | 12                         | 0.9                    |
| 3NE8714-1                 | gR                               | 690/700 <sup>12)</sup> | 50 <sup>14)</sup>                | 20                  | 12                                                        | 83                                      | 40                                    | 7                          | 0.9                    |
| 3NE8715-1                 | gR                               | 690/700 <sup>12)</sup> | 50 <sup>14)</sup>                | 25                  | 19                                                        | 140                                     | 40                                    | 9                          | 0.9                    |
| 3NE8717-1                 | gR                               | 690/700 <sup>12)</sup> | 50 <sup>14)</sup>                | 50                  | 115                                                       | 815                                     | 60                                    | 15                         | 0.9                    |
| 3NE8718-1                 | gR                               | 690/700 <sup>12)</sup> | 50 <sup>14)</sup>                | 63                  | 215                                                       | 1550                                    | 70                                    | 16                         | 0.95                   |
| 3NE8720-1                 | aR                               | 690/700 <sup>12)</sup> | 50 <sup>14)</sup>                | 80                  | 380                                                       | 2700                                    | 80                                    | 18                         | 0.9                    |
| 3NE8721-1                 | aR                               | 690/700 <sup>12)</sup> | 50 <sup>14)</sup>                | 100                 | 695                                                       | 4950                                    | 75                                    | 19                         | 0.95                   |
| 3NE8722-1                 | aR                               | 690/700 <sup>12)</sup> | 50 <sup>14)</sup>                | 125                 | 1250                                                      | 9100                                    | 80                                    | 23                         | 0.95                   |
| 3NE8724-1                 | aR                               | 690/700 <sup>12)</sup> | 50 <sup>14)</sup>                | 160                 | 2350                                                      | 17000                                   | 100                                   | 31                         | 0.9                    |
| 3NE8725-1                 | aR                               | 690/700 <sup>12)</sup> | 50 <sup>14)</sup>                | 200                 | 4200                                                      | 30000                                   | 120                                   | 36                         | 0.9                    |
| 3NE8727-1                 | aR                               | 690/700 <sup>12)</sup> | 50 <sup>14)</sup>                | 250                 | 7750                                                      | 55000                                   | 125                                   | 42                         | 0.9                    |
| 3NE8731-1                 | aR                               | 690/700 <sup>12)</sup> | 50 <sup>14)</sup>                | 315                 | 12000                                                     | 85500                                   | 150                                   | 54                         | 0.85                   |
| 3NE9440-6                 | gR                               | 600 <sup>13)</sup>     | 50 <sup>14)</sup>                | 850                 | 400000                                                    | 2480000                                 | 74                                    | 85                         | 1                      |
| 3NE9450                   | aR                               | 600 <sup>13)</sup>     | 50 <sup>14)</sup>                | 1250 <sup>9)</sup>  | 400000                                                    | 2480000                                 | 80                                    | 210                        | 0.9                    |
| 3NE9450-7                 | aR                               | 600 <sup>13)</sup>     | 50 <sup>14)</sup>                | 1250 <sup>10)</sup> | 400000                                                    | 2480000                                 | 105                                   | 210                        | 0.9                    |
| 3NE9632-1C <sup>11)</sup> | aR                               | 2500 <sup>13)</sup>    | 50 <sup>14)</sup>                | 00                  | 81000                                                     | 620000                                  | 160                                   | 205                        | 1                      |
| 3NE9634-1C <sup>11)</sup> | aR                               | 2500 <sup>13)</sup>    | 50 <sup>14)</sup>                | 500                 | 170000                                                    | 1270000                                 | 180                                   | 235                        | 1                      |
| 3NE9636-1C <sup>11)</sup> | aR                               | 2500 <sup>13)</sup>    | 50 <sup>14)</sup>                | 630                 | 385000                                                    | 2800000                                 | 198                                   | 275                        | 1                      |

- 1) Maximum tightening torque: M10 capped thread: 35 Nm, screw penetration depth  $\geq 9 \text{ mm}$ .
- 2) Temperature rise and power dissipation for operation in LV HRC fuse base.
- 3) Cooling air speed 1 m/s. In the case of natural air cooling, reduction of 5 %.
- 4) Maximum tightening torque:
  - M10 thread (with indicator): 40 Nm
  - M10 capped thread: 50 Nm, screw penetration depth  $\geq 9 \text{ mm}$ .
  - M24  $\times$  1.5 thread: 60 Nm.
- 5) Temperature of water-cooled busbar max. +45 °C.
- 6) Maximum tightening torque: M10 capped thread: 35 Nm, screw penetration depth  $\geq 9 \text{ mm}$ .
- 7) Cooling air speed  $\geq 0.5 \text{ m/s}$ . In the case of natural air cooling, reduction of 5 %.
- 8) Gauge 140 mm, M12 screw connection.
- 9) Cooling air speed  $\geq 2 \text{ m/s}$ .
- 10) Bottom (cooled) connection max. +60 °C, top connection (M10) max. +110 °C.
- 11) M12 screw connection.
- 12) Rated voltage according to UL.
- 13) DC rated voltage: [See page 179, "Use with direct current"](#).
- 14) Minimum 50 kA, higher values on request.
- 15)  $I^2t$  at  $U_{VSI}$  1500 V, at  $U_n$  1250 V is  $k = 0.79$ .  
In the case of 3NB1234-3KK20  $I^2t$  at  $U_{VSI}$  1400 V, at  $U_n$  900 V is  $I^2t$  180000 A<sup>2</sup>s.

### Load rating of SITOR fuse links with 3NH LV HRC fuse bases

#### Use in switch disconnectors and fuse bases

When using SITOR semiconductor fuses in 3KL and 3KM switch disconnectors with fuses and with 3NP fuse switch disconnectors and 3NH LV HRC fuse bases, the rated current of the fuse must sometimes be reduced due to the higher power loss compared with LV HRC fuses for line protection. Sometimes when using SITOR semiconductor fuses, the currents designated can be higher than the rated currents of the switches and fuse bases. These higher currents only apply when using SITOR semiconductor fuses and cannot be used when using the devices with standard LV HRC fuses. You will find further details in the following selection tables.

When using SITOR semiconductor fuses of the 3NC24, 3NC84, 3NE33 and 3NE43 series, the standard switching capacity of the fuse must not be used as the blades of these fuses (in contrast to LV HRC fuses) are slit. Occasional switching of currents up to the rated current of the fuses is permissible.

The use of SITOR semiconductor fuses > 63 A for overload protection is not permitted – even if gR fuses are used (exception: 3NE1).

The operational voltage is limited by the rated voltage of the switch disconnector or the fuse. If switching without load, the limit value is the rated insulation voltage of the switch disconnector.

The 3NE1 "double protection fuses" can be used as full range fuses (gS) both for semiconductor and line protection.

For further information on the assignment of SITOR semiconductor fuses to the fuse bases and safety switching devices, please refer to the tables on [page 85 ff.](#)

| SITOR fuse links |            |               |                   |      |      | Ø min Cu<br>mm <sup>2</sup> | 3NH LV HRC fuse bases |      |                |          |
|------------------|------------|---------------|-------------------|------|------|-----------------------------|-----------------------|------|----------------|----------|
| Article No.      | $I_n$<br>A | $U_n$<br>V AC | Operational class | Size | VL   |                             | Article No.           | Size | $I_{max}$<br>A | $I_{VL}$ |
| 3NC2423-0C/3C    | 150        | 500           | gR                | 3    | 0.85 | 70                          | 3NH3430/20            | 3    | 150            | 128      |
| 3NC2425-0C/3C    | 200        | 500           | gR                | 3    | 0.85 | 95                          |                       | 3    | 190            | 162      |
| 3NC2427-0C/3C    | 250        | 500           | gR                | 3    | 0.85 | 120                         |                       | 3    | 240            | 204      |
| 3NC2428-0C/3C    | 300        | 500           | gR                | 3    | 0.85 | 185                         |                       | 3    | 285            | 242      |
| 3NC2431-0C/3C    | 350        | 500           | gR                | 3    | 0.85 | 240                         |                       | 3    | 330            | 281      |
| 3NC2432-0C/3C    | 400        | 500           | aR                | 3    | 0.85 | 240                         |                       | 3    | 400            | 340      |
| 3NC3336-1U       | 630        | 1000          | aR                | 3    | 0.85 | 2 x (40 x 5)                | 3NH3430/20            | 3    | 560            | 476      |
| 3NC3337-1U       | 710        | 1000          | aR                | 3    | 0.85 | 2 x (50 x 5)                |                       | 3    | 600            | 510      |
| 3NC3338-1U       | 800        | 1000          | aR                | 3    | 0.85 | 2 x (40 x 8)                |                       | 3    | 660            | 561      |
| 3NC3340-1U       | 900        | 1000          | aR                | 3    | 0.90 | 2 x (40 x 8)                |                       | 3    | 750            | 675      |
| 3NC3341-1U       | 1000       | 1000          | aR                | 3    | 0.90 | 2 x (50 x 8)                |                       | 3    | 850            | 765      |
| 3NC3342-1U       | 1100       | 800           | aR                | 3    | 0.90 | 2 x (50 x 8)                |                       | 3    | 900            | 810      |
| 3NC3343-1U       | 1250       | 800           | aR                | 3    | 0.90 | 2 x (50 x 8)                | 3NH3430/20            | 3    | 950            | 855      |
| 3NC3430-1U       | 315        | 1250          | aR                | 3    | 0.95 | 2 x 95                      |                       | 3    | 310            | 295      |
| 3NC3432-1U       | 400        | 1250          | aR                | 3    | 0.95 | 2 x 120                     |                       | 3    | 390            | 371      |
| 3NC3434-1U       | 500        | 1250          | aR                | 3    | 0.90 | 2 x 150                     |                       | 3    | 460            | 414      |
| 3NC3436-1U       | 630        | 1250          | aR                | 3    | 0.95 | 2 x (40 x 5)                |                       | 3    | 560            | 532      |
| 3NC3438-1U       | 800        | 1100          | aR                | 3    | 0.90 | 2 x (40 x 8)                |                       | 3    | 690            | 656      |
| 3NC8423-0C/-3C   | 150        | 690           | gR                | 3    | 0.85 | 70                          | 3NH3430/20            | 3    | 135            | 115      |
| 3NC8425-0C/-3C   | 200        | 690           | gR                | 3    | 0.85 | 95                          |                       | 3    | 180            | 153      |
| 3NC8427-0C/-3C   | 250        | 690           | gR                | 3    | 0.85 | 120                         |                       | 3    | 250            | 213      |
| 3NC8431-0C/-3C   | 350        | 690           | gR                | 3    | 0.85 | 240                         |                       | 3    | 315            | 268      |
| 3NC8434-0C/-3C   | 500        | 690           | gR                | 3    | 0.85 | 2 x 150                     |                       | 3    | 450            | 383      |
| 3NC8444-3C       | 1000       | 600           | aR                | 3    | 0.95 | 2 x (60 x 6)                |                       | 3    | 800            | 800      |
| 3NE1020-2        | 80         | 690           | gR                | 00   | 1.0  | 25                          | 3NH3030/4030          | 00   | 80             | 80       |
| 3NE1021-0        | 100        | 690           | gS                | 00   | 1.0  | 35                          |                       | 00   | 100            | 100      |
| 3NE1021-2        | 100        | 690           | gR                | 00   | 1.0  | 35                          |                       | 00   | 100            | 100      |
| 3NE1022-0        | 125        | 690           | gS                | 00   | 1.0  | 50                          |                       | 00   | 125            | 125      |
| 3NE1022-2        | 125        | 690           | gR                | 00   | 1.0  | 50                          |                       | 00   | 125            | 125      |
| 3NE1224-0        | 160        | 690           | gS                | 1    | 1.0  | 70                          | 3NH3230/4230          | 1    | 160            | 160      |
| 3NE1224-2/-3     | 160        | 690           | gR                | 1    | 1.0  | 70                          |                       | 1    | 160            | 160      |
| 3NE1225-0        | 200        | 690           | gS                | 1    | 1.0  | 95                          |                       | 1    | 200            | 200      |
| 3NE1225-2/-3     | 200        | 690           | gR                | 1    | 1.0  | 95                          |                       | 1    | 200            | 200      |
| 3NE1227-0        | 250        | 690           | gS                | 1    | 1.0  | 120                         |                       | 1    | 250            | 250      |
| 3NE1227-2/-3     | 250        | 690           | gR                | 1    | 1.0  | 120                         |                       | 1    | 250            | 250      |
| 3NE1230-0        | 315        | 690           | gS                | 1    | 1.0  | 2 x 70                      | 3NH3330/20            | 2    | 315            | 315      |
| 3NE1230-2/-3     | 315        | 690           | gR                | 1    | 1.0  | 2 x 70                      |                       | 2    | 315            | 315      |
| 3NE1331-0        | 350        | 690           | gS                | 2    | 1.0  | 2 x 95                      | 3NH3330/20            | 2    | 350            | 350      |
| 3NE1331-2/-3     | 350        | 690           | gR                | 2    | 1.0  | 2 x 95                      |                       | 2    | 350            | 350      |
| 3NE1332-0        | 400        | 690           | gS                | 2    | 1.0  | 2 x 95                      |                       | 2    | 400            | 400      |
| 3NE1332-2/-3     | 400        | 690           | gR                | 2    | 1.0  | 2 x 95                      | 3NH3430/20            | 2    | 400            | 400      |
| 3NE1333-0        | 450        | 690           | gS                | 2    | 1.0  | 2 x 120                     |                       | 3    | 450            | 450      |
| 3NE1333-2/-3     | 450        | 690           | gR                | 2    | 1.0  | 2 x 120                     |                       | 3    | 450            | 450      |
| 3NE1334-0        | 500        | 690           | gS                | 2    | 1.0  | 2 x 120                     |                       | 3    | 500            | 500      |
| 3NE1334-2/-3     | 500        | 690           | gR                | 2    | 1.0  | 2 x 120                     |                       | 3    | 500            | 500      |
| 3NE1435-0        | 560        | 690           | gS                | 3    | 1.0  | 2 x 150                     |                       | 3    | 560            | 560      |
| 3NE1435-2/-3     | 560        | 690           | gR                | 3    | 1.0  | 2 x 150                     |                       | 3    | 560            | 560      |

## Fuse Systems

### SITOR Semiconductor Fuses

#### LV HRC design

| SITOR fuse links    |       |       |                   |      |      | Ø min Cu        | 3NH LV HRC fuse bases |      |           |          |
|---------------------|-------|-------|-------------------|------|------|-----------------|-----------------------|------|-----------|----------|
| Article No.         | $I_n$ | $U_n$ | Operational class | Size | VL   |                 | Article No.           | Size | $I_{max}$ | $I_{VL}$ |
|                     | A     | V AC  |                   |      |      | mm <sup>2</sup> |                       |      | A         |          |
| <b>3NE1436-0</b>    | 630   | 690   | gS                | 3    | 1.0  | 2 x 185         |                       | 3    | 630       | 630      |
| <b>3NE1436-2/-3</b> | 630   | 690   | gR                | 3    | 1.0  | 2 x 185         |                       | 3    | 630       | 630      |
| <b>3NE1437-0</b>    | 710   | 690   | gS                | 3    | 1.0  | 2 x (40 x 5)    |                       | 3    | 710       | 710      |
| <b>3NE1437-1</b>    | 710   | 600   | gR                | 3    | 1.0  | 2 x (40 x 5)    |                       | 3    | 690       | 690      |
| <b>3NE1437-2/-3</b> | 710   | 690   | gR                | 3    | 1.0  | 2 x (40 x 5)    |                       | 3    | 710       | 710      |
| <b>3NE1438-0</b>    | 800   | 690   | gS                | 3    | 1.0  | 2 x (50 x 5)    | <b>3NH3430/20</b>     | 3    | 800       | 800      |
| <b>3NE1438-1</b>    | 800   | 600   | gR                | 3    | 1.0  | 2 x (50 x 5)    |                       | 3    | 750       | 750      |
| <b>3NE1438-2/-3</b> | 800   | 690   | gR                | 3    | 1.0  | 2 x (50 x 5)    |                       | 3    | 800       | 800      |
| <b>3NE1447-2/-3</b> | 670   | 690   | gR                | 3    | 1.0  | 2 x (40 x 5)    |                       | 3    | 670       | 670      |
| <b>3NE1448-2/-3</b> | 850   | 690   | gR                | 3    | 1.0  | 2 x (40 x 8)    |                       | 3    | 850       | 850      |
| <b>3NE1802-0</b>    | 40    | 690   | gS                | 000  | 1.0  | 10              | <b>3NH3030/4030</b>   | 00   | 40        | 40       |
| <b>3NE1803-0</b>    | 35    | 690   | gS                | 000  | 1.0  | 6               |                       | 00   | 35        | 35       |
| <b>3NE1813-0</b>    | 16    | 690   | gS                | 000  | 1.0  | 1.5             |                       | 00   | 16        | 16       |
| <b>3NE1814-0</b>    | 20    | 690   | gS                | 000  | 1.0  | 2.5             |                       | 00   | 20        | 20       |
| <b>3NE1815-0</b>    | 25    | 690   | gS                | 000  | 1.0  | 4               |                       | 00   | 25        | 25       |
| <b>3NE1817-0</b>    | 50    | 690   | gS                | 000  | 1.0  | 10              |                       | 00   | 50        | 50       |
| <b>3NE1818-0</b>    | 63    | 690   | gS                | 000  | 1.0  | 16              |                       | 00   | 63        | 63       |
| <b>3NE1820-0</b>    | 80    | 690   | gS                | 000  | 1.0  | 25              |                       | 00   | 80        | 80       |
| <b>3NE3221</b>      | 100   | 1000  | aR                | 1    | 0.95 | 35              | <b>3NH3230/4230</b>   | 1    | 100       | 95       |
| <b>3NE3222</b>      | 125   | 1000  | aR                | 1    | 0.95 | 50              |                       | 1    | 125       | 119      |
| <b>3NE3224</b>      | 160   | 1000  | aR                | 1    | 1.0  | 70              |                       | 1    | 160       | 160      |
| <b>3NE3225</b>      | 200   | 1000  | aR                | 1    | 1.0  | 95              |                       | 1    | 200       | 200      |
| <b>3NE3227</b>      | 250   | 1000  | aR                | 1    | 1.0  | 120             | <b>3NH3330/20</b>     | 1    | 250       | 250      |
| <b>3NE3230-0B</b>   | 315   | 1000  | aR                | 1    | 0.95 | 185             |                       | 2    | 305       | 290      |
| <b>3NE3231</b>      | 350   | 1000  | aR                | 1    | 0.95 | 240             | <b>3NH3330/20</b>     | 2    | 335       | 318      |
| <b>3NE3232-0B</b>   | 400   | 1000  | aR                | 1    | 0.90 | 240             |                       | 2    | 380       | 342      |
| <b>3NE3233</b>      | 450   | 1000  | aR                | 1    | 0.90 | 2 x 150         |                       | 2    | 425       | 383      |
| <b>3NE3332-0B</b>   | 400   | 1000  | aR                | 2    | 1.0  | 240             | <b>3NH3430/20</b>     | 3    | 400       | 400      |
| <b>3NE3333</b>      | 450   | 1000  | aR                | 2    | 1.0  | 2 x 150         |                       | 3    | 450       | 450      |
| <b>3NE3334-0B</b>   | 500   | 1000  | aR                | 2    | 1.0  | 2 x 150         |                       | 3    | 500       | 500      |
| <b>3NE3335</b>      | 560   | 1000  | aR                | 2    | 1.0  | 2 x 185         |                       | 3    | 560       | 560      |
| <b>3NE3336</b>      | 630   | 1000  | aR                | 2    | 1.0  | 2 x 185         |                       | 3    | 630       | 630      |
| <b>3NE3337-8</b>    | 710   | 900   | aR                | 2    | 1.0  | 2 x (40 x 5)    |                       | 3    | 680       | 680      |
| <b>3NE3338-8</b>    | 800   | 800   | aR                | 2    | 0.95 | 2 x 240         |                       | 3    | 700       | 665      |
| <b>3NE3340-8</b>    | 900   | 690   | aR                | 2    | 0.95 | 2 x (40 x 8)    |                       | 3    | 750       | 713      |
| <b>3NE4101</b>      | 32    | 1000  | gR                | 0    | 0.9  | 6               | <b>3NH3120/4230</b>   | 0/1  | 32        | 29       |
| <b>3NE4102</b>      | 40    | 1000  | gR                | 0    | 0.9  | 10              |                       | 0/1  | 40        | 36       |
| <b>3NE4117</b>      | 50    | 1000  | gR                | 0    | 0.9  | 10              |                       | 0/1  | 50        | 45       |
| <b>3NE4118</b>      | 63    | 1000  | aR                | 0    | 0.9  | 16              |                       | 0/1  | 63        | 57       |
| <b>3NE4120</b>      | 80    | 1000  | aR                | 0    | 0.9  | 25              |                       | 0/1  | 80        | 72       |
| <b>3NE4121</b>      | 100   | 1000  | aR                | 0    | 0.9  | 35              |                       | 0/1  | 100       | 90       |
| <b>3NE4122</b>      | 125   | 1000  | aR                | 0    | 0.9  | 50              |                       | 0/1  | 125       | 113      |
| <b>3NE4124</b>      | 160   | 1000  | aR                | 0    | 0.9  | 70              |                       | 0/1  | 160       | 144      |
| <b>3NE4327-0B</b>   | 250   | 800   | aR                | 2    | 0.85 | 150             | <b>3NH3330/20</b>     | 2    | 240       | 204      |
| <b>3NE4330-0B</b>   | 315   | 800   | aR                | 2    | 0.85 | 240             |                       | 2    | 300       | 255      |
| <b>3NE4333-0B</b>   | 450   | 800   | aR                | 2    | 0.85 | 2 x (30 x 5)    | <b>3NH3430/20</b>     | 3    | 425       | 361      |
| <b>3NE4334-0B</b>   | 500   | 800   | aR                | 2    | 0.85 | 2 x (30 x 5)    |                       | 3    | 475       | 404      |
| <b>3NE4337</b>      | 710   | 800   | aR                | 2    | 0.95 | 2 x (50 x 5)    |                       | 3    | 630       | 599      |
| <b>3NE8015-1</b>    | 25    | 690   | gR                | 00   | 0.95 | 4               | <b>3NH3030/4030</b>   | 00   | 25        | 24       |
| <b>3NE8003-1</b>    | 35    | 690   | gR                | 00   | 0.95 | 6               |                       | 00   | 35        | 33       |
| <b>3NE8017-1</b>    | 50    | 690   | gR                | 00   | 0.90 | 10              |                       | 00   | 50        | 45       |
| <b>3NE8018-1</b>    | 63    | 690   | gR                | 00   | 0.95 | 16              |                       | 00   | 63        | 60       |
| <b>3NE8020-1</b>    | 80    | 690   | aR                | 00   | 0.95 | 25              |                       | 00   | 80        | 76       |
| <b>3NE8021-1</b>    | 100   | 690   | aR                | 00   | 0.95 | 35              | <b>3NH3030/4030</b>   | 00   | 100       | 95       |
| <b>3NE8022-1</b>    | 125   | 690   | aR                | 00   | 0.95 | 50              |                       | 00   | 125       | 119      |
| <b>3NE8024-1</b>    | 160   | 690   | aR                | 00   | 0.95 | 70              |                       | 00   | 160       | 152      |

$U_n$  = Rated voltage

$I_n$  = Rated current

VL = Varying load factor

Ø<sub>min</sub> Cu = Required conductor cross-section Cu

$I_{max}$  = Maximum permissible current

$I_{VL}$  = Maximum permissible current with varying load

### Load rating of SITOR fuse links with 3NP LV HRC fuse switch disconnectors

| SITOR fuse links                                                                                                                                           |                                               |                                               |      |                                               | Ø min Cu                                                                                 | 3NP LV HRC fuse switch disconnectors   |                                 |                                               |                                               |                                 |                                        |                                 |                                               |                            |                                        |                                        |                                               |                                               |                                        |                                        |                          |
|------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------|-----------------------------------------------|------|-----------------------------------------------|------------------------------------------------------------------------------------------|----------------------------------------|---------------------------------|-----------------------------------------------|-----------------------------------------------|---------------------------------|----------------------------------------|---------------------------------|-----------------------------------------------|----------------------------|----------------------------------------|----------------------------------------|-----------------------------------------------|-----------------------------------------------|----------------------------------------|----------------------------------------|--------------------------|
| Article No.                                                                                                                                                | I <sub>n</sub><br>A                           | U <sub>n</sub><br>V AC                        | Size | VL                                            | mm <sup>2</sup>                                                                          | Add-on units                           |                                 |                                               |                                               |                                 |                                        |                                 |                                               |                            |                                        |                                        |                                               |                                               |                                        |                                        |                          |
|                                                                                                                                                            |                                               |                                               |      |                                               |                                                                                          | Article No.                            | Size                            | I <sub>max</sub><br>A                         | I <sub>VL</sub>                               | Article No.                     | Size                                   | I <sub>max</sub><br>A           | I <sub>VL</sub>                               | Article No.                | Size                                   | I <sub>max</sub><br>A                  | I <sub>VL</sub>                               | Article No.                                   | Size                                   | I <sub>max</sub><br>A                  | I <sub>VL</sub>          |
| 3NC2423-0C/<br>3NC2423-3C                                                                                                                                  | 150                                           | 500                                           | 3    | 0.85                                          | 70                                                                                       | 3NP54                                  | 3                               | 145                                           | 125                                           | 3NP4470                         | 3                                      | 140                             | 120                                           | 3NP1163                    | 3                                      | 140                                    | 119                                           |                                               |                                        |                                        |                          |
| 3NC2425-0C/<br>3NC2425-3C                                                                                                                                  | 200                                           | 500                                           | 3    | 0.85                                          | 95                                                                                       |                                        | 3                               | 180                                           | 165                                           |                                 | 3                                      | 175                             | 160                                           |                            | 3                                      | 175                                    | 149                                           |                                               |                                        |                                        |                          |
| 3NC2427-0C/<br>3NC2427-3C                                                                                                                                  | 250                                           | 500                                           | 3    | 0.85                                          | 120                                                                                      |                                        | 3                               | 225                                           | 205                                           |                                 | 3                                      | 220                             | 200                                           |                            | 3                                      | 220                                    | 187                                           |                                               |                                        |                                        |                          |
| 3NC2428-0C/<br>3NC2428-3C                                                                                                                                  | 300                                           | 500                                           | 3    | 0.85                                          | 185                                                                                      |                                        | 3                               | 255                                           | 240                                           |                                 | 3                                      | 250                             | 235                                           |                            | 3                                      | 250                                    | 213                                           |                                               |                                        |                                        |                          |
| 3NC2431-0C/<br>3NC2431-3C                                                                                                                                  | 350                                           | 500                                           | 3    | 0.85                                          | 240                                                                                      |                                        | 3                               | 330                                           | 295                                           |                                 | 3                                      | 320                             | 290                                           |                            | 3                                      | 320                                    | 272                                           |                                               |                                        |                                        |                          |
| 3NC2432-0C/<br>3NC2432-3C                                                                                                                                  | 400                                           | 500                                           | 3    | 0.85                                          | 240                                                                                      | 3                                      | 400                             | 380                                           | 3                                             | 370                             | 370                                    | 3                               | 370                                           | 315                        |                                        |                                        |                                               |                                               |                                        |                                        |                          |
| 3NC3336-1U<br>3NC3337-1U<br>3NC3338-1U                                                                                                                     | 630<br>710<br>800                             | 1000<br>1000<br>1000                          | 3    | 0.85                                          | 2 x (40 x 5)<br>2 x (50 x 5)<br>2 x (40 x 8)                                             | 3NP54                                  | 3<br>3<br>3                     | 530<br>570<br>630                             | 451<br>485<br>536                             | 3NP4470                         | 3<br>3<br>3                            | 500<br>500<br>500               | 425<br>425<br>425                             | 3NP1163                    | 3<br>3<br>3                            | 500<br>500<br>500                      | 425<br>425<br>425                             |                                               |                                        |                                        |                          |
| 3NC3340-1U<br>3NC3341-1U<br>3NC3342-1U<br>3NC3343-1U                                                                                                       | 900<br>1000<br>1100<br>1250                   | 1000<br>1000<br>800<br>800                    | 3    | 0.90<br>0.90<br>0.90<br>0.90                  | 2 x (40 x 8)<br>2 x (50 x 8)<br>2 x (50 x 8)<br>2 x (50 x 8)                             |                                        | 3<br>3<br>3<br>3                | 700<br>770<br>800<br>850                      | 630<br>693<br>720<br>765                      |                                 |                                        |                                 |                                               |                            |                                        |                                        |                                               |                                               |                                        |                                        |                          |
| 3NC3430-1U<br>3NC3432-1U<br>3NC3434-1U                                                                                                                     | 315<br>400<br>500                             | 1250<br>1250<br>1250                          | 3    | 0.95<br>0.95<br>0.90                          | 2 x 95<br>2 x 120<br>2 x 150                                                             |                                        | 3<br>3<br>3                     | 295<br>355<br>440                             | 280<br>337<br>396                             |                                 | 3<br>3<br>3                            | 280<br>340<br>400               | 266<br>323<br>360                             |                            | 3<br>3<br>3                            | 280<br>340<br>400                      | 266<br>323<br>360                             |                                               |                                        |                                        |                          |
| 3NC3436-1U<br>3NC3438-1U                                                                                                                                   | 630<br>800                                    | 1250<br>1100                                  | 3    | 0.95<br>0.90                                  | 2 x (40 x 5)<br>2 x (40 x 8)                                                             |                                        | 3<br>3                          | 520<br>625                                    | 494<br>594                                    |                                 | 3<br>3                                 | 460<br>625                      | 437<br>594                                    |                            | 3<br>3                                 | 460<br>625                             | 437<br>594                                    |                                               |                                        |                                        |                          |
| 3NC8423-0C/<br>3NC8423-3C<br>3NC8425-0C/<br>3NC8425-3C<br>3NC8427-0C/<br>3NC8427-3C<br>3NC8431-0C<br>3NC8431-3C<br>3NC8434-0C/<br>3NC8434-3C<br>3NC8444-3C | 150<br>200<br>250<br>350<br>500<br>1000       | 690<br>690<br>690<br>690<br>690<br>600        | 3    | 0.85<br>0.85<br>0.85<br>0.85<br>0.85<br>0.95  | 70<br>95<br>120<br>240<br>2 x 150<br>2 x (60 x 6)                                        |                                        | 3NP54                           | 3<br>3<br>3<br>3<br>3<br>3                    | 135<br>180<br>225<br>300<br>425<br>800        |                                 | 125<br>165<br>205<br>275<br>400<br>760 | 3NP4470                         | 3<br>3<br>3<br>3<br>3<br>3                    |                            | 120<br>160<br>200<br>270<br>385<br>800 | 120<br>160<br>200<br>270<br>385<br>760 | 3NP1163                                       | 3<br>3<br>3<br>3<br>3<br>3                    | 120<br>160<br>200<br>270<br>385<br>800 | 102<br>136<br>170<br>230<br>327<br>760 |                          |
| 3NE1020-2<br>3NE1021-0<br>3NE1021-2<br>3NE1022-0<br>3NE1022-2                                                                                              | 80<br>100<br>100<br>125<br>125                | 690<br>690<br>690<br>690<br>690               | 00   | 1.0<br>1.0<br>1.0<br>1.0<br>1.0               | 25<br>35<br>35<br>50<br>50                                                               | 00<br>00<br>00<br>00<br>00             |                                 | 80<br>100<br>100<br>125<br>125                | 80<br>100<br>100<br>125<br>125                | 00<br>00<br>00<br>00<br>00      | 80<br>100<br>98<br>125<br>120          |                                 | 80<br>100<br>98<br>125<br>120                 | 00<br>00<br>00<br>00<br>00 | 80<br>100<br>95<br>120<br>115          | 80<br>100<br>95<br>120<br>115          |                                               |                                               |                                        |                                        |                          |
| 3NE1224-0<br>3NE1224-2/-3<br>3NE1225-0<br>3NE1225-2/-3                                                                                                     | 160<br>160<br>200<br>200                      | 690<br>690<br>690<br>690                      | 1    | 1.0<br>1.0<br>1.0<br>1.0                      | 70<br>70<br>95<br>95                                                                     | 1<br>1<br>1<br>1                       |                                 | 160<br>160<br>200<br>200/190                  | 160<br>160<br>200<br>200/190                  | 2<br>2<br>2<br>2                | 160<br>160<br>200<br>200               |                                 | 160<br>160<br>200<br>200                      | 1<br>1<br>1<br>1           | 160<br>150<br>190<br>180               | 160<br>150<br>190<br>180               |                                               | 3NP1153                                       | 2<br>2<br>2<br>2                       | 160<br>160<br>200<br>190               | 160<br>160<br>200<br>190 |
| 3NE1227-0<br>3NE1227-2/-3                                                                                                                                  | 250<br>250                                    | 690<br>690                                    | 1    | 1.0<br>1.0                                    | 120<br>120                                                                               | 1<br>1                                 |                                 | 250<br>250/235                                | 250<br>250/235                                | 2<br>2                          | 250<br>250                             |                                 | 250<br>250                                    | 1<br>1                     | 235<br>220                             | 235<br>220                             |                                               |                                               | 2<br>2                                 | 250<br>235                             | 250<br>235               |
| 3NE1230-0<br>3NE1230-2/-3                                                                                                                                  | 315<br>315                                    | 690<br>690                                    | 1    | 1.0<br>1.0                                    | 2 x 70<br>2 x 70                                                                         | 3NP53/43                               |                                 | 2<br>2                                        | 315<br>315                                    | 315<br>315                      | 3NP53/43                               |                                 | 2<br>2                                        | 290<br>278                 | 290<br>278                             | 3NP1153                                |                                               | 2<br>2                                        | 290<br>278                             | 290<br>278                             |                          |
| 3NE1331-0<br>3NE1331-2/-3<br>3NE1332-0<br>3NE1332-2/-3                                                                                                     | 350<br>350<br>400<br>400                      | 690<br>690<br>690<br>690                      | 2    | 1.0<br>1.0<br>1.0<br>1.0                      | 2 x 95<br>2 x 95<br>2 x 95<br>2 x 95                                                     |                                        | 2<br>2<br>2<br>2                | 350<br>350<br>400<br>400                      | 350<br>350<br>400<br>400                      | 3<br>3<br>3<br>3                |                                        | 350<br>350<br>400<br>400        | 350<br>350<br>400<br>400                      | 2<br>2<br>2<br>2           | 315<br>300<br>340<br>328               |                                        | 315<br>300<br>340<br>328                      | 3NP1163                                       | 3<br>3<br>3<br>3                       | 340<br>330<br>380<br>370               | 340<br>330<br>380<br>370 |
| 3NE1333-0<br>3NE1333-2/-3<br>3NE1334-0<br>3NE1334-2/-3                                                                                                     | 450<br>450<br>500<br>500                      | 690<br>690<br>690<br>690                      | 2    | 1.0<br>1.0<br>1.0<br>1.0                      | 2 x 120<br>2 x 120<br>2 x 120<br>2 x 120                                                 | 3NP54/44<br>3NP54<br>3NP54/44<br>3NP54 | 3<br>3<br>3<br>3                | 450<br>450<br>500<br>500                      | 450<br>450<br>500<br>500                      | 3NP4470                         | 3<br>3                                 | 425<br>425                      | 425<br>425                                    | 3NP1163                    | 3<br>3                                 | 450<br>430                             | 450<br>430                                    |                                               |                                        |                                        |                          |
| 3NE1435-0<br>3NE1435-2/-3<br>3NE1436-0<br>3NE1436-2/-3<br>3NE1437-0<br>3NE1437-1<br>3NE1437-2/-3                                                           | 560<br>560<br>630<br>630<br>710<br>710<br>710 | 690<br>690<br>690<br>690<br>690<br>600<br>690 | 3    | 1.0<br>1.0<br>1.0<br>1.0<br>1.0<br>1.0<br>1.0 | 2 x 150<br>2 x 150<br>2 x 185<br>2 x 185<br>2 x (40 x 5)<br>2 x (40 x 5)<br>2 x (40 x 5) | 3NP54/44<br>3NP54                      | 3<br>3<br>3<br>3<br>3<br>3<br>3 | 560<br>560<br>630<br>625<br>710<br>690<br>685 | 560<br>560<br>630<br>625<br>710<br>690<br>685 |                                 | 3NP4470                                | 3<br>3<br>3<br>3<br>3<br>3<br>3 | 540<br>540<br>620<br>600<br>690<br>670<br>630 |                            | -<br>-<br>-<br>-<br>-<br>-<br>-        | 3<br>3<br>3<br>3<br>3<br>3<br>3        | 560<br>555<br>630<br>620<br>650<br>630<br>630 | 560<br>555<br>630<br>620<br>650<br>630<br>630 |                                        |                                        |                          |
| 3NE1438-0<br>3NE1438-1<br>3NE1438-2/-3<br>3NE1447-2/-3<br>3NE1448-2/-3                                                                                     | 800<br>800<br>800<br>670<br>850               | 690<br>690<br>690<br>690<br>690               | 3    | 1.0<br>1.0<br>1.0<br>1.0<br>1.0               | 2 x (50 x 5)<br>2 x (50 x 5)<br>2 x (50 x 5)<br>2 x (40 x 5)<br>2 x (40 x 8)             |                                        | 3NP54                           | 3<br>3<br>3<br>3<br>3                         | 800<br>750<br>770<br>655<br>820               | 800<br>750<br>770<br>655<br>820 |                                        | 3NP4470                         | 3<br>3                                        | 750<br>710                 | 700<br>630                             | -<br>-<br>-<br>-<br>-                  |                                               |                                               |                                        |                                        |                          |

## Fuse Systems

### SITOR Semiconductor Fuses

#### LV HRC design

| SITOR fuse links  |            |               |      |      | Ø min Cu<br>mm <sup>2</sup> | 3NP LV HRC fuse switch disconnectors |      |                |          |                           |      |                |          |                |      |                |          |
|-------------------|------------|---------------|------|------|-----------------------------|--------------------------------------|------|----------------|----------|---------------------------|------|----------------|----------|----------------|------|----------------|----------|
| Article No.       | $I_n$<br>A | $U_n$<br>V AC | Size | VL   |                             | Add-on units                         |      |                |          |                           |      |                |          |                |      |                |          |
|                   |            |               |      |      |                             | Article No.                          | Size | $I_{max}$<br>A | $I_{VL}$ | Article No.               | Size | $I_{max}$<br>A | $I_{VL}$ | Article No.    | Size | $I_{max}$<br>A | $I_{VL}$ |
| <b>3NE1802-0</b>  | 40         | 690           | 000  | 1.0  | 10                          | <b>3NP35/<br/>3NP4010</b>            | 000  | 40             | 40       | <b>3NP50/<br/>3NP4070</b> | 00   | 40             | 40       | <b>3NP1123</b> | 000  | 40             | 40       |
| <b>3NE1803-0</b>  | 35         | 690           | 000  | 1.0  | 6                           |                                      | 000  | 35             | 35       |                           | 00   | 35             | 35       |                | 000  | 35             | 35       |
| <b>3NE1813-0</b>  | 16         | 690           | 000  | 1.0  | 1.5                         |                                      | 000  | 16             | 16       |                           | 00   | 16             | 16       |                | 000  | 16             | 16       |
| <b>3NE1814-0</b>  | 20         | 690           | 000  | 1.0  | 2.5                         |                                      | 000  | 20             | 20       |                           | 00   | 20             | 20       |                | 000  | 20             | 20       |
| <b>3NE1815-0</b>  | 25         | 690           | 000  | 1.0  | 4                           |                                      | 000  | 25             | 25       |                           | 00   | 25             | 25       |                | 000  | 25             | 25       |
| <b>3NE1817-0</b>  | 50         | 690           | 000  | 1.0  | 10                          |                                      | 000  | 50             | 50       |                           | 00   | 50             | 50       |                | 000  | 50             | 50       |
| <b>3NE1818-0</b>  | 63         | 690           | 000  | 1.0  | 16                          |                                      | 000  | 63             | 63       |                           | 00   | 63             | 63       |                | 000  | 63             | 63       |
| <b>3NE1820-0</b>  | 80         | 690           | 000  | 1.0  | 25                          |                                      | 000  | 80             | 80       |                           | 00   | 80             | 80       |                | 000  | 80             | 80       |
| <b>3NE3221</b>    | 100        | 1000          | 1    | 0.95 | 35                          | <b>3NP52/42</b>                      | 1    | 95             | 90       | <b>3NP53/<br/>3NP43</b>   | 2    | 100            | 95       | <b>3NP1143</b> | 1    | 88             | 84       |
| <b>3NE3222</b>    | 125        | 1000          | 1    | 0.95 | 50                          |                                      | 1    | 110            | 110      |                           | 2    | 120            | 114      |                | 1    | 102            | 97       |
| <b>3NE3224</b>    | 160        | 1000          | 1    | 1.0  | 70                          |                                      | 1    | 140            | 140      |                           | 2    | 150            | 150      |                | 1    | 130            | 130      |
| <b>3NE3225</b>    | 200        | 1000          | 1    | 1.0  | 95                          |                                      | 1    | 175            | 175      |                           | 2    | 190            | 190      |                | 1    | 163            | 163      |
| <b>3NE3227</b>    | 250        | 1000          | 1    | 1.0  | 120                         | <b>3NP53</b>                         | 1    | 210            | 210      | <b>3NP4370</b>            | 2    | 230            | 230      |                | 1    | 195            | 195      |
| <b>3NE3230-0B</b> | 315        | 1000          | 1    | 0.95 | 185                         |                                      | 2    | 285            | 280      |                           | 2    | 270            | 270      |                | 2    | 270            | 257      |
| <b>3NE3231</b>    | 350        | 1000          | 1    | 0.95 | 240                         |                                      | 2    | 310            | 300      |                           | 2    | 290            | 290      |                | 2    | 290            | 276      |
| <b>3NE3232-0B</b> | 400        | 1000          | 1    | 0.90 | 240                         |                                      | 2    | 330            | 320      |                           | 2    | 310            | 310      |                | 2    | 320            | 288      |
| <b>3NE3233</b>    | 450        | 1000          | 1    | 0.90 | 2 x 150                     |                                      | 2    | 360            | 340      |                           | 2    | 330            | 330      |                | 2    | 360            | 324      |
| <b>3NE3332-0B</b> | 400        | 1000          | 2    | 1.0  | 240                         | <b>3NP54</b>                         | 3    | 360            | 345      | <b>3NP4470</b>            | 3    | 345            | 345      | <b>3NP1153</b> | 2    | 330            | 330      |
| <b>3NE3333</b>    | 450        | 1000          | 2    | 1.0  | 2 x 150                     |                                      | 3    | 400            | 385      |                           | 3    | 385            | 385      |                |      |                |          |
| <b>3NE3334-0B</b> | 500        | 1000          | 2    | 1.0  | 2 x 150                     |                                      | 3    | 450            | 450      |                           | 3    | 430            | 430      |                |      |                |          |
| <b>3NE3335</b>    | 560        | 1000          | 2    | 1.0  | 2 x 185                     |                                      | 3    | 510            | 510      |                           | 3    | 490            | 490      |                |      |                |          |
| <b>3NE3336</b>    | 630        | 1000          | 2    | 1.0  | 2 x 185                     |                                      | 3    | 580            | 580      |                           | 3    | 560            | 560      |                |      |                |          |
| <b>3NE3337-8</b>  | 710        | 900           | 2    | 1.0  | 2 x (40 x 5)                |                                      | 3    | 630            | 630      |                           | 3    | 590            | 590      |                |      |                |          |
| <b>3NE3338-8</b>  | 800        | 800           | 2    | 0.95 | 2 x 240                     |                                      | 3    | 630            | 630      |                           | 3    | 605            | 605      |                |      |                |          |
| <b>3NE3340-8</b>  | 900        | 690           | 2    | 0.95 | 2 x (40 x 8)                |                                      | 3    | 630            | 630      |                           | 3    | 630            | 630      |                |      |                |          |
| <b>3NE4101</b>    | 32         | 1000          | 0    | 0.9  | 6                           | <b>3NP52</b>                         | 1    | 32             | 29       | <b>3NP4270</b>            | 1    | 32             | 29       | <b>3NP1143</b> | 1    | 30             | 27       |
| <b>3NE4102</b>    | 40         | 1000          | 0    | 0.9  | 10                          |                                      | 1    | 40             | 36       |                           | 1    | 38             | 34       |                | 1    | 35             | 32       |
| <b>3NE4117</b>    | 50         | 1000          | 0    | 0.9  | 10                          |                                      | 1    | 50             | 45       |                           | 1    | 45             | 41       |                | 1    | 42             | 38       |
| <b>3NE4118</b>    | 63         | 1000          | 0    | 0.9  | 16                          |                                      | 1    | 63             | 57       |                           | 1    | 59             | 53       |                | 1    | 55             | 50       |
| <b>3NE4120</b>    | 80         | 1000          | 0    | 0.9  | 25                          |                                      | 1    | 80             | 72       |                           | 1    | 76             | 68       |                | 1    | 71             | 64       |
| <b>3NE4121</b>    | 100        | 1000          | 0    | 0.9  | 35                          |                                      | 1    | 95             | 86       |                           | 1    | 90             | 81       |                | 1    | 84             | 76       |
| <b>3NE4122</b>    | 125        | 1000          | 0    | 0.9  | 50                          |                                      | 1    | 120            | 108      |                           | 1    | 115            | 104      |                | 1    | 107            | 96       |
| <b>3NE4124</b>    | 160        | 1000          | 0    | 0.9  | 70                          |                                      | 1    | 150            | 135      |                           | 1    | 144            | 130      |                | 1    | 134            | 121      |
| <b>3NE4327-0B</b> | 250        | 800           | 2    | 0.85 | 150                         | <b>3NP53/54</b>                      | 2/3  | 210/           | 205/     | <b>3NP4470</b>            | 3    | 205            | 200      | <b>3NP1153</b> | 2    | 195            | 166      |
| <b>3NE4330-0B</b> | 315        | 800           | 2    | 0.85 | 240                         |                                      | 2/3  | 220/           | 210      |                           | 3    | 260            | 250      |                | 2    | 240            | 204      |
| <b>3NE4333-0B</b> | 450        | 800           | 2    | 0.85 | 2 x (30 x 5)                |                                      | 2/3  | 270/           | 255/     |                           | 3    | 375            | 360      |                |      |                |          |
| <b>3NE4334-0B</b> | 500        | 800           | 2    | 0.85 | 2 x (30 x 5)                | <b>3NP54</b>                         | 2/3  | 285/           | 265/     |                           |      |                |          |                |      |                |          |
| <b>3NE4337</b>    | 710        | 800           | 2    | 0.95 | 2 x (50 x 5)                |                                      | 2/3  | 400/           | 370/     |                           |      |                |          |                |      |                |          |
|                   |            |               |      |      |                             |                                      |      | 420            | 380      |                           |      |                |          |                |      |                |          |
| <b>3NE8015-1</b>  | 25         | 690           | 00   | 0.95 | 4                           | <b>3NP50/<br/>3NP4070</b>            | 00   | 25             | 24       |                           |      |                |          | <b>3NP1133</b> | 00   | 25             | 24       |
| <b>3NE8003-1</b>  | 35         | 690           | 00   | 0.95 | 6                           |                                      | 00   | 33             | 31       |                           |      |                |          |                | 00   | 32             | 30       |
| <b>3NE8017-1</b>  | 50         | 690           | 00   | 0.90 | 10                          |                                      | 00   | 45             | 41       |                           |      |                |          |                | 00   | 43             | 39       |
| <b>3NE8018-1</b>  | 63         | 690           | 00   | 0.95 | 16                          |                                      | 00   | 54             | 51       |                           |      |                |          |                | 00   | 52             | 49       |
| <b>3NE8020-1</b>  | 80         | 690           | 00   | 0.95 | 25                          |                                      | 00   | 68             | 65       |                           |      |                |          |                | 00   | 65             | 62       |
| <b>3NE8021-1</b>  | 100        | 690           | 00   | 0.95 | 35                          | <b>3NP50/<br/>3NP4070</b>            | 00   | 89             | 85       |                           |      |                |          | <b>3NP1133</b> | 00   | 85             | 81       |
| <b>3NE8022-1</b>  | 125        | 690           | 00   | 0.95 | 50                          |                                      | 00   | 106            | 101      |                           |      |                |          |                | 00   | 100            | 95       |
| <b>3NE8024-1</b>  | 160        | 690           | 00   | 0.95 | 70                          |                                      | 00   | 130            | 124      |                           |      |                |          |                | 00   | 120            | 114      |

$U_n$  = Rated voltage

$I_n$  = Rated current

VL = Varying load factor

Ø<sub>min</sub> Cu = Required conductor cross-section Cu

$I_{max}$  = Maximum permissible current

$I_{VL}$  = Maximum permissible current with varying load

# Fuse Systems

## SITOR Semiconductor Fuses

### LV HRC design

| SITOR fuse links          |                     |                        |      |      | Ø min Cu        | 3NP LV HRC fuse switch disconnectors |      |                       |                 |             |      |                       |                 |             |      |                       |                 |
|---------------------------|---------------------|------------------------|------|------|-----------------|--------------------------------------|------|-----------------------|-----------------|-------------|------|-----------------------|-----------------|-------------|------|-----------------------|-----------------|
| Article No.               | I <sub>n</sub><br>A | U <sub>n</sub><br>V AC | Size | VL   | mm <sup>2</sup> | Busbar devices                       |      |                       |                 |             |      |                       |                 |             |      |                       |                 |
|                           |                     |                        |      |      |                 | Article No.                          | Size | I <sub>max</sub><br>A | I <sub>VL</sub> | Article No. | Size | I <sub>max</sub><br>A | I <sub>VL</sub> | Article No. | Size | I <sub>max</sub><br>A | I <sub>VL</sub> |
| 3NC2423-0C/<br>3NC2423-3C | 150                 | 500                    | 3    | 0.85 | 70              | 3NP4476                              | 3    | 140                   | 120             |             |      |                       |                 | 3NP1163     | 3    | 150                   | 128             |
| 3NC2425-0C/<br>3NC2425-3C | 200                 | 500                    | 3    | 0.85 | 95              |                                      | 3    | 175                   | 160             |             |      |                       |                 |             | 3    | 190                   | 162             |
| 3NC2427-0C/<br>3NC2427-3C | 250                 | 500                    | 3    | 0.85 | 120             |                                      | 3    | 215                   | 195             |             |      |                       |                 |             | 3    | 237                   | 201             |
| 3NC2428-0C/<br>3NC2428-3C | 300                 | 500                    | 3    | 0.85 | 185             |                                      | 3    | 245                   | 230             |             |      |                       |                 |             | 3    | 285                   | 242             |
| 3NC2431-0C/<br>3NC2431-3C | 350                 | 500                    | 3    | 0.85 | 240             |                                      | 3    | 315                   | 285             |             |      |                       |                 |             | 3    | 332                   | 282             |
| 3NC2432-0C/<br>3NC2432-3C | 400                 | 500                    | 3    | 0.85 | 240             |                                      | 3    | 360                   | 360             |             |      |                       |                 |             | 3    | 380                   | 323             |
| 3NC3336-1U                | 630                 | 1000                   | 3    | 0.85 | 2 x (40 x 5)    |                                      |      |                       |                 |             |      |                       |                 | 3NP1163     | 3    | 500                   | 425             |
| 3NC3337-1U                | 710                 | 1000                   | 3    | 0.85 | 2 x (50 x 5)    |                                      |      |                       |                 |             |      |                       |                 |             | 3    | 560                   | 476             |
| 3NC3338-1U                | 800                 | 1000                   | 3    | 0.85 | 2 x (40 x 8)    |                                      |      |                       |                 |             |      |                       |                 |             | 3    | 630                   | 536             |
| 3NC3340-1U                | 900                 | 1000                   | 3    | 0.90 | 2 x (40 x 8)    |                                      |      |                       |                 |             |      |                       |                 |             | 3    | 630                   | 567             |
| 3NC3341-1U                | 1000                | 1000                   | 3    | 0.90 | 2 x (50 x 8)    |                                      |      |                       |                 |             |      |                       |                 |             | 3    | 630                   | 567             |
| 3NC3342-1U                | 1100                | 800                    | 3    | 0.90 | 2 x (50 x 8)    |                                      |      |                       |                 |             |      |                       |                 |             | 3    | 630                   | 567             |
| 3NC3343-1U                | 1250                | 800                    | 3    | 0.90 | 2 x (50 x 8)    |                                      |      |                       |                 |             |      |                       |                 |             | 3    | 630                   | 567             |
| 3NC3430-1U                | 315                 | 1250                   | 3    | 0.95 | 2 x 95          | 3NP4476                              | 3    | 280                   | 266             |             |      |                       |                 | 3NP1163     | 3    | 285                   | 271             |
| 3NC3432-1U                | 400                 | 1250                   | 3    | 0.95 | 2 x 120         |                                      | 3    | 340                   | 323             |             |      |                       |                 |             | 3    | 340                   | 323             |
| 3NC3434-1U                | 500                 | 1250                   | 3    | 0.90 | 2 x 150         |                                      | 3    | 400                   | 360             |             |      |                       |                 |             | 3    | 425                   | 383             |
| 3NC3436-1U                | 630                 | 1250                   | 3    | 0.95 | 2 x (40 x 5)    |                                      | 3    | 460                   | 437             |             |      |                       |                 |             | 3    | 535                   | 508             |
| 3NC3438-1U                | 800                 | 1100                   | 3    | 0.90 | 2 x (40 x 8)    |                                      |      |                       |                 |             |      |                       |                 |             | 3    | 520                   | 494             |
| 3NC8423-0C/<br>3NC8423-3C | 150                 | 690                    | 3    | 0.85 | 70              | 3NP4476                              | 3    | 120                   | 120             |             |      |                       |                 | 3NP1163     | 3    | 140                   | 120             |
| 3NC8425-0C/<br>3NC8425-3C | 200                 | 690                    | 3    | 0.85 | 95              |                                      | 3    | 155                   | 155             |             |      |                       |                 |             | 3    | 190                   | 155             |
| 3NC8427-0C/<br>3NC8427-3C | 250                 | 690                    | 3    | 0.85 | 120             |                                      | 3    | 195                   | 195             |             |      |                       |                 |             | 3    | 240                   | 195             |
| 3NC8431-0C/<br>3NC8431-3C | 350                 | 690                    | 3    | 0.85 | 240             |                                      | 3    | 260                   | 260             |             |      |                       |                 |             | 3    | 300                   | 260             |
| 3NC8434-0C/<br>3NC8434-3C | 500                 | 690                    | 3    | 0.85 | 2 x 150         |                                      | 3    | 375                   | 375             |             |      |                       |                 |             | 3    | 385                   | 375             |
| 3NC8444-3C                | 1000                | 600                    | 3    | 0.95 | 2 x (60 x 6)    |                                      | 3    | 630                   | 630             |             |      |                       |                 |             | 3    | 600                   | 630             |
| 3NE1020-2                 | 80                  | 690                    | 00   | 1.0  | 25              | 3NP4076                              | 00   | 80                    | 80              |             |      |                       |                 | 3NP1133     | 00   | 80                    | 80              |
| 3NE1021-0                 | 100                 | 690                    | 00   | 1.0  | 35              |                                      | 00   | 100                   | 100             |             |      |                       |                 |             | 00   | 100                   | 100             |
| 3NE1021-2                 | 100                 | 690                    | 00   | 1.0  | 35              |                                      | 00   | 98                    | 98              |             |      |                       |                 |             | 00   | 95                    | 95              |
| 3NE1022-0                 | 125                 | 690                    | 00   | 1.0  | 50              |                                      | 00   | 125                   | 125             |             |      |                       |                 |             | 00   | 120                   | 120             |
| 3NE1022-2                 | 125                 | 690                    | 00   | 1.0  | 50              |                                      | 00   | 120                   | 120             |             |      |                       |                 |             | 00   | 115                   | 115             |
| 3NE1224-0                 | 160                 | 690                    | 1    | 1.0  | 70              | 3NP4276                              | 1    | 160                   | 160             | 3NP4376     | 2    | 160                   | 160             | 3NP1143     | 1    | 160                   | 160             |
| 3NE1224-2/-3              | 160                 | 690                    | 1    | 1.0  | 70              |                                      | 1    | 160                   | 160             |             | 2    | 160                   | 160             |             | 1    | 152                   | 152             |
| 3NE1225-0                 | 200                 | 690                    | 1    | 1.0  | 95              |                                      | 1    | 200                   | 200             |             | 2    | 200                   | 200             |             | 1    | 200                   | 200             |
| 3NE1225-2/-3              | 200                 | 690                    | 1    | 1.0  | 95              |                                      | 1    | 190                   | 190             |             | 2    | 200                   | 200             |             | 1    | 180                   | 180             |
| 3NE1227-0                 | 250                 | 690                    | 1    | 1.0  | 120             |                                      | 1    | 250                   | 250             |             | 2    | 250                   | 250             |             | 1    | 238                   | 238             |
| 3NE1227-2/-3              | 250                 | 690                    | 1    | 1.0  | 120             |                                      | 1    | 235                   | 235             |             | 2    | 250                   | 250             |             | 1    | 213                   | 213             |
| 3NE1230-0                 | 315                 | 690                    | 1    | 1.0  | 2 x 70          | 3NP4376                              |      |                       |                 | 3NP4476     | 2    | 315                   | 315             | 3NP1153     |      |                       |                 |
| 3NE1230-2/-3              | 315                 | 690                    | 1    | 1.0  | 2 x 70          |                                      |      |                       |                 |             | 2    | 315                   | 315             |             |      |                       |                 |
| 3NE1331-0                 | 350                 | 690                    | 2    | 1.0  | 2 x 95          |                                      | 2    | 350                   | 350             |             | 3    | 350                   | 350             |             | 2    | 350                   | 350             |
| 3NE1331-2/-3              | 350                 | 690                    | 2    | 1.0  | 2 x 95          |                                      | 2    | 350                   | 350             |             | 3    | 350                   | 350             |             | 2    | 330                   | 330             |
| 3NE1332-0                 | 400                 | 690                    | 2    | 1.0  | 2 x 95          |                                      | 2    | 400                   | 400             |             | 3    | 400                   | 400             |             | 2    | 380                   | 380             |
| 3NE1332-2/-3              | 400                 | 690                    | 2    | 1.0  | 2 x 95          |                                      | 2    | 400                   | 400             |             | 3    | 400                   | 400             |             | 2    | 360                   | 360             |
| 3NE1333-0                 | 450                 | 690                    | 2    | 1.0  | 2 x 120         |                                      |      |                       |                 |             | 3    | 450                   | 450             |             |      |                       |                 |
| 3NE1333-2/-3              | 450                 | 690                    | 2    | 1.0  | 2 x 120         |                                      |      |                       |                 |             | 3    | 425                   | 425             |             |      |                       |                 |
| 3NE1334-0                 | 500                 | 690                    | 2    | 1.0  | 2 x 120         |                                      |      |                       |                 |             | 3    | 480                   | 480             |             |      |                       |                 |
| 3NE1334-2/-3              | 500                 | 690                    | 2    | 1.0  | 2 x 120         |                                      |      |                       |                 |             | 3    | 450                   | 450             |             |      |                       |                 |
| 3NE1435-0                 | 560                 | 690                    | 3    | 1.0  | 2 x 150         | 3NP4476                              | 3    | 510                   | 510             |             |      |                       |                 | 3NP1163     | 3    | 520                   | 520             |
| 3NE1435-2/-3              | 560                 | 690                    | 3    | 1.0  | 2 x 150         |                                      | 3    | 500                   | 500             |             |      |                       |                 |             | 3    | 510                   | 510             |
| 3NE1436-0                 | 630                 | 690                    | 3    | 1.0  | 2 x 185         |                                      | 3    | 535                   | 535             |             |      |                       |                 |             | 3    | 585                   | 585             |
| 3NE1436-2/-3              | 630                 | 690                    | 3    | 1.0  | 2 x 185         |                                      | 3    | 520                   | 520             |             |      |                       |                 |             | 3    | 570                   | 570             |
| 3NE1437-0                 | 710                 | 690                    | 3    | 1.0  | 2 x (40 x 5)    |                                      | 3    | 600                   | 600             |             |      |                       |                 |             | 3    | 605                   | 605             |
| 3NE1437-1                 | 710                 | 600                    | 3    | 1.0  | 2 x (40 x 5)    |                                      | 3    | 570                   | 570             |             |      |                       |                 |             | 3    | 590                   | 590             |
| 3NE1437-2/-3              | 710                 | 690                    | 3    | 1.0  | 2 x (40 x 5)    |                                      | 3    | 540                   | 540             |             |      |                       |                 |             | 3    | 580                   | 580             |
| 3NE1438-0                 | 800                 | 690                    | 3    | 1.0  | 2 x (50 x 5)    | 3NP4476                              | 3    | 640                   | 630             |             |      |                       |                 | 3NP1163     | 3    | 630                   | 630             |
| 3NE1438-1                 | 800                 | 600                    | 3    | 1.0  | 2 x (50 x 5)    |                                      | 3    | 600                   | 600             |             |      |                       |                 |             | 3    | 610                   | 610             |
| 3NE1438-2/-3              | 800                 | 690                    | 3    | 1.0  | 2 x (50 x 5)    |                                      | 3    | 580                   | 580             |             |      |                       |                 |             | 3    | 600                   | 600             |
| 3NE1447-2/-3              | 670                 | 690                    | 3    | 1.0  | 2 x (40 x 5)    |                                      | 3    | 530                   | 530             |             |      |                       |                 |             | 3    | 575                   | 575             |
| 3NE1448-2/-3              | 850                 | 690                    | 3    | 1.0  | 2 x (40 x 8)    |                                      | 3    | 630                   | 630             |             |      |                       |                 |             | 3    | 630                   | 630             |

## Fuse Systems

### SITOR Semiconductor Fuses

#### LV HRC design

| SITOR fuse links |                     |                        |      |      | Ø min Cu<br><br>mm <sup>2</sup> | 3NP LV HRC fuse switch disconnectors |                       |                 |             |                     |                       |                 |             |         |                       |                 |             |         |                       |                 |     |
|------------------|---------------------|------------------------|------|------|---------------------------------|--------------------------------------|-----------------------|-----------------|-------------|---------------------|-----------------------|-----------------|-------------|---------|-----------------------|-----------------|-------------|---------|-----------------------|-----------------|-----|
| Article No.      | I <sub>n</sub><br>A | U <sub>n</sub><br>V AC | Size | VL   |                                 | Busbar devices                       |                       |                 |             |                     |                       |                 |             |         |                       |                 |             |         |                       |                 |     |
|                  |                     |                        |      |      | Article No.                     | Size                                 | I <sub>max</sub><br>A | I <sub>VL</sub> | Article No. | Size                | I <sub>max</sub><br>A | I <sub>VL</sub> | Article No. | Size    | I <sub>max</sub><br>A | I <sub>VL</sub> | Article No. | Size    | I <sub>max</sub><br>A | I <sub>VL</sub> |     |
| 3NE1802-0        | 40                  | 690                    | 000  | 1.0  | 10                              | 3NP4015/<br>3NP4016                  | 000                   | 40              | 40          | 3NP4075/<br>3NP4076 | 00                    | 40              | 40          | 3NP1123 | 000                   | 40              | 40          | 3NP1133 | 00                    | 40              | 40  |
| 3NE1803-0        | 35                  | 690                    | 000  | 1.0  | 6                               |                                      | 000                   | 35              | 35          |                     | 00                    | 35              | 35          |         | 000                   | 35              | 35          |         | 00                    | 35              | 35  |
| 3NE1813-0        | 16                  | 690                    | 000  | 1.0  | 1.5                             |                                      | 000                   | 16              | 16          |                     | 00                    | 16              | 16          |         | 000                   | 16              | 16          |         | 00                    | 16              | 16  |
| 3NE1814-0        | 20                  | 690                    | 000  | 1.0  | 2.5                             |                                      | 000                   | 20              | 20          |                     | 00                    | 20              | 20          |         | 000                   | 20              | 20          |         | 00                    | 20              | 20  |
| 3NE1815-0        | 25                  | 690                    | 000  | 1.0  | 4                               |                                      | 000                   | 25              | 25          |                     | 00                    | 25              | 25          |         | 000                   | 25              | 25          |         | 00                    | 25              | 25  |
| 3NE1817-0        | 50                  | 690                    | 000  | 1.0  | 10                              |                                      | 000                   | 50              | 50          |                     | 00                    | 50              | 50          |         | 000                   | 50              | 50          |         | 00                    | 50              | 50  |
| 3NE1818-0        | 63                  | 690                    | 000  | 1.0  | 16                              | 000                                  | 63                    | 63              | 00          | 63                  | 63                    | 000             | 63          | 63      | 00                    | 63              | 63          |         |                       |                 |     |
| 3NE1820-0        | 80                  | 690                    | 000  | 1.0  | 25                              | 000                                  | 80                    | 80              | 00          | 80                  | 80                    | 000             | 80          | 80      | 00                    | 80              | 80          |         |                       |                 |     |
| 3NE3221          | 100                 | 1000                   | 1    | 0.95 | 35                              | 3NP4276                              | 1                     | 95              | 90          | 3NP4376             | 2                     | 100             | 95          | 3NP1143 | 1                     | 95              | 90          | 3NP1153 | 2                     | 100             | 95  |
| 3NE3222          | 125                 | 1000                   | 1    | 0.95 | 50                              |                                      | 1                     | 115             | 109         |                     | 2                     | 125             | 119         |         | 1                     | 113             | 107         |         | 2                     | 125             | 119 |
| 3NE3224          | 160                 | 1000                   | 1    | 1.0  | 70                              |                                      | 1                     | 150             | 150         |                     | 2                     | 160             | 160         |         | 1                     | 140             | 140         |         | 2                     | 150             | 150 |
| 3NE3225          | 200                 | 1000                   | 1    | 1.0  | 95                              |                                      | 1                     | 185             | 185         |                     | 2                     | 200             | 200         |         | 1                     | 170             | 170         |         | 2                     | 180             | 180 |
| 3NE3227          | 250                 | 1000                   | 1    | 1.0  | 120                             |                                      | 1                     | 225             | 225         |                     | 2                     | 250             | 250         |         | 1                     | 200             | 200         |         | 2                     | 215             | 215 |
| 3NE3230-0B       | 315                 | 1000                   | 1    | 0.95 | 185                             |                                      |                       |                 |             |                     | 2                     | 285             | 285         |         |                       |                 |             |         | 2                     | 265             | 252 |
| 3NE3231          | 350                 | 1000                   | 1    | 0.95 | 240                             |                                      |                       |                 | 2           | 310                 | 310                   |                 |             |         | 2                     | 280             | 266         |         |                       |                 |     |
| 3NE3232-0B       | 400                 | 1000                   | 1    | 0.90 | 240                             |                                      |                       |                 | 2           | 330                 | 330                   |                 |             |         | 2                     | 310             | 279         |         |                       |                 |     |
| 3NE3233          | 450                 | 1000                   | 1    | 0.90 | 2 x 150                         |                                      |                       |                 | 2           | 360                 | 360                   |                 |             |         | 2                     | 330             | 297         |         |                       |                 |     |
| 3NE3332-0B       | 400                 | 1000                   | 2    | 1.0  | 240                             |                                      |                       |                 | 3NP4476     | 3                   | 340                   | 340             |             |         |                       | 3NP1163         | 3           | 360     | 360                   |                 |     |
| 3NE3333          | 450                 | 1000                   | 2    | 1.0  | 2 x 150                         |                                      |                       |                 |             | 3                   | 370                   | 370             |             |         |                       |                 | 3           | 390     | 390                   |                 |     |
| 3NE3334-0B       | 500                 | 1000                   | 2    | 1.0  | 2 x 150                         |                                      |                       |                 |             | 3                   | 410                   | 410             |             |         |                       |                 | 3           | 415     | 415                   |                 |     |
| 3NE3335          | 560                 | 1000                   | 2    | 1.0  | 2 x 185                         |                                      |                       |                 |             | 3                   | 450                   | 450             |             |         |                       |                 | 3           | 460     | 460                   |                 |     |
| 3NE3336          | 630                 | 1000                   | 2    | 1.0  | 2 x 185                         |                                      |                       |                 |             | 3                   | 500                   | 500             |             |         |                       |                 | 3           | 500     | 500                   |                 |     |
| 3NE3337-8        | 710                 | 900                    | 2    | 1.0  | 2 x (40 x 5)                    |                                      |                       |                 |             | 3                   | 510                   | 510             |             |         |                       |                 | 3           | 500     | 500                   |                 |     |
| 3NE3338-8        | 800                 | 800                    | 2    | 0.95 | 2 x 240                         |                                      |                       |                 | 3           | 520                 | 520                   |                 |             |         | 3                     | 500             | 475         |         |                       |                 |     |
| 3NE3340-8        | 900                 | 690                    | 2    | 0.95 | 2 x (40 x 8)                    |                                      |                       |                 | 3           | 530                 | 530                   |                 |             |         | 3                     | 500             | 475         |         |                       |                 |     |
| 3NE4101          | 32                  | 1000                   | 0    | 0.9  | 6                               |                                      |                       |                 | 3NP4276     | 1                   | 32                    | 29              |             |         |                       | 3NP1143         | 1           | 32      | 29                    |                 |     |
| 3NE4102          | 40                  | 1000                   | 0    | 0.9  | 10                              |                                      |                       |                 |             | 1                   | 38                    | 34              |             |         |                       |                 | 1           | 40      | 36                    |                 |     |
| 3NE4117          | 50                  | 1000                   | 0    | 0.9  | 10                              |                                      |                       |                 |             | 1                   | 45                    | 41              |             |         |                       |                 | 1           | 50      | 45                    |                 |     |
| 3NE4118          | 63                  | 1000                   | 0    | 0.9  | 16                              |                                      |                       |                 |             | 1                   | 59                    | 53              |             |         |                       |                 | 1           | 60      | 54                    |                 |     |
| 3NE4120          | 80                  | 1000                   | 0    | 0.9  | 25                              |                                      |                       |                 |             | 1                   | 76                    | 68              |             |         |                       |                 | 1           | 76      | 68                    |                 |     |
| 3NE4121          | 100                 | 1000                   | 0    | 0.9  | 35                              |                                      |                       |                 |             | 1                   | 90                    | 81              |             |         |                       |                 | 1           | 93      | 84                    |                 |     |
| 3NE4122          | 125                 | 1000                   | 0    | 0.9  | 50                              |                                      |                       |                 | 1           | 115                 | 104                   |                 |             |         | 1                     | 115             | 104         |         |                       |                 |     |
| 3NE4124          | 160                 | 1000                   | 0    | 0.9  | 70                              |                                      |                       |                 | 1           | 144                 | 130                   |                 |             |         | 1                     | 144             | 130         |         |                       |                 |     |
| 3NE4327-0B       | 250                 | 800                    | 2    | 0.85 | 150                             |                                      |                       |                 | 3NP4476     | 3                   | 235                   | 210             |             |         |                       | 3NP1163         | 3           | 220     | 187                   |                 |     |
| 3NE4330-0B       | 315                 | 800                    | 2    | 0.85 | 240                             |                                      |                       |                 |             | 3                   | 280                   | 260             |             |         |                       |                 | 3           | 255     | 217                   |                 |     |
| 3NE4333-0B       | 450                 | 800                    | 2    | 0.85 | 2 x (30 x 5)                    |                                      |                       |                 |             | 3                   | 390                   | 370             |             |         |                       |                 | 3           | 355     | 302                   |                 |     |
| 3NE4334-0B       | 500                 | 800                    | 2    | 0.85 | 2 x (30 x 5)                    |                                      |                       |                 |             | 3                   | 415                   | 400             |             |         |                       |                 | 3           | 390     | 332                   |                 |     |
| 3NE4337          | 710                 | 800                    | 2    | 0.95 | 2 x (50 x 5)                    |                                      |                       |                 |             | 3                   | 480                   | 480             |             |         |                       |                 | 3           | 500     | 475                   |                 |     |
| 3NE8015-1        | 25                  | 690                    | 00   | 0.95 | 4                               | 3NP4075/<br>3NP4076                  | 00                    | 25              | 24          |                     |                       |                 | 3NP1133     | 00      | 25                    | 24              |             |         |                       |                 |     |
| 3NE8003-1        | 35                  | 690                    | 00   | 0.95 | 6                               |                                      | 00                    | 33              | 31          |                     |                       |                 |             | 00      | 35                    | 33              |             |         |                       |                 |     |
| 3NE8017-1        | 50                  | 690                    | 00   | 0.90 | 10                              |                                      | 00                    | 45              | 41          |                     |                       |                 |             | 00      | 50                    | 45              |             |         |                       |                 |     |
| 3NE8018-1        | 63                  | 690                    | 00   | 0.95 | 16                              |                                      | 00                    | 53              | 50          |                     |                       |                 |             | 00      | 60                    | 57              |             |         |                       |                 |     |
| 3NE8020-1        | 80                  | 690                    | 00   | 0.95 | 25                              |                                      | 00                    | 68              | 65          |                     |                       |                 |             | 00      | 72                    | 68              |             |         |                       |                 |     |
| 3NE8021-1        | 100                 | 690                    | 00   | 0.95 | 35                              |                                      | 00                    | 85              | 81          |                     |                       |                 |             | 00      | 85                    | 81              |             |         |                       |                 |     |
| 3NE8022-1        | 125                 | 690                    | 00   | 0.95 | 50                              | 3NP4075/<br>3NP4076                  | 00                    | 100             | 95          |                     |                       |                 | 3NP1133     | 00      | 100                   | 95              |             |         |                       |                 |     |
| 3NE80s24-1       | 160                 | 690                    | 00   | 0.95 | 70                              |                                      | 00                    | 125             | 120         |                     |                       |                 |             | 00      | 115                   | 109             |             |         |                       |                 |     |

$U_n$  = Rated voltage

$I_n$  = Rated current

VL = Varying load factor

Ø<sub>min</sub> Cu = Required conductor cross-section Cu

$I_{max}$  = Maximum permissible current

$I_{VL}$  = Maximum permissible current with varying load

### Load rating of SITOR fuse links with 3KL/3KM LV HRC fuse switch disconnectors

| SITOR fuse links                                     |                             |                            |      |                              | Ø min Cu                                                     | 3KL/3KM switch disconnectors with fuses |                  |                          |                          |             |                  |                          |                          | 3KM... busbar devices |                |                  |                  |             |                |                  |                  |
|------------------------------------------------------|-----------------------------|----------------------------|------|------------------------------|--------------------------------------------------------------|-----------------------------------------|------------------|--------------------------|--------------------------|-------------|------------------|--------------------------|--------------------------|-----------------------|----------------|------------------|------------------|-------------|----------------|------------------|------------------|
| Article No.                                          | $I_n$<br>A                  | $U_n$<br>V AC              | Size | VL                           | mm <sup>2</sup>                                              | Article No.                             | Size             | $I_{max}$<br>A           | $I_{VL}$                 | Article No. | Size             | $I_{max}$<br>A           | $I_{VL}$                 | Article No.           | Size           | $I_{max}$<br>A   | $I_{VL}$         | Article No. | Size           | $I_{max}$<br>A   | $I_{VL}$         |
| 3NC2423-0C/<br>3NC2423-3C                            | 150                         | 500                        | 3    | 0.85                         | 70                                                           | 3KL61                                   | 3                | 145                      | 123                      | 3KL62       | 3                | 150                      | 128                      |                       |                |                  |                  |             |                |                  |                  |
| 3NC2425-0C/<br>3NC2425-3C                            | 200                         | 500                        | 3    | 0.85                         | 95                                                           |                                         | 3                | 180                      | 153                      |             | 3                | 190                      | 162                      |                       |                |                  |                  |             |                |                  |                  |
| 3NC2427-0C/<br>3NC2427-3C                            | 250                         | 500                        | 3    | 0.85                         | 120                                                          |                                         | 3                | 225                      | 191                      |             | 3                | 240                      | 204                      |                       |                |                  |                  |             |                |                  |                  |
| 3NC2428-0C/<br>3NC2428-3C                            | 300                         | 500                        | 3    | 0.85                         | 185                                                          |                                         | 3                | 255                      | 217                      |             | 3                | 270                      | 230                      |                       |                |                  |                  |             |                |                  |                  |
| 3NC2431-0C/<br>3NC2431-3C                            | 350                         | 500                        | 3    | 0.85                         | 240                                                          |                                         | 3                | 330                      | 281                      |             | 3                | 345                      | 293                      |                       |                |                  |                  |             |                |                  |                  |
| 3NC2432-0C/<br>3NC2432-3C                            | 400                         | 500                        | 3    | 0.85                         | 240                                                          |                                         | 3                | 400                      | 340                      |             | 3                | 400                      | 340                      |                       |                |                  |                  |             |                |                  |                  |
| 3NC3336-1U<br>3NC3337-1U<br>3NC3338-1U               | 630<br>710<br>800           | 1000<br>1000<br>1000       | 3    | 0.85<br>0.85<br>0.85         | 2 x (40 x 5)<br>2 x (50 x 5)<br>2 x (40 x 8)                 | 3KL62                                   | 3<br>3<br>3      | 500<br>540<br>600        | 425<br>459<br>510        | 3KL61       | 3<br>3<br>3      | 480<br>540<br>600        | 408<br>459<br>510        |                       |                |                  |                  |             |                |                  |                  |
| 3NC3340-1U<br>3NC3341-1U<br>3NC3342-1U<br>3NC3343-1U | 900<br>1000<br>1100<br>1250 | 1000<br>1000<br>800<br>800 | 3    | 0.90<br>0.90<br>0.90<br>0.90 | 2 x (40 x 8)<br>2 x (50 x 8)<br>2 x (50 x 8)<br>2 x (50 x 8) |                                         | 3<br>3<br>3<br>3 | 650<br>720<br>800<br>800 | 585<br>648<br>720<br>720 |             | 3<br>3<br>3<br>3 | 480<br>540<br>600<br>600 | 408<br>459<br>510<br>510 |                       |                |                  |                  |             |                |                  |                  |
| 3NC3430-1U<br>3NC3432-1U                             | 315<br>400                  | 1250<br>1250               | 3    | 0.95<br>0.95                 | 2 x 95<br>2 x 120                                            | 3KL61                                   | 3<br>3           | 285<br>365               | 271<br>347               | 3KL62       | 3<br>3           | 300<br>380               | 285<br>361               |                       |                |                  |                  |             |                |                  |                  |
| 3NC3434-1U<br>3NC3436-1U<br>3NC3438-1U               | 500<br>630<br>800           | 1250<br>1250<br>1100       | 3    | 0.90<br>0.95<br>0.90         | 2 x 150<br>2 x (40 x 5)<br>2 x (40 x 8)                      |                                         | 3<br>3<br>3      | 425<br>500<br>650        | 383<br>475<br>618        |             | 3<br>3<br>3      | 450<br>540<br>618        | 405<br>513<br>618        |                       |                |                  |                  |             |                |                  |                  |
| 3NC8423-0C/<br>3NC8423-3C                            | 150                         | 690                        | 3    | 0.85                         | 70                                                           |                                         | 3                | 135                      | 115                      |             | 3                | 140                      | 119                      |                       |                |                  |                  |             |                |                  |                  |
| 3NC8425-0C/<br>3NC8425-3C                            | 200                         | 690                        | 3    | 0.85                         | 95                                                           |                                         | 3                | 180                      | 153                      |             | 3                | 190                      | 162                      |                       |                |                  |                  |             |                |                  |                  |
| 3NC8427-0C/<br>3NC8427-3C                            | 250                         | 690                        | 3    | 0.85                         | 120                                                          |                                         | 3                | 225                      | 191                      |             | 3                | 240                      | 204                      |                       |                |                  |                  |             |                |                  |                  |
| 3NC8431-0C/<br>3NC8431-3C                            | 350                         | 690                        | 3    | 0.85                         | 240                                                          |                                         | 3                | 300                      | 255                      |             | 3                | 315                      | 268                      |                       |                |                  |                  |             |                |                  |                  |
| 3NC8434-0C/<br>3NC8434-3C                            | 500                         | 690                        | 3    | 0.85                         | 2 x 150                                                      |                                         | 3                | 425                      | 361                      |             | 3                | 450                      | 383                      |                       |                |                  |                  |             |                |                  |                  |
| 3NC8444-3C                                           | 1000                        | 600                        | 3    | 0.95                         | 2 x (60 x 6)                                                 | 3KL62                                   | 3                | 800                      | 760                      | 3KL61       | 3                | 630                      | 630                      |                       |                |                  |                  |             |                |                  |                  |
| 3NE1020-2<br>3NE1021-0<br>3NE1021-2                  | 80<br>100<br>100            | 690<br>690<br>690          | 00   | 1.0                          | 25<br>35<br>35                                               | 3KL52                                   | 00<br>00<br>00   | 80<br>100<br>100         | 80<br>100<br>100         | 3KL53       | 00<br>00<br>00   | 80<br>100<br>100         | 80<br>100<br>100         | 3KM52                 | 00<br>00<br>00 | 80<br>100<br>100 | 80<br>100<br>100 | 3KM53       | 00<br>00<br>00 | 80<br>100<br>100 | 80<br>100<br>100 |
| 3NE1022-0<br>3NE1022-2                               | 125<br>125                  | 690<br>690                 | 00   | 1.0                          | 50<br>50                                                     |                                         | 00<br>00         | 125<br>125               | 125<br>125               |             | 00<br>00         | 125<br>125               | 125<br>125               |                       | 00<br>00       | 125<br>125       | 125<br>125       |             | 00<br>00       | 100<br>125       | 100<br>125       |
| 3NE1224-0<br>3NE1224-2/3                             | 160<br>160                  | 690<br>690                 | 1    | 1.0                          | 70<br>70                                                     |                                         | 1<br>1           | 160<br>160               | 160<br>160               |             | 2<br>2           | 160<br>160               | 160<br>160               |                       | 1<br>1         | 160<br>160       | 160<br>160       |             | 00<br>2        | 125<br>160       | 125<br>160       |
| 3NE1225-0<br>3NE1225-2/3                             | 200<br>200                  | 690<br>690                 | 1    | 1.0                          | 95<br>95                                                     |                                         | 1<br>1           | 200<br>200               | 200<br>200               |             | 2<br>2           | 200<br>200               | 200<br>200               |                       | 1<br>1         | 200<br>200       | 200<br>200       |             | 2<br>2         | 160<br>200       | 160<br>200       |
| 3NE1227-0<br>3NE1227-2/3                             | 250<br>250                  | 690<br>690                 | 1    | 1.0                          | 120<br>120                                                   |                                         | 1<br>1           | 250<br>245               | 250<br>245               |             | 2<br>2           | 250<br>250               | 250<br>250               |                       | 1<br>1         | 250<br>245       | 250<br>245       |             | 2<br>2         | 200<br>250       | 200<br>250       |
| 3NE1230-0<br>3NE1230-2/3                             | 315<br>315                  | 690<br>690                 | 1    | 1.0                          | 2 x 70<br>2 x 70                                             | 3KL57                                   | 2<br>2           | 315<br>280               | 315<br>280               | 3KL57       | 2<br>2           | 315<br>280               | 315<br>280               | 3KM57                 | 2<br>2         | 315<br>280       | 315<br>280       |             | 2<br>2         | 250<br>250       | 250<br>250       |
| 3NE1331-0<br>3NE1331-2/3                             | 350<br>350                  | 690<br>690                 | 2    | 1.0                          | 2 x 95<br>2 x 95                                             |                                         | 2<br>2           | 330<br>300               | 330<br>300               |             | 3<br>3           | 350<br>350               | 350<br>350               |                       | 2<br>2         | 330<br>300       | 330<br>300       |             |                |                  |                  |
| 3NE1332-0<br>3NE1332-2/3                             | 400<br>400                  | 690<br>690                 | 2    | 1.0                          | 2 x 95<br>2 x 95                                             |                                         | 2<br>2           | 375<br>340               | 375<br>340               |             | 3<br>3           | 400<br>400               | 400<br>400               |                       | 2<br>2         | 375<br>315       | 375<br>315       |             |                |                  |                  |
| 3NE1333-0<br>3NE1333-2/3                             | 450<br>450                  | 690<br>690                 | 2    | 1.0                          | 2 x 120<br>2 x 120                                           |                                         | 3<br>3           | 450<br>450               | 450<br>450               |             | 3<br>3           | 450<br>450               | 450<br>500               |                       | 2<br>2         | 400<br>325       | 400<br>325       |             |                |                  |                  |
| 3NE1334-0<br>3NE1334-2/3                             | 500<br>500                  | 690<br>690                 | 2    | 1.0                          | 2 x 120<br>2 x 120                                           |                                         | 3<br>3           | 500<br>500               | 500<br>500               |             | 3<br>3           | 500<br>500               | 500<br>500               |                       | 2<br>2         | 400<br>350       | 400<br>350       |             |                |                  |                  |
| 3NE1435-0<br>3NE1435-2/3                             | 560<br>560                  | 690<br>690                 | 3    | 1.0                          | 2 x 150<br>2 x 150                                           | 3KL61                                   | 3<br>3           | 560<br>560               | 560<br>560               | 3KL62       | 3<br>3           | 560<br>560               | 560<br>560               |                       |                |                  |                  |             |                |                  |                  |
| 3NE1436-0<br>3NE1436-2/3                             | 630<br>630                  | 690<br>690                 | 3    | 1.0                          | 2 x 185<br>2 x 185                                           |                                         | 3<br>3           | 630<br>615               | 630<br>615               |             | 3<br>3           | 630<br>630               | 630<br>630               |                       |                |                  |                  |             |                |                  |                  |
| 3NE1437-0<br>3NE1437-1<br>3NE1437-2/3                | 710<br>710<br>710           | 690<br>600<br>690          | 3    | 1.0                          | 2 x (40 x 5)<br>2 x (40 x 5)<br>2 x (40 x 5)                 |                                         | 3<br>3<br>3      | 630<br>630<br>630        | 630<br>630<br>630        |             | 3<br>3<br>3      | 710<br>710<br>700        | 710<br>710<br>700        |                       |                |                  |                  |             |                |                  |                  |
| 3NE1438-0<br>3NE1438-1<br>3NE1438-2/3                | 800<br>800<br>800           | 690<br>600<br>690          | 3    | 1.0                          | 2 x (50 x 5)<br>2 x (50 x 5)<br>2 x (50 x 5)                 |                                         | 3<br>3<br>3      | 630<br>630<br>630        | 630<br>630<br>630        |             | 3<br>3<br>3      | 800<br>800<br>760        | 800<br>800<br>760        |                       |                |                  |                  |             |                |                  |                  |
| 3NE1447-2/3<br>3NE1448-2/3                           | 670<br>850                  | 690<br>690                 | 3    | 1.0                          | 2 x (40 x 5)<br>2 x (40 x 8)                                 |                                         | 3<br>3           | 630<br>630               | 630<br>630               |             | 3<br>3           | 670<br>790               | 670<br>790               |                       |                |                  |                  |             |                |                  |                  |

## Fuse Systems

### SITOR Semiconductor Fuses

#### LV HRC design

| SITOR fuse links  |            |               |      |      | Ø min Cu        | 3KL/3KM switch disconnectors with fuses |      |                |          |              |      |                |          | 3KM... busbar devices |      |                |          |              |      |                |          |
|-------------------|------------|---------------|------|------|-----------------|-----------------------------------------|------|----------------|----------|--------------|------|----------------|----------|-----------------------|------|----------------|----------|--------------|------|----------------|----------|
| Article No.       | $I_n$<br>A | $U_n$<br>V AC | Size | VL   | mm <sup>2</sup> | 3KL... add-on devices                   |      |                |          |              |      |                |          |                       |      |                |          |              |      |                |          |
|                   |            |               |      |      |                 | Article No.                             | Size | $I_{max}$<br>A | $I_{VL}$ | Article No.  | Size | $I_{max}$<br>A | $I_{VL}$ | Article No.           | Size | $I_{max}$<br>A | $I_{VL}$ | Article No.  | Size | $I_{max}$<br>A | $I_{VL}$ |
| <b>3NE1802-0</b>  | 40         | 690           | 000  | 1.0  | 10              | <b>3KL50</b>                            | 00   | 40             | 40       | <b>3KL52</b> | 00   | 40             | 40       | <b>3KM50</b>          | 00   | 40             | 40       | <b>3KM52</b> | 00   | 40             | 40       |
| <b>3NE1803-0</b>  | 35         | 690           | 000  | 1.0  | 6               |                                         | 00   | 35             | 35       |              | 00   | 35             | 35       |                       | 00   | 35             | 35       |              | 00   | 35             | 35       |
| <b>3NE1813-0</b>  | 16         | 690           | 000  | 1.0  | 1.5             |                                         | 00   | 16             | 16       |              | 00   | 16             | 16       |                       | 00   | 16             | 16       |              | 00   | 35             | 35       |
| <b>3NE1814-0</b>  | 20         | 690           | 000  | 1.0  | 2.5             |                                         | 00   | 20             | 20       |              | 00   | 20             | 20       |                       | 00   | 20             | 20       |              | 00   | 16             | 16       |
| <b>3NE1815-0</b>  | 25         | 690           | 000  | 1.0  | 4               |                                         | 00   | 25             | 25       |              | 00   | 25             | 25       |                       | 00   | 25             | 25       |              | 00   | 20             | 20       |
| <b>3NE1817-0</b>  | 50         | 690           | 000  | 1.0  | 10              |                                         | 00   | 50             | 50       |              | 00   | 50             | 50       |                       | 00   | 50             | 50       |              | 00   | 25             | 25       |
| <b>3NE1818-0</b>  | 63         | 690           | 000  | 1.0  | 16              | <b>3KL52</b>                            | 00   | 63             | 63       |              | 00   | 63             | 63       | <b>3KM52</b>          | 00   | 63             | 63       |              | 00   | 50             | 50       |
| <b>3NE1820-0</b>  | 80         | 690           | 000  | 1.0  | 25              |                                         | 00   | 80             | 80       |              | 00   | 80             | 80       |                       | 00   | 80             | 80       |              | 00   | 63             | 63       |
| <b>3NE3221</b>    | 100        | 1000          | 1    | 0.95 | 35              | <b>3KL55</b>                            | 1    | 90             | 86       | <b>3KL57</b> | 2    | 95             | 90       | <b>3KM55</b>          | 1    | 90             | 86       | <b>3KM57</b> | 2    | 95             | 90       |
| <b>3NE3222</b>    | 125        | 1000          | 1    | 0.95 | 50              |                                         | 1    | 110            | 105      |              | 2    | 115            | 109      |                       | 1    | 110            | 105      |              | 2    | 115            | 109      |
| <b>3NE3224</b>    | 160        | 1000          | 1    | 1.0  | 70              |                                         | 1    | 140            | 140      |              | 2    | 150            | 150      |                       | 1    | 140            | 140      |              | 2    | 115            | 109      |
| <b>3NE3225</b>    | 200        | 1000          | 1    | 1.0  | 95              |                                         | 1    | 175            | 175      |              | 2    | 180            | 180      |                       | 1    | 175            | 175      |              | 2    | 150            | 150      |
| <b>3NE3227</b>    | 250        | 1000          | 1    | 1.0  | 120             |                                         | 1    | 210            | 210      |              | 2    | 220            | 220      |                       | 1    | 210            | 210      |              | 2    | 180            | 180      |
| <b>3NE3230-0B</b> | 315        | 1000          | 1    | 0.95 | 185             |                                         |      |                |          |              | 2    | 240            | 228      |                       |      |                |          |              | 2    | 220            | 220      |
| <b>3NE3231</b>    | 350        | 1000          | 1    | 0.95 | 240             |                                         |      |                |          |              | 2    | 265            | 252      |                       |      |                |          |              | 2    | 240            | 228      |
| <b>3NE3232-0B</b> | 400        | 1000          | 1    | 0.90 | 240             |                                         |      |                |          |              | 2    | 290            | 261      |                       |      |                |          |              | 2    | 265            | 252      |
| <b>3NE3233</b>    | 450        | 1000          | 1    | 0.90 | 2 x 150         |                                         |      |                |          |              | 2    | 320            | 288      |                       |      |                |          |              | 2    | 290            | 261      |
| <b>3NE3332-0B</b> | 400        | 1000          | 2    | 1.0  | 240             | <b>3KL61</b>                            | 3    | 340            | 340      | <b>3KL62</b> | 3    | 360            | 360      | <b>3KM57</b>          | 2    | 290            | 290      | <b>3KM57</b> | 2    | 320            | 288      |
| <b>3NE3333</b>    | 450        | 1000          | 2    | 1.0  | 2 x 150         |                                         | 3    | 380            | 380      |              | 3    | 400            | 400      |                       | 2    | 320            | 320      |              |      |                |          |
| <b>3NE3334-0B</b> | 500        | 1000          | 2    | 1.0  | 2 x 150         |                                         | 3    | 440            | 440      |              | 3    | 470            | 470      |                       | 2    | 360            | 360      |              |      |                |          |
| <b>3NE3335</b>    | 560        | 1000          | 2    | 1.0  | 2 x 185         |                                         | 3    | 500            | 500      |              | 3    | 530            | 530      |                       | 2    | 400            | 400      |              |      |                |          |
| <b>3NE3336</b>    | 630        | 1000          | 2    | 1.0  | 2 x 185         |                                         | 3    | 540            | 540      |              | 3    | 580            | 580      |                       | 2    | 400            | 400      |              |      |                |          |
| <b>3NE3337-8</b>  | 710        | 900           | 2    | 1.0  | 2 x (40 x 5)    |                                         | 3    | 600            | 600      |              | 3    | 640            | 640      |                       | 2    | 400            | 400      |              |      |                |          |
| <b>3NE3338-8</b>  | 800        | 800           | 2    | 0.95 | 2 x 240         |                                         | 3    | 630            | 630      |              | 3    | 720            | 680      |                       | 2    | 400            | 400      |              |      |                |          |
| <b>3NE3340-8</b>  | 900        | 690           | 2    | 0.95 | 2 x (40 x 8)    |                                         | 3    | 630            | 630      |              | 3    | 800            | 750      |                       | 2    | 400            | 400      |              |      |                |          |
| <b>3NE4101</b>    | 32         | 1000          | 0    | 0.9  | 6               |                                         |      |                |          | <b>3KL55</b> | 1    | 32             | 29       | <b>3KM55</b>          | 1    | 32             | 29       |              |      |                |          |
| <b>3NE4102</b>    | 40         | 1000          | 0    | 0.9  | 10              |                                         |      |                |          |              | 1    | 40             | 36       |                       | 1    | 40             | 36       |              |      |                |          |
| <b>3NE4117</b>    | 50         | 1000          | 0    | 0.9  | 10              |                                         |      |                |          |              | 1    | 50             | 45       |                       | 1    | 50             | 45       |              |      |                |          |
| <b>3NE4118</b>    | 63         | 1000          | 0    | 0.9  | 16              |                                         |      |                |          |              | 1    | 63             | 57       |                       | 1    | 63             | 57       |              |      |                |          |
| <b>3NE4120</b>    | 80         | 1000          | 0    | 0.9  | 25              |                                         |      |                |          |              | 1    | 80             | 72       |                       | 1    | 80             | 72       |              |      |                |          |
| <b>3NE4121</b>    | 100        | 1000          | 0    | 0.9  | 35              |                                         |      |                |          |              | 1    | 95             | 86       |                       | 1    | 95             | 86       |              |      |                |          |
| <b>3NE4122</b>    | 125        | 1000          | 0    | 0.9  | 50              |                                         |      |                |          |              | 1    | 120            | 108      |                       | 1    | 120            | 108      |              |      |                |          |
| <b>3NE4124</b>    | 160        | 1000          | 0    | 0.9  | 70              |                                         |      |                |          |              | 1    | 150            | 135      |                       | 1    | 150            | 135      |              |      |                |          |
| <b>3NE4327-0B</b> | 250        | 800           | 2    | 0.85 | 150             | <b>3KL57</b>                            | 2    | 175            | 149      | <b>3KL61</b> | 3    | 200            | 170      | <b>3KM57</b>          | 2    | 175            | 149      |              |      |                |          |
| <b>3NE4330-0B</b> | 315        | 800           | 2    | 0.85 | 240             |                                         | 2    | 230            | 196      |              | 3    | 260            | 221      |                       | 2    | 230            | 196      |              |      |                |          |
| <b>3NE4333-0B</b> | 450        | 800           | 2    | 0.85 | 2 x (30 x 5)    |                                         | 2    | 340            | 289      |              | 3    | 370            | 315      |                       | 2    | 340            | 289      |              |      |                |          |
| <b>3NE4334-0B</b> | 500        | 800           | 2    | 0.85 | 2 x (30 x 5)    | <b>3KL61</b>                            | 3    | 425            | 361      | <b>3KL62</b> | 3    | 450            | 375      |                       | 2    | 380            | 323      |              |      |                |          |
| <b>3NE4337</b>    | 710        | 800           | 2    | 0.95 | 2 x (50 x 5)    |                                         | 3    | 600            | 570      |              | 3    | 630            | 600      |                       | 2    | 400            | 400      |              |      |                |          |
| <b>3NE8015-1</b>  | 25         | 690           | 00   | 0.95 | 4               | <b>3KL50</b>                            | 00   | 25             | 24       | <b>3KL52</b> | 00   | 25             | 24       | <b>3KM50</b>          | 00   | 25             | 24       | <b>3KM52</b> | 00   | 25             | 24       |
| <b>3NE8003-1</b>  | 35         | 690           | 00   | 0.95 | 6               |                                         | 00   | 33             | 31       |              | 00   | 35             | 33       |                       | 00   | 33             | 31       |              | 00   | 35             | 33       |
| <b>3NE8017-1</b>  | 50         | 690           | 00   | 0.90 | 10              |                                         | 00   | 45             | 41       |              | 00   | 50             | 45       |                       | 00   | 45             | 41       |              | 00   | 35             | 33       |
| <b>3NE8018-1</b>  | 63         | 690           | 00   | 0.95 | 16              |                                         | 00   | 54             | 51       |              | 00   | 60             | 57       |                       | 00   | 54             | 51       |              | 00   | 50             | 45       |
| <b>3NE8020-1</b>  | 80         | 690           | 00   | 0.95 | 25              | <b>3KL52</b>                            | 00   | 68             | 65       | <b>3KL53</b> | 00   | 68             | 65       | <b>3KM52</b>          | 00   | 68             | 65       |              | 00   | 60             | 57       |
| <b>3NE8021-1</b>  | 100        | 690           | 00   | 0.95 | 35              | <b>3KL52</b>                            | 00   | 89             | 85       | <b>3KL53</b> | 00   | 89             | 85       | <b>3KM52</b>          | 00   | 89             | 85       | <b>3KM53</b> | 00   | 68             | 65       |
| <b>3NE8022-1</b>  | 125        | 690           | 00   | 0.95 | 50              |                                         | 00   | 106            | 101      |              | 00   | 106            | 101      |                       | 00   | 106            | 101      |              | 00   | 89             | 85       |
| <b>3NE8024-1</b>  | 160        | 690           | 00   | 0.95 | 70              |                                         | 00   | 130            | 124      |              | 00   | 130            | 124      |                       | 00   | 130            | 124      |              | 00   | 106            | 101      |

$U_n$  = Rated voltage


$I_n$  = Rated current

VL = Varying load factor


Ø<sub>min</sub> Cu = Required conductor cross-section Cu

$I_{max}$  = Maximum permissible current


$I_{VL}$  = Maximum permissible current with varying load

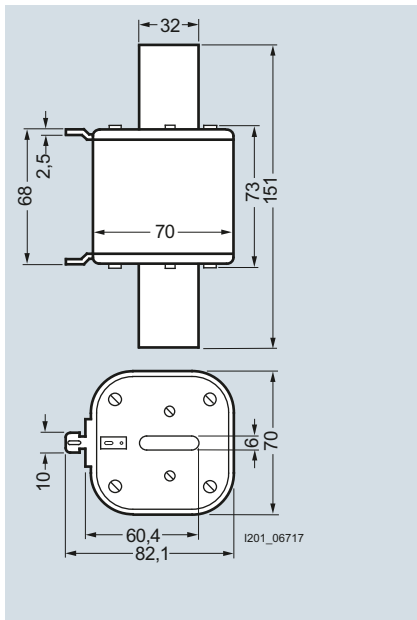**Dimensional drawings**


3NE143.-0, 3NE143.-1

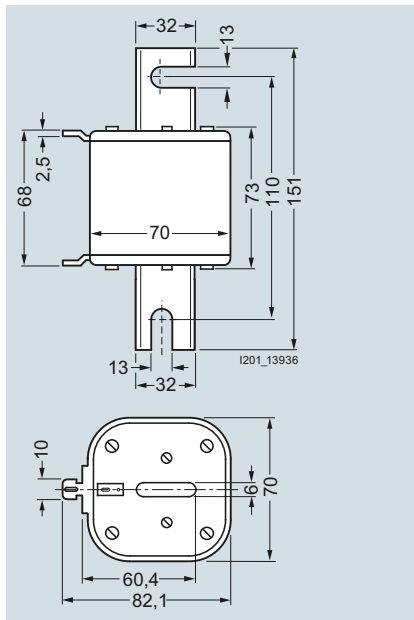


3NE14...-3

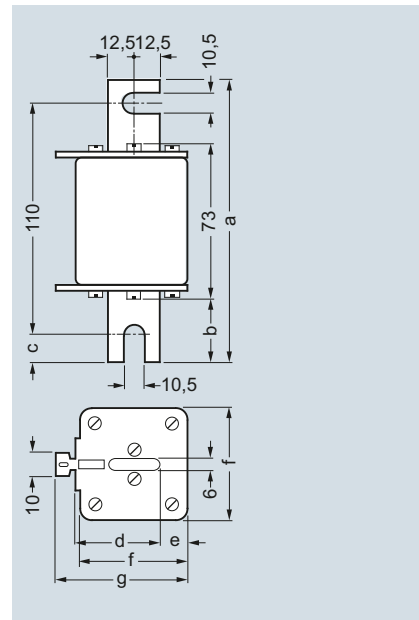


3NE12...-3, 3NE13...-3

| Type       | Dimensions (mm) |    |      |      |      |    |      |
|------------|-----------------|----|------|------|------|----|------|
|            | a               | b  | c    | d    | e    | f  | g    |
| 3NE12...-3 | 135             | 31 | 12.5 | 40.5 | 13.5 | 52 | 63.5 |
| 3NE13...-3 | 149             | 38 | 19.5 | 47.5 | 15   | 60 | 72   |

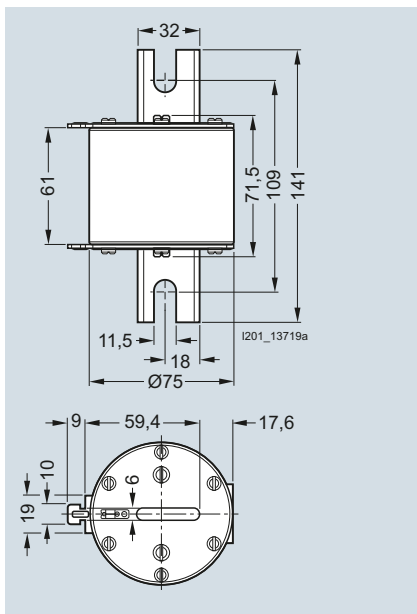

3NC24...-0C, 3NC84...-0C

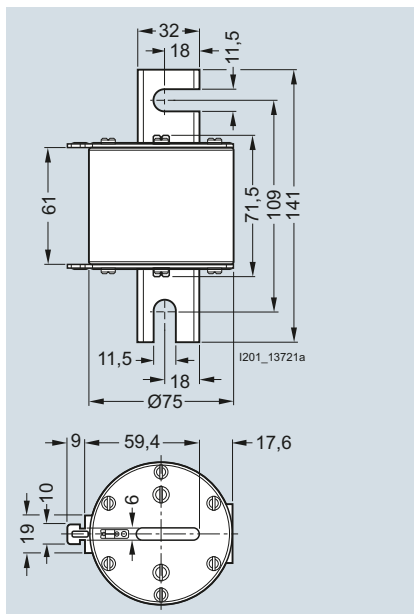


3NC24...-3C, 3NC84...-3C

## Fuse Systems


### SITOR Semiconductor Fuses

#### LV HRC design

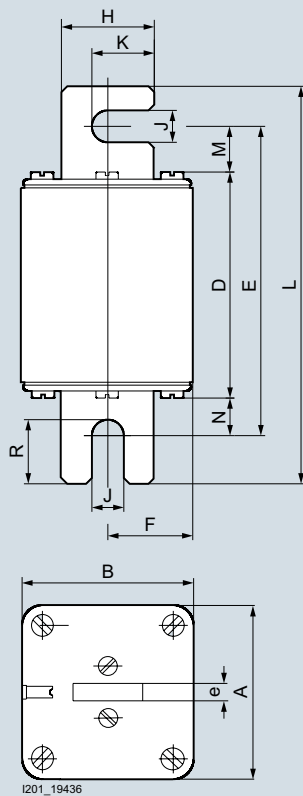


| Type           | Dimensions |    |      |       |    |    |    |      |     |      |      |      |   |  |
|----------------|------------|----|------|-------|----|----|----|------|-----|------|------|------|---|--|
|                | A          | B  | D    | E     | F  | H  | J  | K    | L   | M    | N    | R    | e |  |
| 3NE32...-0MK   | 52         | 52 | 78,4 | 106,6 | 26 | 25 | 11 | 18   | 137 | 15,7 | 12,5 | 22,3 | 6 |  |
| 3NE32...-0MK08 | 52         | 52 | 78,4 | 106,6 | 26 | 25 | 11 | 18   | 137 | 15,7 | 12,5 | 22,3 | 6 |  |
| 3NE53...-0MK06 | 60         | 60 | 137  | 165,5 | 30 | 32 | 11 | 21,5 | 196 | 15,8 | 12,8 | 22,1 | 6 |  |


3NE32...-0MK, 3NE323...-0MK08

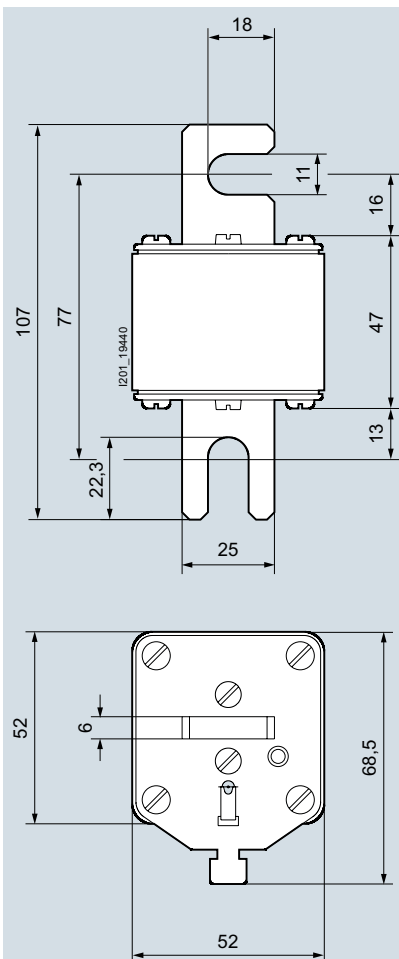


3NE82...-3MK:

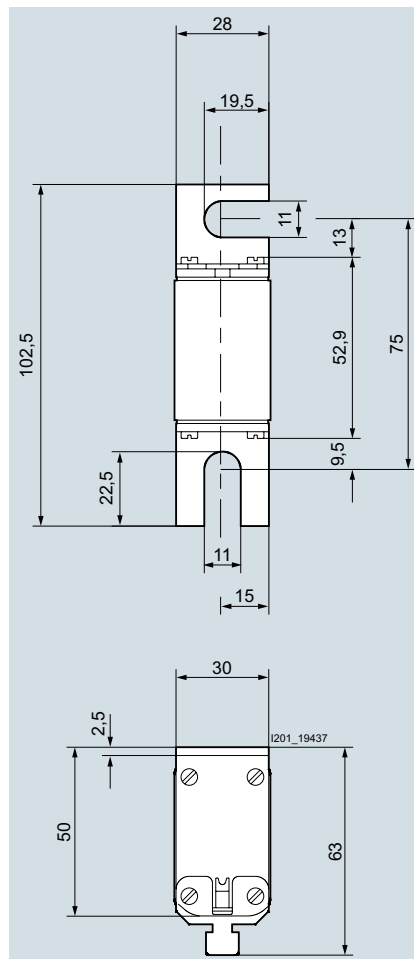


3NE80...-3MK:

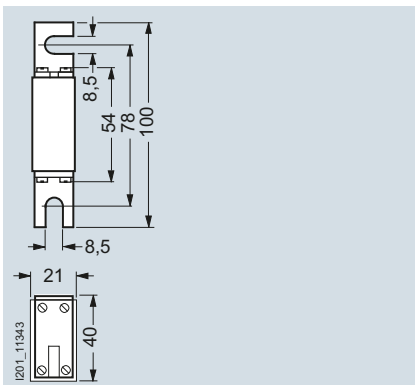

3NE87...-1

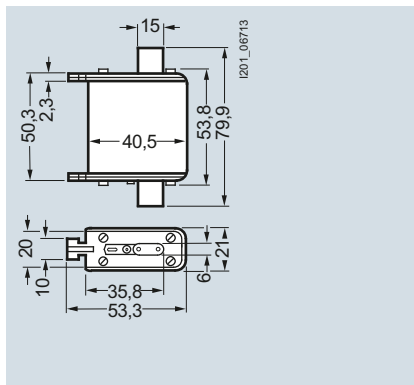

3NE18...-0

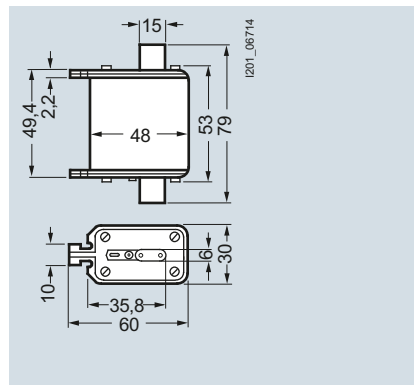


3NE102...-0, 3NE102...-2, 3NE80...-1


## Fuse Systems

### SITOR Semiconductor Fuses


#### LV HRC design

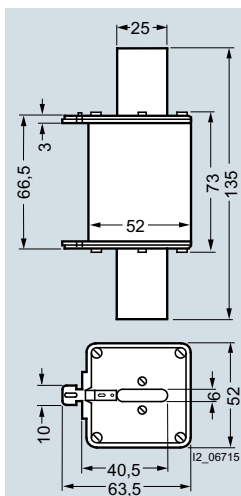


3NE12...-0, 3NE12...-2

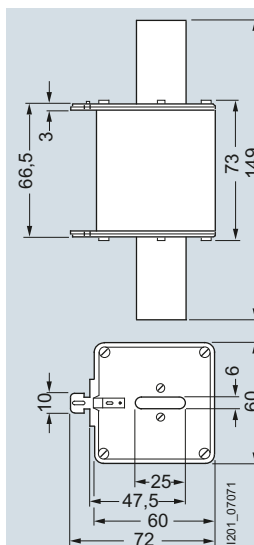

3NE133...-0, 3NE133...-2

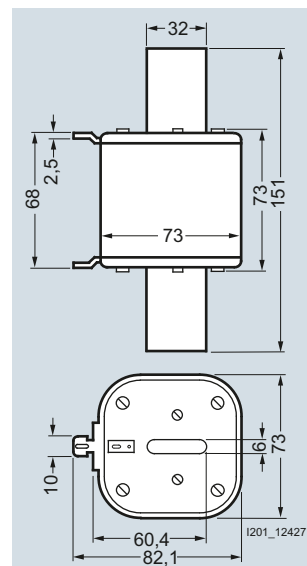


3NE14...-2

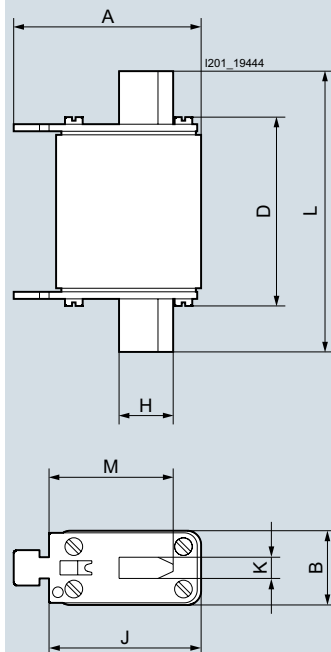


| Type         | Dimensions |    |      |    |    |   |    |      |
|--------------|------------|----|------|----|----|---|----|------|
|              | A          | B  | D    | H  | J  | K | M  | L    |
| 3NE88...-0MK | 53         | 21 | 51,5 | 15 | 43 | 6 | 35 | 78,5 |
| 3NE82...-0MK | 62,5       | 44 | 70,5 | 20 | 53 | 6 | 40 | 135  |
| 3NE83...-0MK | 68         | 50 | 70,5 | 25 | 61 | 6 | 48 | 150  |

3NE82...-0MK, 3NE83...-0MK, 3NE88...-0MK

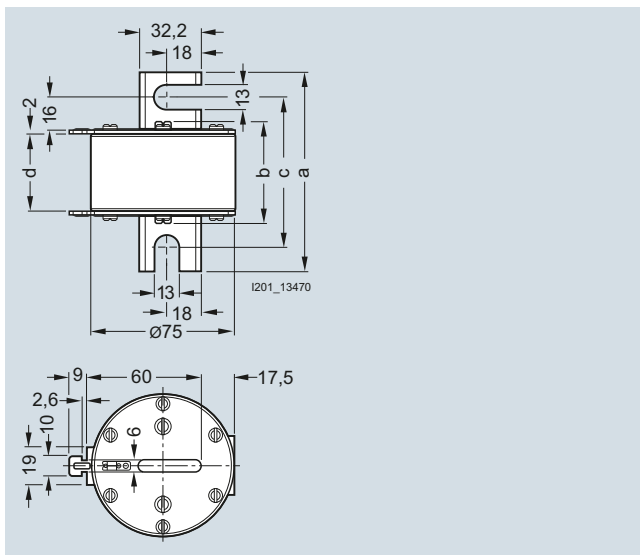


3NC32..-1U, 3NC33..-1U, 3NC34..-1U

| Type       | Dimensions (mm) |    |     |    |
|------------|-----------------|----|-----|----|
|            | a               | b  | c   | d  |
| 3NC32...1U | 102             | 51 | 78  | 40 |
| 3NC33...1U | 139             | 72 | 108 | 61 |
| 3NC34...1U | 139             | 72 | 108 | 61 |

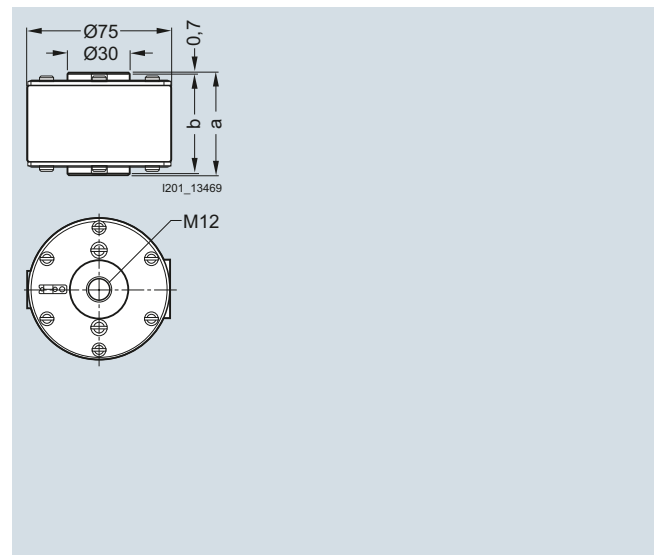


3NC32..-6U, 3NC33..-6U, 3NC34..-6U


| Type       | Dimensions (mm) |    |
|------------|-----------------|----|
|            | a               | b  |
| 3NC32...6U | 52              | 50 |
| 3NC33...6U | 73              | 71 |
| 3NC34...6U | 73              | 71 |

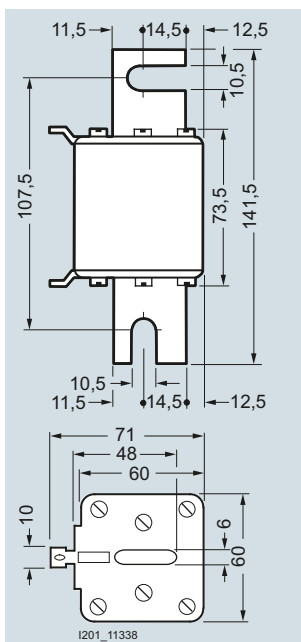

3NE43...-0B, 3NE4337

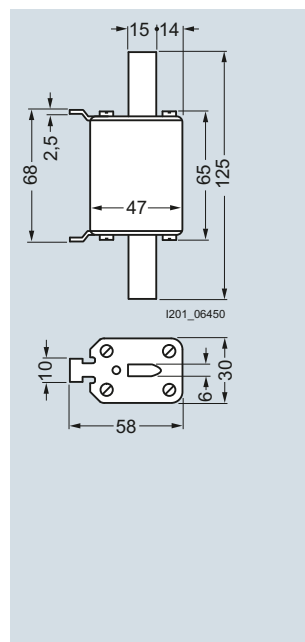

3NE41..

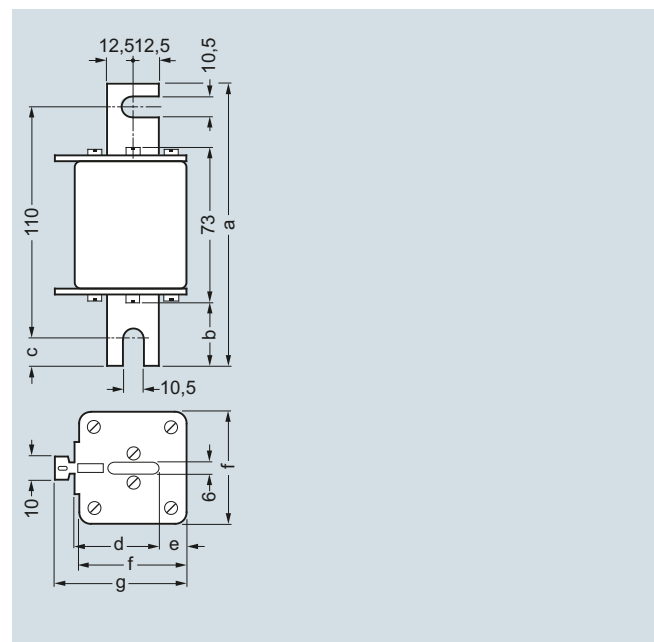


3NE322., 3NE323., 3NE33..

| Type    | Dimensions (mm) |    |      |      |      |    |      |
|---------|-----------------|----|------|------|------|----|------|
|         | a               | b  | c    | d    | e    | f  | g    |
| 3NE322. | 135             | 31 | 12.5 | 40.5 | 13.5 | 52 | 63.5 |
| 3NE323. | 135             | 31 | 12.5 | 40.5 | 13.5 | 52 | 63.5 |
| 3NE33.. | 149             | 38 | 19.5 | 47.5 | 15   | 60 | 72   |


## Fuse Systems

### SITOR Semiconductor Fuses

#### LV HRC design

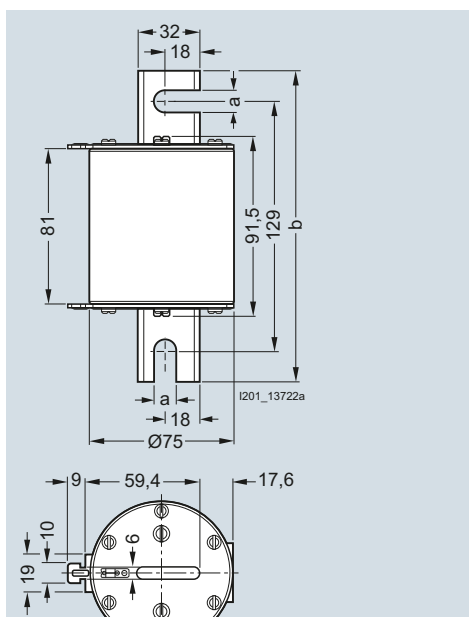


3NE3...-0C, 3NE36...-1C

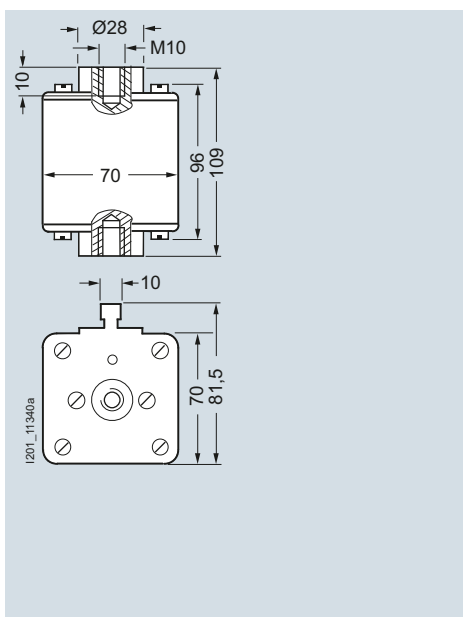


3NE3635-6

| Type        | Dimensions (mm) |     |
|-------------|-----------------|-----|
|             | a               | b   |
| 3NE3...-0C  | 11.5            | 161 |
| 3NE36...-1C | 13              | 171 |

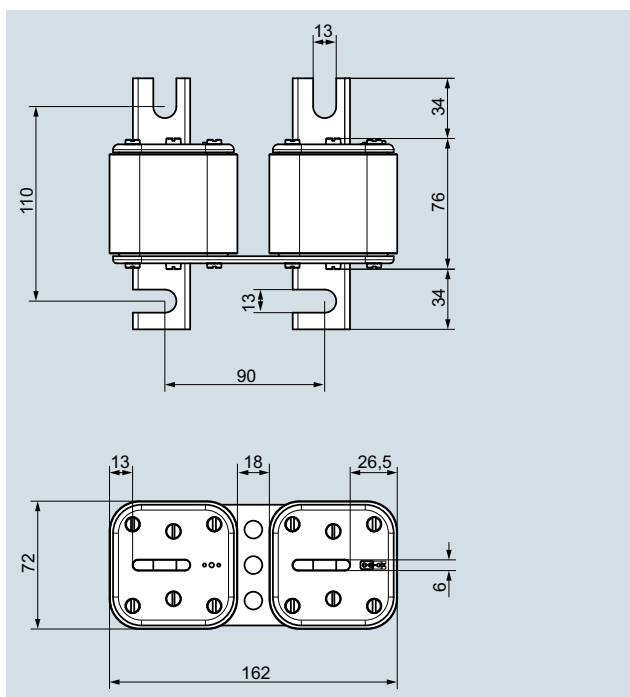


3NB335-1KK26

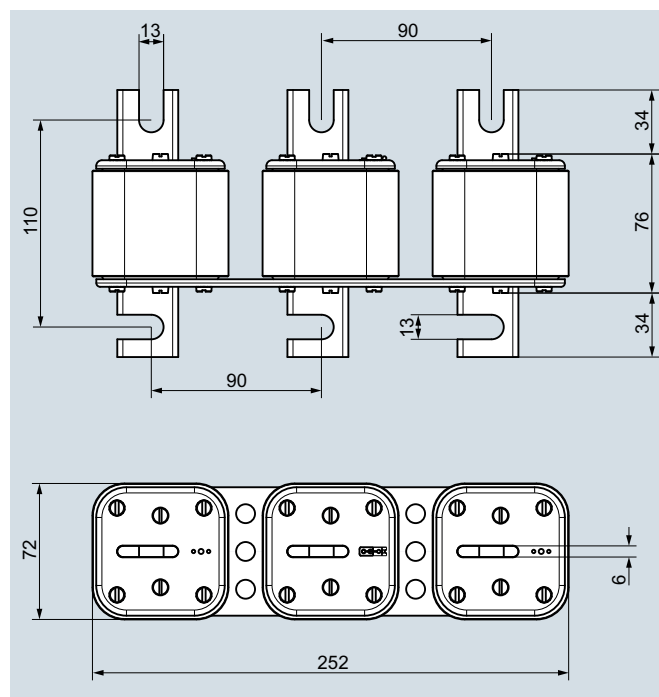

3NB3358-1KK27, 3NB3362-1KK27

| Type          | $I_n$<br>A | $U_n$<br>V AC | Operational class<br>Characteristic |
|---------------|------------|---------------|-------------------------------------|
| 3NB3350-1KK26 | 1000       | 690           | gR                                  |
| 3NB3351-1KK26 | 1100       | 690           | gR                                  |
| 3NB3352-1KK26 | 1250       | 690           | gR                                  |
| 3NB3354-1KK26 | 1350       | 690           | gR                                  |
| 3NB3355-1KK26 | 1400       | 690           | gR                                  |
| 3NB3357-1KK26 | 1600       | 690           | gR                                  |
| 3NB3358-1KK26 | 1700       | 690           | gR                                  |


| Type          | $I_n$<br>A | $U_n$<br>V AC | Operational class<br>Characteristic |
|---------------|------------|---------------|-------------------------------------|
| 3NB3358-1KK27 | 1700       | 690           | gR                                  |
| 3NB3362-1KK27 | 1900       | 690           | gR                                  |

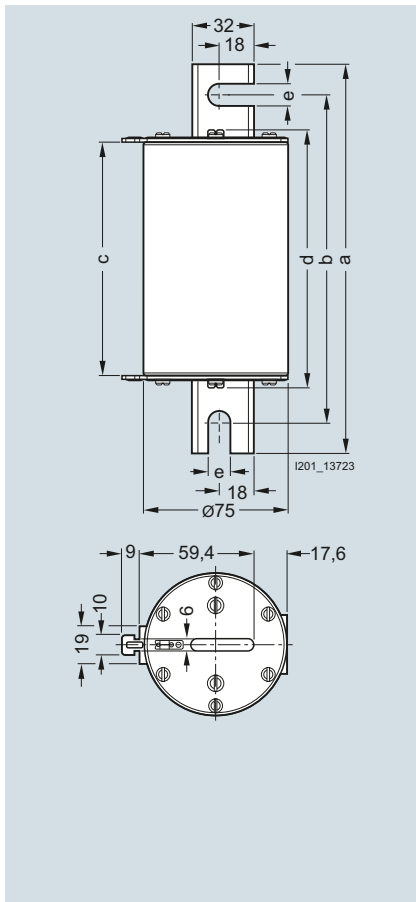

3NE56...-0C


| Type | Dimensions (mm) |   |   |   |   |
|------|-----------------|---|---|---|---|
|      | a               | b | c | d | e |

|             |     |     |     |       |      |
|-------------|-----|-----|-----|-------|------|
| 3NE56...-0C | 201 | 169 | 121 | 131.5 | 11.5 |
|-------------|-----|-----|-----|-------|------|

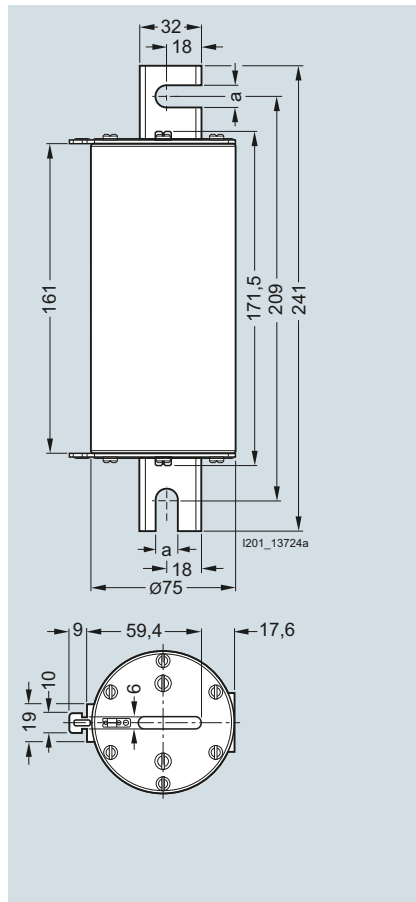3NE54...-0C, 3NE54...-1C;  
3NE7...-0U, 3NE7...-1U

| Type | Dimensions (mm) |  |
|------|-----------------|--|
|      | a               |  |

|             |      |
|-------------|------|
| 3NE54...-0C | 11.5 |
| 3NE54...-1C | 13   |
| 3NE7...-0U  | 11.5 |
| 3NE7...-1U  | 13   |

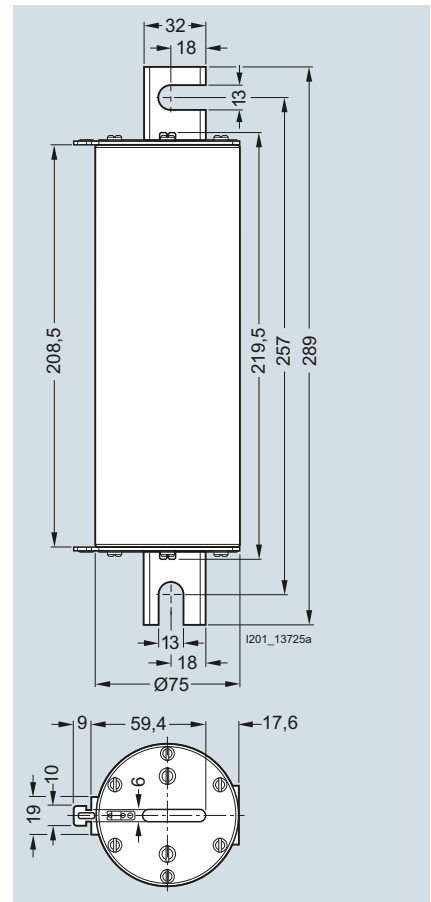


3NE96...-1C

Fuse Systems


SITOR Semiconductor Fuses

LV HRC design

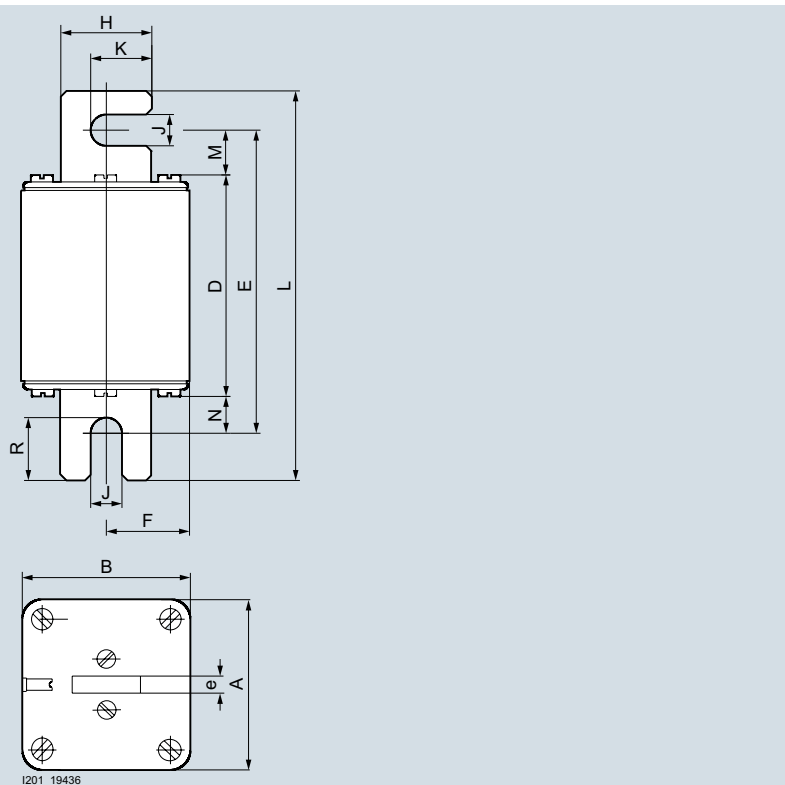


| Type           | Dimensions |    |      |       |    |    |    |    |     |      |      |      |
|----------------|------------|----|------|-------|----|----|----|----|-----|------|------|------|
|                | A          | B  | D    | E     | F  | H  | J  | K  | L   | M    | N    | R    |
| 3NE32...-0MK   | 52         | 52 | 78,4 | 106,6 | 26 | 25 | 11 | 18 | 137 | 15,7 | 12,5 | 22,3 |
| 3NE32...-0MK08 | 52         | 52 | 78,4 | 106,6 | 26 | 25 | 11 | 18 | 137 | 15,7 | 12,5 | 22,3 |


3NE53...-0MK06

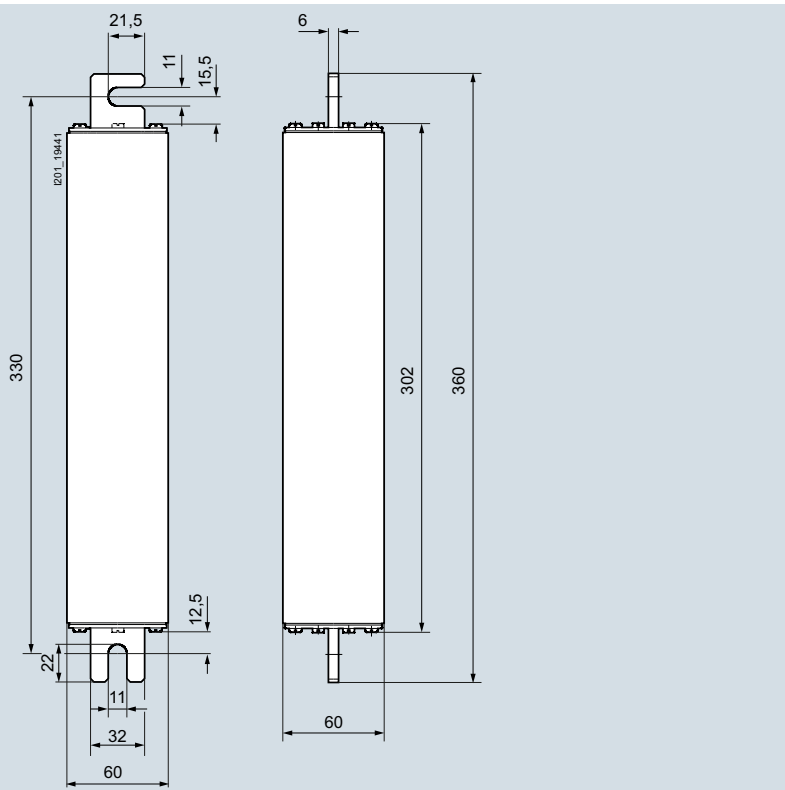

3NE9330-0MK07

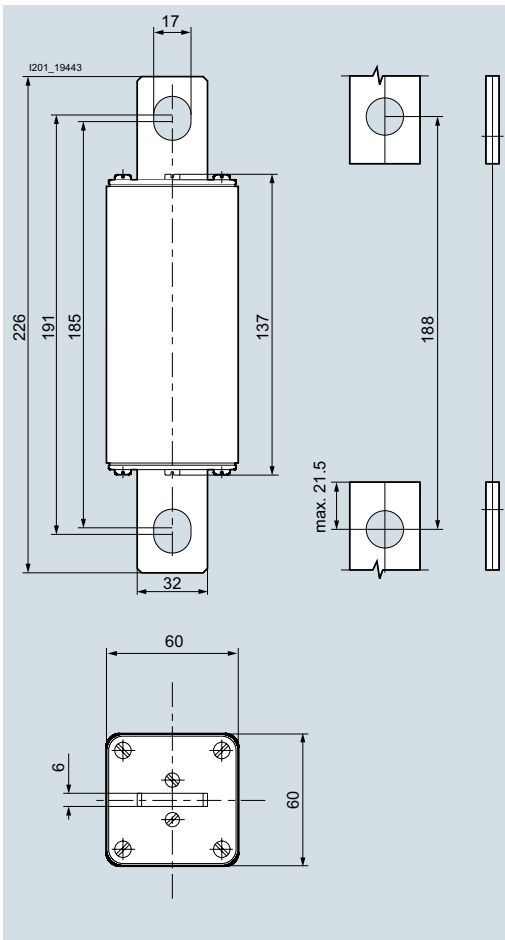


3NE5336-0MK66

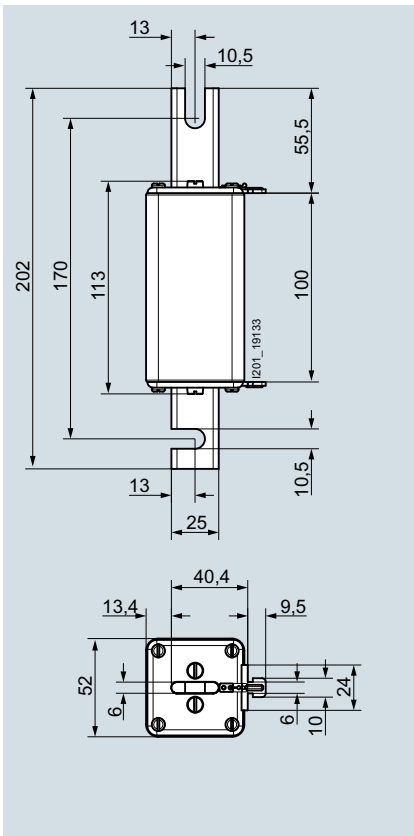


3NB1126-4KK11  
3NB1128-4KK11

| Type                 | $I_n$<br>A | $U_n$<br>V DC | Operational<br>class<br>Characteristic |
|----------------------|------------|---------------|----------------------------------------|
| <b>3NB1126-4KK11</b> | 200        | 1250          | aR                                     |
| <b>3NB1128-4KK11</b> | 250        | 1250          | aR                                     |

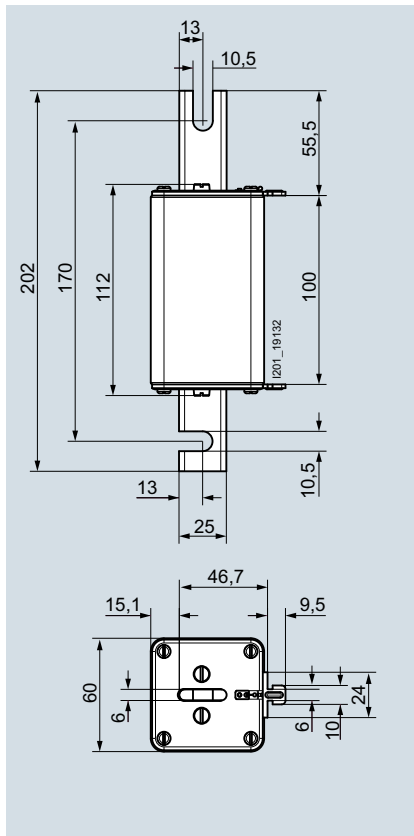

3NB1231-4KK11  
3NB1234-4KK11

| Type                 | $I_n$<br>A | $U_n$<br>V DC | Operational<br>class<br>Characteristic |
|----------------------|------------|---------------|----------------------------------------|
| <b>3NB1231-4KK11</b> | 315        | 1250          | aR                                     |
| <b>3NB1234-4KK11</b> | 400        | 1250          | aR                                     |

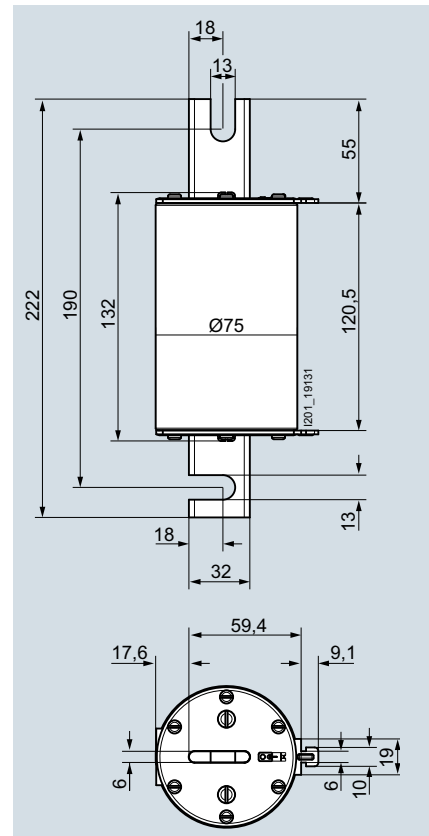


3NB1337-4KK11  
3NB1345-4KK11

| Type                 | $I_n$<br>A | $U_n$<br>V DC | Operational<br>class<br>Characteristic |
|----------------------|------------|---------------|----------------------------------------|
| <b>3NB1337-4KK11</b> | 500        | 1250          | aR                                     |
| <b>3NB1345-4KK11</b> | 800        | 1250          | aR                                     |


## Fuse Systems

### SITOR Semiconductor Fuses

#### LV HRC design

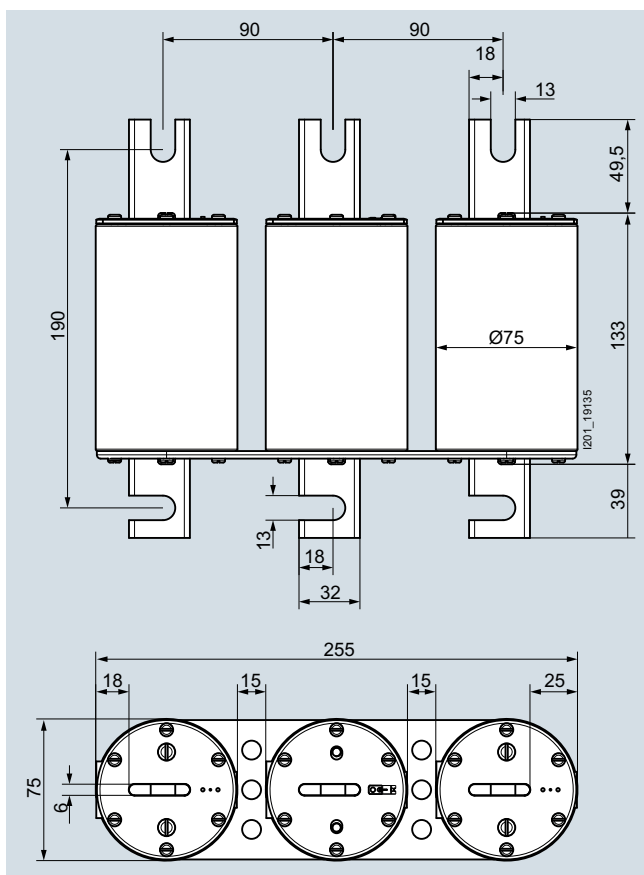

3NB2364-4KK17, 3NB2366-4KK17

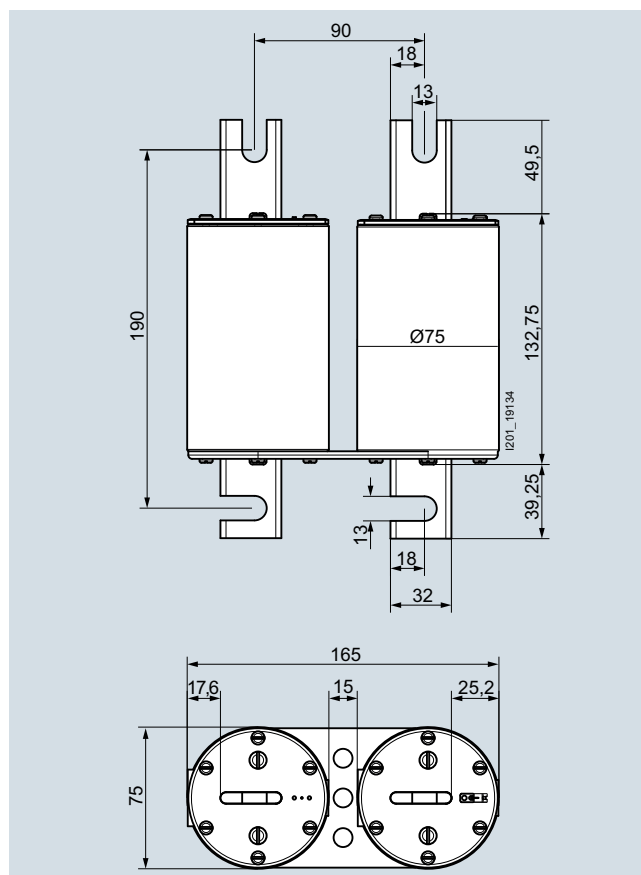

3NB2345-4KK16,  
3NB2350-4KK16,  
3NB2355-4KK16,  
3NB2357-4KK16


| Type          | $I_n$<br>A | $U_n$<br>V DC | Operational class<br>Characteristic |
|---------------|------------|---------------|-------------------------------------|
| 3NB2364-4KK17 | 2100       | 1250          | aR                                  |
| 3NB2366-4KK17 | 2400       | 1000          | aR                                  |

| Type          | $I_n$<br>A | $U_n$<br>V DC | Operational class<br>Characteristic |
|---------------|------------|---------------|-------------------------------------|
| 3NB2345-4KK16 | 800        | 1250          | aR                                  |
| 3NB2350-4KK16 | 1000       | 1250          | aR                                  |
| 3NB2355-4KK16 | 1400       | 1250          | aR                                  |
| 3NB2357-4KK16 | 1600       | 1250          | aR                                  |


# Fuse Systems

## SITOR Semiconductor Fuses


### LV HRC design

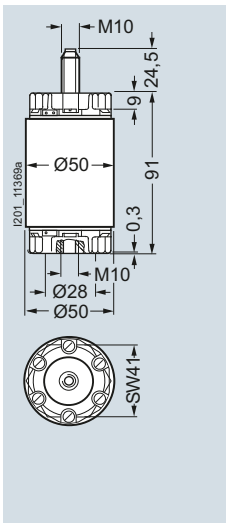


3NC5531

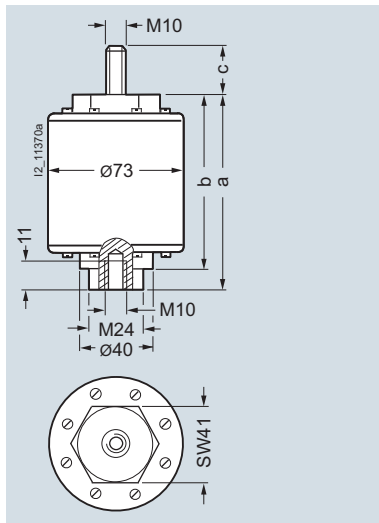

3NC58..

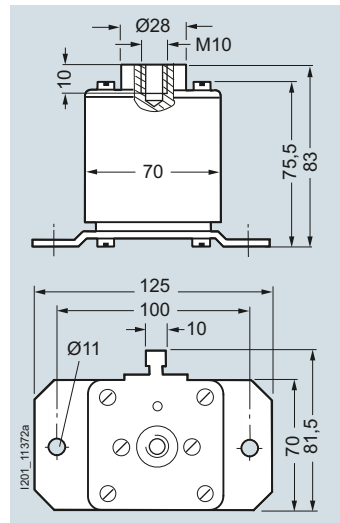


3NE64...-7, 3NE94...-7

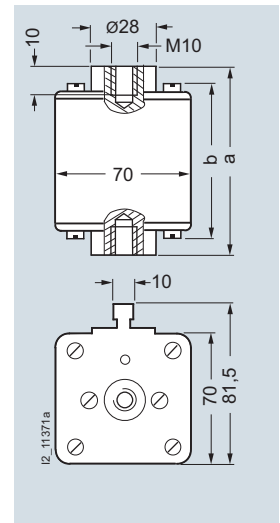


3NE64.., 3NE94..

| Type    | Dimensions (mm) |       |      |
|---------|-----------------|-------|------|
|         | a               | b     | c    |
| 3NC5838 | 98              | 88.5  | 25   |
| 3NC5841 | 98              | 88.5  | 25   |
| 3NC5840 | 119             | 109.5 | 20.5 |


| Type      | Dimensions (mm) |    |
|-----------|-----------------|----|
|           | a               | b  |
| 3NE6437   | 89              | 76 |
| 3NE9450   | 89              | 76 |
| 3NE9440-6 | 89              | 76 |
| 3NE6444   | 99              | 86 |

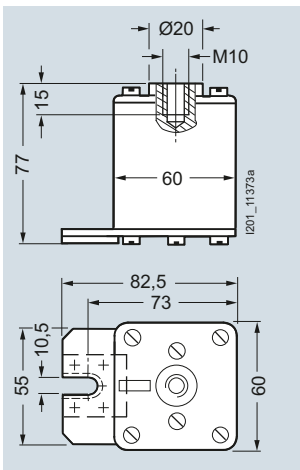


3NE3...-5

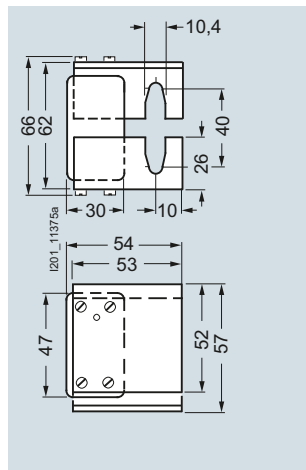

3NE41...-5

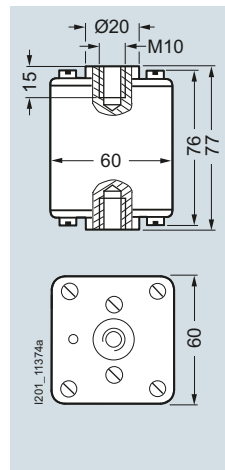

3NE43...-6B, 3NE4337-6

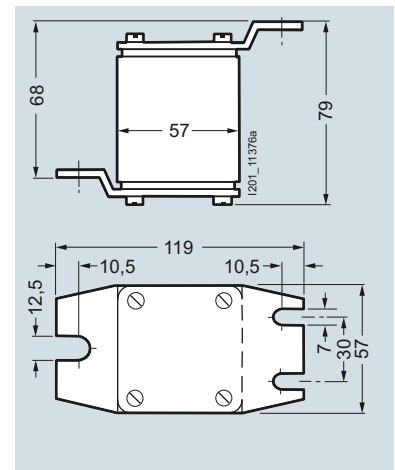


3NC73...-2

## Fuse Systems


### SITOR Semiconductor Fuses

#### LV HRC design

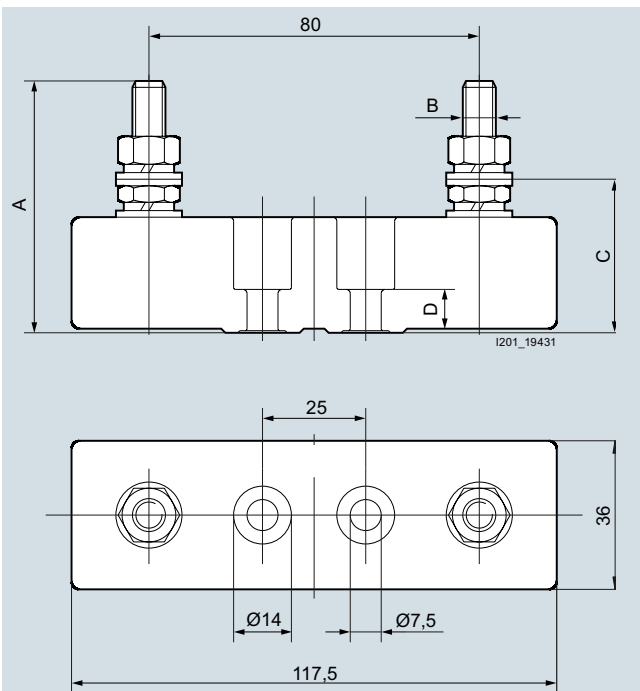


| Type    | Dimensions |     |      |    |
|---------|------------|-----|------|----|
|         | A          | B   | C    | D  |
| 3NH5023 | 59         | M8  | 35,5 | 11 |
| 3NH5323 | 64         | M10 | 38   | 11 |

3NH5023, 3NH5323

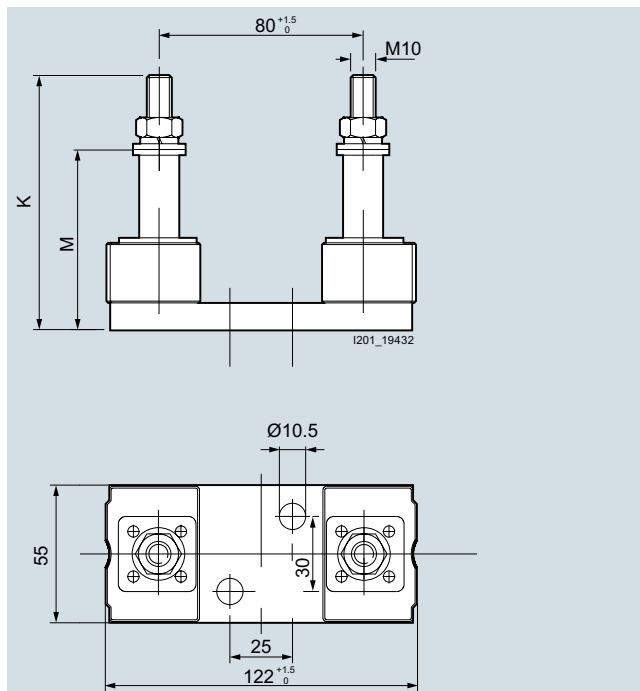

3NH5423

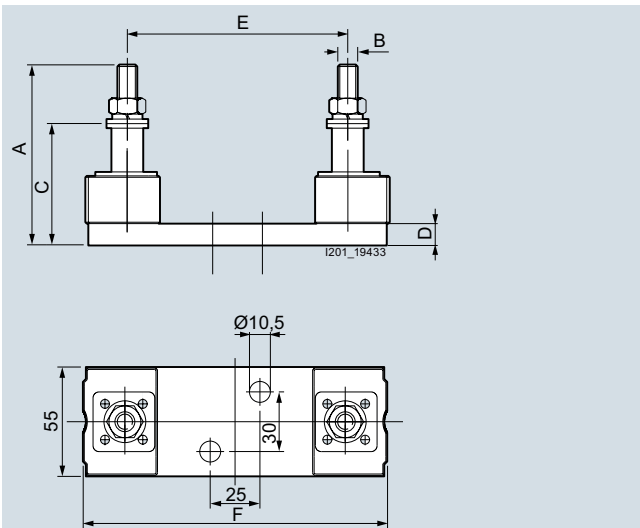

| Type    | Dimensions |     |    |    |     |     |
|---------|------------|-----|----|----|-----|-----|
|         | A          | B   | C  | D  | E   | F   |
| 3NH5463 | 94         | M10 | 65 | 11 | 110 | 153 |
| 3NH5473 | 101        | M10 | 72 | 11 | 170 | 211 |


3NH5463, 3NH5473

### Characteristic curves


#### 3NC24.. series

Size: 3  
 Operational class: gR or aR  
 Rated voltage: 500 V AC  
 Rated current: 150 ... 400 A


#### Time/current characteristics diagram

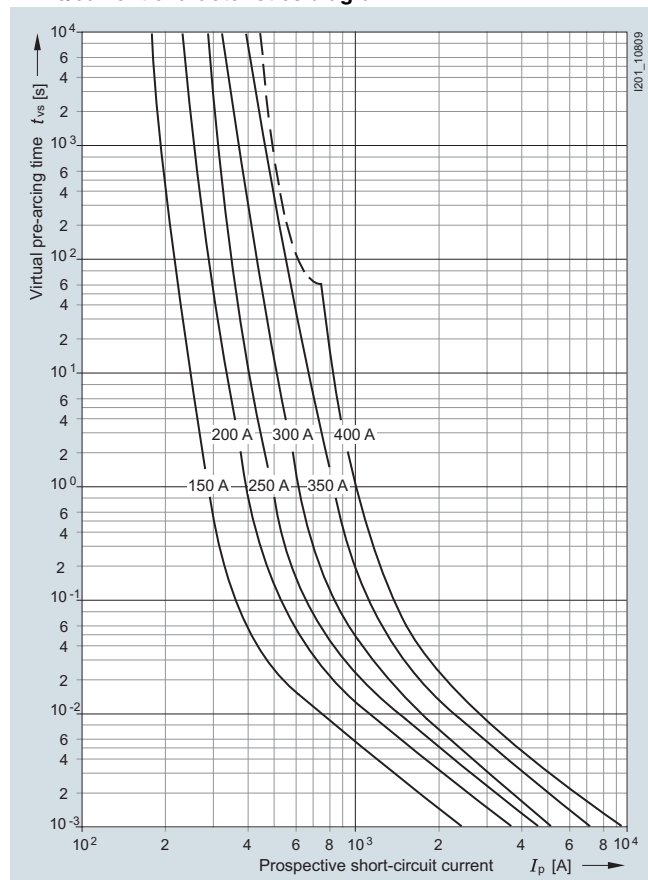


#### Let-through characteristics (current limitation at 50 Hz)

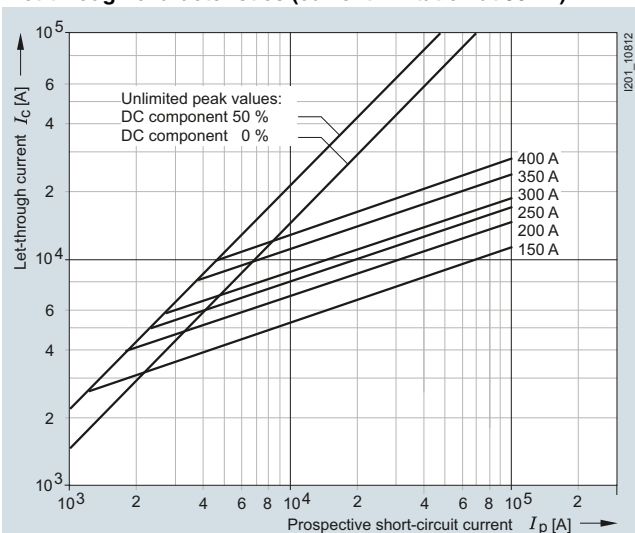

#### Correction factor $k_A$ for breaking $I^2t$ value

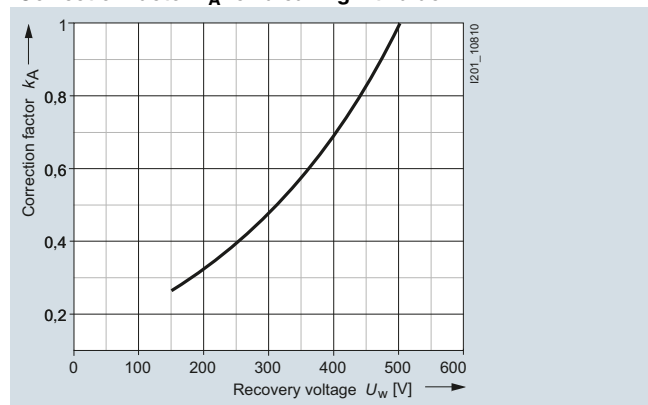

#### Peak arc voltage

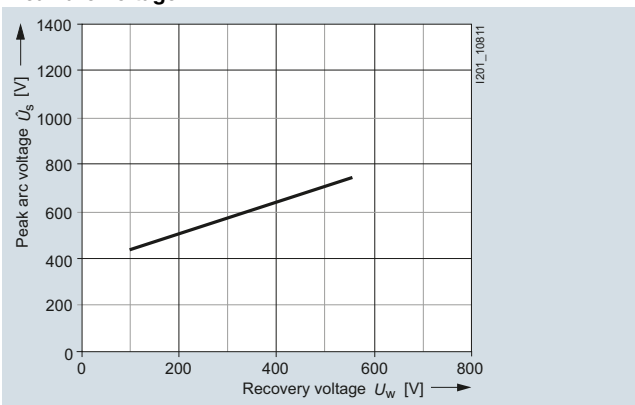

## Fuse Systems


### SITOR Semiconductor Fuses

#### LV HRC design


##### 3NB33 series..

Size: 2 x 3, 3 x 3  
 Operational class: gR  
 Rated voltage: 690 V AC  
 Rated current: 1000 ... 1900 A

##### Time/current characteristics diagram

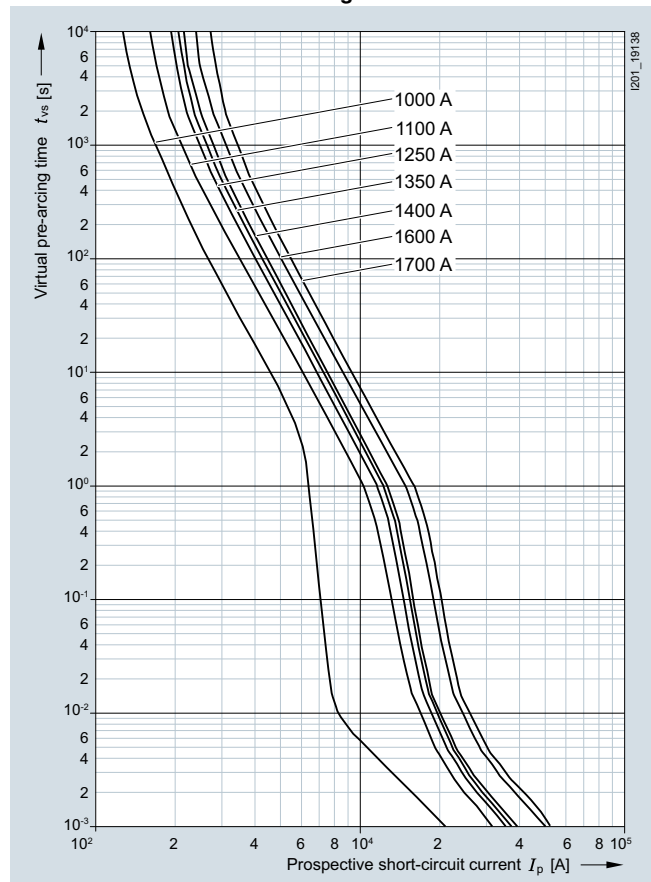


3NB33..-1KK26

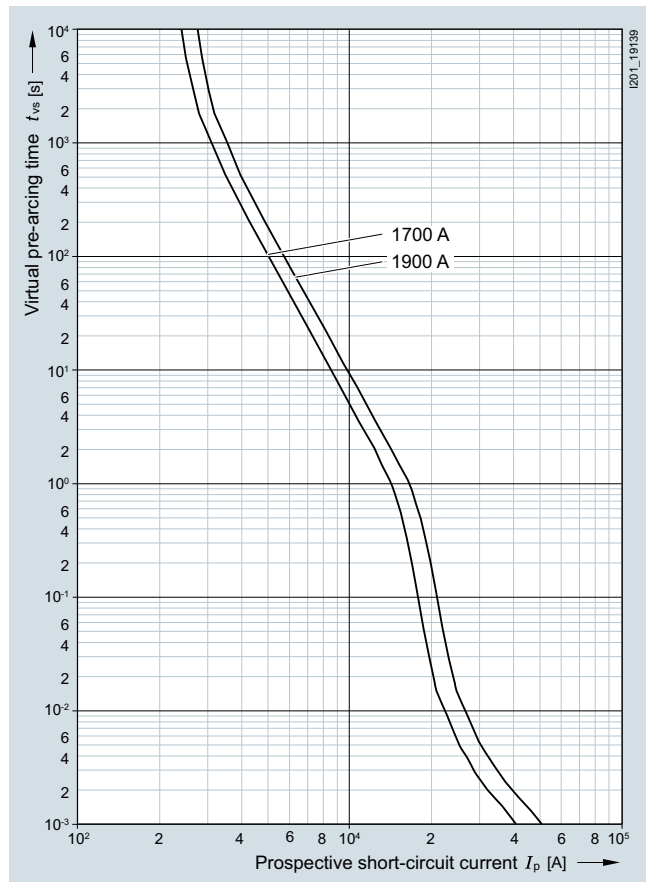


3NB33..-1KK27

### Let-through characteristics (current limitation at 50 Hz)

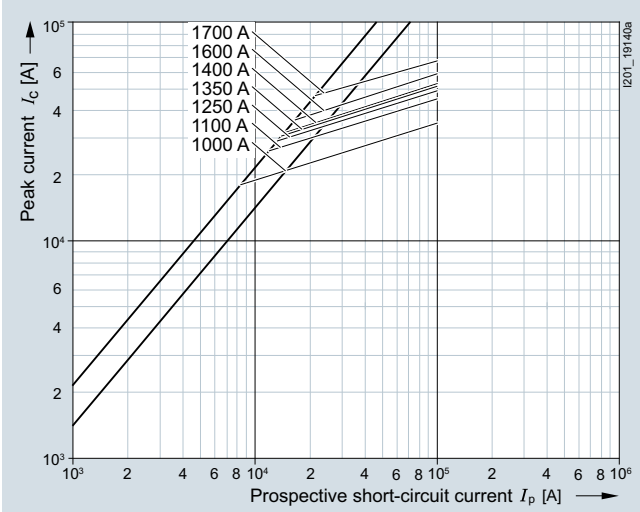


3NB33...-1KK26

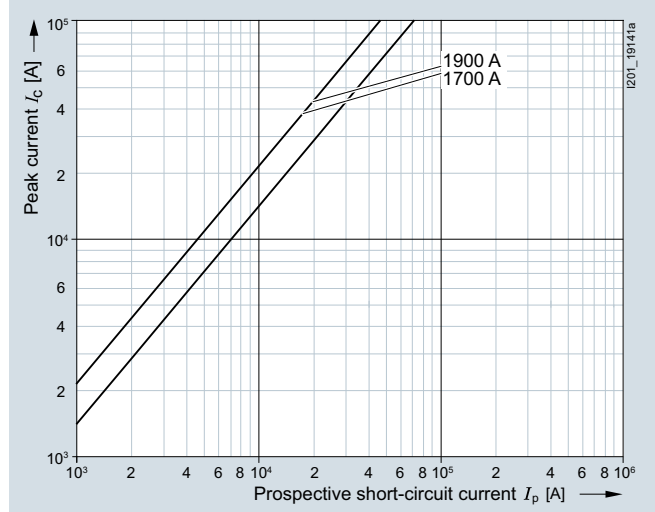


3NB33...-1KK27

### Correction factor $k_A$ for breaking $I^2t$ value

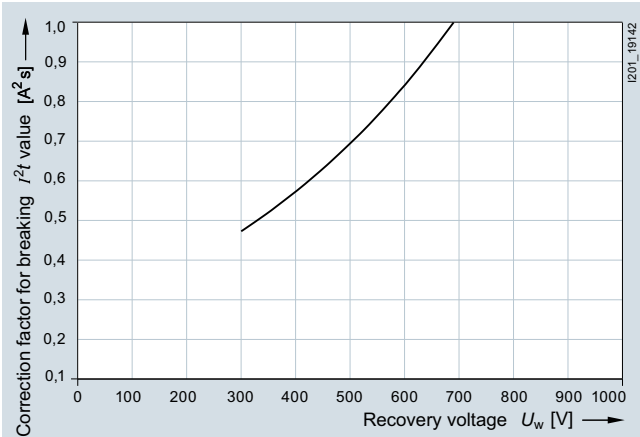

3NB33...-1KK.

### Peak arc voltage

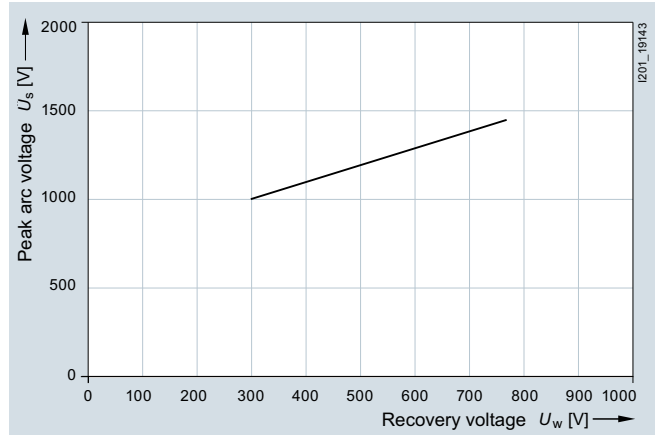

3NB33...-1KK.

## Fuse Systems


### SITOR Semiconductor Fuses

#### LV HRC design


##### 3NC32 series

Size: 3  
 Operational class: aR  
 Rated voltage: 690 V AC (630 ... 1250 A),  
 500 V AC (1400 ... 1600 A)  
 Rated current: 630 ... 1600 A


##### Time/current characteristics diagram

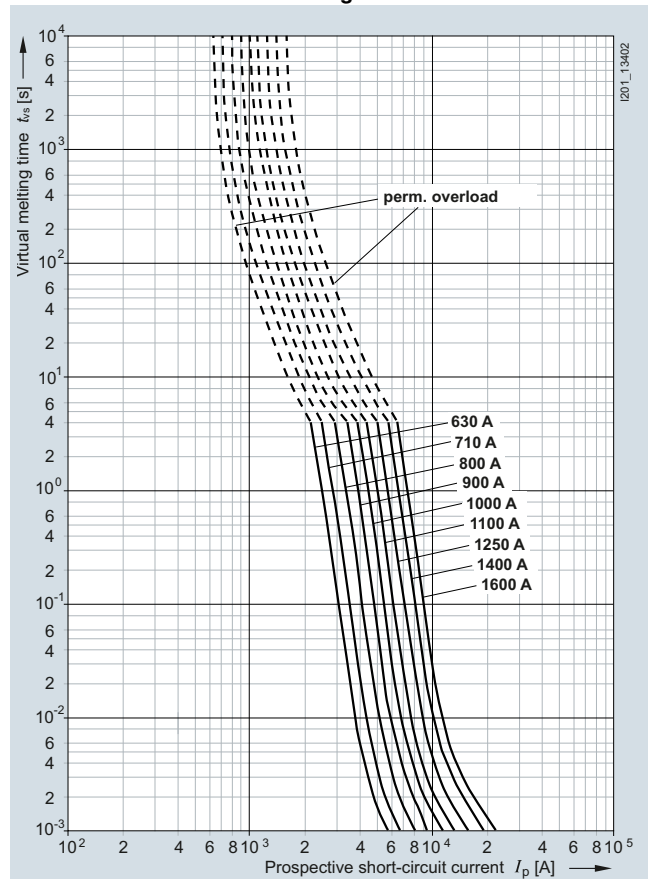


##### Let-through characteristic curves

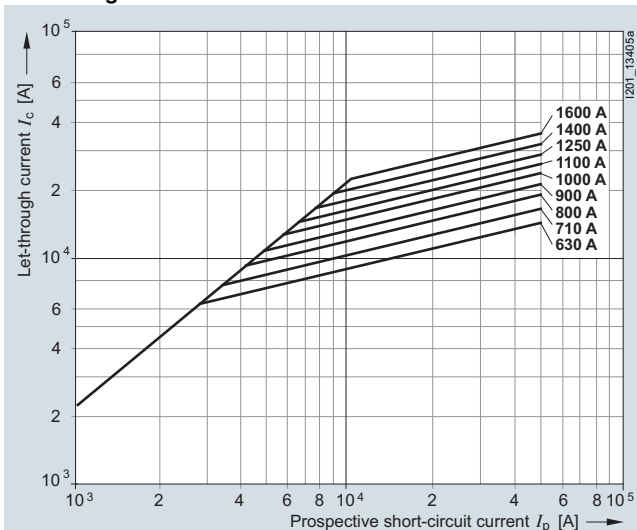

##### Correction factor $k_A$ for breaking $I^2t$ value




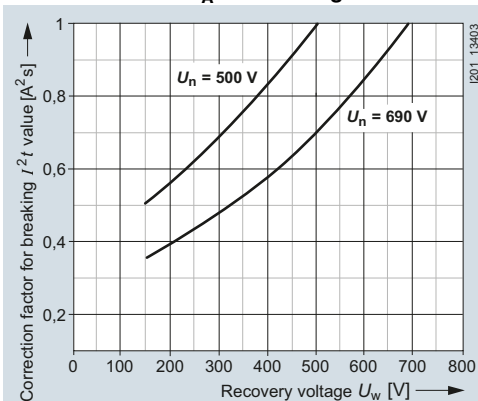


##### Peak arc voltage

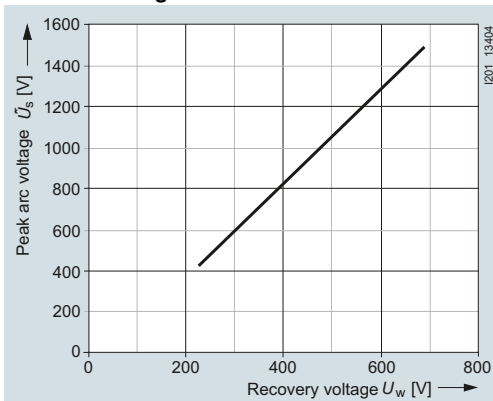

**3NC33 series**

Size: 3  
 Operational class: aR  
 Rated voltage: 1000 V AC (630 ... 1000 A),  
 800 V AC (1100 ... 1250 A)  
 Rated current: 630 ... 1250 A

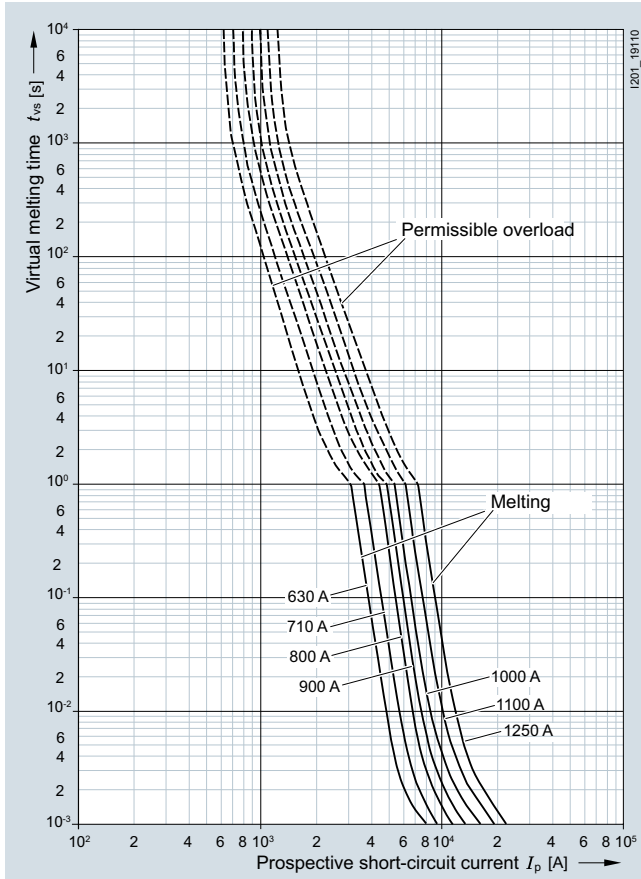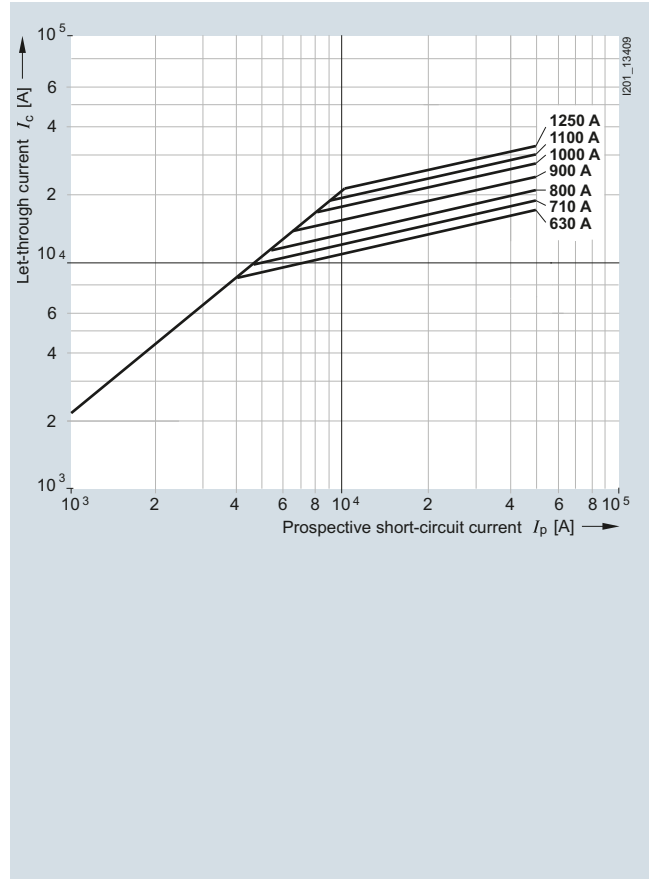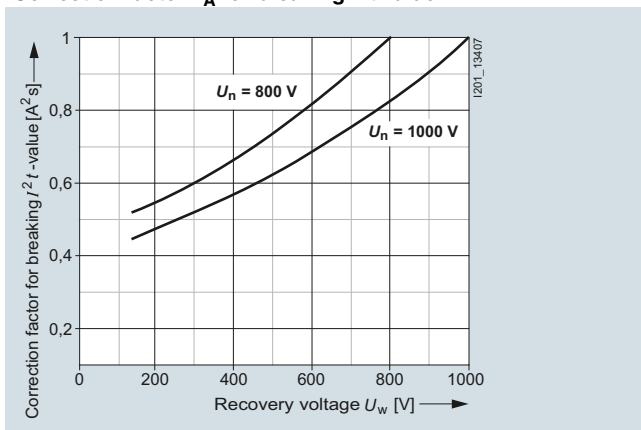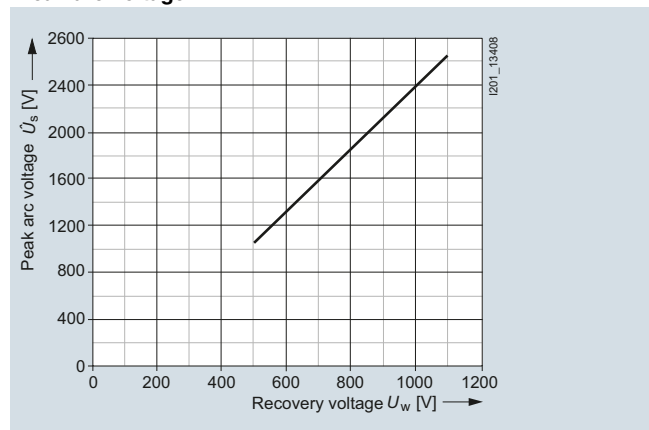**Time/current characteristics diagram****Let-through characteristic curves****Correction factor  $k_A$  for breaking  $I^2t$  value****Peak arc voltage**

## Fuse Systems


### SITOR Semiconductor Fuses

#### LV HRC design


##### 3NC34 series

Size: 3  
 Operational class: aR  
 Rated voltage: 1250 V AC (315 ... 630 A),  
 1100 V AC (800 A)  
 Rated current: 315 ... 800 A


##### Time/current characteristics diagram

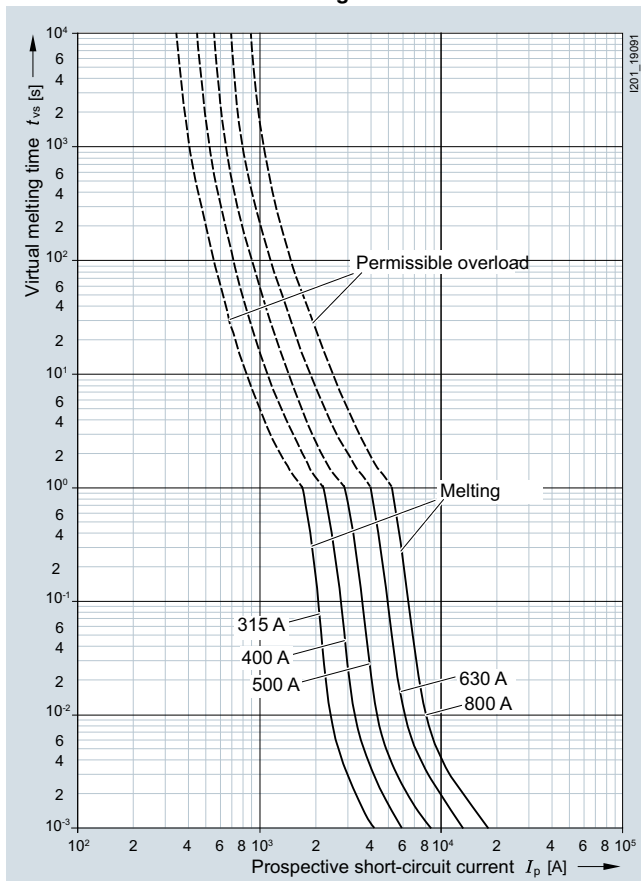


##### Let-through characteristic curves

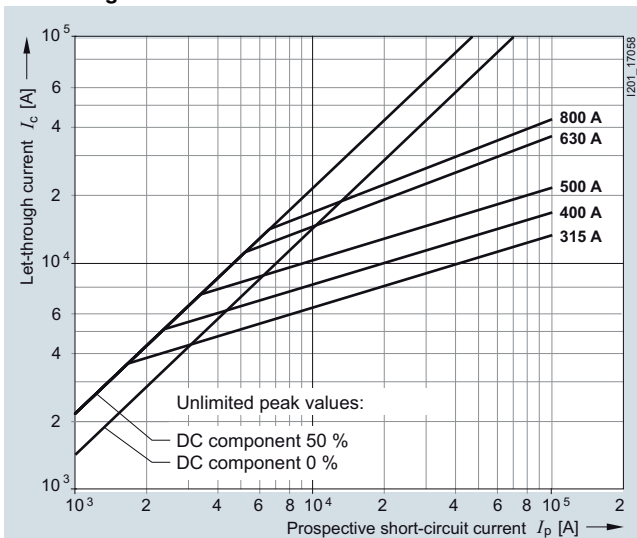

##### Correction factor $k_A$ for breaking $I^2t$ value




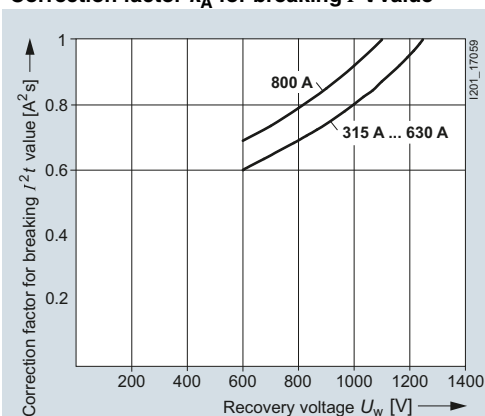


##### Peak arc voltage

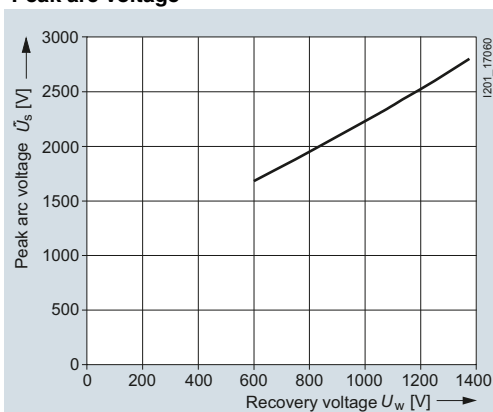

**3NC5531, 3NC58.. series**

Operational class: aR  
 Rated voltage: 800 V AC (350 A, 630 A),  
 1000 V AC (600 A, 800 A)  
 Rated current: 350 ... 800 A

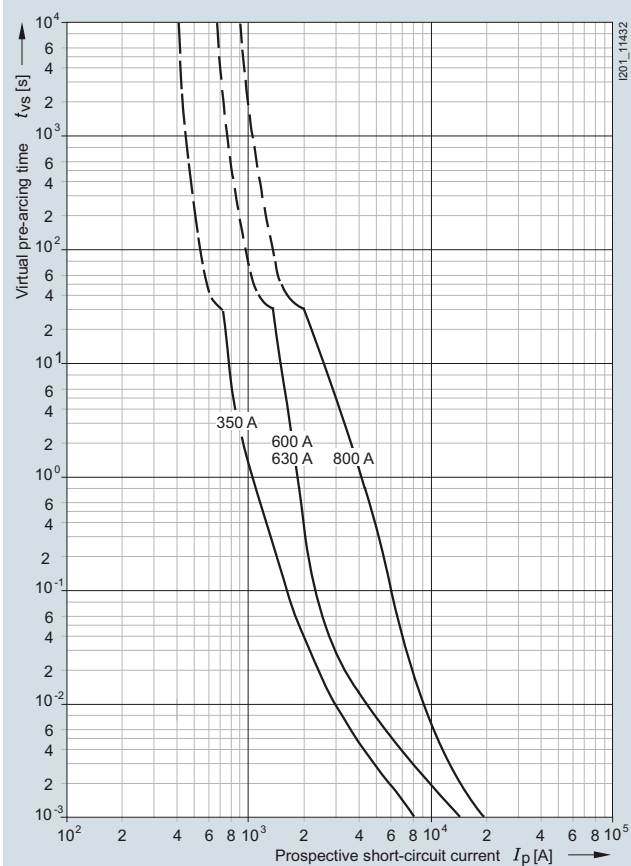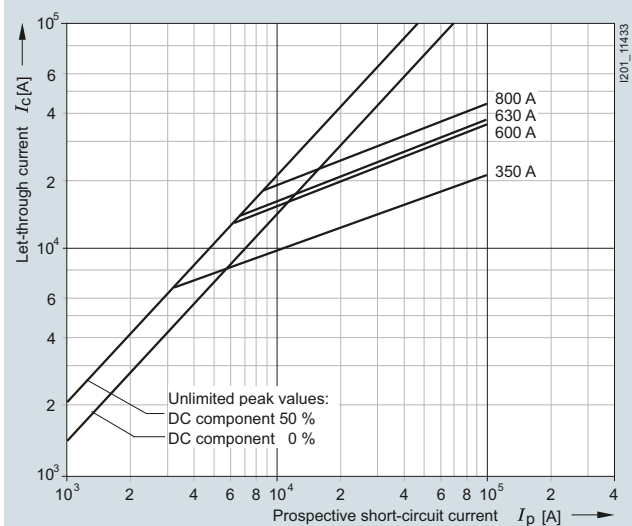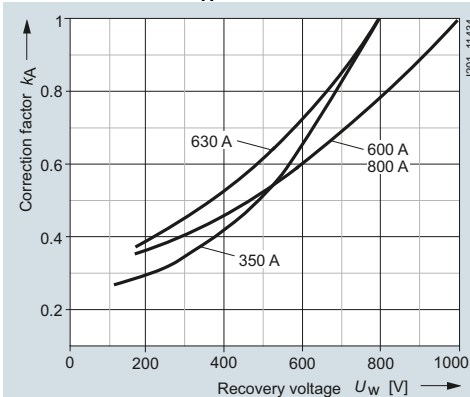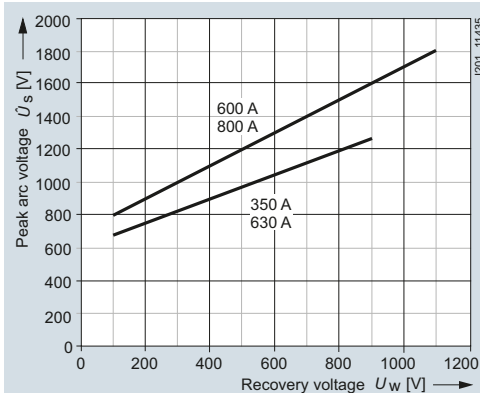**Time/current characteristics diagram****Let-through characteristics (current limitation at 50 Hz)****Correction factor  $k_A$  for breaking  $I^2t$  value****Peak arc voltage**

## Fuse Systems


### SITOR Semiconductor Fuses

#### LV HRC design


##### 3NC73...-2 series

Operational class: aR  
 Rated voltage: 680 V AC  
 Rated current: 250 A, 350 A


##### Time/current characteristics diagram

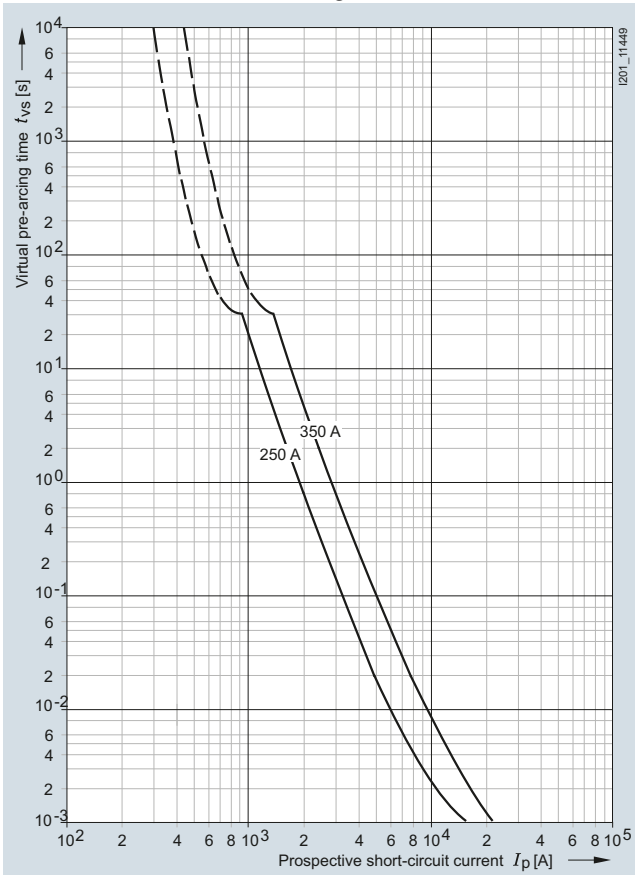


##### Let-through characteristics (current limitation at 50 Hz)

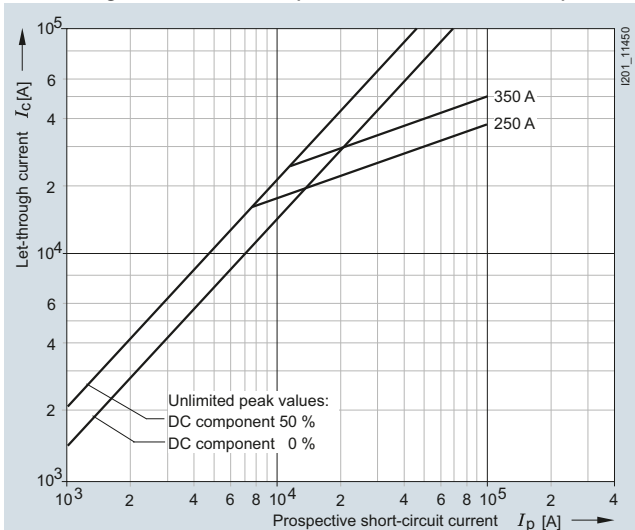

##### Correction factor $k_A$ for breaking $I^2t$ value




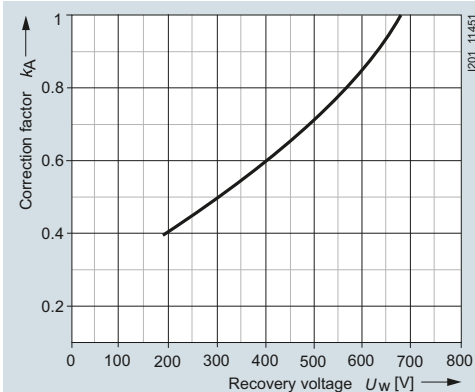


##### Peak arc voltage

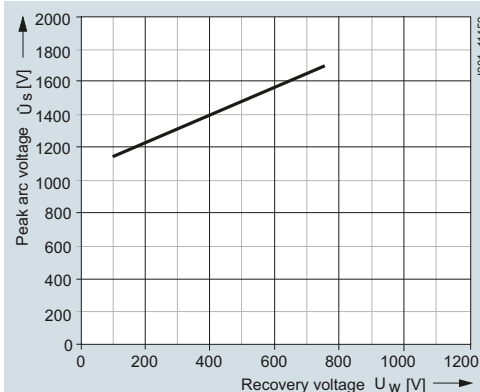

**3NC84.. series**

Size: 3  
 Operational class: gR or aR  
 Rated voltage: 660 V AC  
 Rated current: 150 ... 1000 A

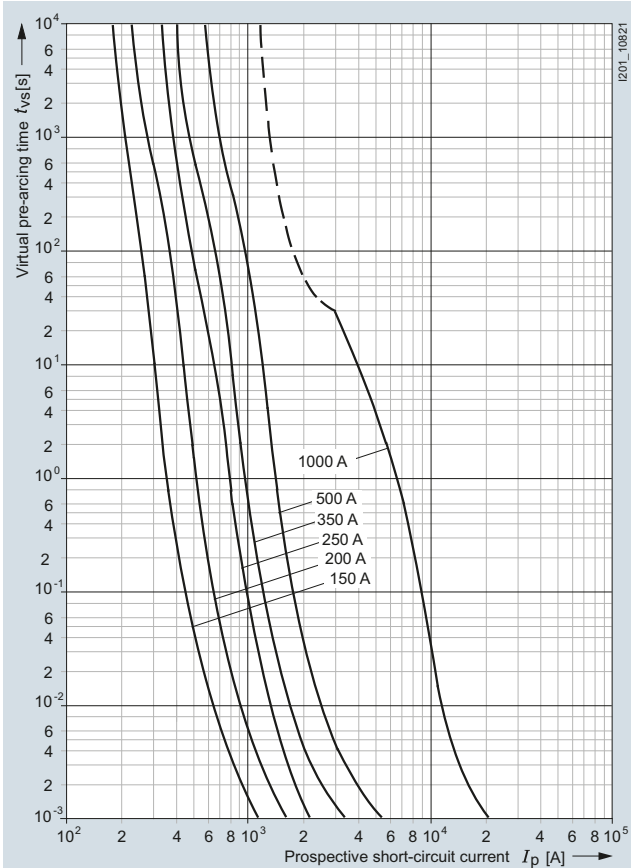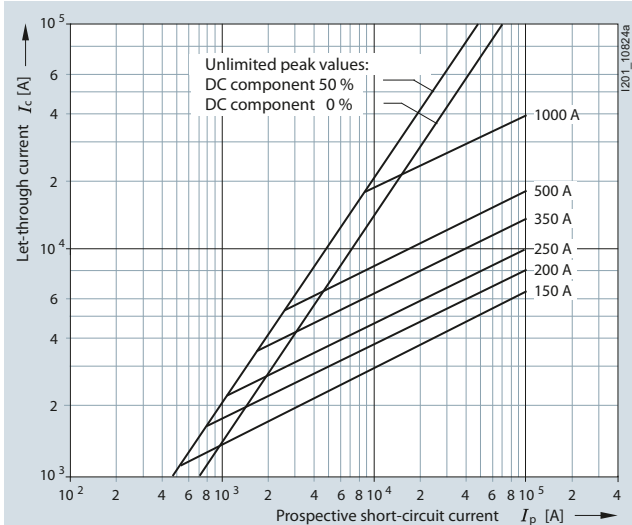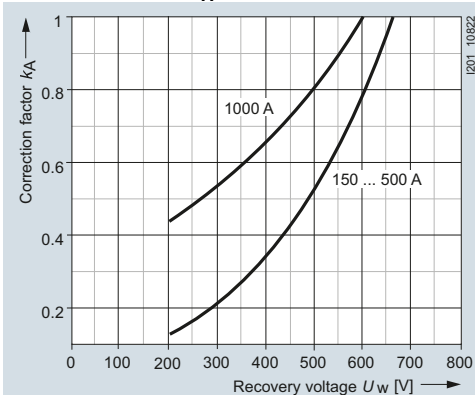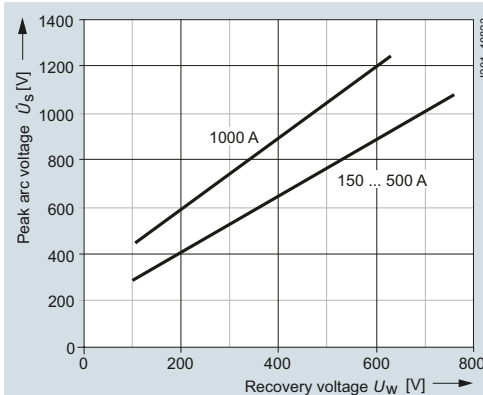**Time/current characteristics diagram****Let-through characteristics (current limitation at 50 Hz)****Correction factor  $k_A$  for breaking  $I^2t$  value****Peak arc voltage**

## Fuse Systems


### SITOR Semiconductor Fuses

#### LV HRC design


##### 3NE102.-0, 3NE12..-0 series

Size: 00, 1  
 Operational class: gS  
 Rated voltage: 690 V AC  
 Rated current: 100 ... 315 A


##### Time/current characteristics diagram

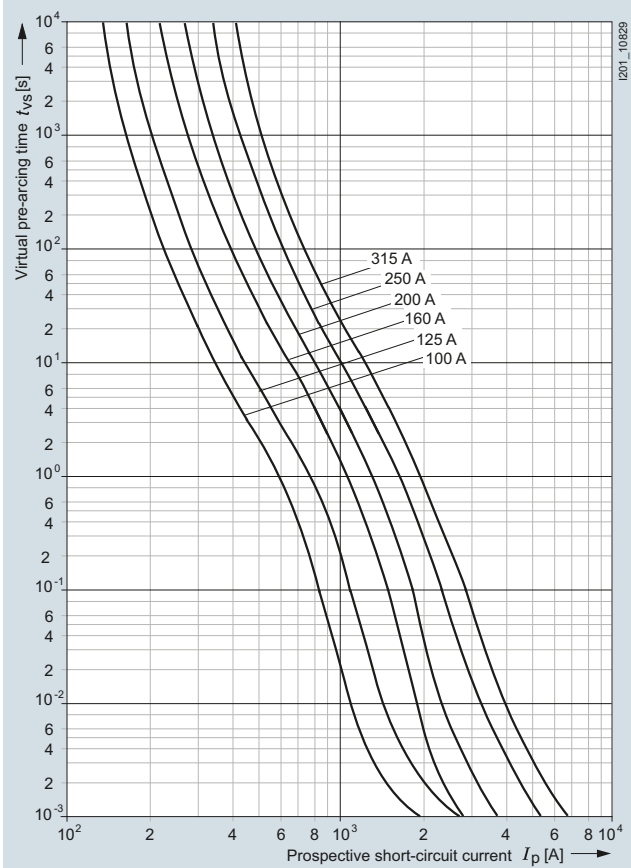


##### Let-through characteristics (current limitation at 50 Hz)

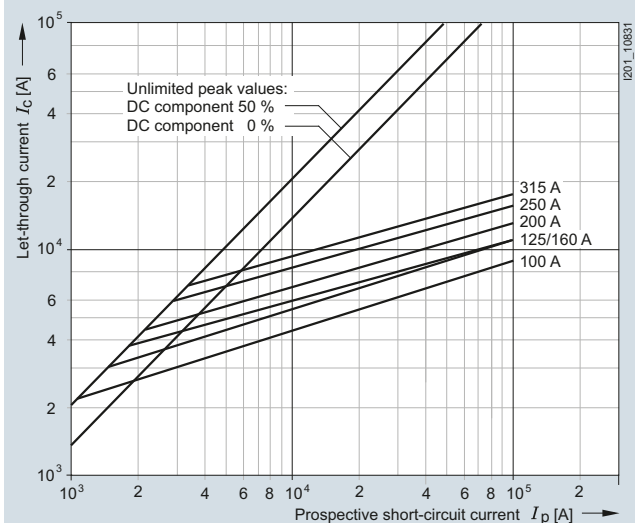

##### Correction factor $k_A$ for breaking $I^2t$ value




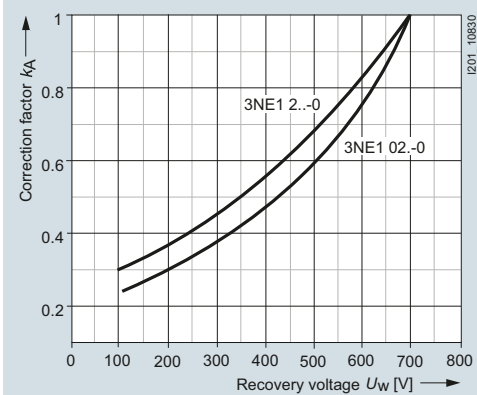


##### Peak arc voltage

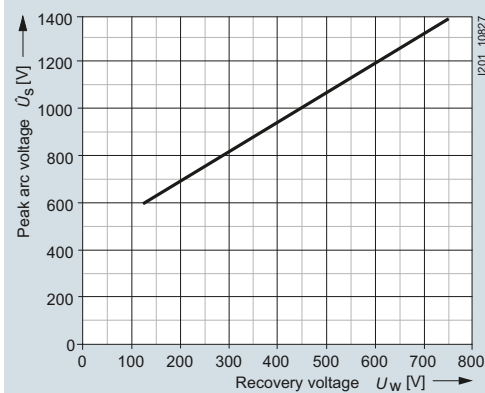

**3NE102.-2, 3NE12.-2, 3NE12.-3, 3NE13.-2, 3NE13.-3 series**

Size: 00, 1, 2  
 Operational class: gR  
 Rated voltage: 690 V AC  
 Rated current: 80 ... 500 A

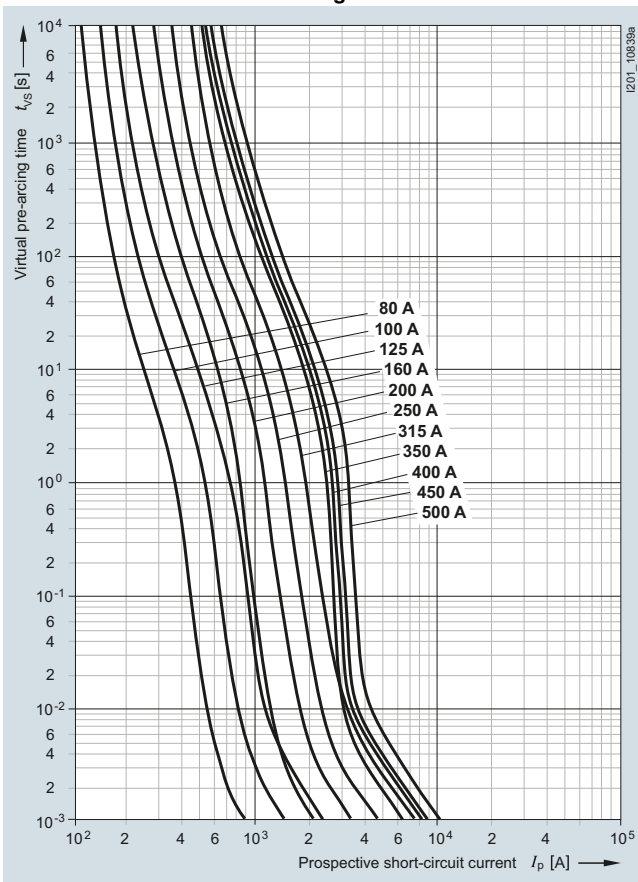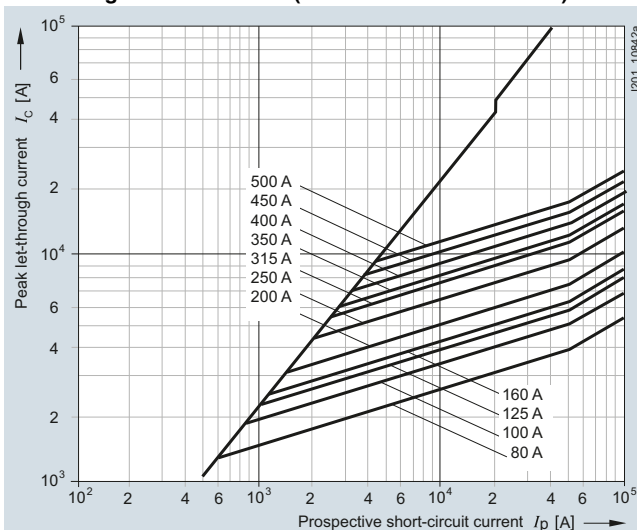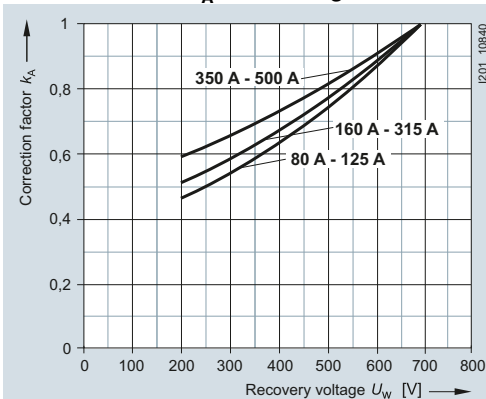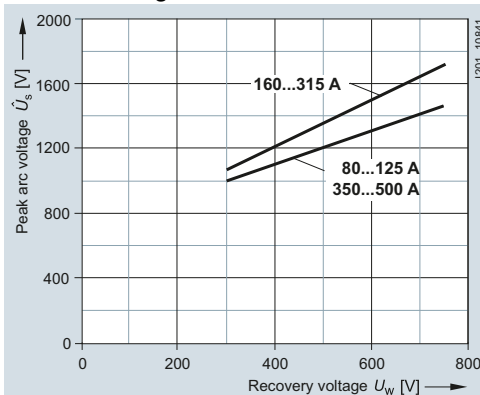**Time/current characteristics diagram****Let-through characteristics (current limitation at 50 Hz)****Correction factor  $k_A$  for breaking  $I^2t$  value****Peak arc voltage**

## Fuse Systems


### SITOR Semiconductor Fuses

#### LV HRC design


##### 3NE133.-0, 3NE143.-0 series

Size: 2, 3  
 Operational class: gS  
 Rated voltage: 690 V AC  
 Rated current: 350 ... 800 A


##### Time/current characteristics diagram

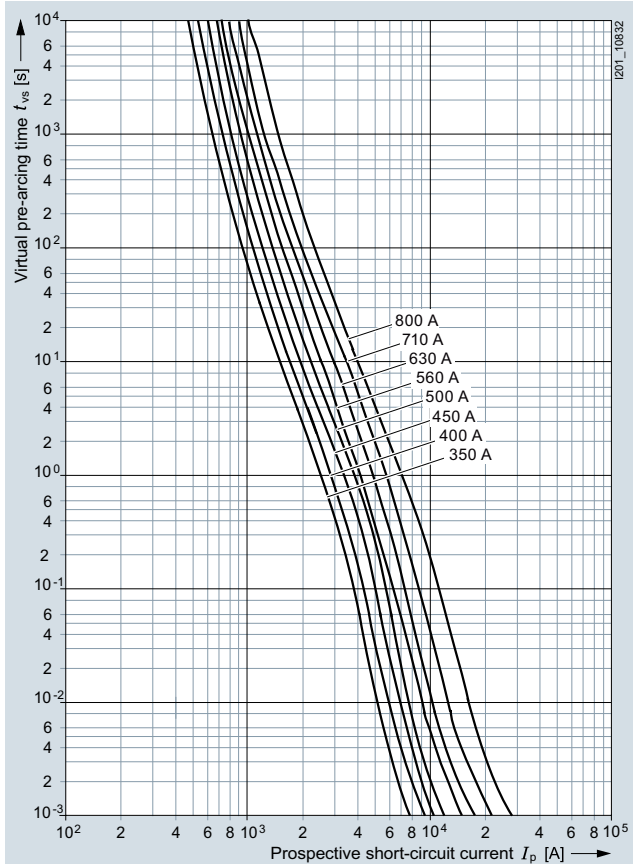


##### Let-through characteristics (current limitation at 50 Hz)

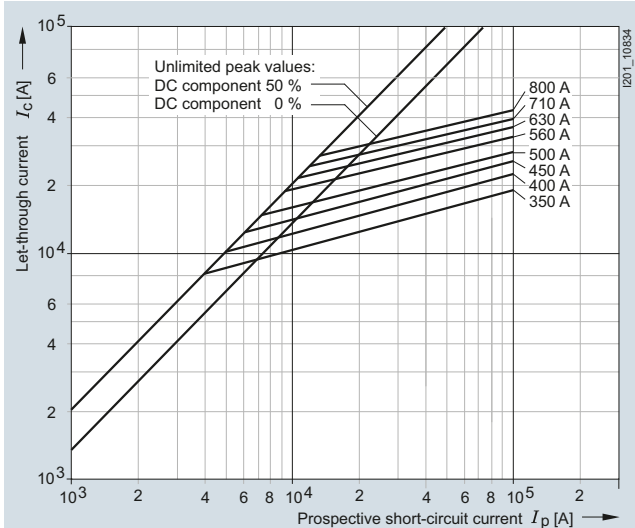

##### Correction factor $k_A$ for breaking $I^2t$ value




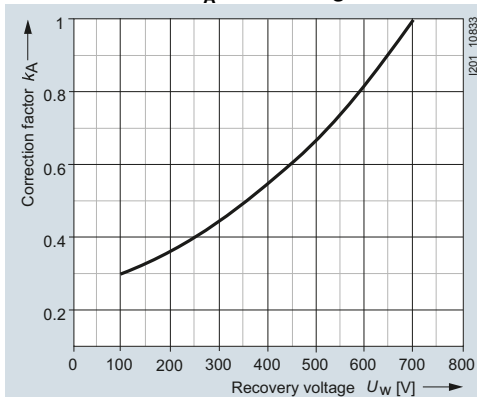


##### Peak arc voltage

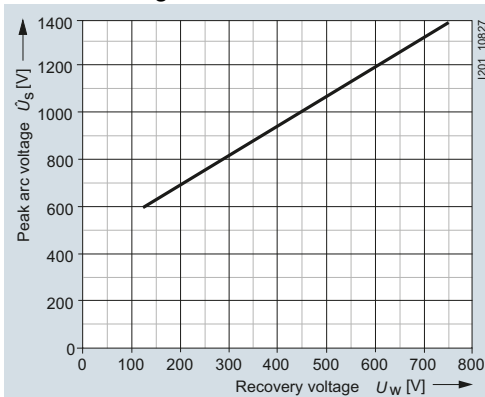

**3NE14..-2, 3NE14..-3 series**

Size: 3  
 Operational class: gR  
 Rated voltage: 690 V AC  
 Rated current: 560 ... 850 A

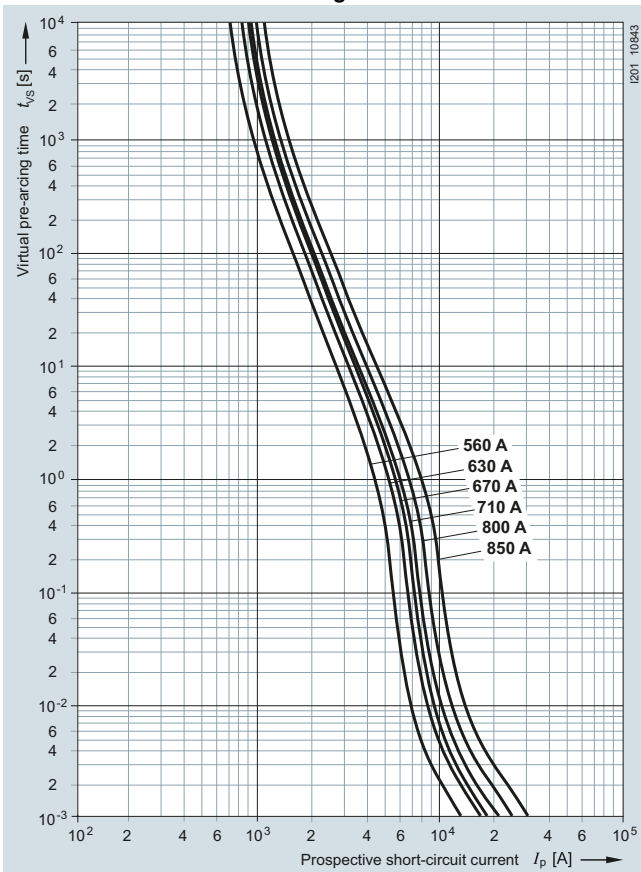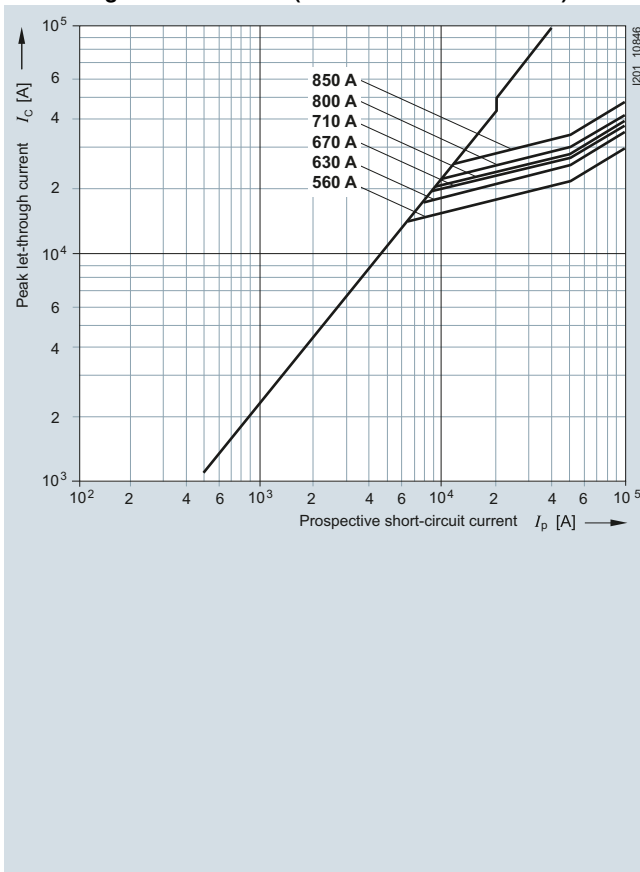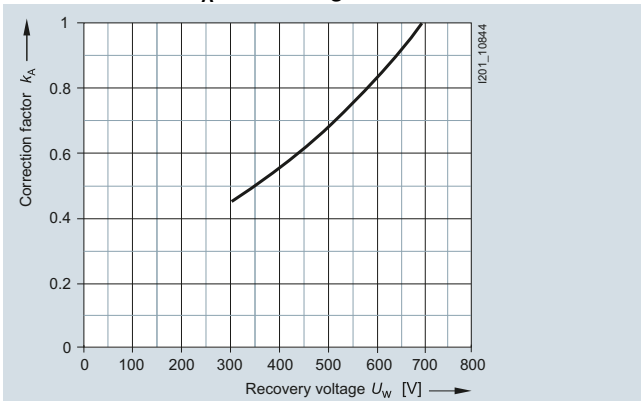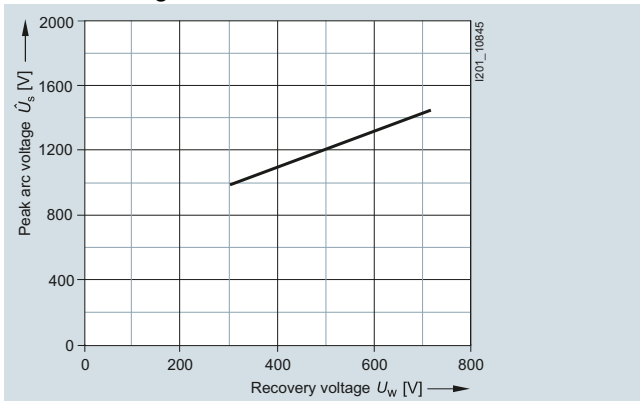**Time/current characteristics diagram****Let-through characteristics (current limitation at 50 Hz)****Correction factor  $k_A$  for breaking  $I^2t$  value****Peak arc voltage**

## Fuse Systems


### SITOR Semiconductor Fuses

#### LV HRC design


##### 3NE1437-1, 3NE1438-1 series

Size: 3  
 Operational class: gR  
 Rated voltage: 600 V AC  
 Rated current: 710 and 800 A


##### Time/current characteristics diagram

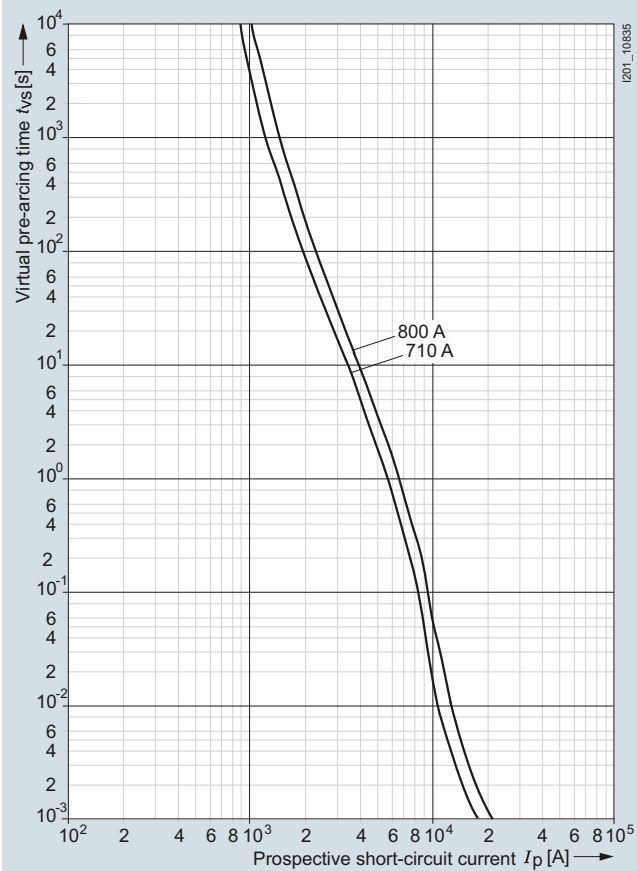


##### Let-through characteristics (current limitation at 50 Hz)

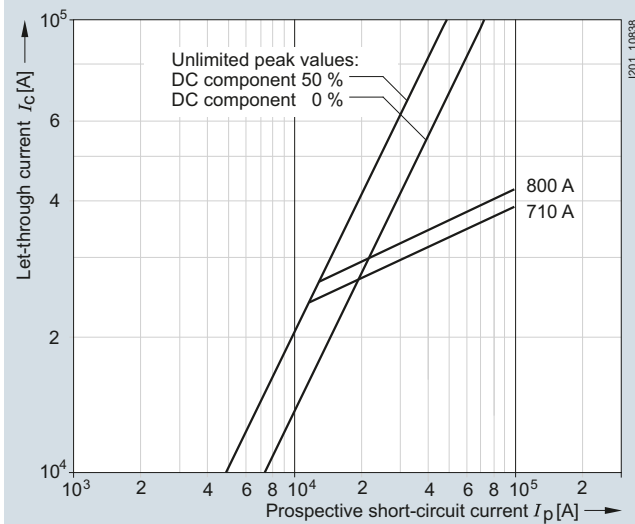

##### Correction factor $k_A$ for breaking $I^2t$ value




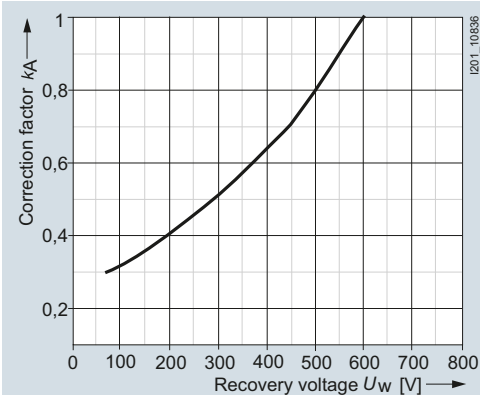


##### Peak arc voltage

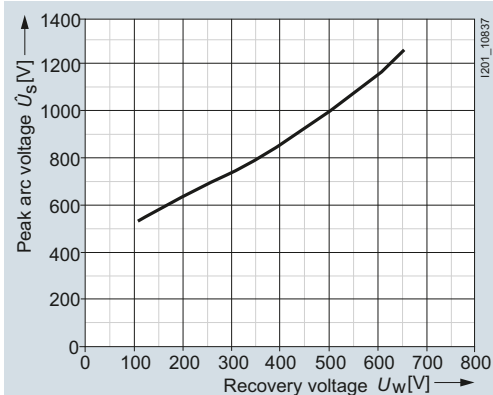

**3NE18...-0 series**

Size: 000  
 Operational class: gS  
 Rated voltage: 690 V AC  
 Rated current: 16 ... 80 A

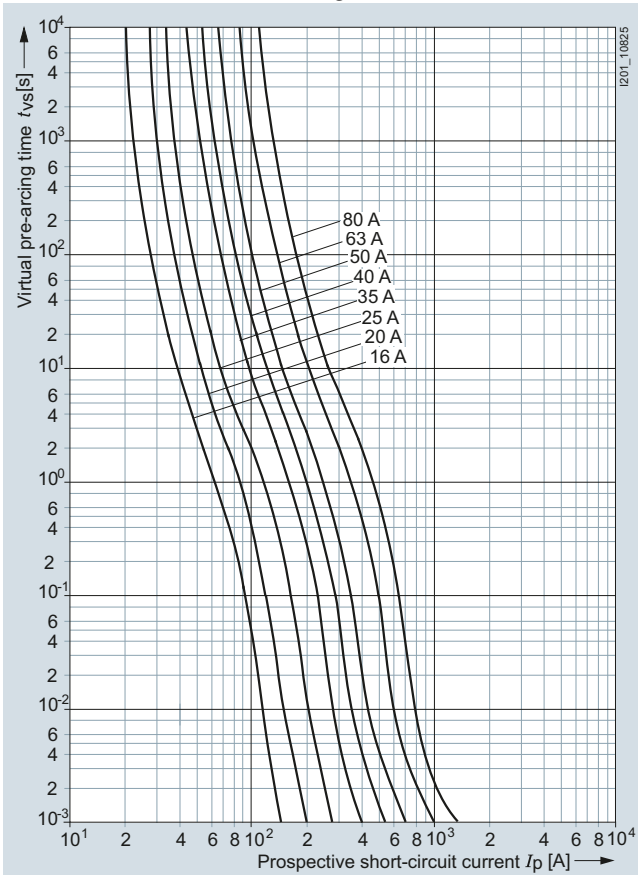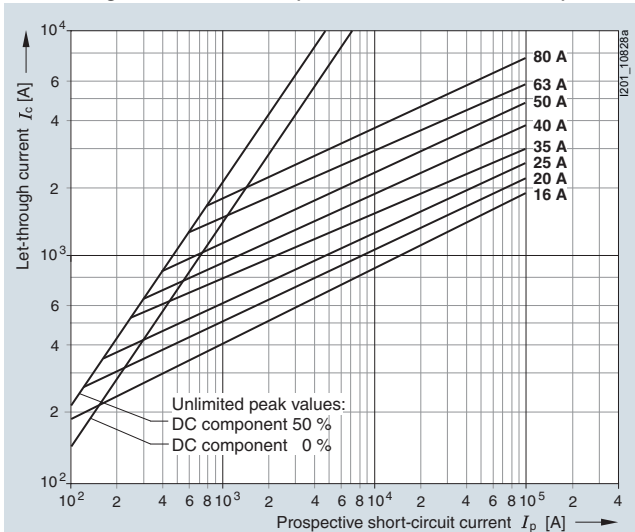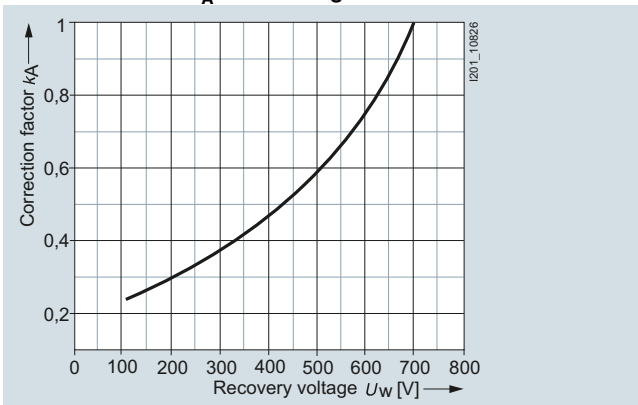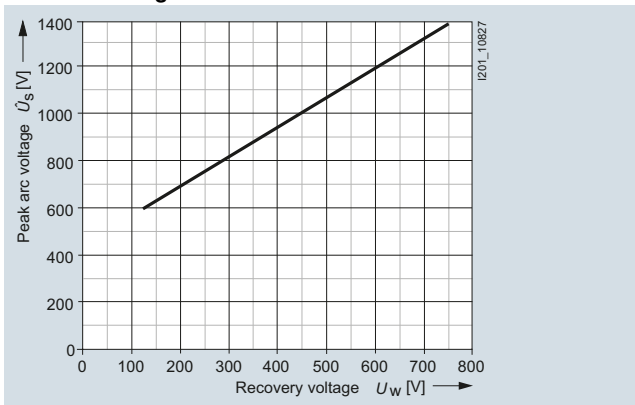**Time/current characteristics diagram****Let-through characteristics (current limitation at 50 Hz)****Correction factor  $k_A$  for breaking  $I^2t$  value****Peak arc voltage**

## Fuse Systems


### SITOR Semiconductor Fuses

#### LV HRC design


##### 3NE32..-0MK series

Size: 1  
 Operational class: gR  
 Rated voltage: 1000 V AC/600 V DC  
 Rated current: 32 ... 63 A


##### Time/current characteristics diagram

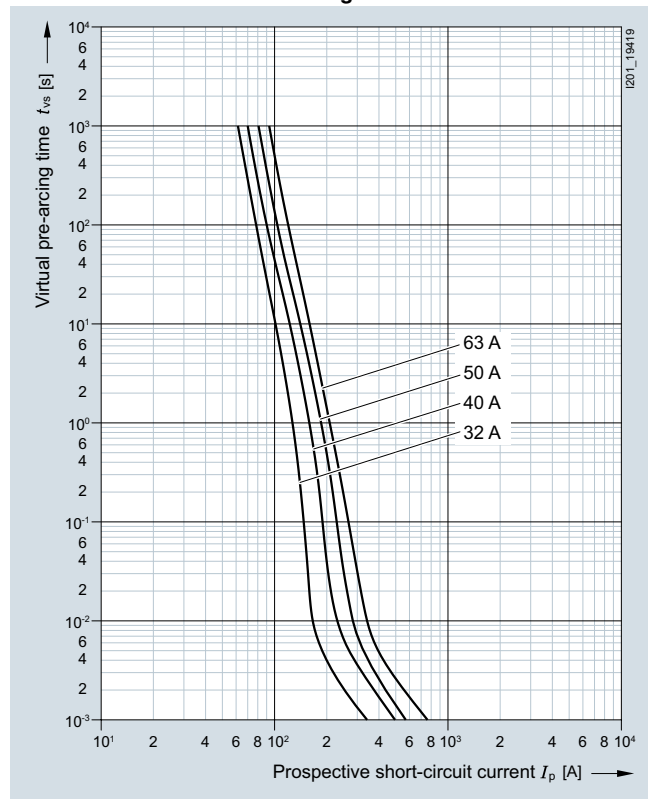


##### Let-through characteristics (current limitation at 50 Hz)

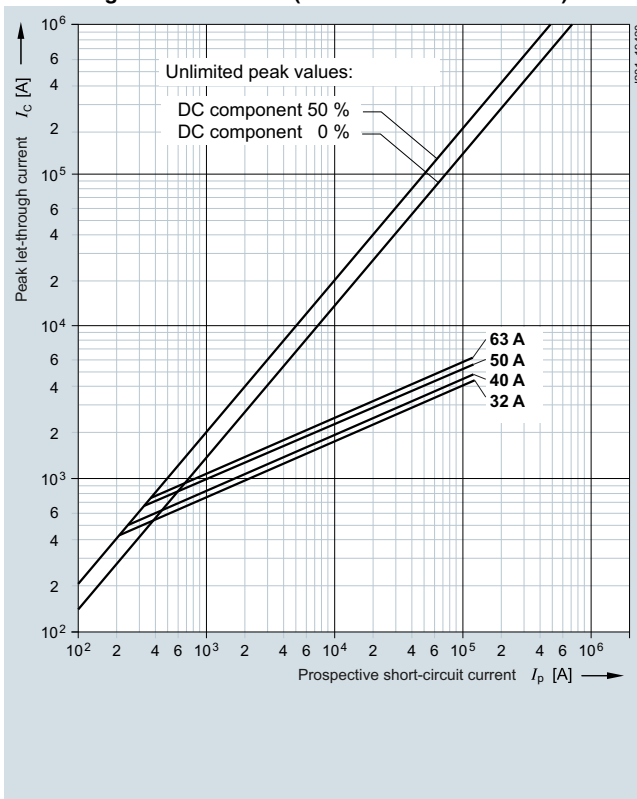

##### Correction factor $k_A$ for breaking $I^2t$ value




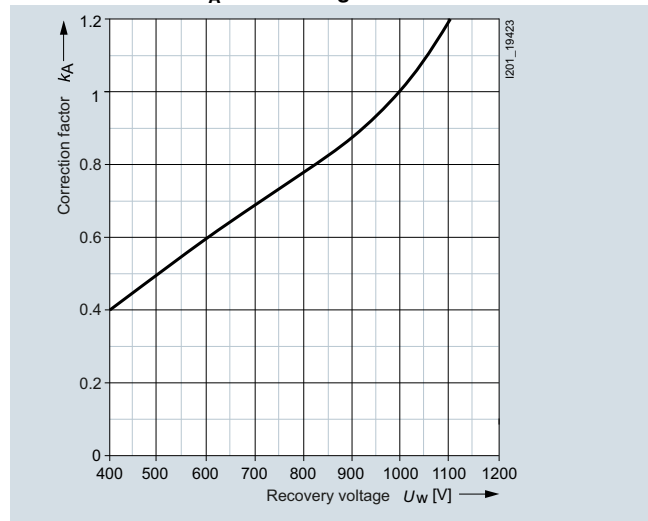


##### Peak arc voltage

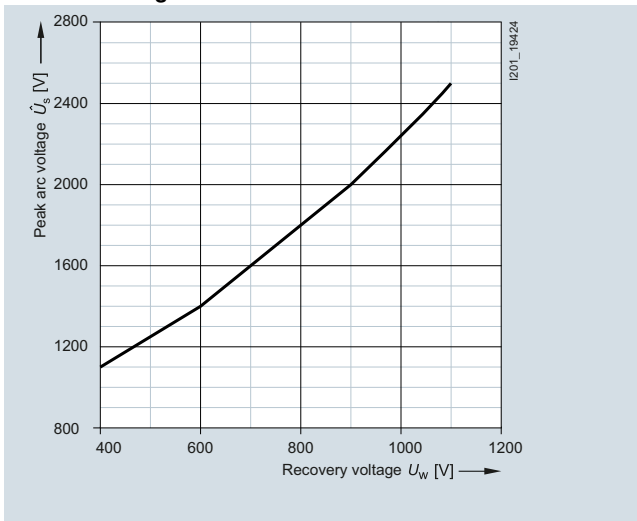

**3NE322. series**

Size: 1  
 Operational class: aR  
 Rated voltage: 1000 V AC  
 Rated current: 100 ... 250 A

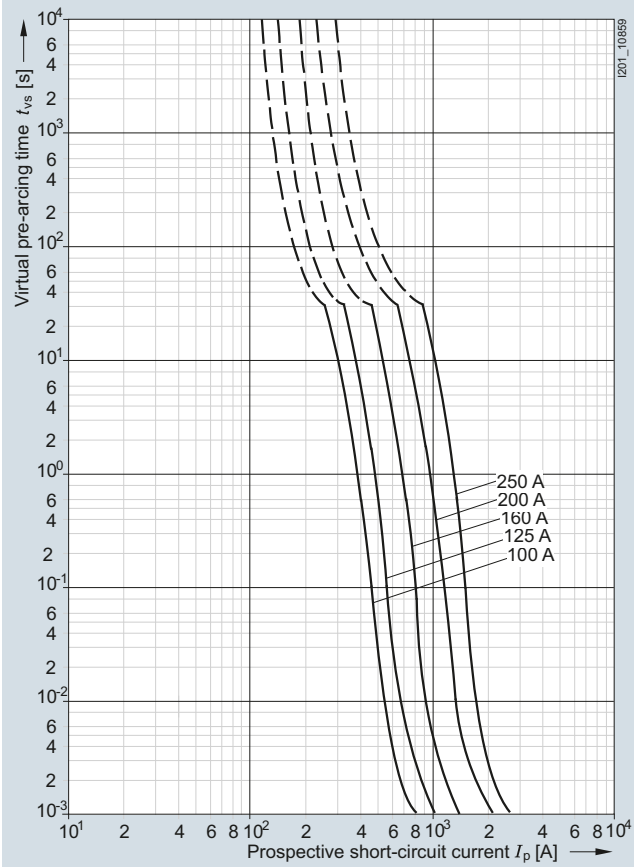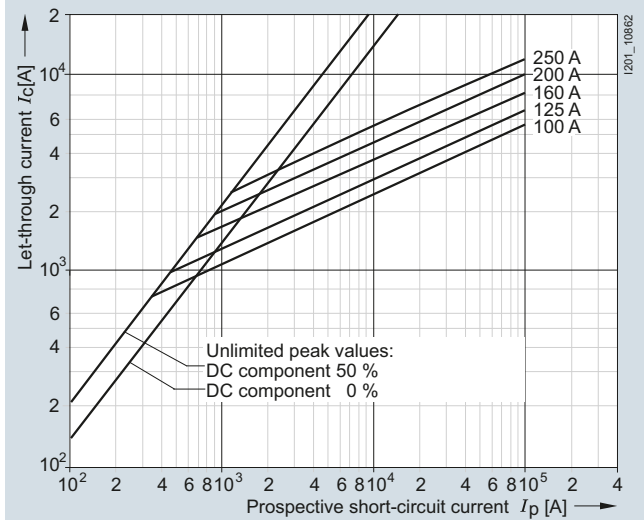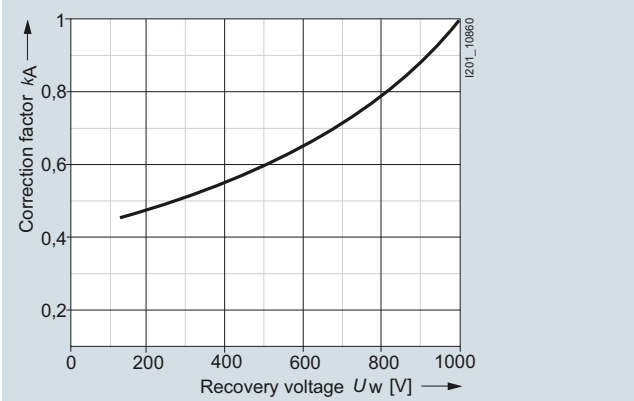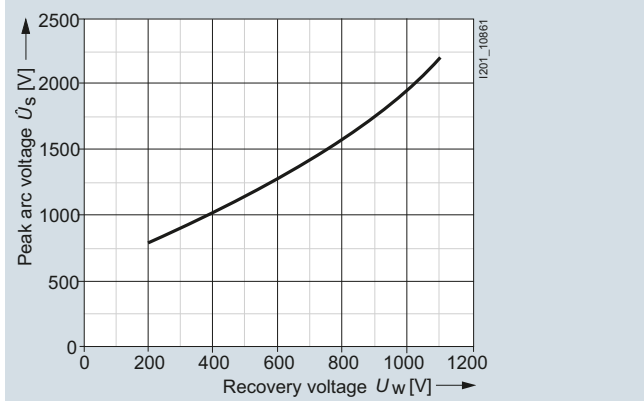**Time/current characteristics diagram****Let-through characteristics (current limitation at 50 Hz)****Correction factor  $k_A$  for breaking  $I^2t$  value****Peak arc voltage**

## Fuse Systems


### SITOR Semiconductor Fuses

#### LV HRC design


##### 3NE323. series

Size: 1  
 Operational class: aR  
 Rated voltage: 1000 V AC  
 Rated current: 315 ... 450 A


##### Time/current characteristics diagram

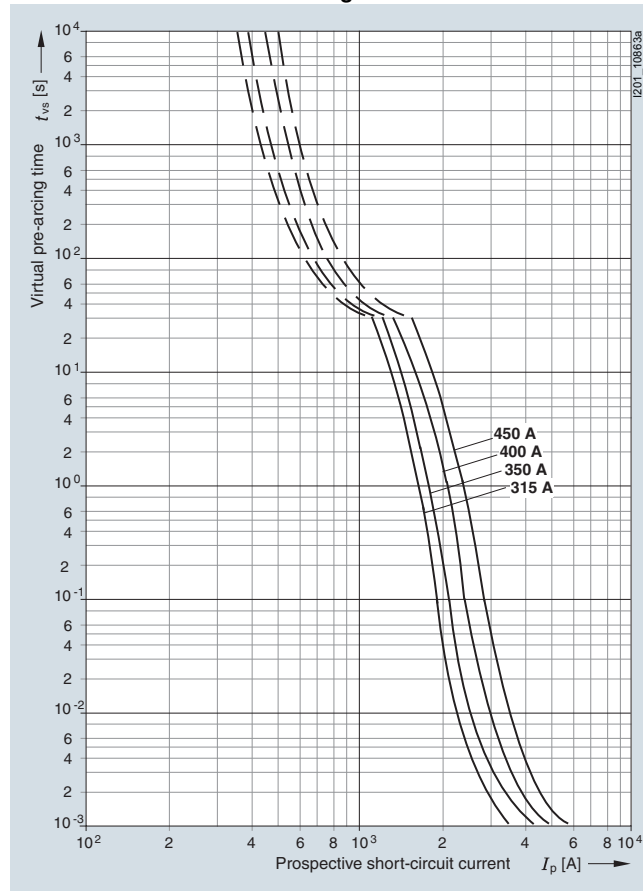


##### Let-through characteristics (current limitation at 50 Hz)

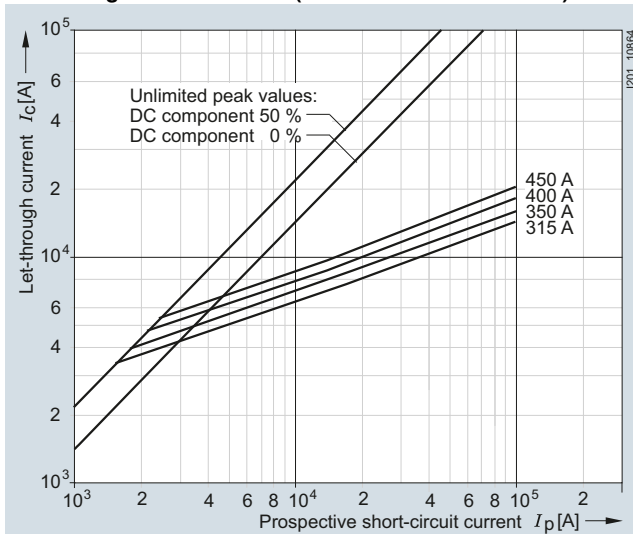

##### Correction factor $k_A$ for breaking $I^2 t$ value




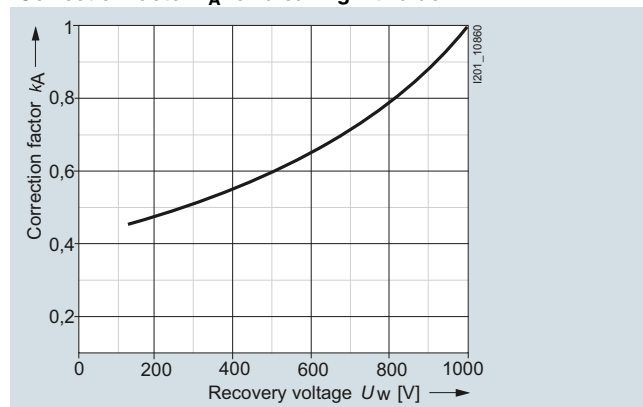


##### Peak arc voltage

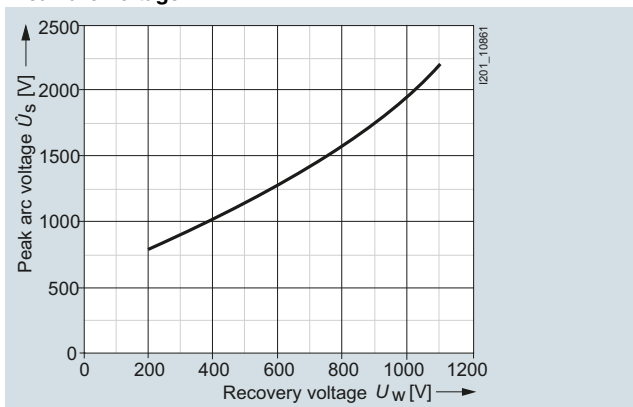

**3NE323.-0MK08 series**

Size: 1  
 Operational class: aR  
 Rated voltage: 1000 V AC/600 V DC  
 Rated current: 500 ... 630 A

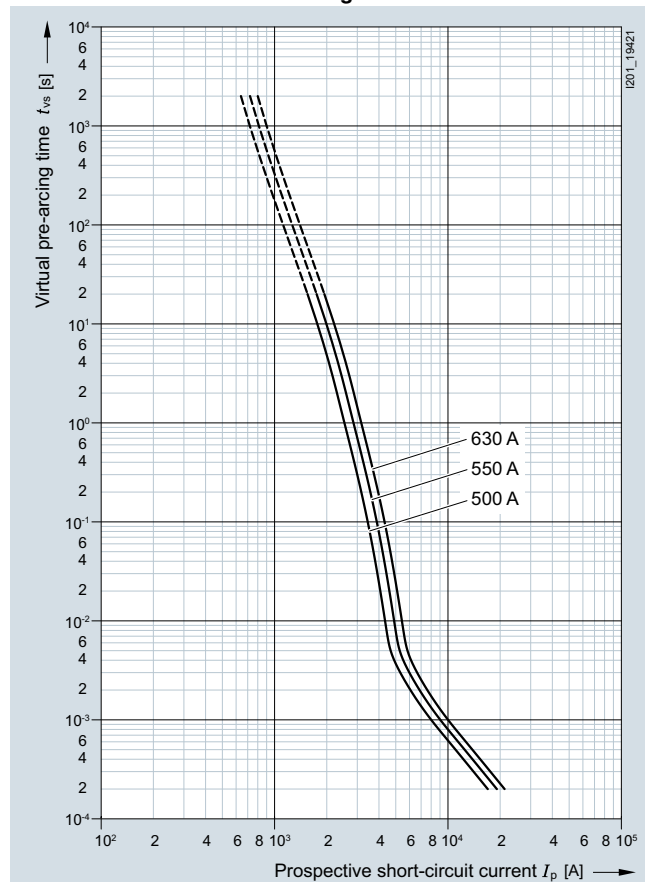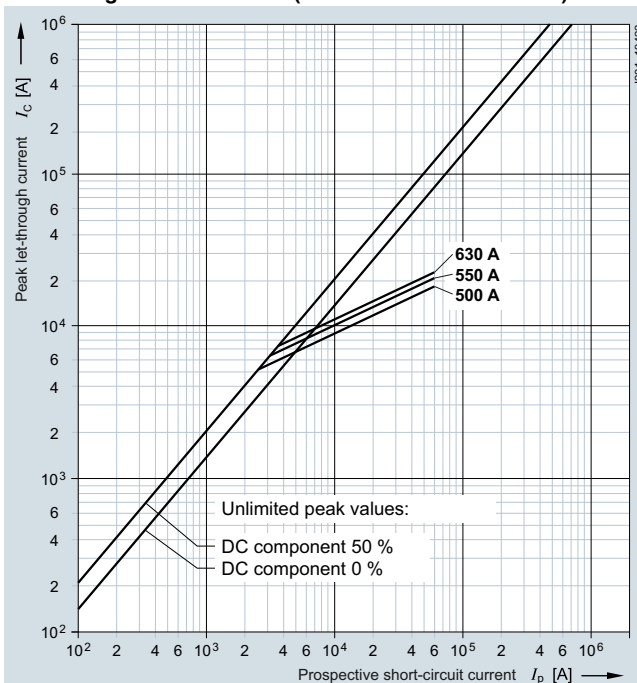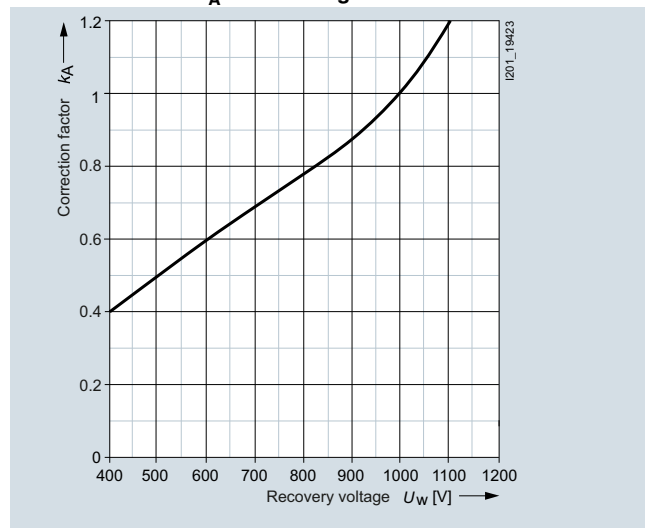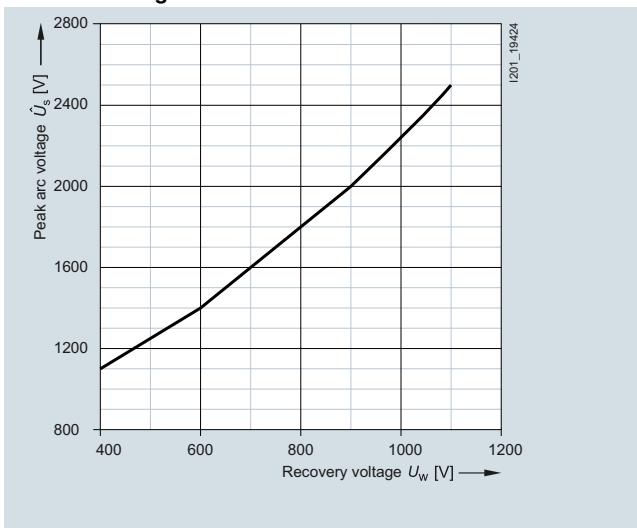**Time/current characteristics diagram****Let-through characteristics (current limitation at 50 Hz)****Correction factor  $k_A$  for breaking  $I^2t$  value****Peak arc voltage**

## Fuse Systems


### SITOR Semiconductor Fuses

#### LV HRC design


##### 3NE33.. series

Size: 2  
 Operational class: aR  
 Rated voltage: 1000 V AC (up to 630 A)  
 900 V AC (710 A)  
 800 V AC (800 A)  
 690 V AC (900 A)  
 Rated current: 400 ... 900 A


##### Time/current characteristics diagram

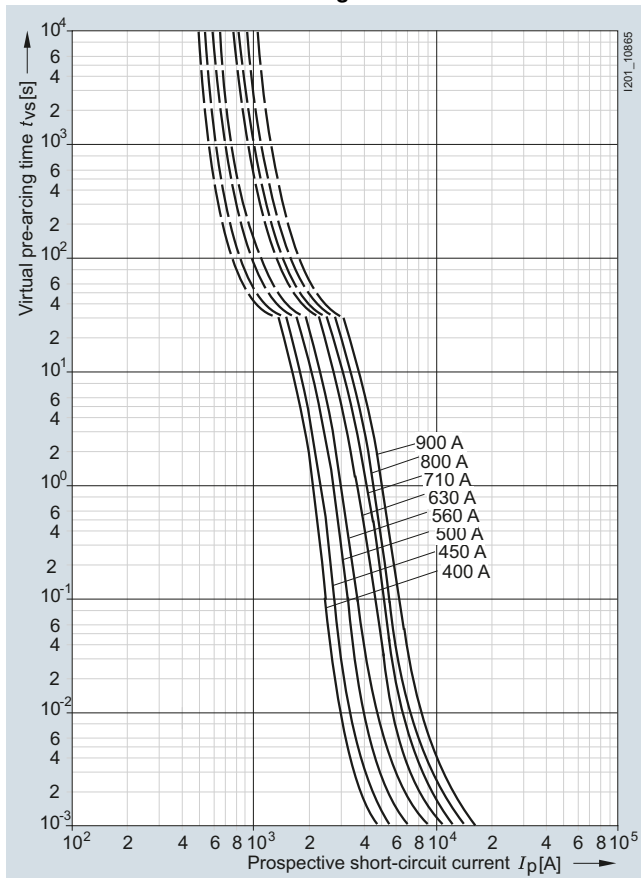


##### Let-through characteristics (current limitation at 50 Hz)

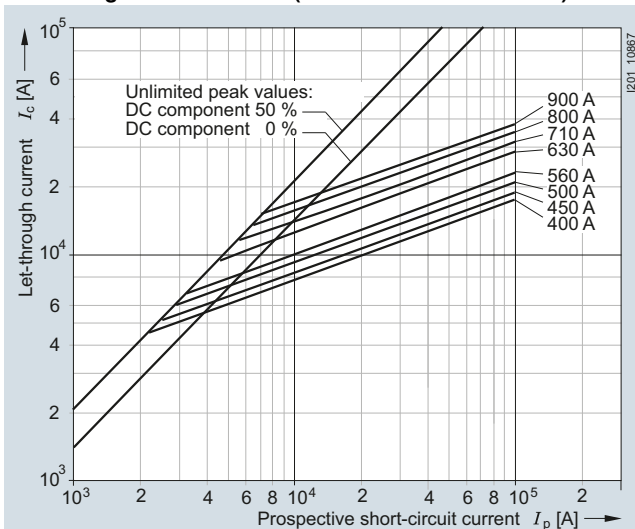

##### Correction factor $k_A$ for breaking $I^2 t$ value




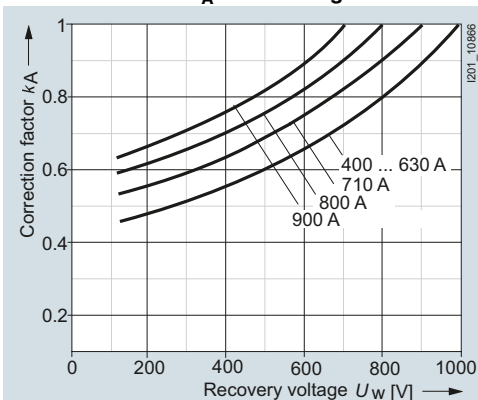


##### Peak arc voltage

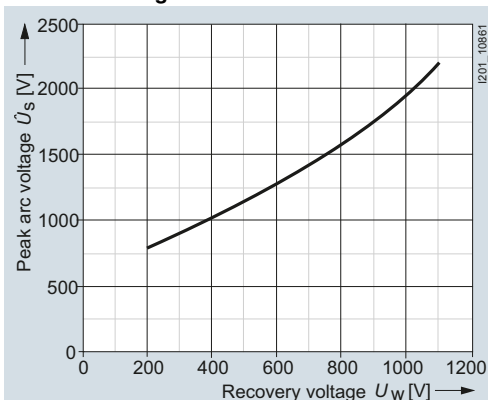

**3NE34..., 3NE36.. series**

Size: 3  
 Operational class: aR  
 Rated voltage: 1000 V AC  
 Rated current: 100 ... 710 A

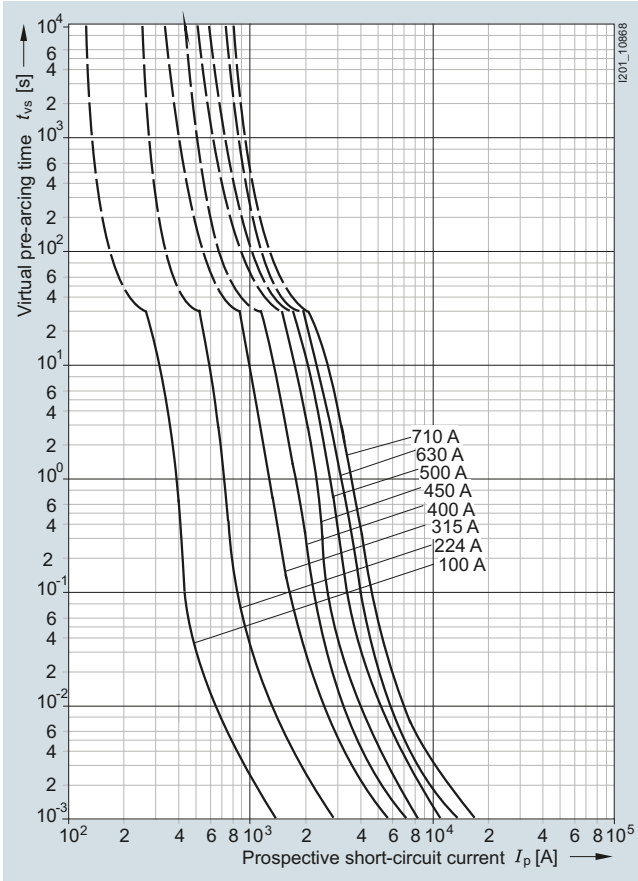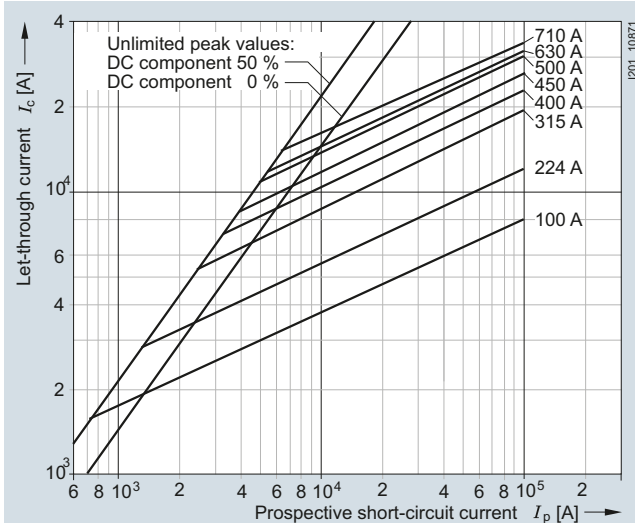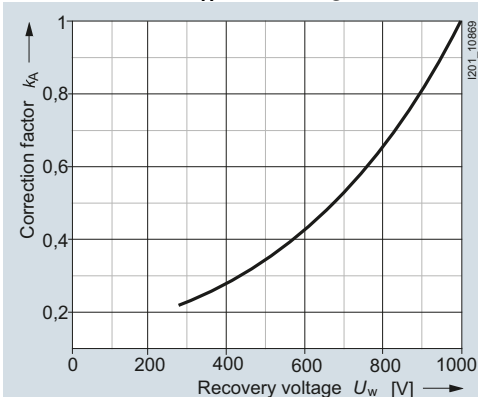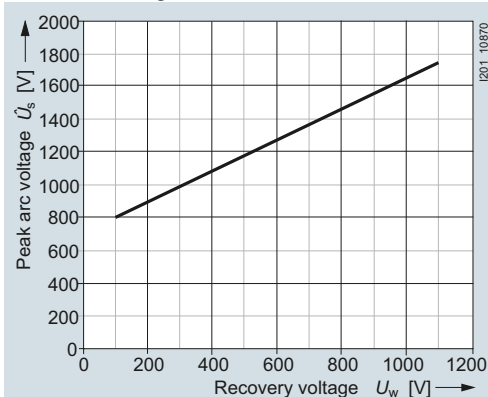**Time/current characteristics diagram****Let-through characteristics (current limitation at 50 Hz)****Correction factor  $k_A$  for breaking  $I^2t$  value****Peak arc voltage**

## Fuse Systems


### SITOR Semiconductor Fuses

#### LV HRC design


##### 3NE35.5-5, 3NE41...-5 series

Operational class: aR, gR  
 Rated voltage: 800 V AC (170 A)  
 1000 V AC (50 A, 100 A, 200 A, 450 A)  
 Rated current: 50 ... 450 A


##### Time/current characteristics diagram

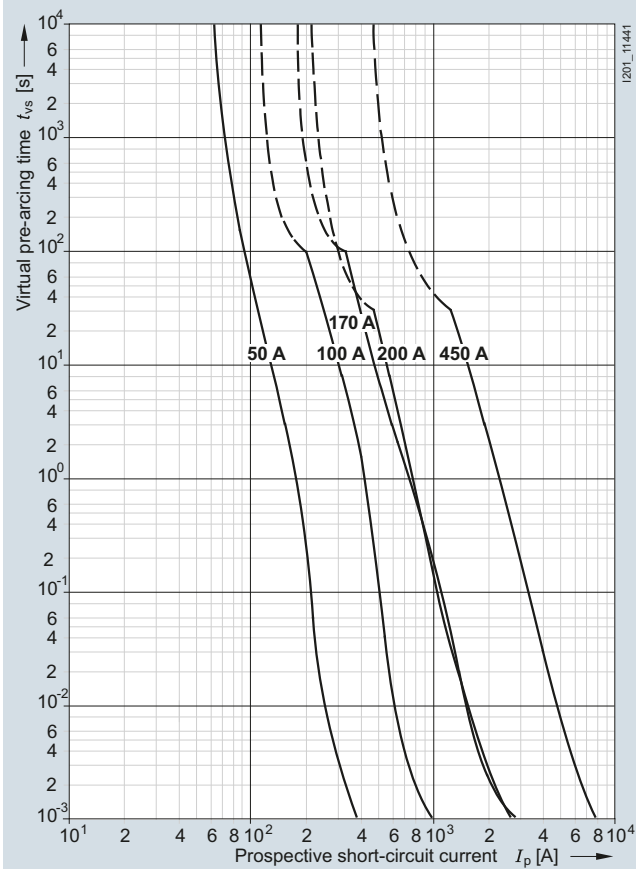


##### Let-through characteristics (current limitation at 50 Hz)

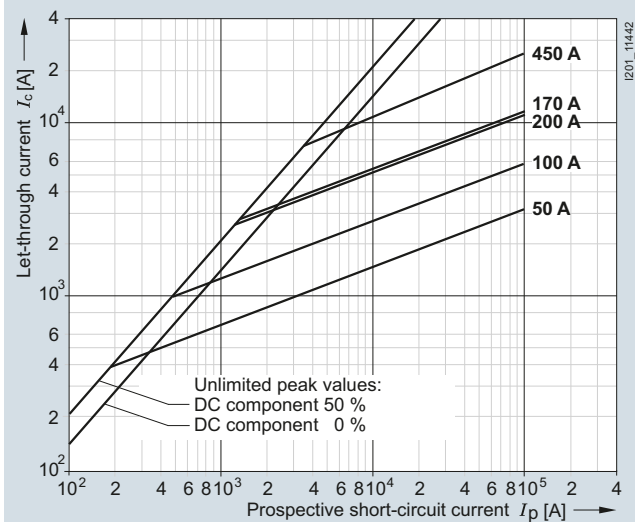

##### Correction factor $k_A$ for breaking $I^2t$ value




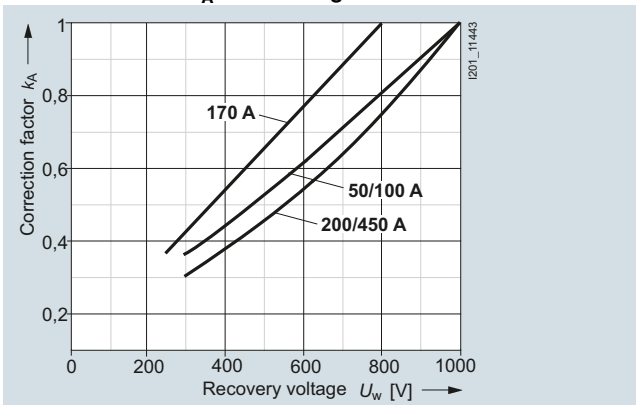


##### Peak arc voltage

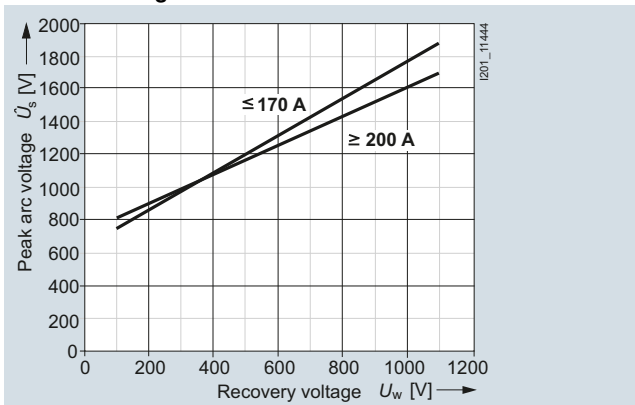

**3NE41.. series**

Size: 0  
 Operational class: gR or aR  
 Rated voltage: 1000 V AC  
 Rated current: 32 ... 160 A

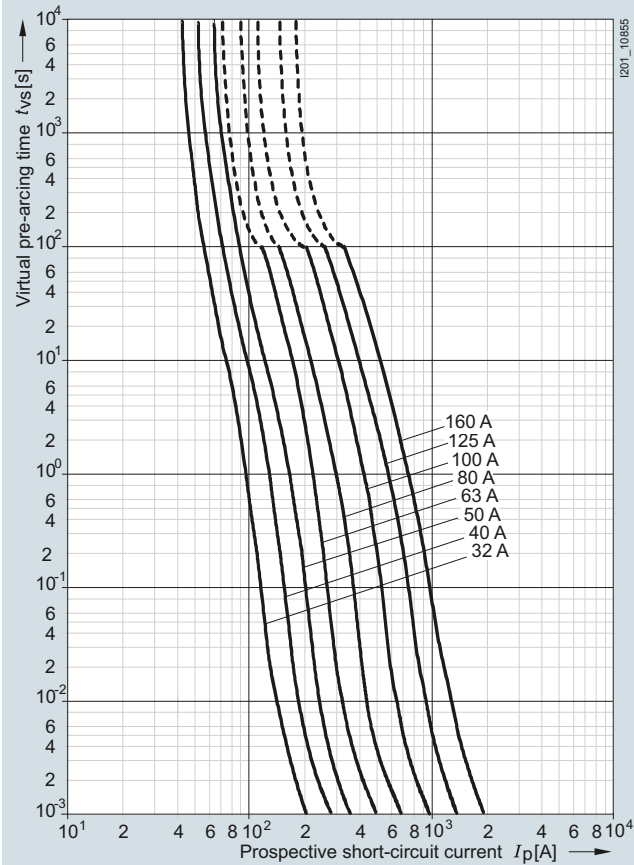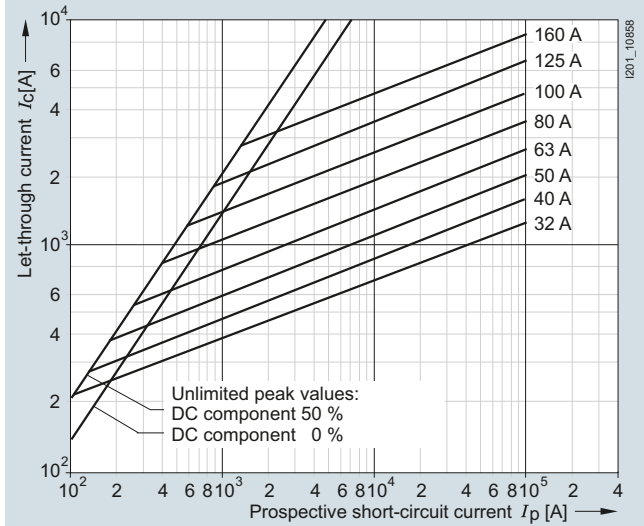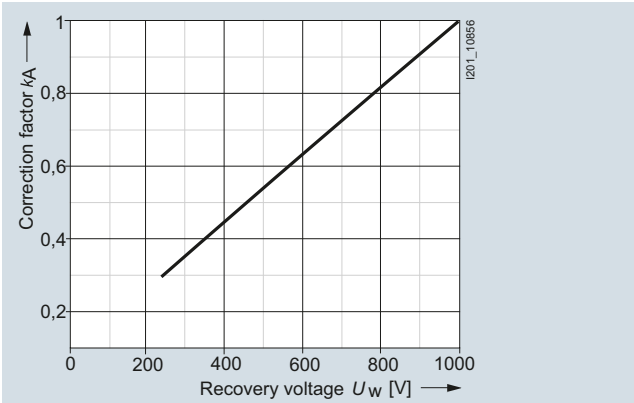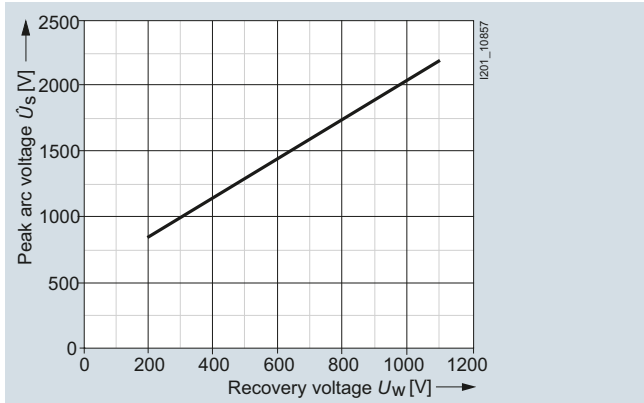**Time/current characteristics diagram****Let-through characteristics (current limitation at 50 Hz)****Correction factor  $k_A$  for breaking  $I^2t$  value****Peak arc voltage**

## Fuse Systems


### SITOR Semiconductor Fuses

#### LV HRC design


#### 3NE43...-0B, 3NE43...-6B, 3NE4337, 3NE4337-6 series

Size: 2  
 Operational class: aR  
 Rated voltage: 800 V AC  
 Rated current: 250 ... 710 A


#### Time/current characteristics diagram

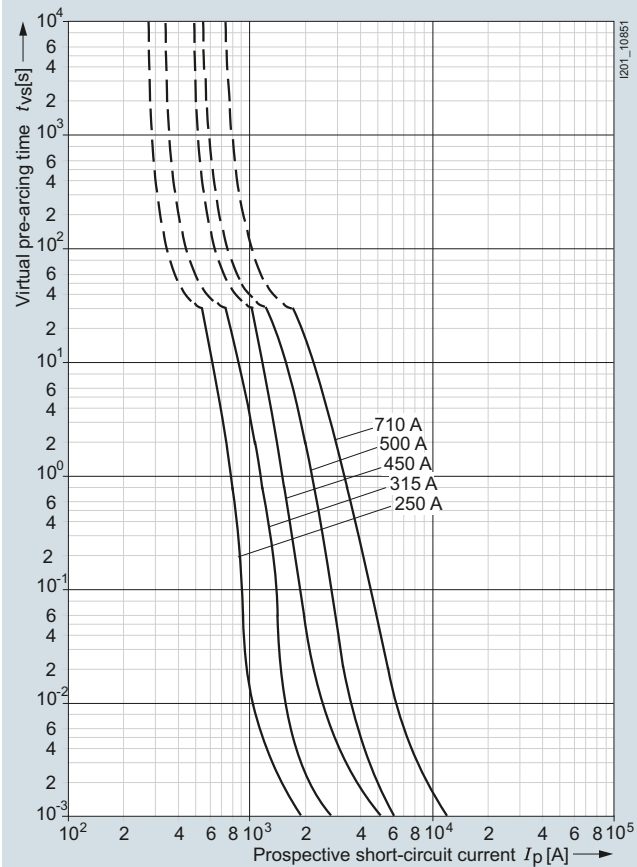


#### Let-through characteristics (current limitation at 50 Hz)

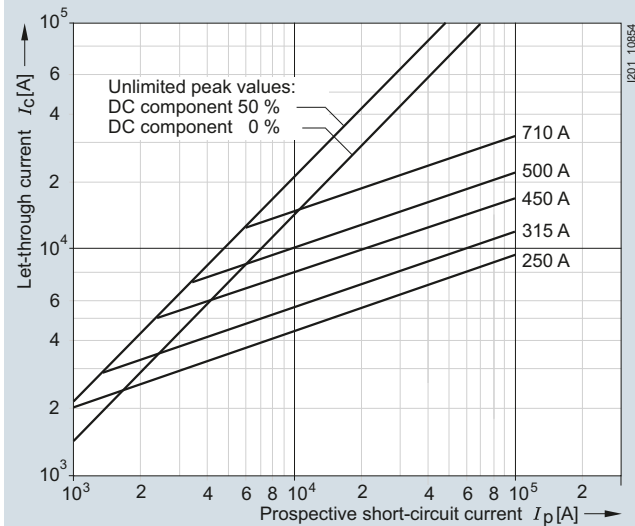

#### Correction factor $k_A$ for breaking $I^2t$ value


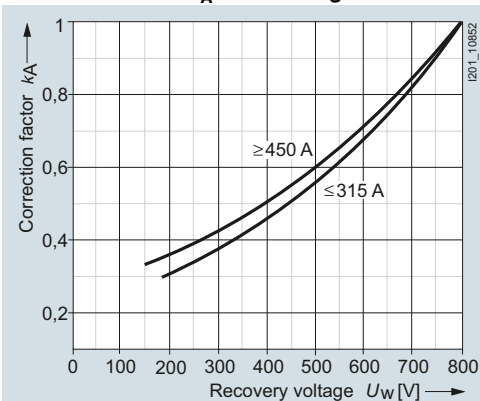


#### Peak arc voltage

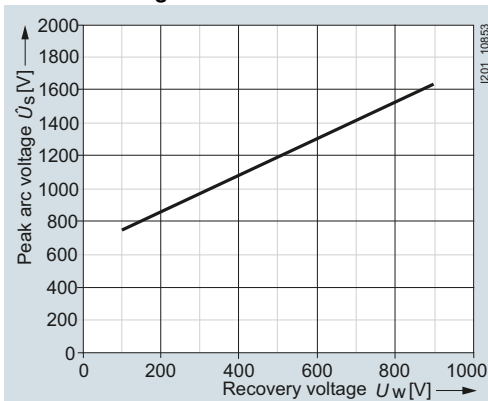

**3NE53..-0MK06, -MK66 series**

Size: 2  
 Operational class: gR, aR  
 Rated voltage: 1500 V AC/1000 V DC  
 Rated current: 40 ... 630 A

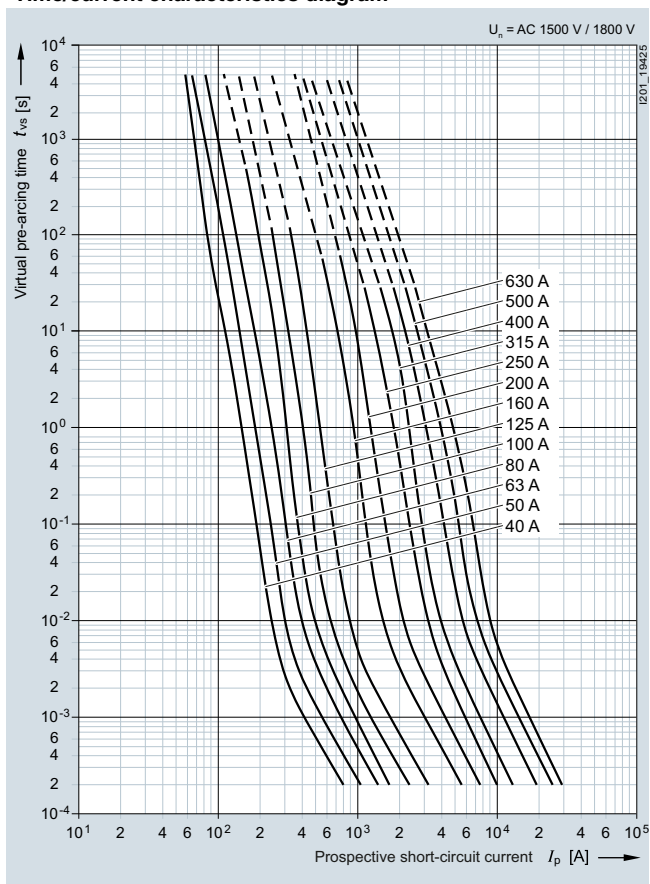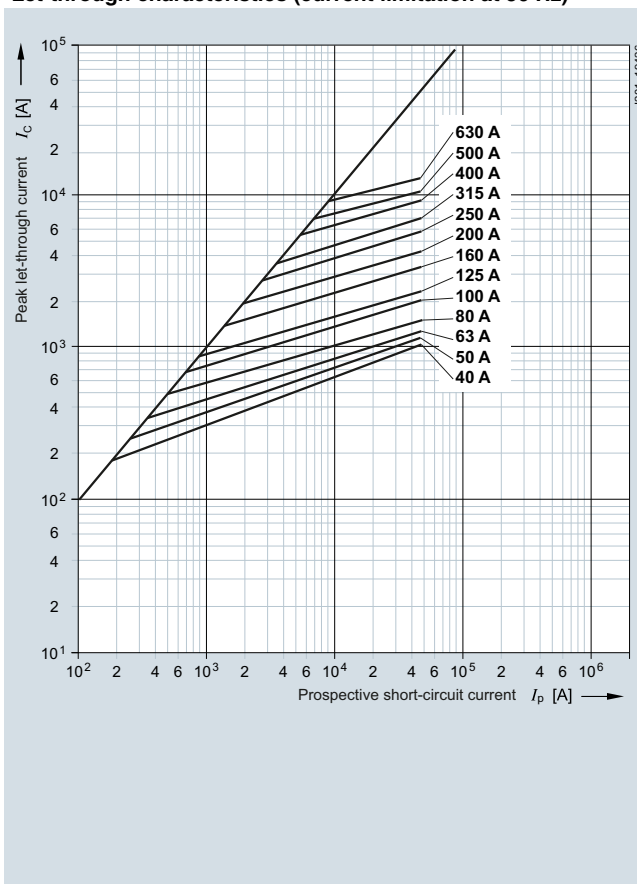**Time/current characteristics diagram****Let-through characteristics (current limitation at 50 Hz)**

## Fuse Systems


### SITOR Semiconductor Fuses

#### LV HRC design


##### 3NE54.. series

Size: 3  
 Operational class: aR  
 Rated voltage: 1500 V AC  
 Rated current: 160 ... 450 A


##### Time/current characteristics diagram

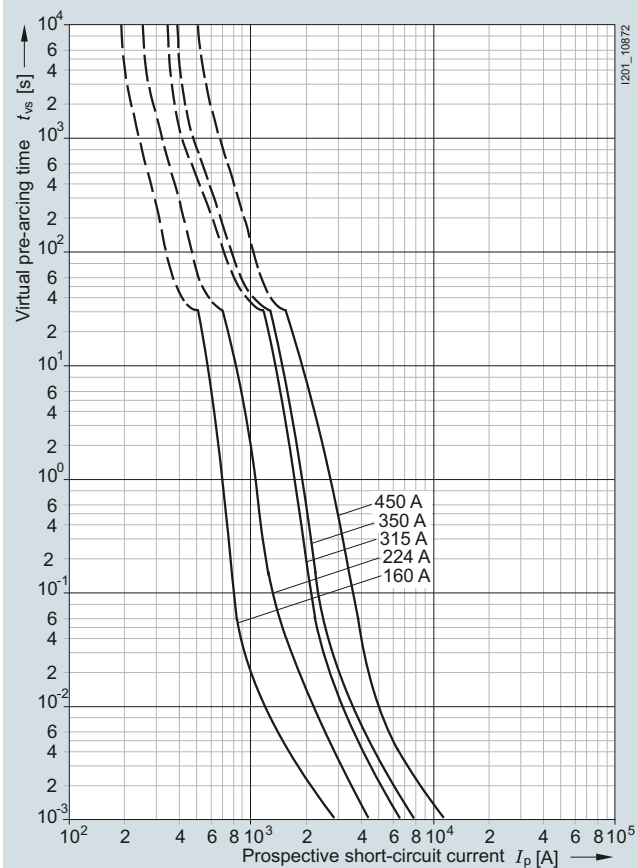


##### Let-through characteristics (current limitation at 50 Hz)

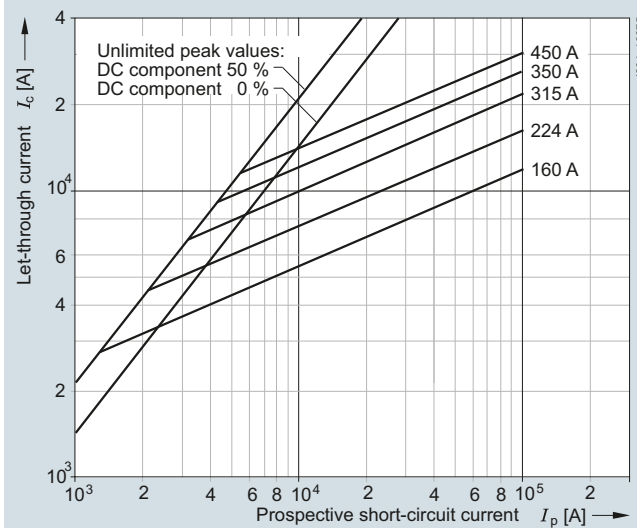

##### Correction factor $k_A$ for breaking $I^2t$ value




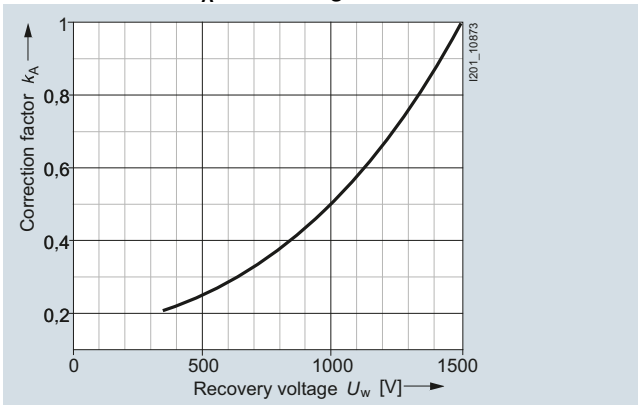


##### Peak arc voltage

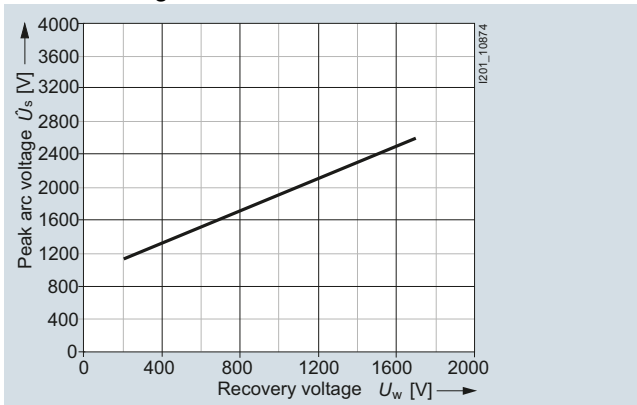

**3NE56.. series**

Size: 3  
 Operational class: aR  
 Rated voltage: 1500 V AC  
 Rated current: 250 ... 600 A

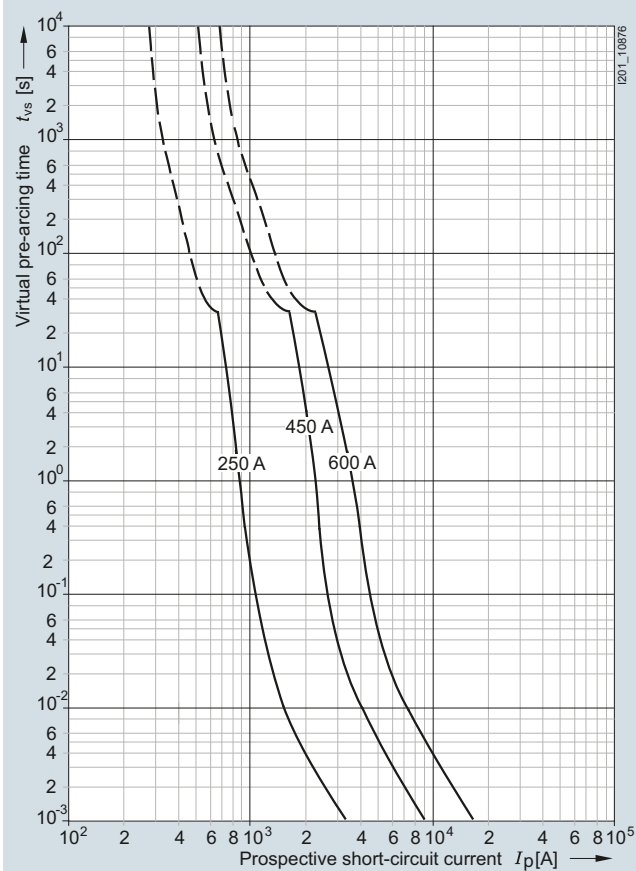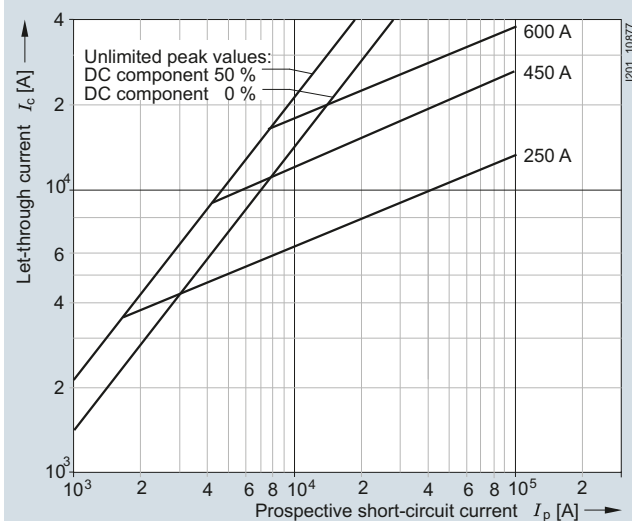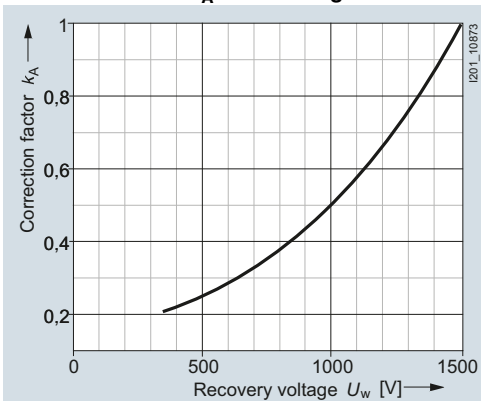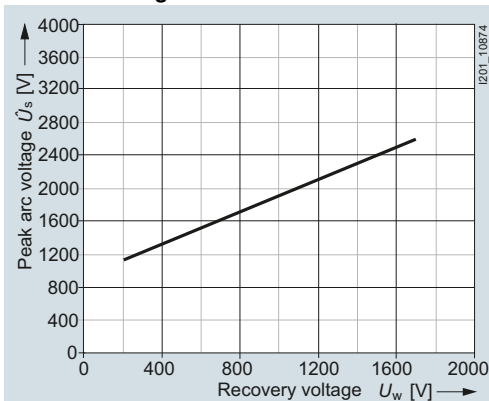**Time/current characteristics diagram****Let-through characteristics (current limitation at 50 Hz)****Correction factor  $k_A$  for breaking  $I^2t$  value****Peak arc voltage**

## Fuse Systems



### SITOR Semiconductor Fuses

#### LV HRC design

#### 3NE64.., 3NE94.. series


Operational class: aR, gR  
 Rated voltage: 600 V AC (850 A, 1250 A),  
 900 V AC (710 A, 900 A)  
 Rated current: 710 ... 1250 A

#### Time/current characteristics diagrams

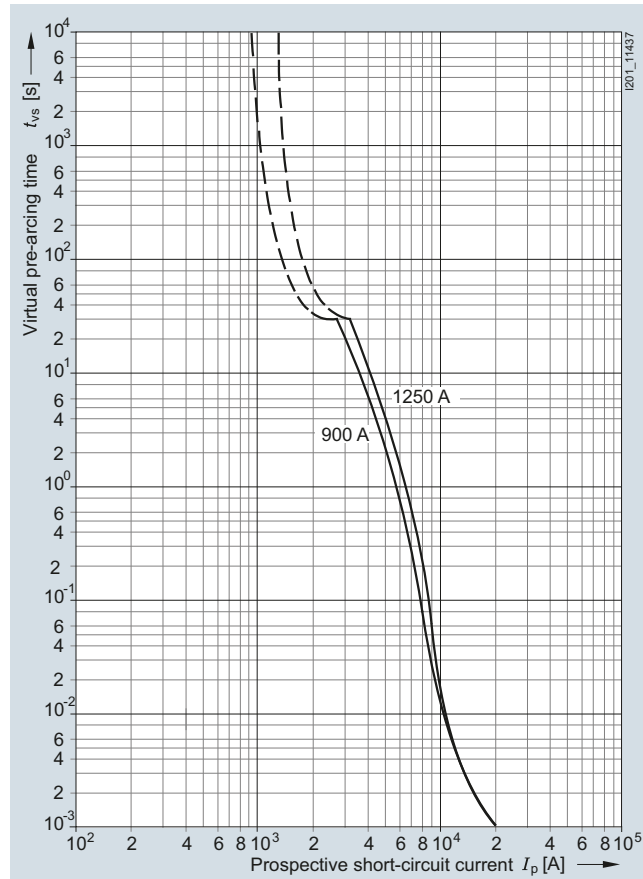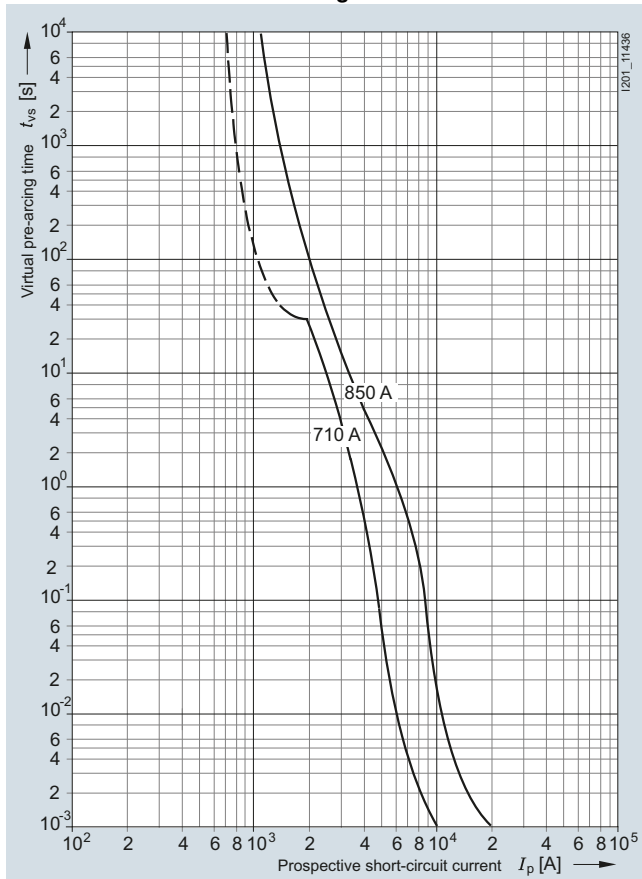


**Series 3NB1..., 3NB2...**


Size: 1L, 2L, 3L, 2 x 2L, 2 x 3L, 3 x 3L,  
 Operational class: aR  
 Rated voltage: 1250 V DC  
 Rated current: 200 ... 2400 A

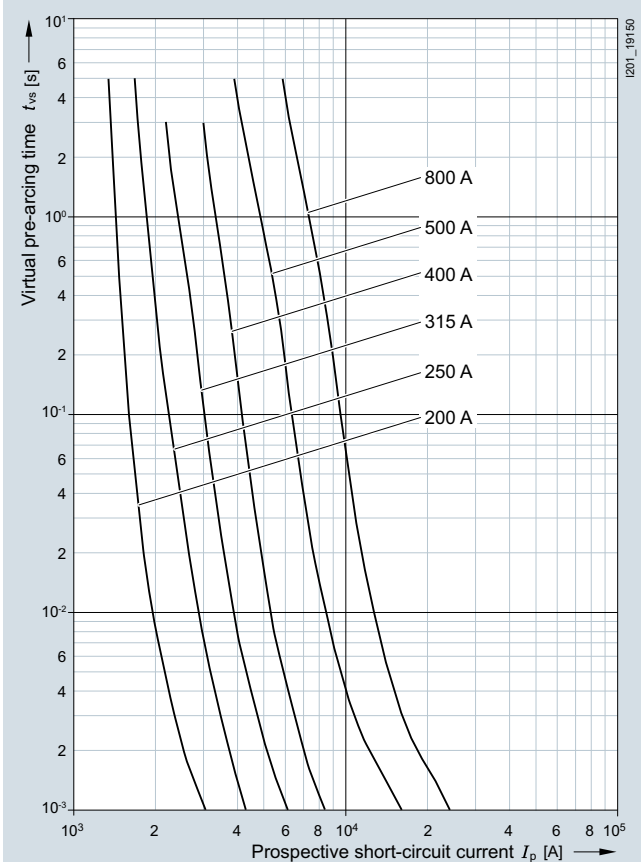**Time/current characteristics diagram**


3NB1...-4KK11

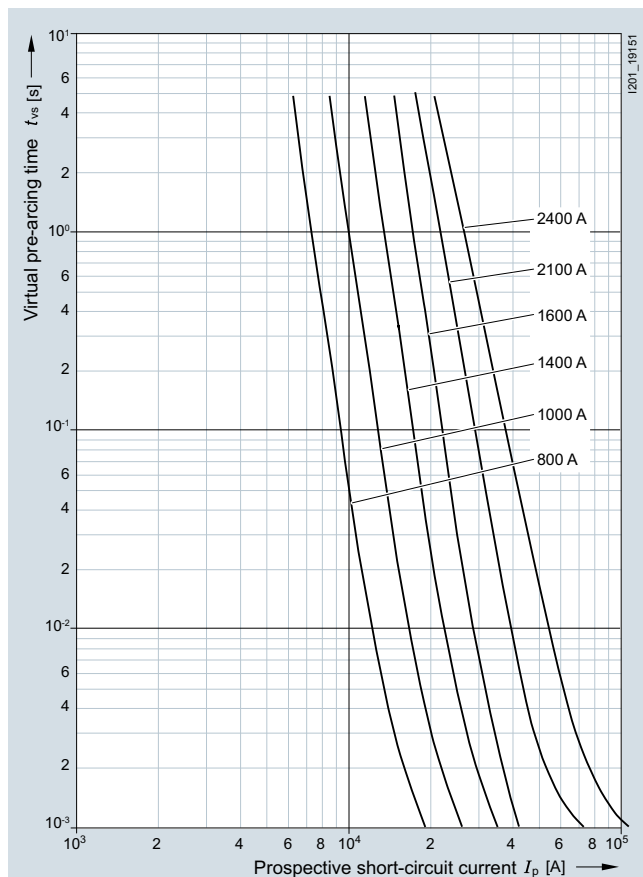

3NB2...-4KK1.

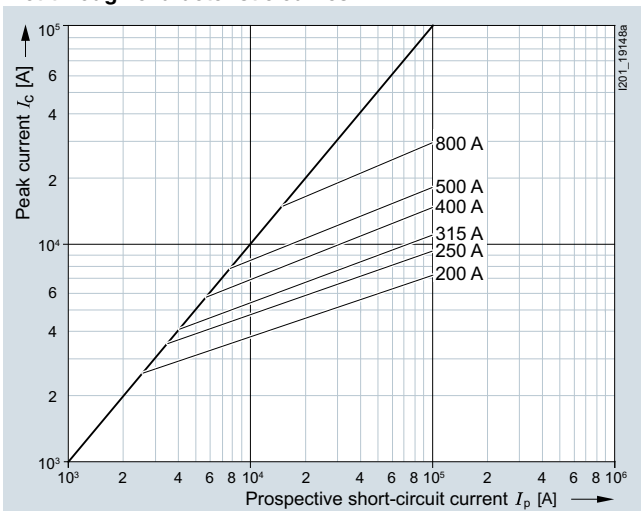**Let-through characteristic curves**

3NB1...-4KK11

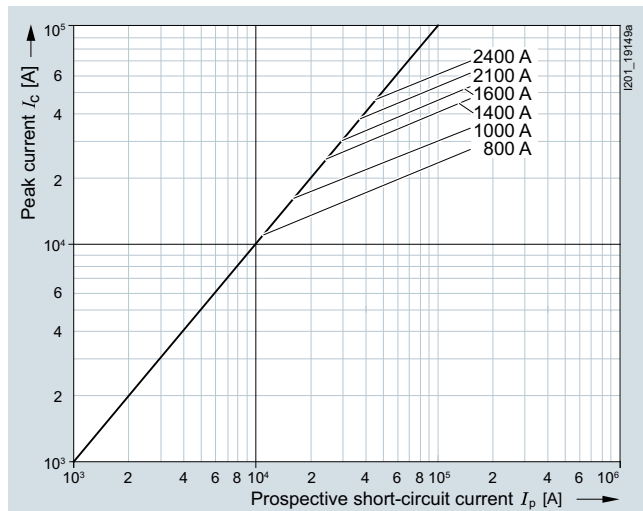


3NB2...-4KK1.

## Fuse Systems

### SITOR Semiconductor Fuses


#### LV HRC design

Correction factor  $k_A$  for breaking  $I^2t$  value

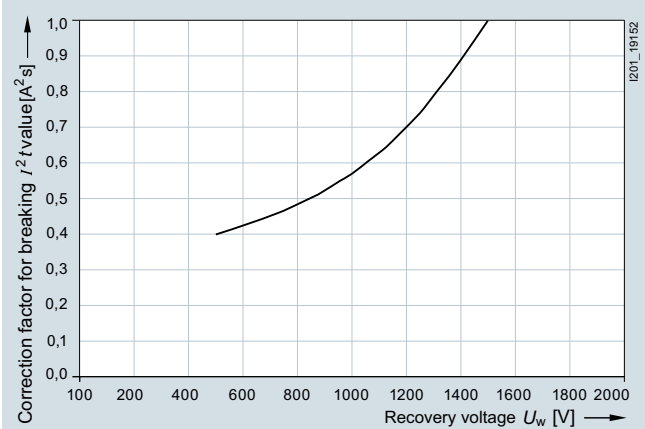

3NB1...-4KK11  
3NB2...-4KK1.




Peak arc voltage

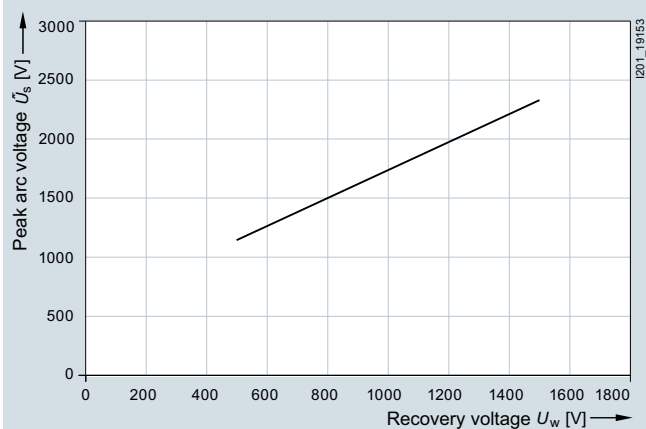

3NB1...-4KK11  
3NB2...-4KK1.

**3NE64..., 3NE94.. series**

Operational class: aR, gR  
 Rated voltage: 600 V AC (850 A, 1250 A),  
 900 V AC (710 A, 900 A)  
 Rated current: 710 ... 1250 A

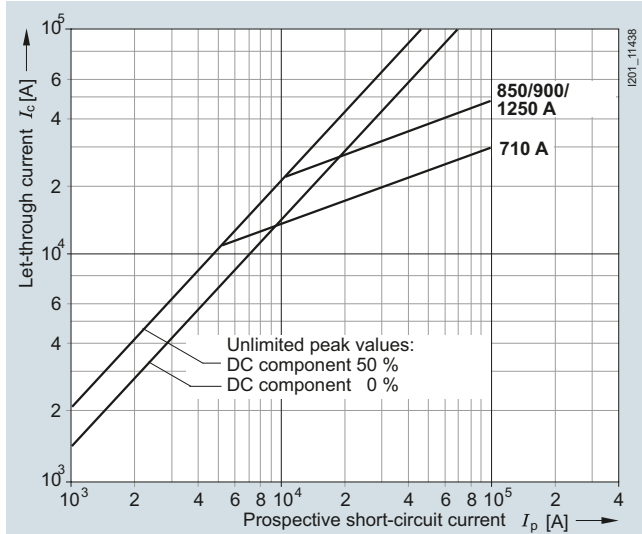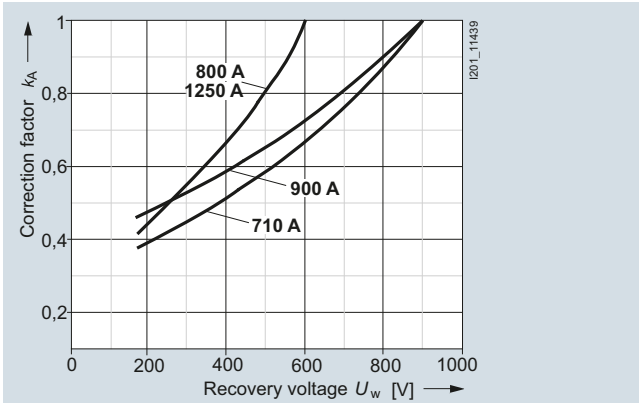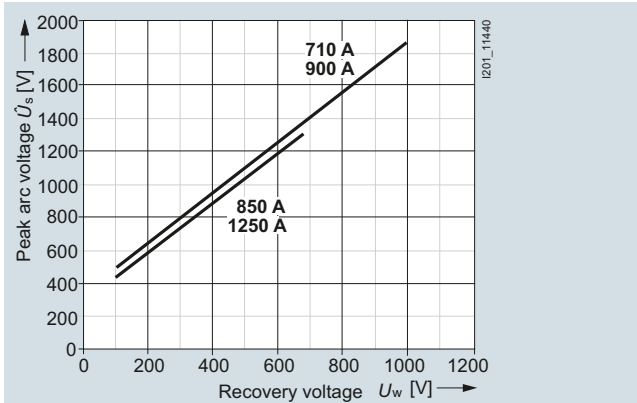**Let-through characteristics (current limitation at 50 Hz)****Correction factor  $k_A$  for breaking  $I^2t$  value****Peak arc voltage**

## Fuse Systems


### SITOR Semiconductor Fuses

#### LV HRC design


##### 3NE74..., 3NE76.. series

Size: 3  
 Operational class: aR  
 Rated voltage: 2000 V AC  
 Rated current: 200 ... 710 A


##### Time/current characteristics diagram

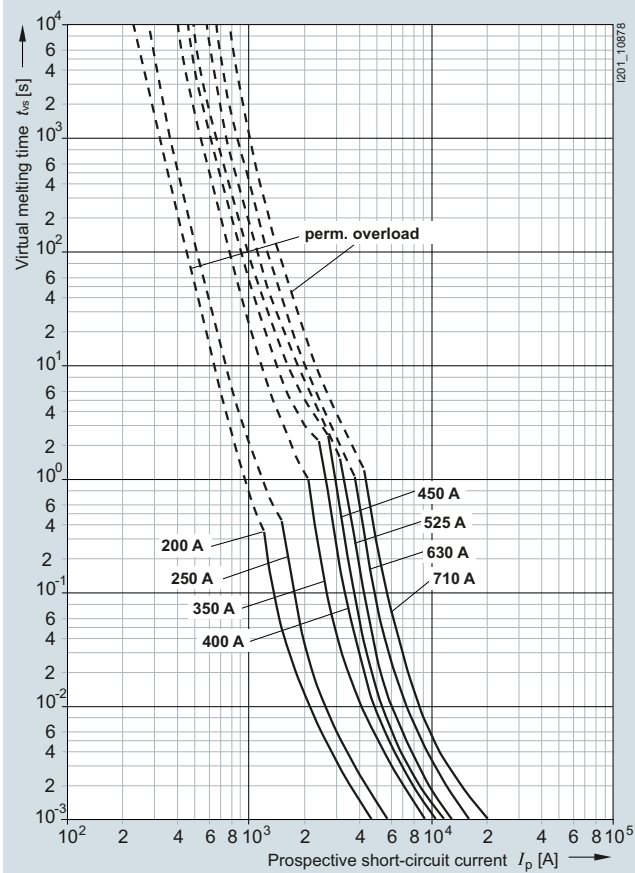


##### Let-through characteristics (current limitation at 50 Hz)

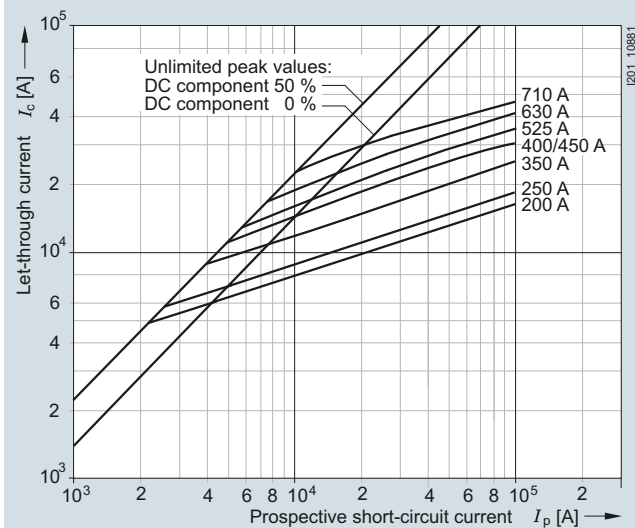

##### Correction factor $k_A$ for breaking $I^2t$ value




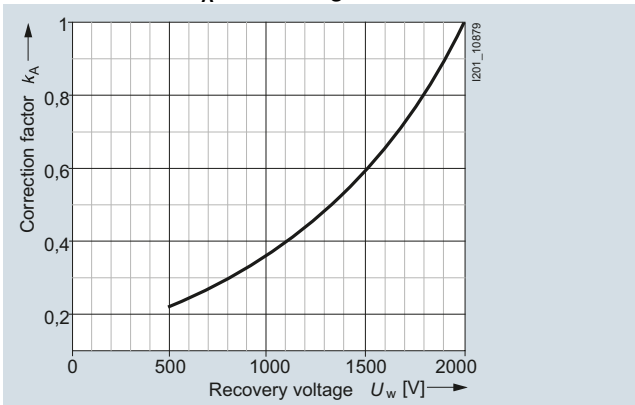


##### Peak arc voltage

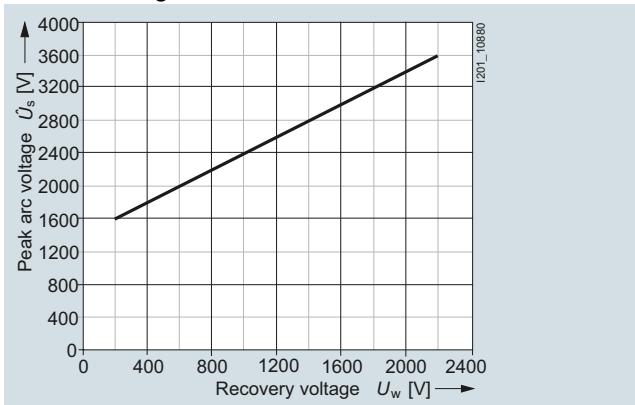

**3NE80...-1 series**

Size: 00  
 Operational class: gR or aR  
 Rated voltage: 690 V AC  
 Rated current: 25 ... 160 A

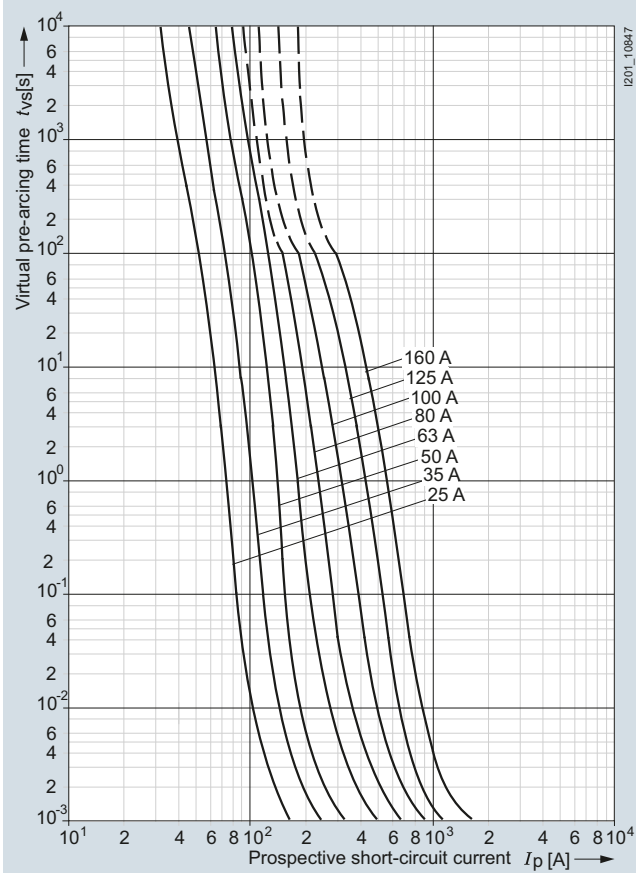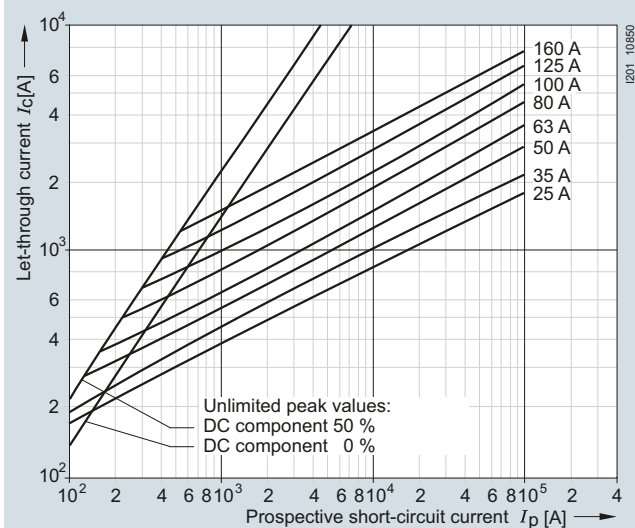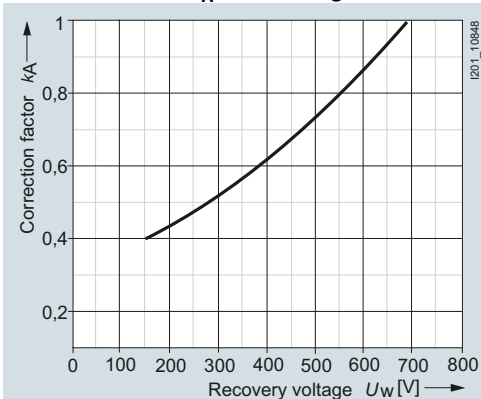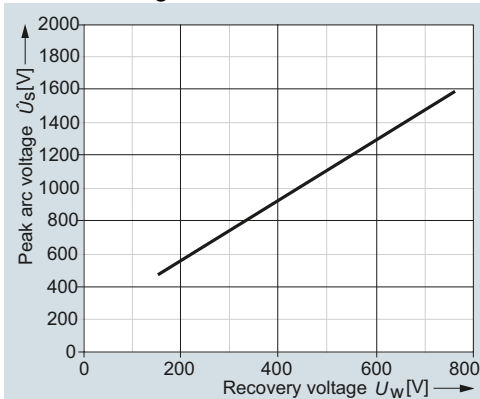**Time/current characteristics diagram****Let-through characteristics (current limitation at 50 Hz)****Correction factor  $k_A$  for breaking  $I^2t$  value****Peak arc voltage**

## Fuse Systems


### SITOR Semiconductor Fuses

#### LV HRC design


##### 3NE80...3MK series

Size: 00  
 Operational class: gR/aR  
 Rated voltage: 690 V AC/440 V DC  
 Rated current: 80 A, 100 A, 350 A, 400 A


Time/current characteristics diagram

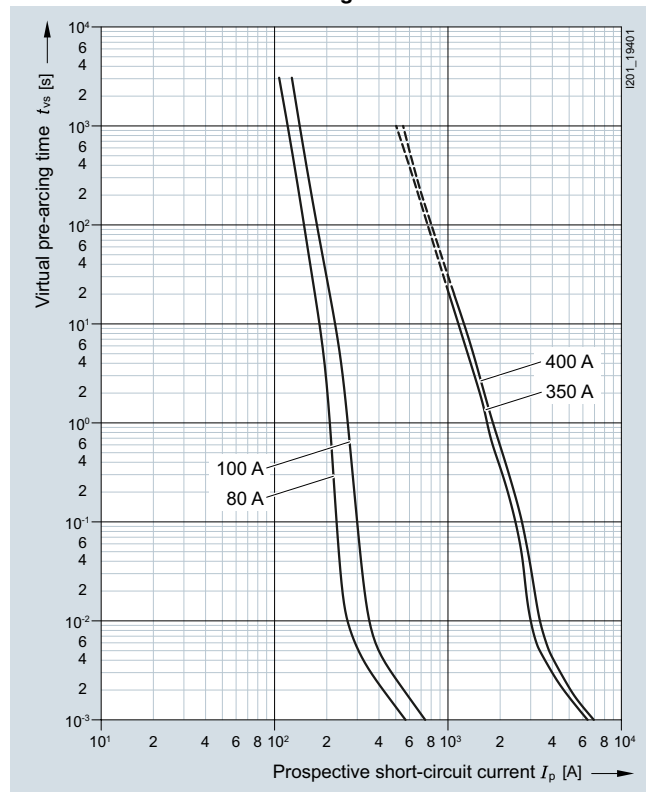


Let-through characteristics (current limitation at 50 Hz)

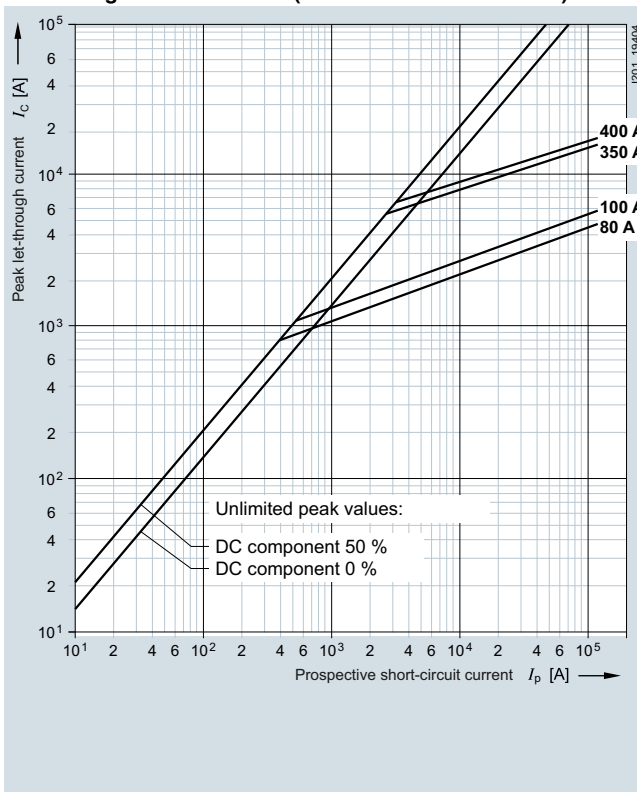

Correction factor  $k_A$  for breaking  $I^2t$  value




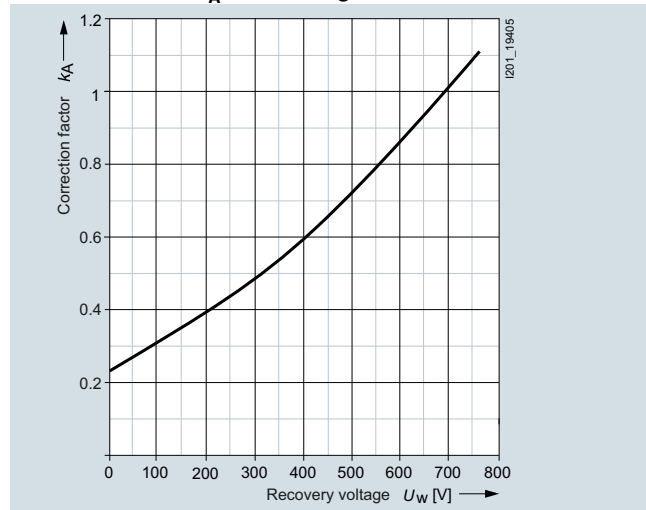


Peak arc voltage

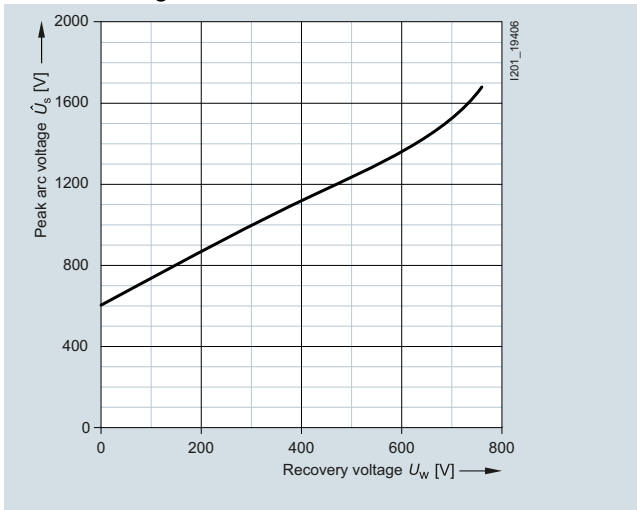

**3NE82..-0MK series**

Size: 1  
 Operational class: aR  
 Rated voltage: 690 V AC/440 V DC  
 Rated current: 100 ... 315 A

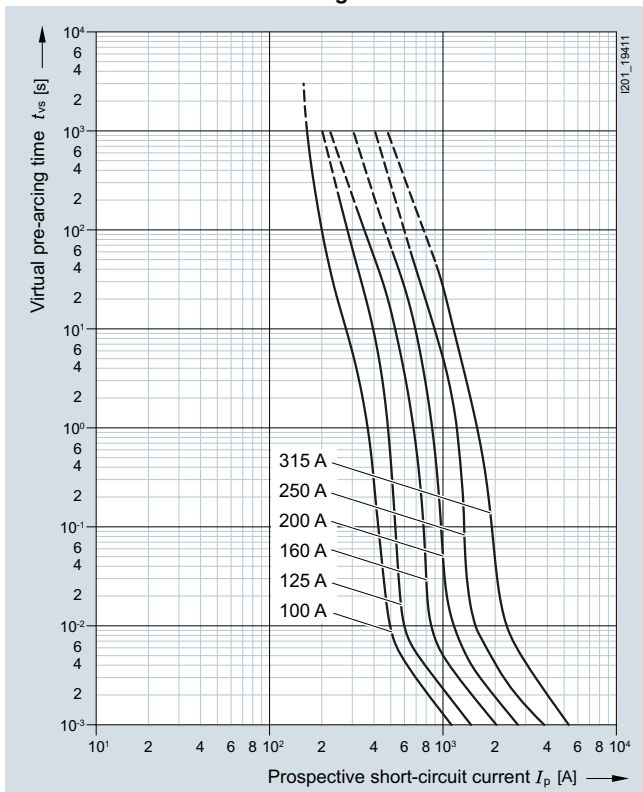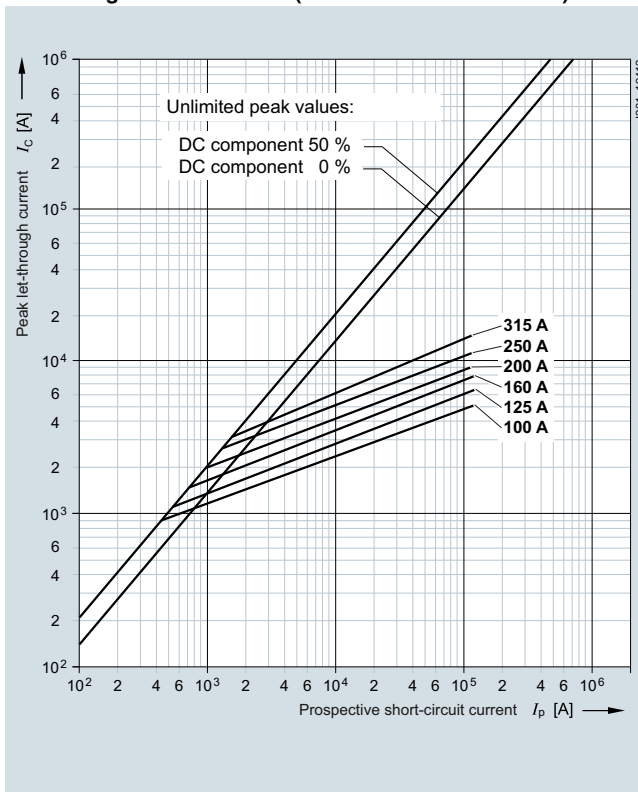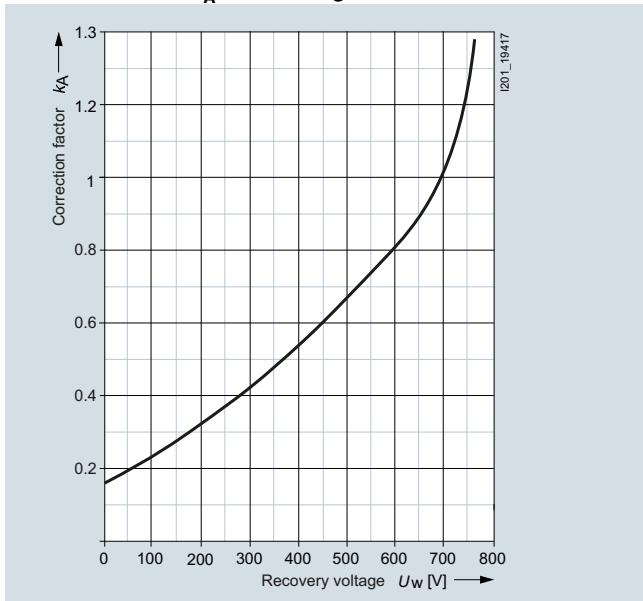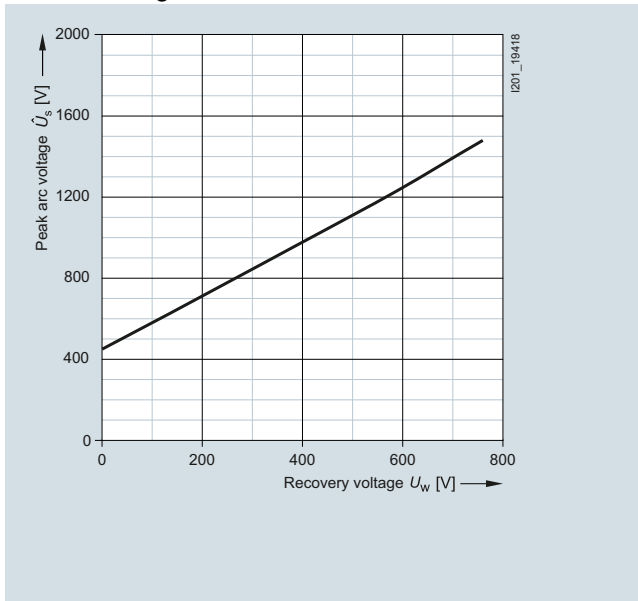**Time/current characteristics diagram****Let-through characteristics (current limitation at 50 Hz)****Correction factor  $k_A$  for breaking  $I^2t$  value****Peak arc voltage**

## Fuse Systems


### SITOR Semiconductor Fuses

#### LV HRC design


##### 3NE82..-3MK series

Size: 1  
 Operational class: aR  
 Rated voltage: 690 V AC/440 V DC  
 Rated current: 100 ... 630 A


##### Time/current characteristics diagram

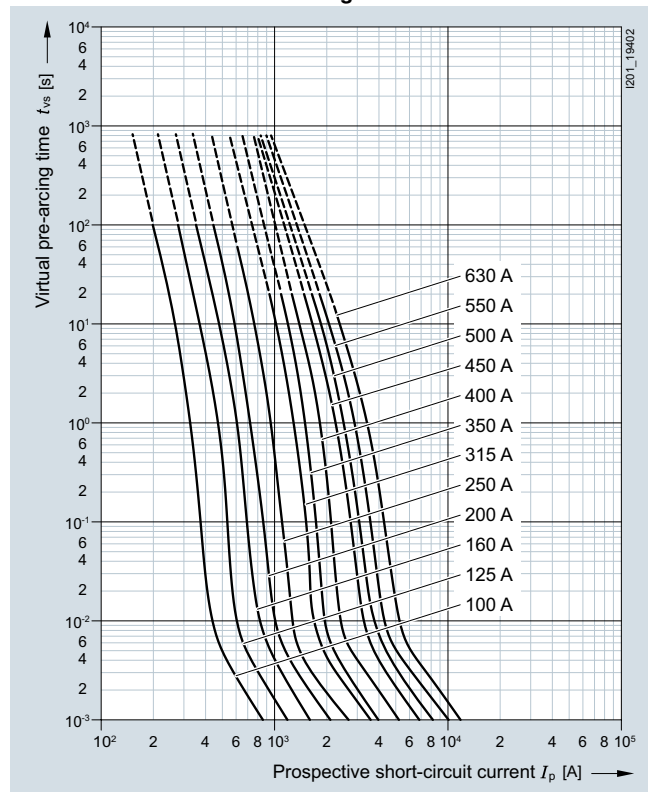


##### Let-through characteristics (current limitation at 50 Hz)

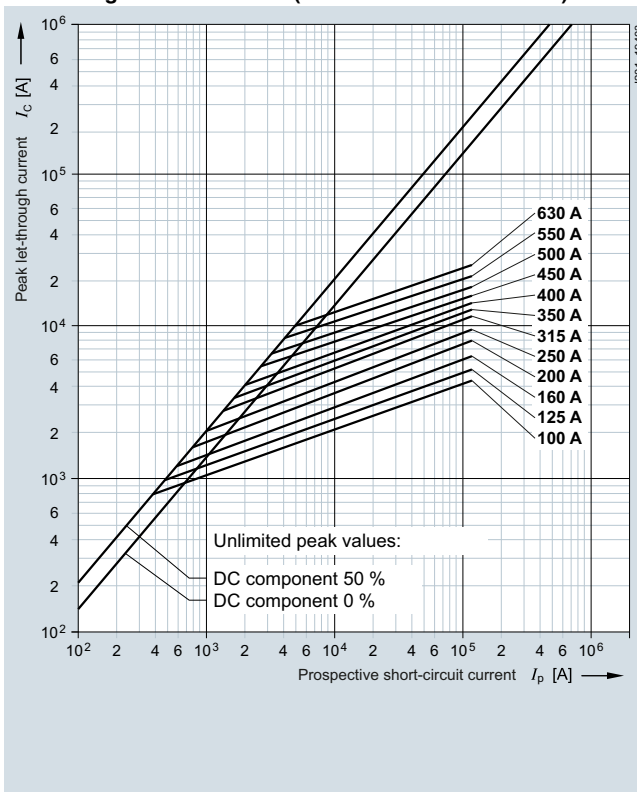

##### Correction factor $k_A$ for breaking $I^2t$ value




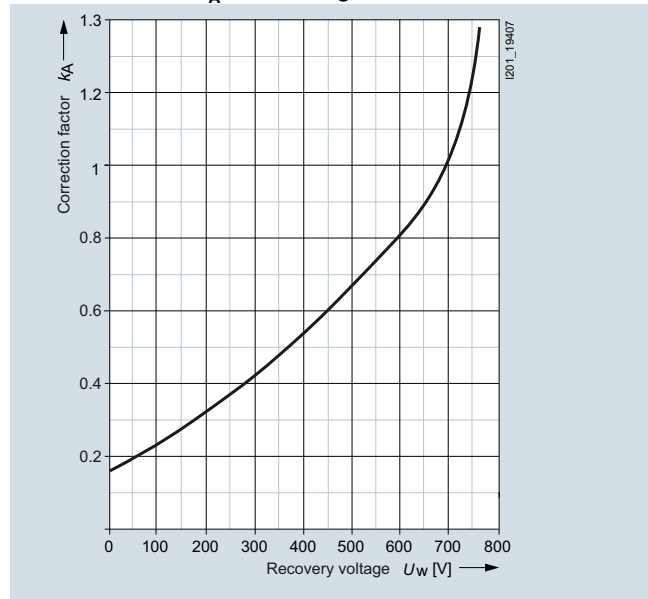


##### Peak arc voltage

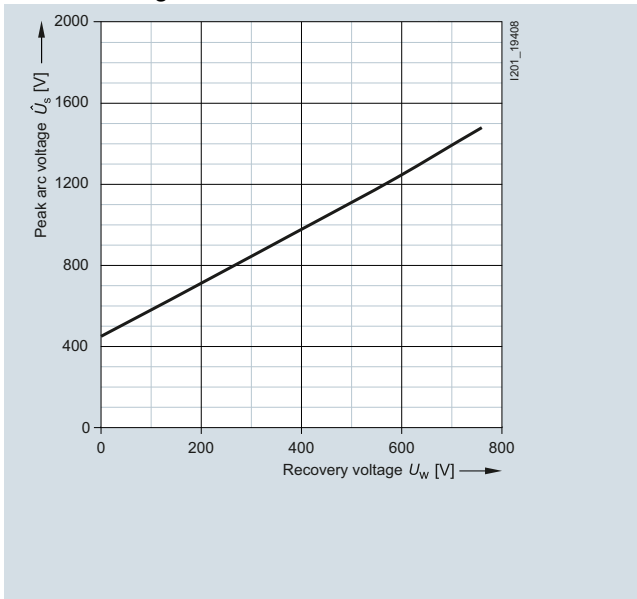

**3NE83..-0MK series**

Size: 2  
 Operational class: aR  
 Rated voltage: 690 V AC/440 V DC  
 Rated current: 350 ... 630 A

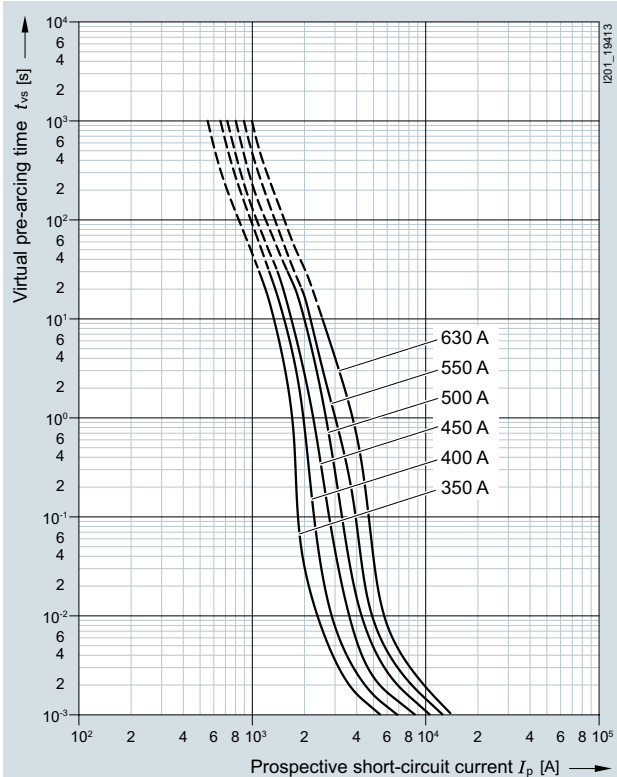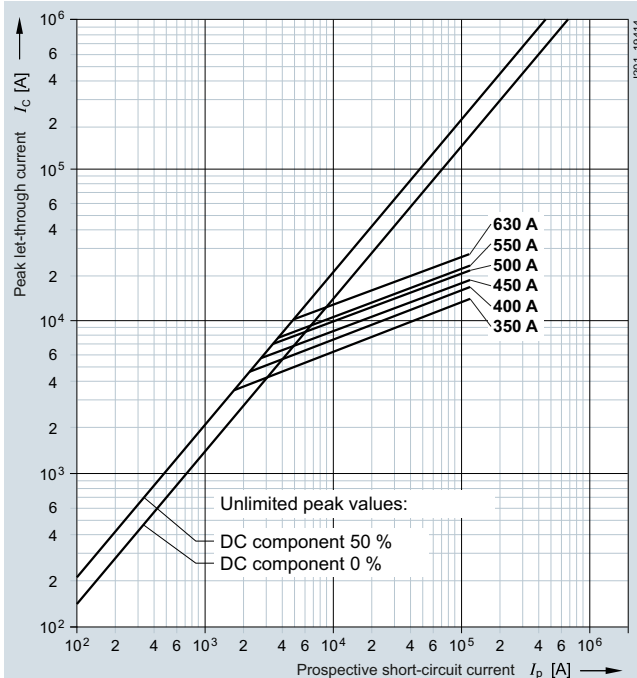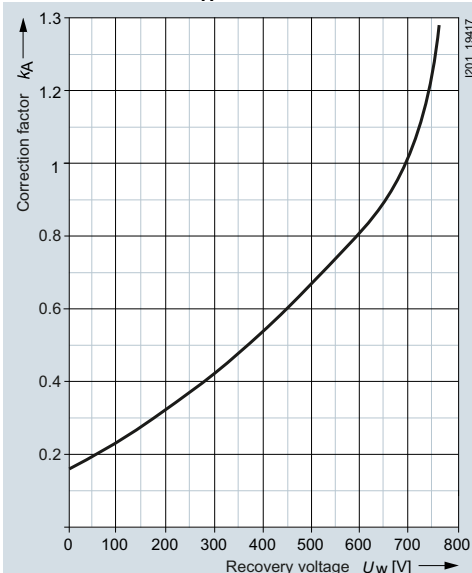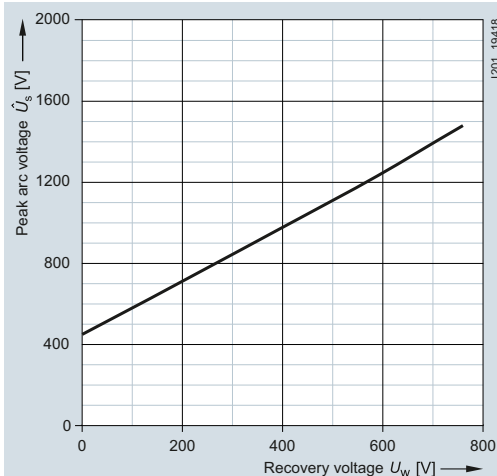**Time/current characteristics diagram****Let-through characteristics (current limitation at 50 Hz)****Correction factor  $k_A$  for breaking  $I^2t$  value****Peak arc voltage**

## Fuse Systems


### SITOR Semiconductor Fuses

#### LV HRC design


##### 3NE870.-1, 3NE871.-1 series

Size: 000  
 Operational class: gR or aR  
 Rated voltage: 690 V AC/700 V DC  
 Rated current: 20 ... 63 A


##### Time/current characteristics diagram

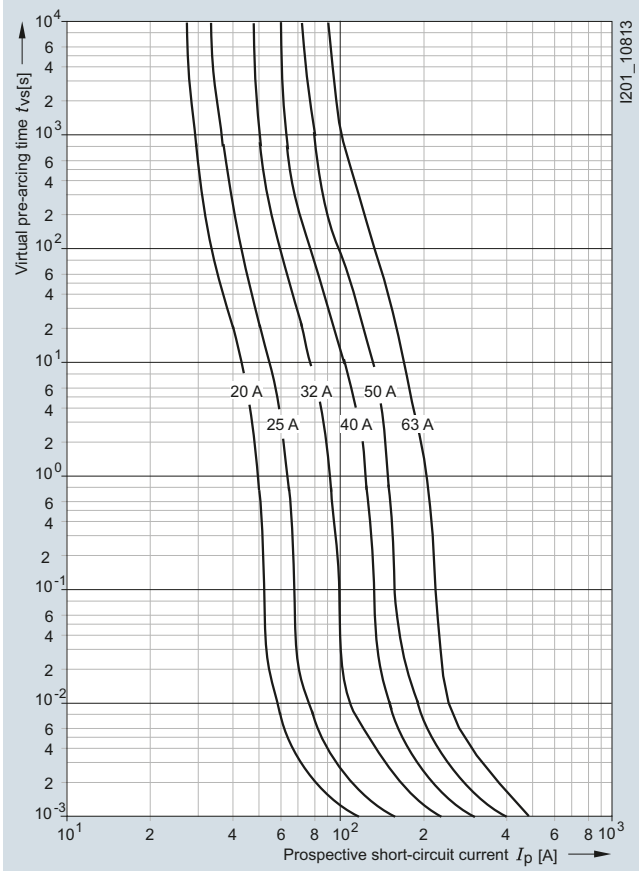


##### Let-through characteristics (current limitation at 50 Hz)

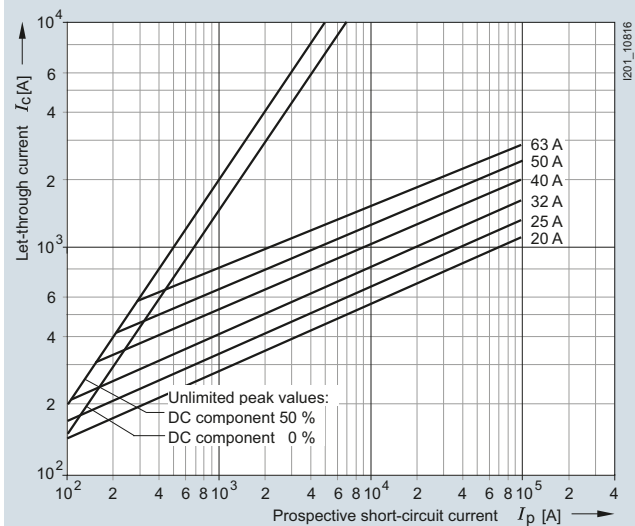

##### Correction factor $k_A$ for breaking $I^2t$ value




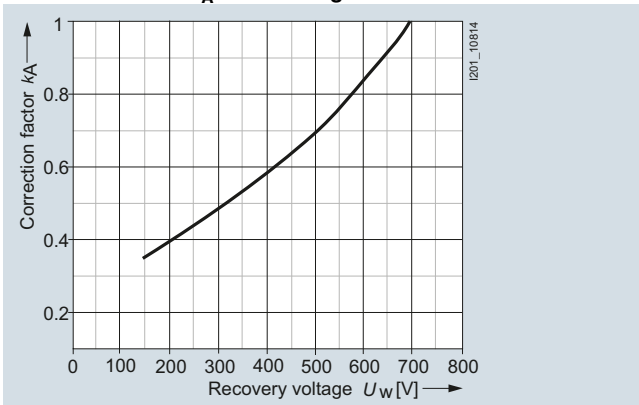


##### Peak arc voltage

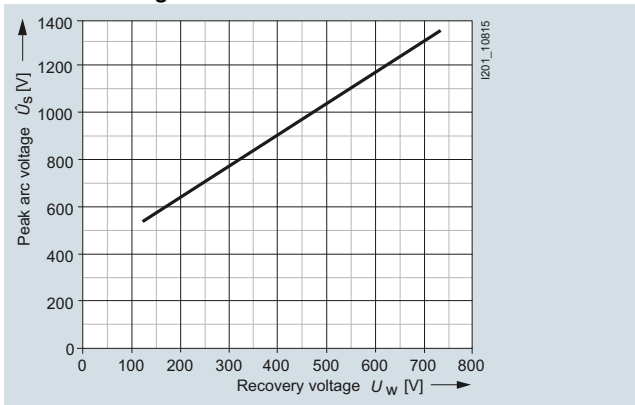

**3NE872.-1, 3NE8731-1 series**

Size: 000  
 Operational class: aR  
 Rated voltage: 690 V AC/700 V DC according to UL  
 Rated current: 80 ... 315 A

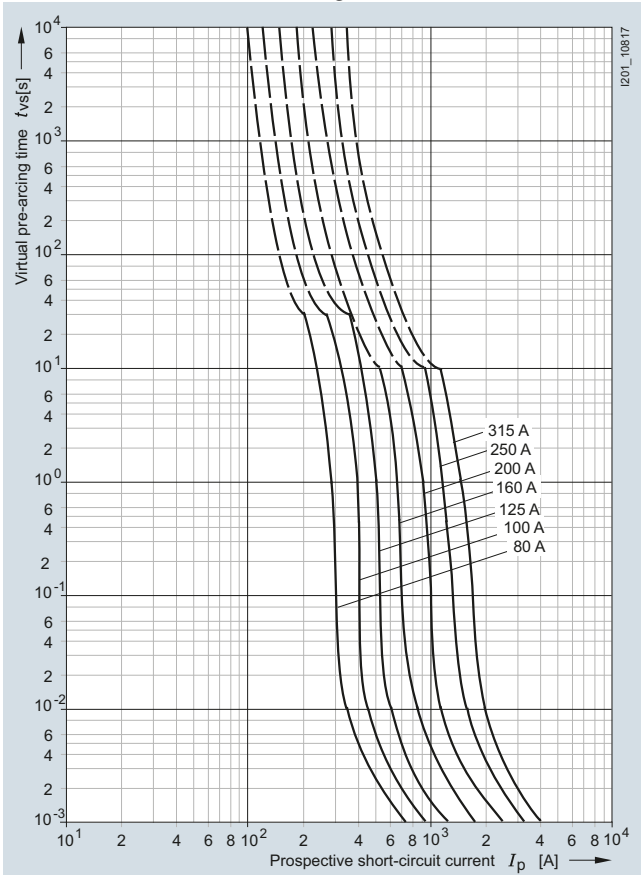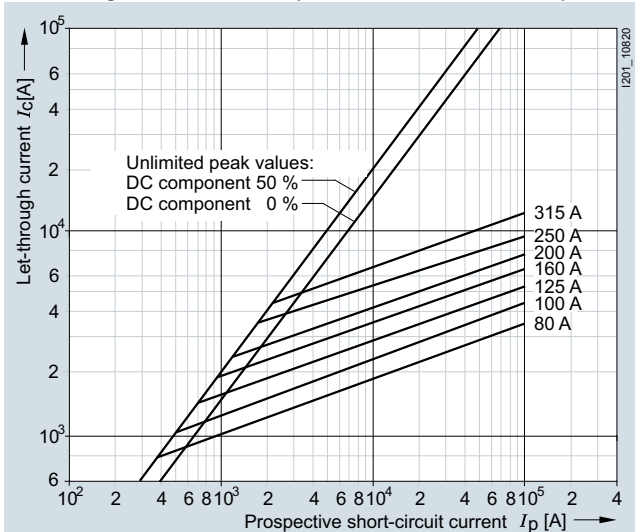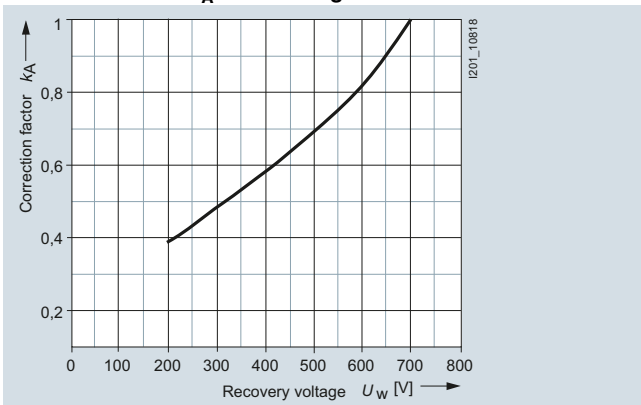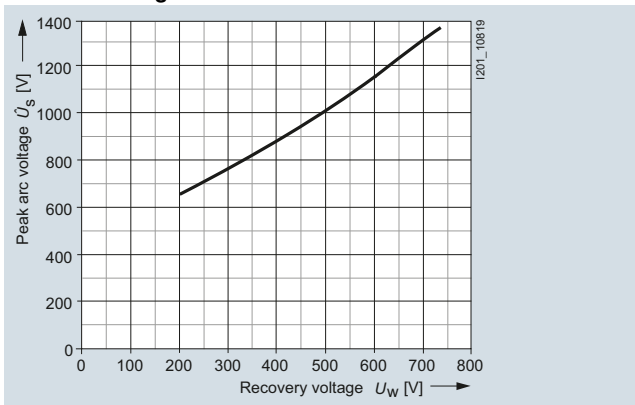**Time/current characteristics diagram****Let-through characteristics (current limitation at 50 Hz)****Correction factor  $k_A$  for breaking  $I^2t$  value****Peak arc voltage**

## Fuse Systems


### SITOR Semiconductor Fuses

#### LV HRC design


##### 3NE88..-0MK series

Size: 000  
 Operational class: gR/aR  
 Rated voltage: 500 ... 690 V AC/440 V DC  
 Rated current: 6 ... 160 A


##### Time/current characteristics diagram

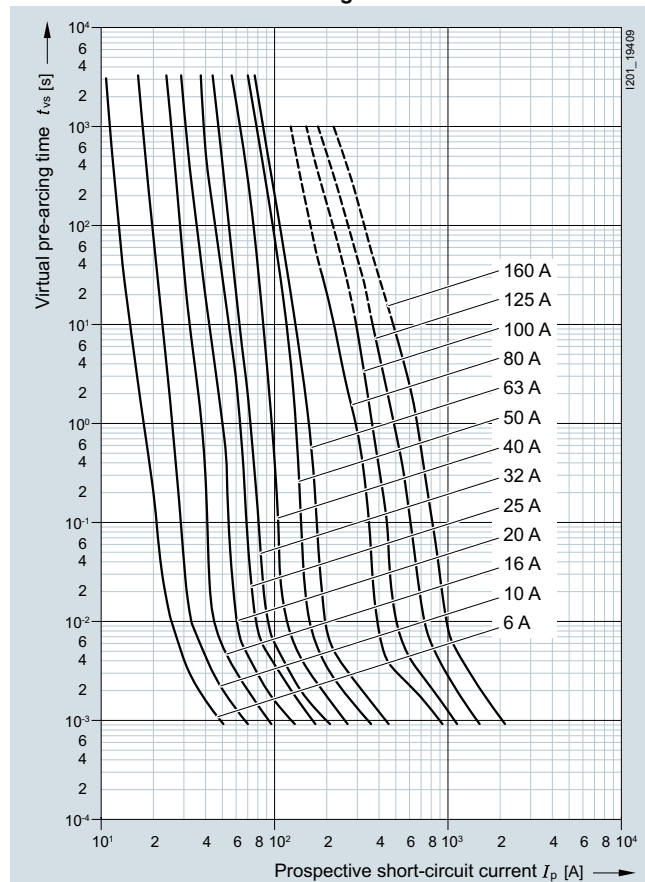


##### Let-through characteristics (current limitation at 50 Hz)

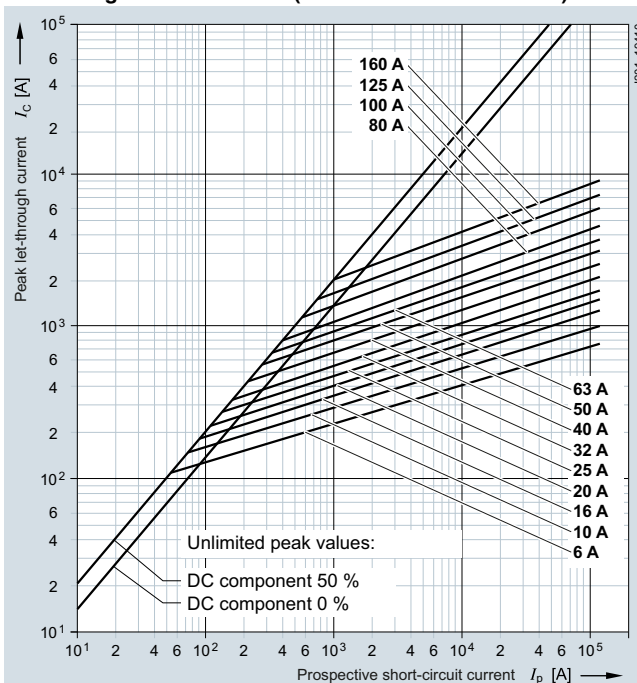

##### Correction factor $k_A$ for breaking $I^2t$ value


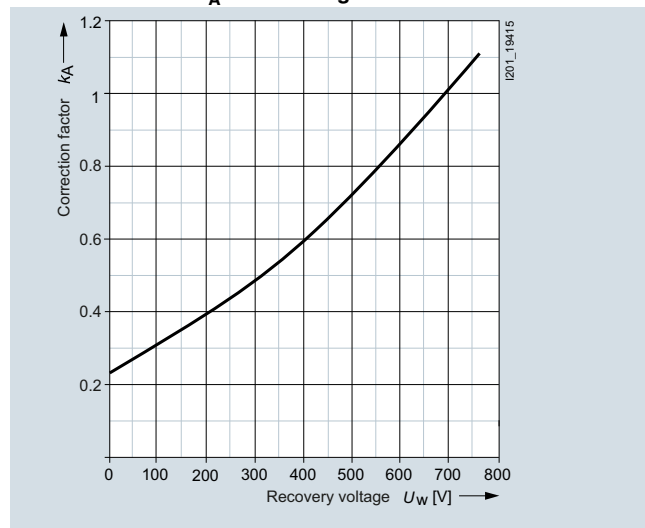


##### Peak arc voltage

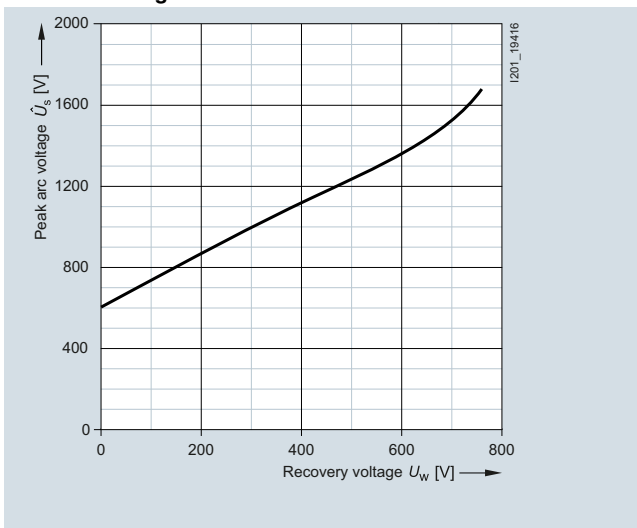

**3NE93...0MK07 series**

Size: 2  
 Operational class: aR  
 Rated voltage: 3000 V DC  
 Rated current: 315 A

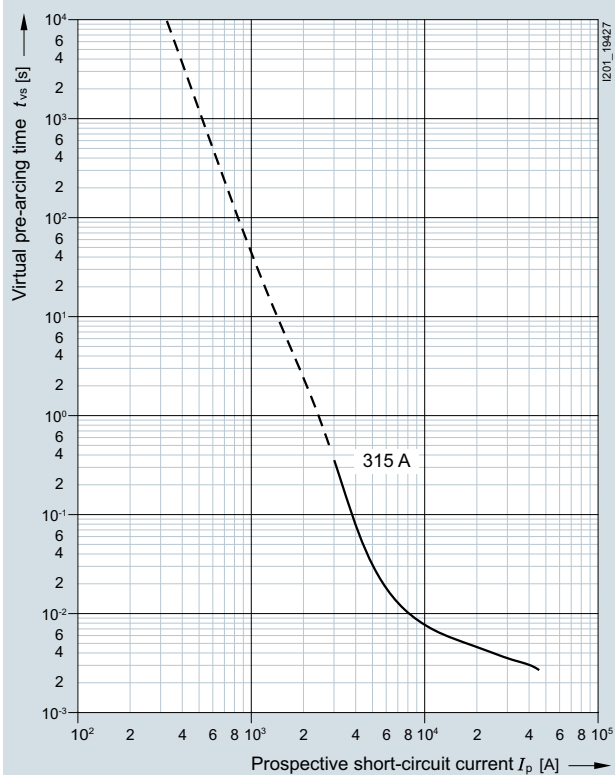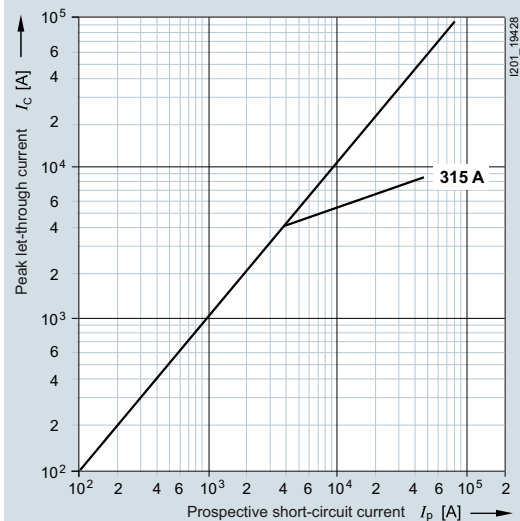**Time/current characteristics diagram****Let-through characteristics (current limitation at 50 Hz)**

## Fuse Systems


### SITOR Semiconductor Fuses

#### LV HRC design


##### 3NE963. series

Size: 3  
 Operational class: aR  
 Rated voltage: 2500 V AC  
 Rated current: 400 ... 630 A


##### Time/current characteristics diagram

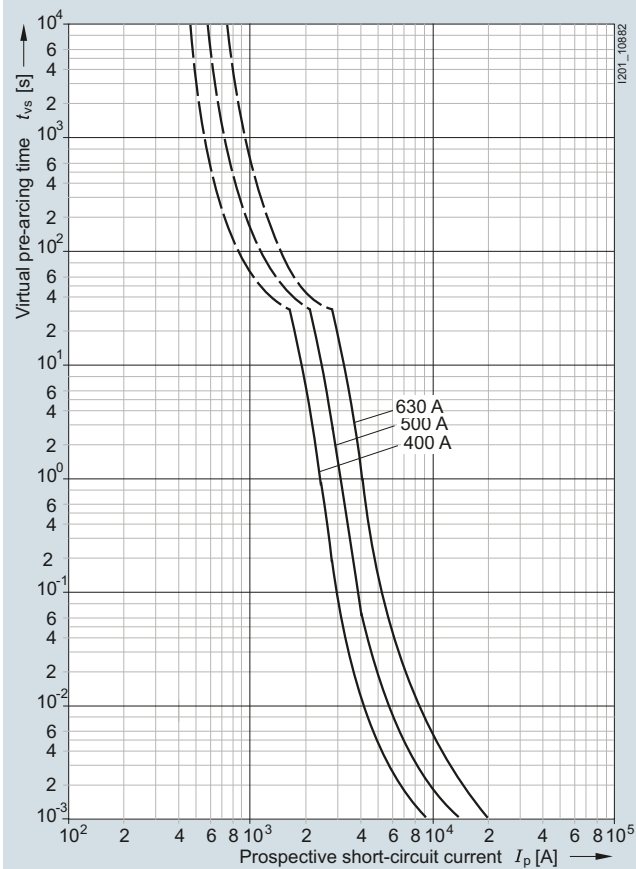


##### Let-through characteristics (current limitation at 50 Hz)

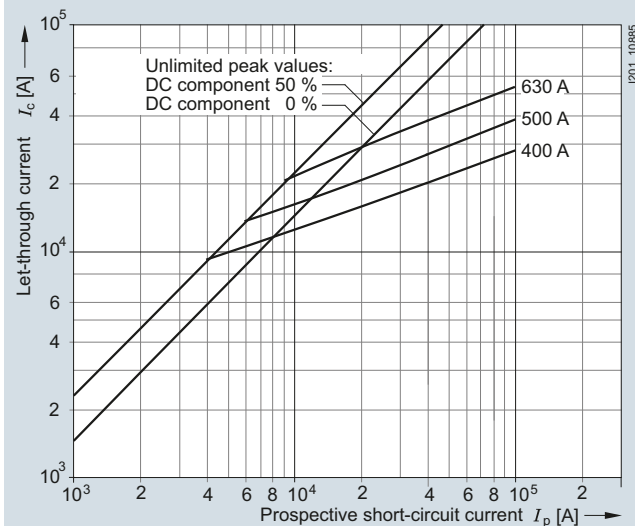

##### Correction factor $k_A$ for breaking $I^2t$ value

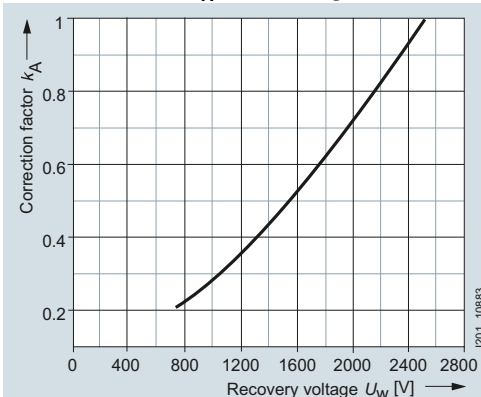

##### Peak arc voltage

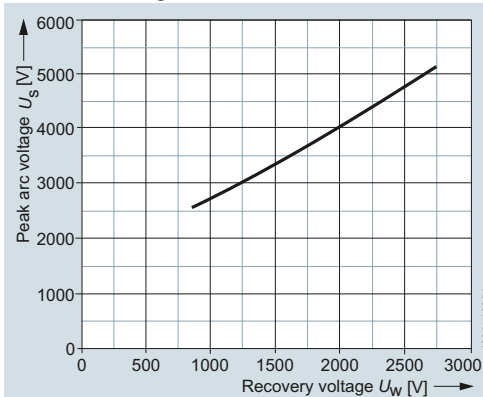

### Overview

SITOR cylindrical fuses protect power semiconductors from the effects of short-circuits because the super quick-response disconnect characteristic is far quicker than that of conventional fuses. They protect expensive devices and system components such as solid-state contactors, electronic relays (solid state), converters with fuses in the input and in the DC link, UPS systems and soft starters for motors up to 100 A.

The cylindrical design is approved for industrial applications. The cylindrical fuse links comply with IEC 60269.

Cylindrical fuse holders also comply with IEC 60269 and UL 512. The cylindrical fuse holders for 10 x 38 mm and 14 x 51 mm have been tested and approved as fuse switch disconnectors and the cylindrical fuse holders for 22 x 58 mm as fuse disconnectors according to the switching device standard IEC 60947-3. The utilization category and the tested current and voltage values are specified in the Table "Technical Specifications".

The cylindrical fuse holders have been specially developed for the application of SITOR fuse links with regard to heat tolerance and heat dissipation and are therefore not recommended for standard applications.

Cylindrical fuse bases do not offer the same comprehensive touch protection as the fuse holders, but have better heat dissipation. The single-pole cylindrical fuse bases for 14 x 51 mm and 22 x 58 mm allow modular expansion to multi-pole bases.

### Benefits

- Cylindrical fuses have an extremely compact design and a correspondingly small footprint
- The cylindrical fuses have IEC and UL approval and are suitable for universal use worldwide
- The use of SITOR cylindrical fuses in the cylindrical fuse holders and bases has been tested with regard to heat dissipation and maximum current loading. This makes planning and dimensioning easier and prevents consequential damage
- The use of fuse holders as switch disconnectors expands the area of application of these devices and increases operating safety

### Technical specifications

|                                                                                |                 | Cylindrical fuse holders                                   |                                                      |                                                       |
|--------------------------------------------------------------------------------|-----------------|------------------------------------------------------------|------------------------------------------------------|-------------------------------------------------------|
|                                                                                |                 | 3NC10                                                      | 3NC14                                                | 3NC22                                                 |
| Size                                                                           | mm x mm         | 10 x 38                                                    | 14 x 51                                              | 22 x 58                                               |
| Standards                                                                      |                 | UL 4248-1; CSA C22.2; IEC 60269-2; IEC 60947-3             |                                                      |                                                       |
| Approvals                                                                      |                 | UL 4248-1; UL File Number E171267; CSA C22.2 No. 39-M, CCC |                                                      |                                                       |
| Rated voltage $U_n$                                                            | V AC            | 690; 600 acc. to UL/CSA                                    |                                                      |                                                       |
| Rated current $I_n$                                                            | A AC            | 32<br>30 acc. to UL/CSA                                    | 50<br>50 acc. to UL<br>40 acc. to CSA                | 100<br>80 acc. to UL/CSA                              |
| Rated conditional short-circuit current                                        | kA              | 50                                                         | 50 (100 at 400 V)                                    | 50 (100 at 500 V)                                     |
| Breaking capacity                                                              |                 |                                                            |                                                      |                                                       |
| • Utilization category                                                         |                 | AC-22B (400 V)                                             | AC-22B (400 V)                                       | AC-20B (690 V)                                        |
| Max. power dissipation of the fuse link<br>(conductor cross-section used)      | W               | 3 (6 mm <sup>2</sup> )<br>4.3 (10 mm <sup>2</sup> )        | 5 (10 mm <sup>2</sup> )<br>6.5 (25 mm <sup>2</sup> ) | 9.5 (35 mm <sup>2</sup> )<br>11 (50 mm <sup>2</sup> ) |
| Rated impulse withstand voltage                                                | kV              | 6                                                          |                                                      |                                                       |
| Overvoltage category                                                           |                 | II                                                         |                                                      |                                                       |
| Pollution degree                                                               |                 | 2                                                          |                                                      |                                                       |
| No-voltage changing of fuse links                                              |                 | Yes                                                        |                                                      |                                                       |
| Sealable when installed                                                        |                 | Yes                                                        |                                                      |                                                       |
| Mounting position                                                              |                 | Any                                                        |                                                      |                                                       |
| Current direction                                                              |                 | Any                                                        |                                                      |                                                       |
| Degree of protection acc. to IEC 60529                                         |                 | IP20                                                       |                                                      |                                                       |
| Terminals with touch protection acc. to BGV A3<br>incoming and outgoing feeder |                 | Yes                                                        |                                                      |                                                       |
| Ambient temperature                                                            | °C              | 45                                                         |                                                      |                                                       |
| Conductor cross-sections                                                       |                 |                                                            |                                                      |                                                       |
| • Finely stranded, with end sleeve                                             | mm <sup>2</sup> | 1.5 ... 16                                                 | 1.5 ... 35                                           | 4 ... 50                                              |
| • AWG (American Wire Gauge)                                                    | AWG             | 15 ... 5                                                   | 14 ... 2                                             | 10 ... 1/0                                            |
| Tightening torque                                                              | Nm<br>lb.in     | 2.5<br>22                                                  | 2.5 ... 3<br>22 ... 26                               | 3.5 ... 4<br>31 ... 35                                |

## Fuse Systems

### SITOR Semiconductor Fuses

#### Cylindrical fuse design

##### Load rating of SITOR cylindrical fuses

| Cylinder  | Operational class<br>(IEC 60269) | Rated voltage $U_n$ | Rated voltage $U_n$ | Rated current $I_n$ | Melting $I^2t$ value $I^2t_s$<br>( $t_{vs} = 1$ ms) | Breaking $I^2t$ value $I^2t_a$ at $U_n$ | Temperature rise at $I_n$ body center | Power dissipation at $I_n$ | Weight approx. |
|-----------|----------------------------------|---------------------|---------------------|---------------------|-----------------------------------------------------|-----------------------------------------|---------------------------------------|----------------------------|----------------|
|           |                                  | V AC                | V DC                | A                   | A <sup>2</sup> s                                    | A <sup>2</sup> s                        | K                                     | W                          | kg             |
| 3NC1003   | aR                               | 600                 | 700                 | 3                   | 3                                                   | 8                                       | 30                                    | 1.2                        | 0.01           |
| 3NC1006   | aR                               | 600                 | 700                 | 6                   | 4                                                   | 20                                      | 30                                    | 1.5                        | 0.01           |
| 3NC1008   | aR                               | 600                 | 700                 | 8                   | 6                                                   | 30                                      | 25                                    | 2                          | 0.01           |
| 3NC1010   | aR                               | 600                 | 700                 | 10                  | 9                                                   | 60                                      | 40                                    | 2.5                        | 0.01           |
| 3NC1012   | aR                               | 600                 | 700                 | 12                  | 15                                                  | 110                                     | 50                                    | 3                          | 0.01           |
| 3NC1016   | aR                               | 600                 | 700                 | 16                  | 25                                                  | 150                                     | 60                                    | 3.5                        | 0.01           |
| 3NC1020   | aR                               | 600                 | 700                 | 20                  | 34                                                  | 200                                     | 80                                    | 4.8                        | 0.01           |
| 3NC1025   | aR                               | 600                 | 700                 | 25                  | 60                                                  | 250                                     | 90                                    | 6                          | 0.01           |
| 3NC1032   | aR                               | 600                 | --                  | 32                  | 95                                                  | 500                                     | 110                                   | 7.5                        | 0.01           |
| 3NC1401   | aR                               | 660                 | --                  | 1                   | --                                                  | 1.2                                     | 90                                    | 5                          | 0.02           |
| 3NC1402   | aR                               | 660                 | --                  | 2                   | --                                                  | 10                                      | 30                                    | 3                          | 0.02           |
| 3NC1403   | aR                               | 660                 | --                  | 3                   | --                                                  | 15                                      | 40                                    | 2.5                        | 0.02           |
| 3NC1404   | aR                               | 660                 | --                  | 4                   | --                                                  | 25                                      | 50                                    | 3                          | 0.02           |
| 3NC1405   | aR                               | 690                 | 800                 | 5                   | 1.6                                                 | 9                                       | 20                                    | 1.5                        | 0.02           |
| 3NC1406   | aR                               | 690                 | 800                 | 6                   | 1.4                                                 | 15                                      | 47                                    | 1.5                        | 0.02           |
| 3NC1410   | aR                               | 690                 | 800                 | 10                  | 3.6                                                 | 20                                      | 50                                    | 4                          | 0.02           |
| 3NC1410-5 | aR                               | 690                 | 600                 | 10                  | 3.6                                                 | 90                                      | 50                                    | 4                          | 0.02           |
| 3NC1415   | aR                               | 690                 | 800                 | 15                  | 10                                                  | 75                                      | 60                                    | 5.5                        | 0.02           |
| 3NC1415-5 | aR                               | 690                 | 600                 | 15                  | 9                                                   | 100                                     | 60                                    | 5.5                        | 0.02           |
| 3NC1420   | aR                               | 690                 | 800                 | 20                  | 26                                                  | 120                                     | 70                                    | 6                          | 0.02           |
| 3NC1420-5 | aR                               | 690                 | 600                 | 20                  | 26                                                  | 500                                     | 70                                    | 6                          | 0.02           |
| 3NC1425   | aR                               | 690                 | 800                 | 25                  | 44                                                  | 250                                     | 80                                    | 7                          | 0.02           |
| 3NC1425-5 | aR                               | 690                 | 600                 | 25                  | 47                                                  | 400                                     | 80                                    | 7                          | 0.02           |
| 3NC1430   | aR                               | 690                 | 800                 | 30                  | 58                                                  | 300                                     | 80                                    | 9                          | 0.02           |
| 3NC1430-5 | aR                               | 690                 | 600                 | 30                  | 58                                                  | 500                                     | 80                                    | 9                          | 0.02           |
| 3NC1432   | aR                               | 690                 | 800                 | 32                  | 95                                                  | 700                                     | 80                                    | 7.6                        | 0.02           |
| 3NC1432-5 | aR                               | 690                 | 600                 | 32                  | 68                                                  | 600                                     | 80                                    | 7.6                        | 0.02           |
| 3NC1440   | aR                               | 690                 | 800                 | 40                  | 110                                                 | 900                                     | 100                                   | 8                          | 0.02           |
| 3NC1440-5 | aR                               | 690                 | 600                 | 40                  | 84                                                  | 900                                     | 100                                   | 8                          | 0.02           |
| 3NC1450   | aR                               | 690                 | 800                 | 50                  | 220                                                 | 1800                                    | 110                                   | 9                          | 0.02           |
| 3NC1450-5 | aR                               | 690                 | 600                 | 50                  | 200                                                 | 2000                                    | 110                                   | 9                          | 0.02           |
| 3NC2200   | aR                               | 600                 | 500                 | 100                 | 1250                                                | 8000                                    | 110                                   | 16                         | 0.06           |
| 3NC2200-5 | aR                               | 600                 | 500                 | 100                 | 1100                                                | 8500                                    | 110                                   | 16                         | 0.06           |
| 3NC2220   | aR                               | 690                 | 500                 | 20                  | 34                                                  | 220                                     | 41                                    | 4.6                        | 0.06           |
| 3NC2220-5 | aR                               | 690                 | 500                 | 20                  | 19                                                  | 240                                     | 40                                    | 5                          | 0.06           |
| 3NC2225   | aR                               | 690                 | 500                 | 25                  | 50                                                  | 300                                     | 50                                    | 5.6                        | 0.06           |
| 3NC2225-5 | aR                               | 690                 | 500                 | 25                  | 34                                                  | 350                                     | 50                                    | 6                          | 0.06           |
| 3NC2232   | aR                               | 690                 | 500                 | 32                  | 80                                                  | 450                                     | 65                                    | 7                          | 0.06           |
| 3NC2232-5 | aR                               | 690                 | 500                 | 32                  | 54                                                  | 500                                     | 65                                    | 8                          | 0.06           |
| 3NC2240   | aR                               | 690                 | 500                 | 40                  | 100                                                 | 700                                     | 80                                    | 8.5                        | 0.06           |
| 3NC2240-5 | aR                               | 690                 | 500                 | 40                  | 68                                                  | 800                                     | 80                                    | 9                          | 0.06           |
| 3NC2250   | aR                               | 690                 | 500                 | 50                  | 185                                                 | 1350                                    | 90                                    | 9.5                        | 0.06           |
| 3NC2250-5 | aR                               | 690                 | 500                 | 50                  | 135                                                 | 1500                                    | 90                                    | 9.5                        | 0.06           |
| 3NC2263   | aR                               | 690                 | 500                 | 63                  | 310                                                 | 2600                                    | 100                                   | 11                         | 0.06           |
| 3NC2263-5 | aR                               | 690                 | 500                 | 63                  | 280                                                 | 3000                                    | 100                                   | 11                         | 0.06           |
| 3NC2280   | aR                               | 690                 | 500                 | 80                  | 620                                                 | 5500                                    | 110                                   | 13.5                       | 0.06           |
| 3NC2280-5 | aR                               | 690                 | 500                 | 80                  | 600                                                 | 6000                                    | 110                                   | 13.5                       | 0.06           |

| MLFB        | Operational class<br>(IEC 60269) | Rated voltage $U_n$ | Rated breaking capacity $I_{1n}$ | Rated current $I_n$ | Melting $I^2t$ value $I^2t_s$<br>( $t_{vs} = 1$ ms) | Breaking $I^2t$ value $I^2t_a$ at $U_n$ | Temperature rise at $I_n$ body center | Power dissipation at $I_n$ | Varying load factor VL |
|-------------|----------------------------------|---------------------|----------------------------------|---------------------|-----------------------------------------------------|-----------------------------------------|---------------------------------------|----------------------------|------------------------|
|             |                                  | V AC / V DC         | kA                               | 1)<br>A             | A <sup>2</sup> s                                    | A <sup>2</sup> s                        | 2)<br>K                               | 2)<br>W                    |                        |
| 3NC1006-OMK | gR                               | 690/440             | 100/50                           | 6                   | 0.5                                                 | 6.5                                     | 33                                    | 2.5                        | On request             |
| 3NC1010-OMK | gR                               | 690/440             | 100/50                           | 10                  | 1.3                                                 | 18                                      | 37                                    | 3.3                        | On request             |
| 3NC1012-OMK | gR                               | 690/440             | 100/50                           | 12                  | 1.9                                                 | 35                                      | 45                                    | 4                          | On request             |
| 3NC1016-OMK | gR                               | 690/440             | 100/50                           | 16                  | 3                                                   | 45                                      | 57                                    | 6                          | On request             |
| 3NC1020-OMK | gR                               | 690/250             | 100/50                           | 20                  | 5.9                                                 | 110                                     | 70                                    | 7.8                        | On request             |
| 3NC1025-OMK | gR                               | 690/250             | 100/50                           | 25                  | 12                                                  | 140                                     | 76                                    | 8.7                        | On request             |
| 3NC1032-OMK | gR                               | 690/250             | 100/50                           | 32                  | 50                                                  | 450                                     | 90                                    | 12                         | On request             |
| 3NC1406-OMK | gR                               | 690/700             | 100/50                           | 6                   | 0.5                                                 | 3.5                                     | 31                                    | 3.1                        | On request             |
| 3NC1410-OMK | gR                               | 690/700             | 100/50                           | 10                  | 1.4                                                 | 15                                      | 47                                    | 4.6                        | On request             |
| 3NC1416-OMK | gR                               | 690/600             | 100/50                           | 16                  | 3.2                                                 | 32                                      | 56                                    | 6.7                        | On request             |
| 3NC1420-OMK | gR                               | 690/600             | 100/50                           | 20                  | 6.3                                                 | 68                                      | 62                                    | 7.4                        | On request             |
| 3NC1425-OMK | gR                               | 690/600             | 100/50                           | 25                  | 13                                                  | 108                                     | 71                                    | 8.4                        | On request             |
| 3NC1432-OMK | gR                               | 690/600             | 100/50                           | 32                  | 19                                                  | 175                                     | 100                                   | 12.3                       | On request             |
| 3NC1440-OMK | gR                               | 690/440             | 100/50                           | 40                  | 43                                                  | 470                                     | 87                                    | 11.7                       | On request             |
| 3NC1450-OMK | gR                               | 690/250             | 100/50                           | 50                  | 140                                                 | 830                                     | 115                                   | 16.3                       | On request             |
| 3NC1463-OMK | aR                               | 690/250             | 100/50                           | 63                  | 330                                                 | 2.100                                   | 110                                   | 16.7                       | On request             |

# Fuse Systems

## SITOR Semiconductor Fuses

### Cylindrical fuse design

| MLFB         | Operational class<br>(IEC 60269) | Rated voltage $U_n$ | Rated breaking capacity<br>$I_{1n}$ | Rated current $I_n$ | Melting $I^2t$<br>value $I^2t_s$<br>( $t_{vs} = 1 \text{ ms}$ ) | Breaking $I^2t$<br>value<br>$I^2t_a$ at $U_n$ | Temperature<br>rise at $I_n$<br>body center<br>2) | Power dissipation at $I_n$ | Varying load factor<br>VL |
|--------------|----------------------------------|---------------------|-------------------------------------|---------------------|-----------------------------------------------------------------|-----------------------------------------------|---------------------------------------------------|----------------------------|---------------------------|
|              |                                  | V AC / V DC         | kA                                  | 1)<br>A             | A <sup>2</sup> s                                                | A <sup>2</sup> s                              | K                                                 | 2)<br>W                    |                           |
| 3NC18100-OMK | gR                               | 690/440             | 100/50                              | 10                  | 0.9                                                             | 17                                            | 33                                                | 4.6                        | 0.06                      |
| 3NC18160-OMK | gR                               | 690/440             | 100/50                              | 16                  | 3                                                               | 52                                            | 31                                                | 5.2                        | 0.06                      |
| 3NC18200-OMK | gR                               | 690/440             | 100/50                              | 20                  | 5.3                                                             | 90                                            | 35                                                | 6.8                        | 0.06                      |
| 3NC18250-OMK | gR                               | 690/440             | 100/50                              | 25                  | 8.3                                                             | 160                                           | 43                                                | 8.7                        | 0.06                      |
| 3NC18320-OMK | gR                               | 690/440             | 100/50                              | 32                  | 21                                                              | 400                                           | 49                                                | 9.8                        | 0.06                      |
| 3NC18400-OMK | gR                               | 690/440             | 100/50                              | 40                  | 33                                                              | 600                                           | 52                                                | 11                         | 0.06                      |
| 3NC18500-OMK | gR                               | 690/440             | 100/50                              | 50                  | 65                                                              | 1.250                                         | 53                                                | 13.8                       | 0.06                      |
| 3NC2200-OMK  | gR                               | 690/700             | 100/50                              | 25                  | 13                                                              | 180                                           | 38                                                | 8.1                        | On request                |
| 3NC2211-OMK  | gR                               | 690/600             | 100/50                              | 32                  | 25                                                              | 420                                           | 41                                                | 9                          | On request                |
| 3NC2225-OMK  | gR                               | 690/440             | 100/50                              | 40                  | 42                                                              | 700                                           | 50                                                | 12.5                       | On request                |
| 3NC2232-OMK  | gR                               | 690/250             | 100/50                              | 50                  | 74                                                              | 1.250                                         | 63                                                | 15.2                       | On request                |
| 3NC2240-OMK  | gR                               | 690/250             | 100/50                              | 63                  | 94                                                              | 2400                                          | 64                                                | 17.5                       | On request                |
| 3NC2250-OMK  | gR                               | 690/250             | 100/50                              | 80                  | 320                                                             | 4400                                          | 72                                                | 23                         | On request                |
| 3NC2263-OMK  | gR                               | 690/250             | 100/50                              | 100                 | 850                                                             | 11500                                         | 79                                                | 28.1                       | On request                |
| 3NC2280-OMK  | aR                               | 690/250             | 100/50                              | 125                 | 1500                                                            | 29000                                         | 88                                                | 35.3                       | On request                |
| 3NC2301-OMK  | gS                               | 1500/1000           | 30/50                               | 1                   | 0.1                                                             | 2                                             | 9                                                 | 2                          | On request                |
| 3NC2302-OMK  | gS                               | 1500/1000           | 30/50                               | 2                   | 1                                                               | 4.4                                           | 14                                                | 2.5                        | On request                |
| 3NC2304-OMK  | gS                               | 1500/1000           | 30/50                               | 4                   | 7                                                               | 55                                            | 21                                                | 5.3                        | On request                |
| 3NC2306-OMK  | gS                               | 1500/1000           | 30/50                               | 6                   | 8                                                               | 150                                           | 26                                                | 6.4                        | On request                |
| 3NC2310-OMK  | gS                               | 1500/1000           | 30/50                               | 10                  | 90                                                              | 540                                           | 17                                                | 3.1                        | On request                |
| 3NC2316-OMK  | gS                               | 1500/1000           | 30/50                               | 16                  | 310                                                             | 1120                                          | 1                                                 | 4.7                        | On request                |
| 3NC2320-OMK  | gS                               | 1500/1000           | 30/50                               | 20                  | 570                                                             | 2850                                          | 25                                                | 5.4                        | On request                |
| 3NC2325-OMK  | gS                               | 1500/1000           | 30/50                               | 25                  | 910                                                             | 3300                                          | 33                                                | 6.9                        | On request                |
| 3NC2332-OMK  | gS                               | 1500/1000           | 30/50                               | 32                  | 2650                                                            | 9050                                          | 31                                                | 6.7                        | On request                |
| 3NC2340-OMK  | gR                               | 1500/1000           | 30/50                               | 40                  | 3260                                                            | 12800                                         | 38                                                | 9.4                        | On request                |
| 3NC2350-OMK  | gR                               | 1500/1000           | 30/50                               | 50                  | 6480                                                            | 26000                                         | 46                                                | 11.6                       | On request                |
| 3NC26250MK   | gR                               | 690/440             | 100/50                              | 25                  | 8                                                               | 120                                           | 40                                                | 9.5                        | On request                |
| 3NC26320MK   | gR                               | 690/440             | 100/50                              | 32                  | 14.5                                                            | 190                                           | 54                                                | 12.3                       | On request                |
| 3NC26400MK   | gR                               | 690/440             | 100/50                              | 40                  | 21                                                              | 400                                           | 64                                                | 14.8                       | On request                |
| 3NC26500MK   | gR                               | 690/440             | 100/50                              | 50                  | 48                                                              | 950                                           | 66                                                | 17.5                       | On request                |
| 3NC26630MK   | gR                               | 690/440             | 100/50                              | 63                  | 108                                                             | 2,050                                         | 68                                                | 18.8                       | On request                |
| 3NC26800MK   | aR                               | 690/440             | 100/50                              | 80                  | 205                                                             | 3500                                          | 62                                                | 22.5                       | On request                |
| 3NC26000MK   | aR                               | 690/440             | 100/50                              | 100                 | 340                                                             | 5400                                          | 70                                                | 31.5                       | On request                |
| 3NC26110MK   | aR                               | 690/440             | 100/50                              | 125                 | 645                                                             | 11800                                         | 88                                                | 39                         | On request                |

## Fuse Systems

### SITOR Semiconductor Fuses

#### Cylindrical fuse design

**Load rating of SITOR cylindrical fuses without strikers  
in fuse holders - can be used as fuse switch disconnectors <sup>1)</sup>**

| For SITOR fuse links   | Rated voltage | Rated current | Required conductor cross-section | Fuse holders – can be used as fuse switch disconnectors <sup>1)</sup> |               |                                 |               |                                 |               |
|------------------------|---------------|---------------|----------------------------------|-----------------------------------------------------------------------|---------------|---------------------------------|---------------|---------------------------------|---------------|
|                        |               |               |                                  | 1-pole Type                                                           | $I_{\max 2)}$ | 2-pole Type                     | $I_{\max 2)}$ | 3-pole Type                     | $I_{\max 2)}$ |
|                        | V AC/V DC     | A             | mm <sup>2</sup>                  |                                                                       | A             |                                 | A             |                                 | A             |
| <b>Size 10 x 38 mm</b> |               |               |                                  |                                                                       |               |                                 |               |                                 |               |
| <b>3NC1003</b>         | 600/700       | 3             | 1                                | <b>3NC1091</b>                                                        | 3             | <b>3NC1092/<br/>2 x 3NC1091</b> | 3             | <b>3NC1093/<br/>3 x 3NC1091</b> | 3             |
| <b>3NC1006</b>         |               | 6             | 1                                |                                                                       | 6             |                                 | 6             |                                 | 6             |
| <b>3NC1008</b>         |               | 8             | 1                                |                                                                       | 8             |                                 | 8             |                                 | 8             |
| <b>3NC1010</b>         |               | 10            | 1.5                              |                                                                       | 10            |                                 | 10            |                                 | 10            |
| <b>3NC1012</b>         | 600/--        | 12            | 1.5                              |                                                                       | 12            |                                 | 12            |                                 | 12            |
| <b>3NC1016</b>         |               | 16            | 2.5                              |                                                                       | 16            |                                 | 16            |                                 | 16            |
| <b>3NC1020</b>         |               | 20            | 2.5                              |                                                                       | 20            |                                 | 20            |                                 | 20            |
| <b>3NC1025</b>         |               | 25            | 4                                |                                                                       | 25            |                                 | 24            |                                 | 22            |
| <b>3NC1032</b>         |               | 32            | 6                                |                                                                       | 32            |                                 | 30            |                                 | 28            |

For footnotes, [see next page](#).

# Fuse Systems

## SITOR Semiconductor Fuses

### Cylindrical fuse design

| For SITOR fuse links | Rated voltage | Rated current | Required conductor cross-section | Fuse holders – can be used as fuse switch disconnectors <sup>1)</sup> |               |                         |               |                         |               |
|----------------------|---------------|---------------|----------------------------------|-----------------------------------------------------------------------|---------------|-------------------------|---------------|-------------------------|---------------|
|                      |               |               |                                  | 1-pole Type                                                           | $I_{\max 2)}$ | 2-pole Type             | $I_{\max 2)}$ | 3-pole Type             | $I_{\max 2)}$ |
|                      |               |               |                                  |                                                                       |               |                         |               |                         |               |
|                      | V AC/V DC     | A             | mm <sup>2</sup>                  |                                                                       | A             |                         | A             |                         | A             |
| Size 14 × 51 mm      |               |               |                                  |                                                                       |               |                         |               |                         |               |
| 3NC1401              | 660           | 1             | 1                                | 3NC1491                                                               | 1             | 3NC1492/<br>2 × 3NC1491 | 1             | 3NC1493/<br>3 × 3NC1491 | 1             |
| 3NC1402              |               | 2             | 1                                |                                                                       | 2             |                         | 2             |                         | 2             |
| 3NC1403              |               | 3             | 1                                |                                                                       | 3             |                         | 3             |                         | 3             |
| 3NC1404              |               | 4             | 1                                |                                                                       | 4             |                         | 4             |                         | 4             |
| 3NC1405              | 690/800       | 5             | 1                                |                                                                       | 5             |                         | 5             |                         | 5             |
| 3NC1406              |               | 6             | 1                                |                                                                       | 6             |                         | 6             |                         | 6             |
| 3NC1410              |               | 10            | 1.5                              |                                                                       | 10            |                         | 10            |                         | 10            |
| 3NC1415              |               | 15            | 1.5                              |                                                                       | 15            |                         | 15            |                         | 15            |
| 3NC1420              |               | 20            | 2.5                              |                                                                       | 20            |                         | 20            |                         | 20            |
| 3NC1425              |               | 25            | 4                                |                                                                       | 25            |                         | 24            |                         | 22            |
| 3NC1430              |               | 30            | 6                                |                                                                       | 28            |                         | 27            |                         | 25            |
| 3NC1432              |               | 32            | 6                                |                                                                       | 32            |                         | 32            |                         | 32            |
| 3NC1440              |               | 40            | 10                               |                                                                       | 40            |                         | 39            |                         | 38            |
| 3NC1450              |               | 50            | 10                               |                                                                       | 48            |                         | 46            |                         | 44            |
| Size 22 × 58 mm      |               |               |                                  |                                                                       |               |                         |               |                         |               |
| 3NC2220              | 690/500       | 20            | 2.5                              | 3NC2291                                                               | 20            | 3NC2292/<br>2 × 3NC2291 | 20            | 3NC2293/<br>3 × 3NC2291 | 20            |
| 3NC2225              |               | 25            | 4                                |                                                                       | 25            |                         | 25            |                         | 25            |
| 3NC2232              |               | 32            | 6                                |                                                                       | 32            |                         | 32            |                         | 32            |
| 3NC2240              |               | 40            | 10                               |                                                                       | 40            |                         | 39            |                         | 38            |
| 3NC2250              |               | 50            | 10                               |                                                                       | 50            |                         | 48            |                         | 44            |
| 3NC2263              |               | 63            | 16                               |                                                                       | 60            |                         | 58            |                         | 56            |
| 3NC2280              |               | 80            | 25                               |                                                                       | 74            |                         | 71            |                         | 69            |
| 3NC2200              |               | 600/500       | 100                              |                                                                       | 35            |                         | 95            |                         | 90            |

Fuse tongs: 3NC1000.

- <sup>1)</sup> Fuse holders acc. to IEC 60269-3, UL 512  
 Fuse switch disconnectors (10 × 38, 14 × 51 mm) acc. to IEC 60947-3  
 Fuse switch disconnectors (22 × 58 mm) acc. to IEC 60947-3

- <sup>2)</sup> The  $I_{\max}$  values apply to "stand-alone operation". If several devices are butt-mounted and/or subject to unfavorable cooling conditions, these values may be reduced still further. With a larger conductor cross-section, values higher than  $I_{\max}$  are possible.

### Load rating of SITOR cylindrical fuses with strikers in fuse holders – can be used as fuse switch disconnectors <sup>1)</sup>

| For SITOR fuse links | Rated voltage | Rated current       | Required conductor cross-section | Fuse holders – can be used as fuse switch disconnectors <sup>1)</sup> |                         |                           |                         |                           |                         |
|----------------------|---------------|---------------------|----------------------------------|-----------------------------------------------------------------------|-------------------------|---------------------------|-------------------------|---------------------------|-------------------------|
|                      |               |                     |                                  | 1-pole                                                                |                         | 2-pole                    |                         | 3-pole                    |                         |
|                      | V AC          | I <sub>n</sub><br>A | Cu<br>mm <sup>2</sup>            | Type                                                                  | I <sub>max2)</sub><br>A | Type                      | I <sub>max2)</sub><br>A | Type                      | I <sub>max2)</sub><br>A |
| Size 14 x 51 mm      |               |                     |                                  |                                                                       |                         |                           |                         |                           |                         |
| 3NC1410-5            | 690/600       | 10                  | 1.5                              | 3NC1491                                                               | 10                      | 3NC1492/<br>2 x 3NC1491-5 | 10                      | 3NC1493/<br>3 x 3NC1491-5 | 10                      |
| 3NC1415-5            |               | 15                  | 1.5                              |                                                                       | 15                      |                           | 15                      |                           | 15                      |
| 3NC1420-5            |               | 20                  | 2.5                              |                                                                       | 20                      |                           | 20                      |                           | 20                      |
| 3NC1425-5            |               | 25                  | 4                                |                                                                       | 25                      |                           | 25                      |                           | 25                      |
| 3NC1430-5            |               | 30                  | 6                                |                                                                       | 30                      |                           | 30                      |                           | 30                      |
| 3NC1432-5            |               | 32                  | 6                                |                                                                       | 32                      |                           | 32                      |                           | 31                      |
| 3NC1440-5            |               | 40                  | 10                               |                                                                       | 38                      |                           | 35                      |                           | 34                      |
| 3NC1450-5            |               | 50                  | 10                               |                                                                       | 48                      |                           | 46                      |                           | 44                      |
| Size 22 x 58 mm      |               |                     |                                  |                                                                       |                         |                           |                         |                           |                         |
| 3NC2220-5            | 690/500       | 20                  | 2.5                              | 3NC2291                                                               | 20                      | 3NC2292/<br>2 x 3NC2291-5 | 20                      | 3NC2293/<br>3 x 3NC2291-5 | 20                      |
| 3NC2225-5            |               | 25                  | 4                                |                                                                       | 25                      |                           | 25                      |                           | 25                      |
| 3NC2232-5            |               | 32                  | 6                                |                                                                       | 32                      |                           | 31                      |                           | 30                      |
| 3NC2240-5            |               | 40                  | 10                               |                                                                       | 40                      |                           | 39                      |                           | 37                      |
| 3NC2250-5            |               | 50                  | 10                               |                                                                       | 45                      |                           | 43                      |                           | 42                      |
| 3NC2263-5            |               | 63                  | 16                               |                                                                       | 59                      |                           | 55                      |                           | 52                      |
| 3NC2280-5            |               | 80                  | 25                               |                                                                       | 71                      |                           | 69                      |                           | 68                      |
| 3NC2200-5            | 600/500       | 100                 | 35                               |                                                                       | 94                      |                           | 90                      |                           | 85                      |

- <sup>1)</sup> Fuse holders acc. to IEC 60269-3, UL 512  
 Fuse switch disconnectors (10 × 38, 14 × 51 mm) acc. to IEC 60947-3  
 Fuse switch disconnectors (22 × 58 mm) acc. to IEC 60947-3

- <sup>2)</sup> The  $I_{\max}$  values apply to "stand-alone operation". If several devices are butt-mounted and/or subject to unfavorable cooling conditions, these values may be reduced still further. With a larger conductor cross-section, values higher than  $I_{\max}$  are possible.


## Fuse Systems

### SITOR Semiconductor Fuses


#### Cylindrical fuse design

##### Dimensional drawings


##### Cylindrical fuse links

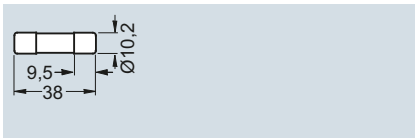


3NC10..., 3NC10...-0MK

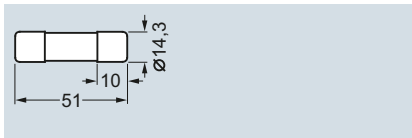

3NC14..., 3NC14...-0MK

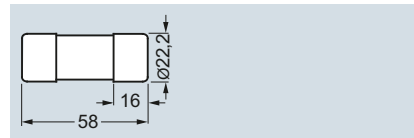


3NC22..., 3NC22...-0MK

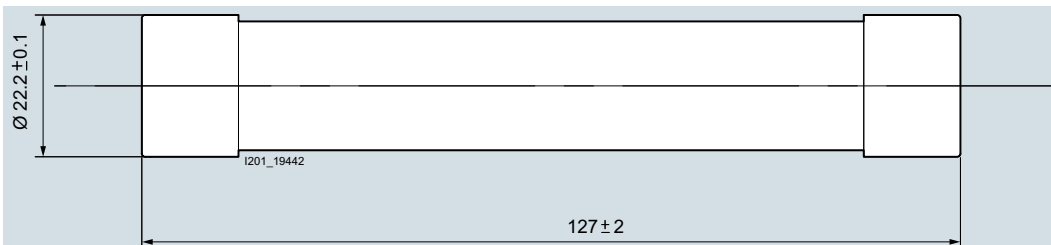


3NC23...-0MK


##### Cylindrical fuse holders

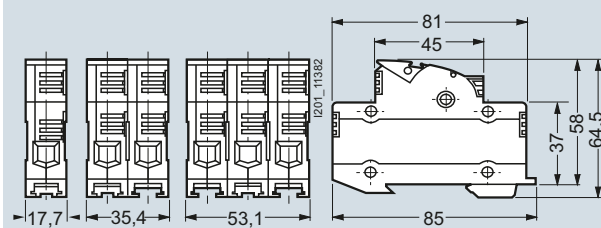


3NC109.

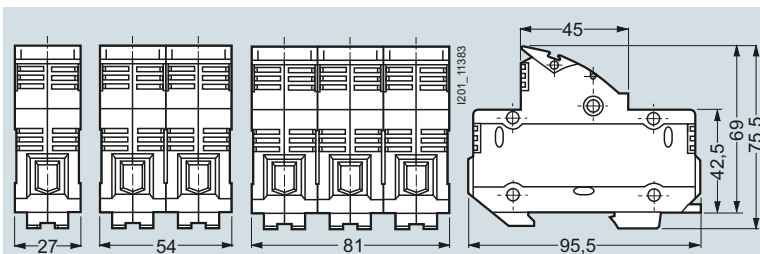


3NC149.

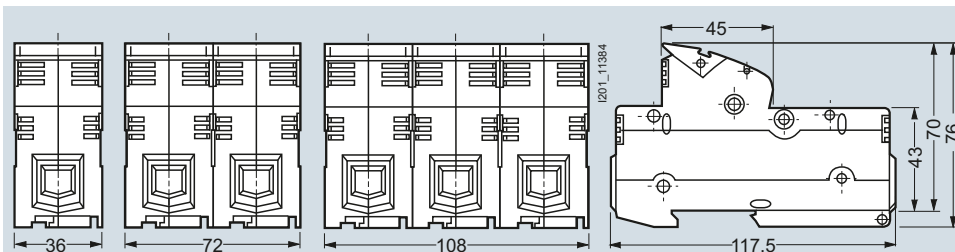


3NC129.

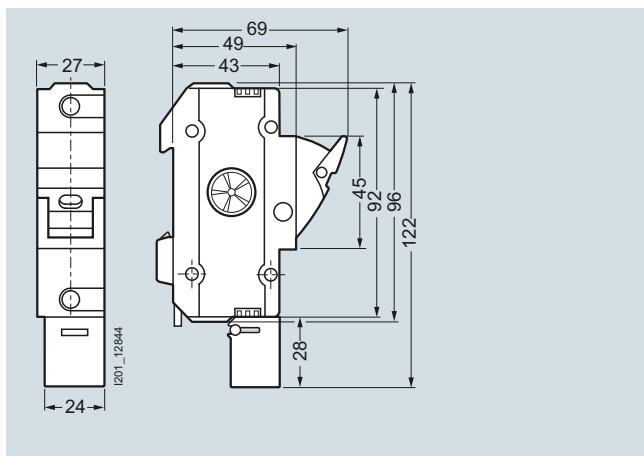**Cylindrical fuse holders with signaling switch**


3NC1491-5

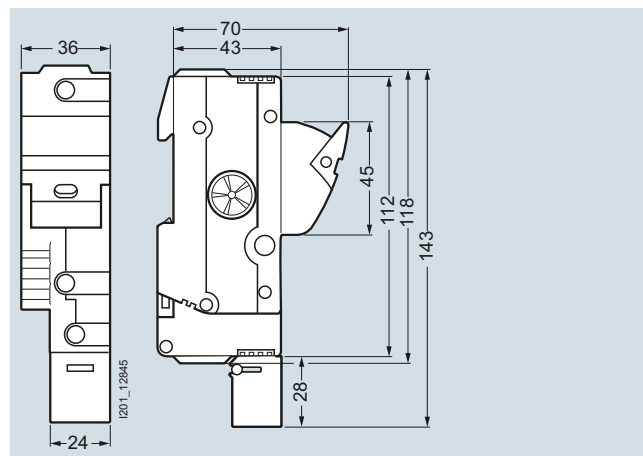


3NC1291-5

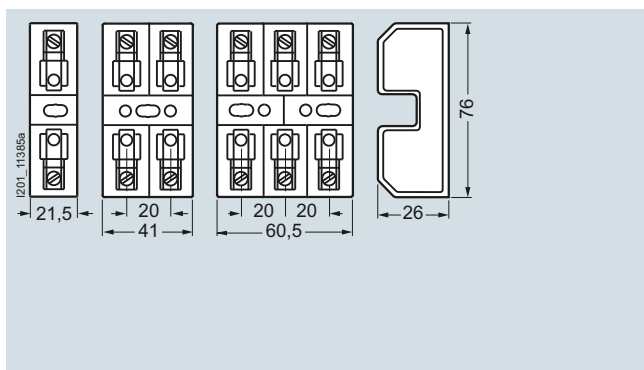**Cylindrical fuse bases**

3NC1038-1 to 3NC1038-3

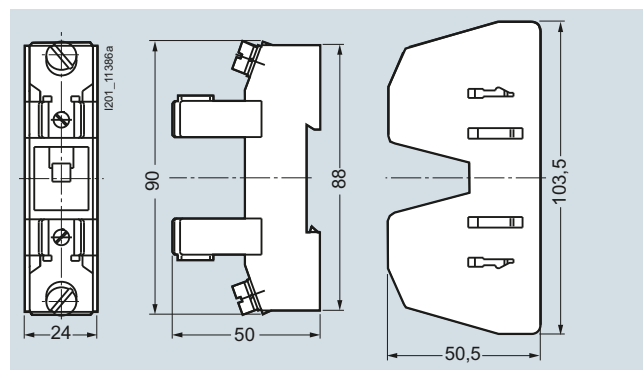

3NC1451-1

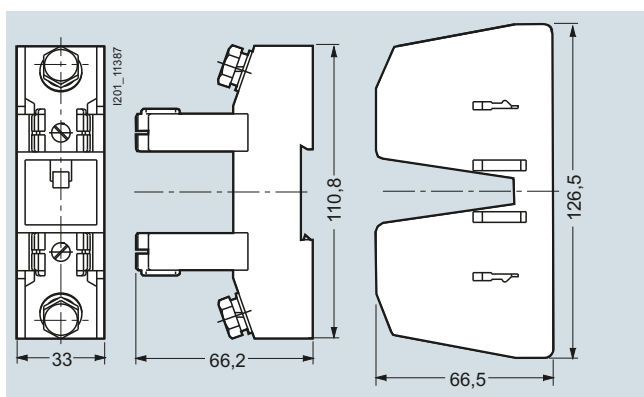


3NC2258-1

## Fuse Systems


### SITOR Semiconductor Fuses

#### Cylindrical fuse design

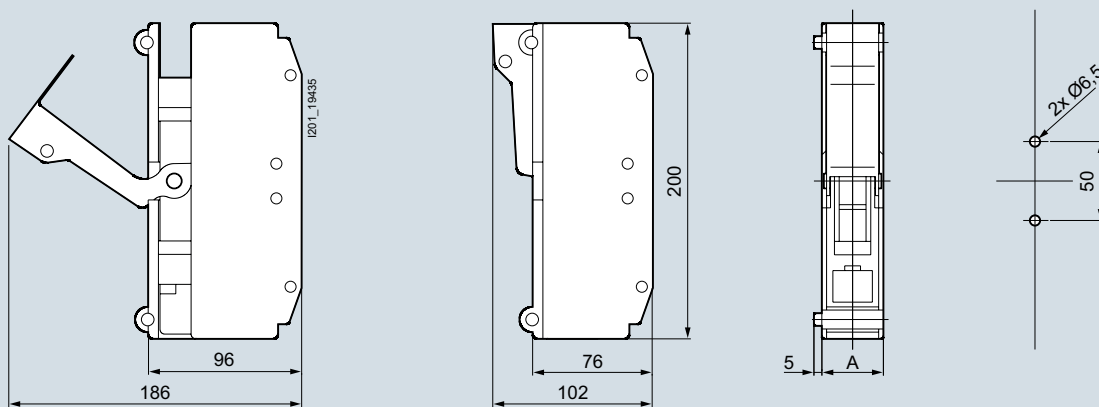


| Type        | Dimensions |
|-------------|------------|
|             | A          |
| 3NC2391-0MK | 40         |
| 3NC2392-0MK | 80         |
| 3NC2393-0MK | 120        |

3NC239.-0MK

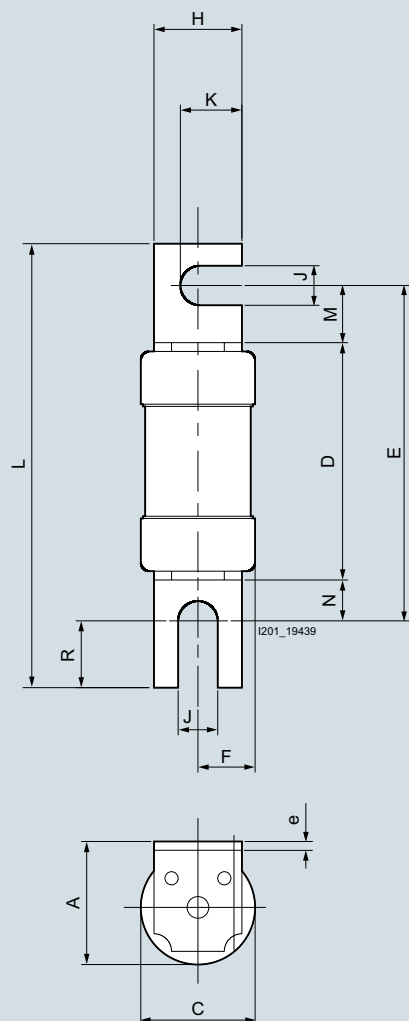


| Type        | Dimensions |    |      |      |    |    |    |     |    |     |      |     |  |
|-------------|------------|----|------|------|----|----|----|-----|----|-----|------|-----|--|
|             | ØC         | A  | D    | E    | F  | H  | K  | L   | M  | N   | R    | e   |  |
| 3NC18..-0MK | 18         | 19 | 52,2 | 71,5 | 9  | 12 | 9  | 88  | 12 | 7   | 14   | 1,4 |  |
| 3NC26..-0MK | 26         | 29 | 53,5 | 75,8 | 13 | 19 | 14 | 103 | 13 | 9,3 | 19,7 | 2   |  |

3NC18.-0MK, 3NC26.-0MK

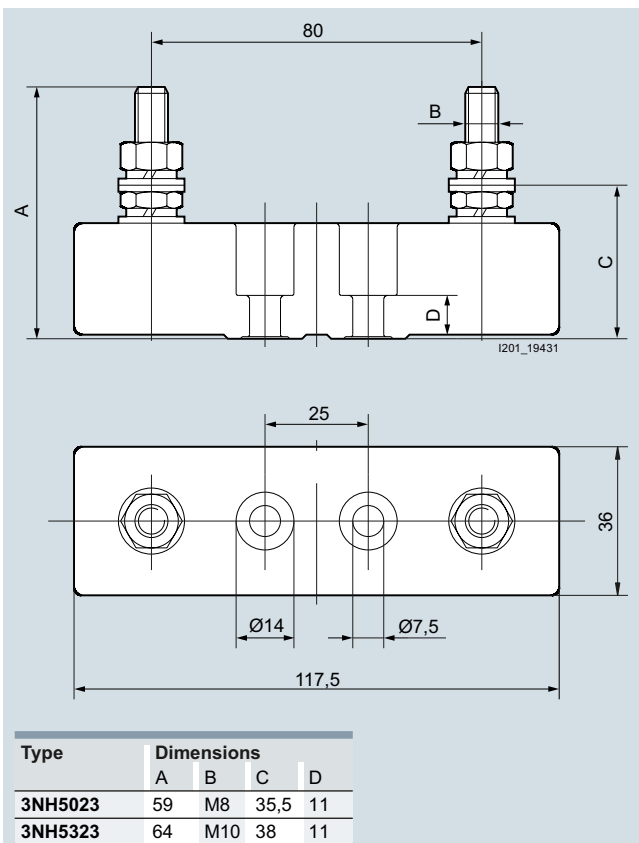

3NH5023

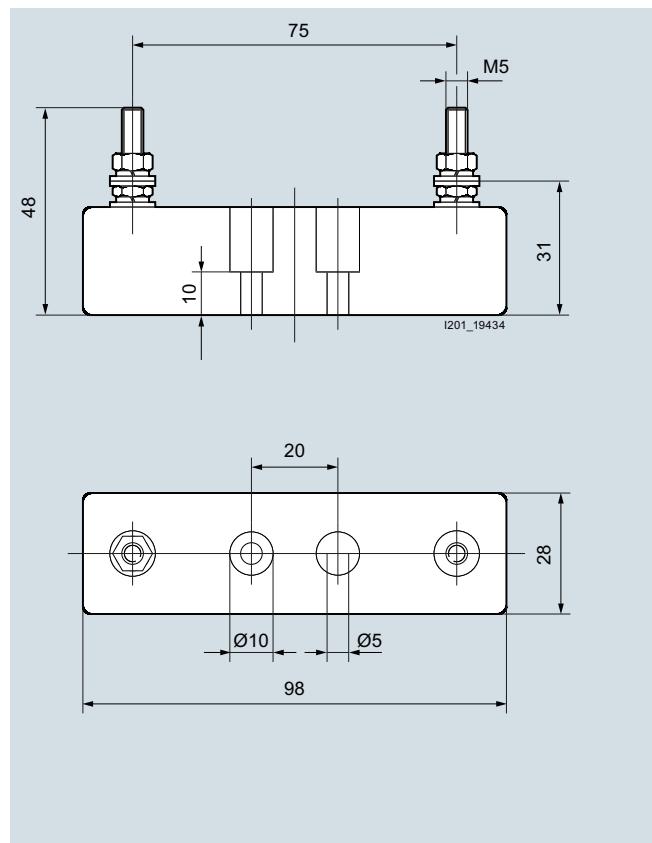

3NH5723

## Fuse Systems

### SITOR Semiconductor Fuses


#### Cylindrical fuse design

#### Characteristic curves


##### 3NC10 series

Size: 10 × 38 mm  
 Operational class: aR  
 Rated voltage: 600 V AC/700 V DC, 3 ... 25 A  
 600 V AC, 32 A  
 Rated current: 3 ... 32 A


##### Time/current characteristics diagram

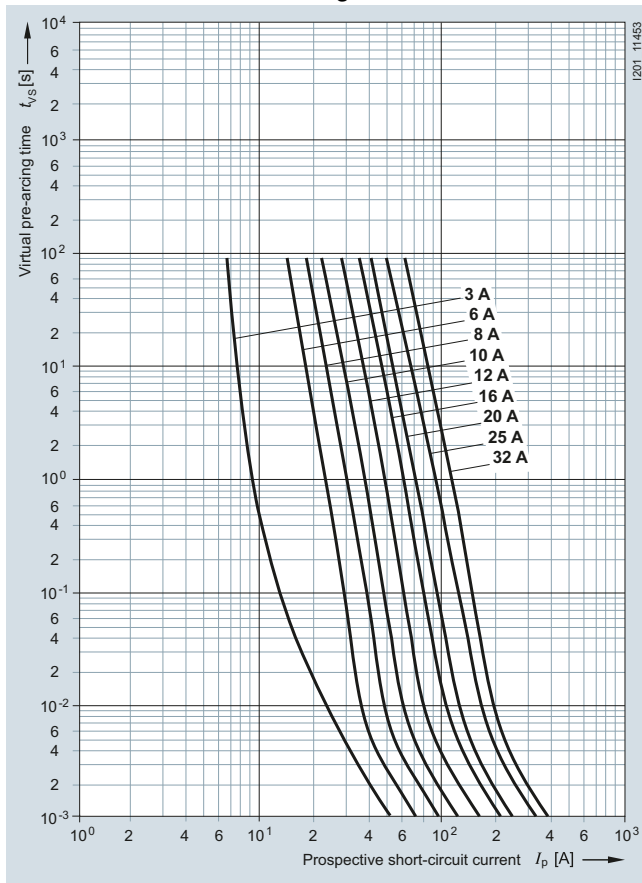


##### Let-through characteristics (current limitation at 50 Hz)

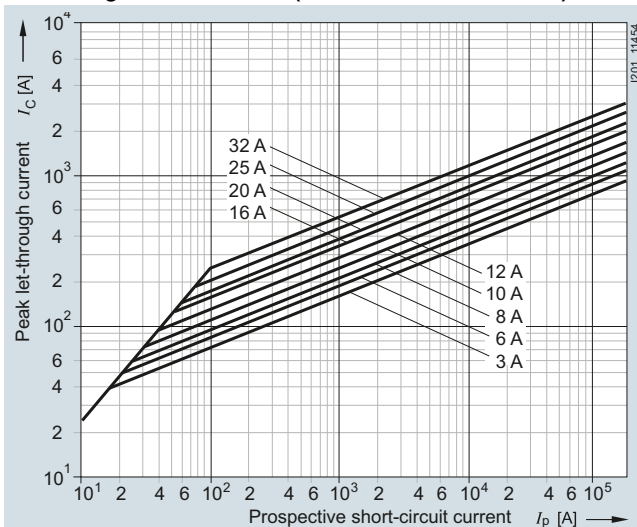

##### Correction factor $k_A$ for breaking $I^2t$ value




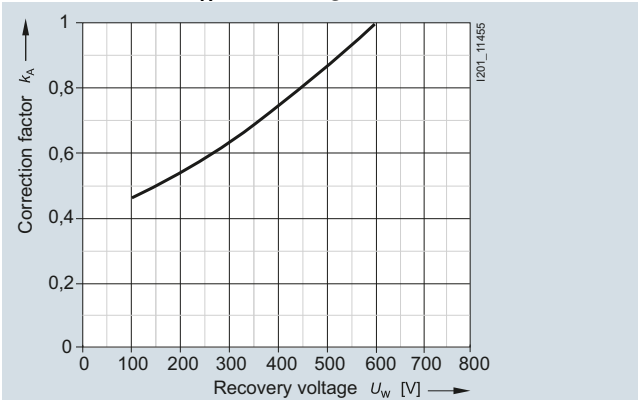


##### Peak arc voltage

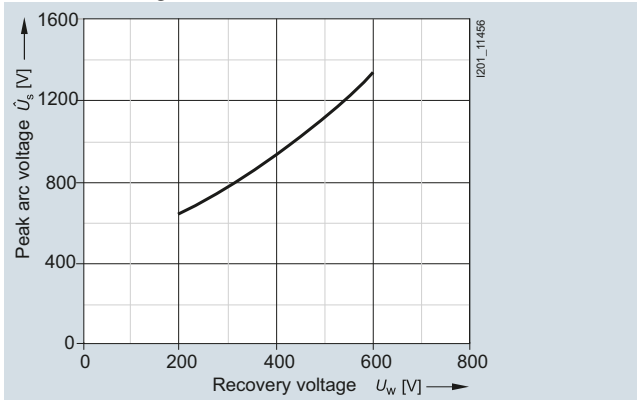

**3NC10..-0MK series**

Size: 10 × 38 mm  
 Operational class: gR  
 Rated voltage: 690 V AC; 250 ... 400 V DC  
 Rated current: 6 ... 32 A

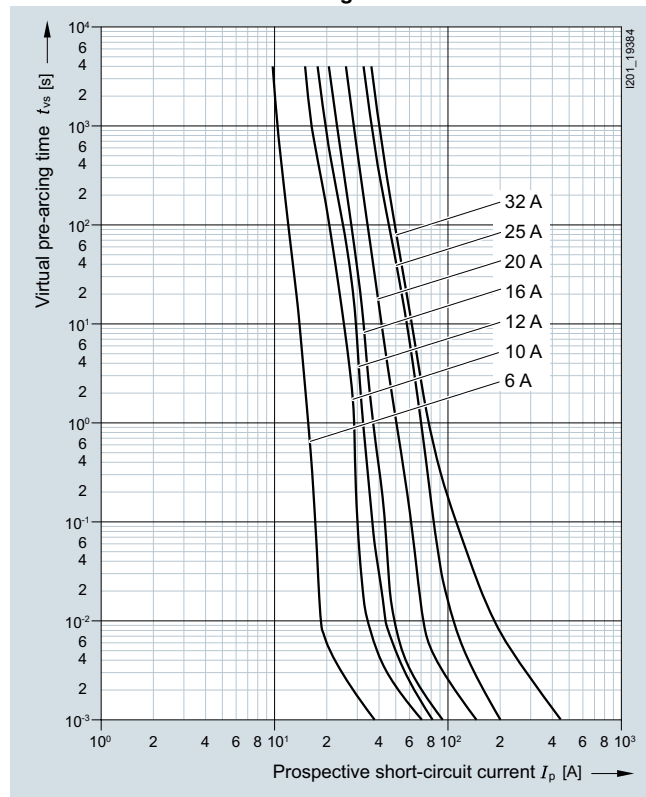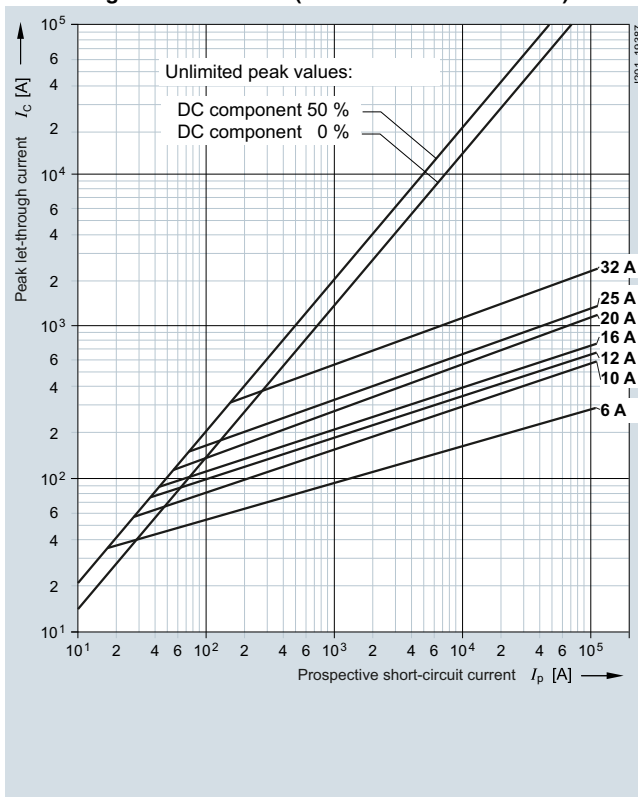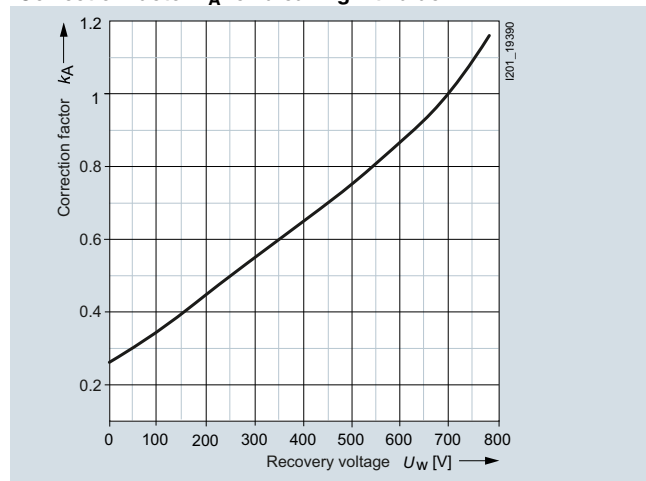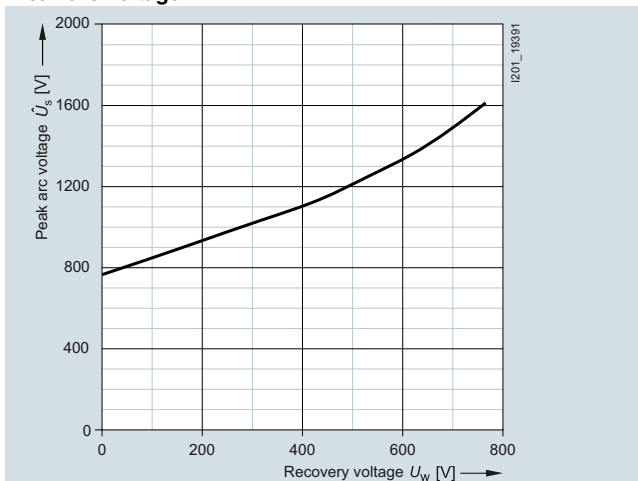**Time/current characteristics diagram****Let-through characteristics (current limitation at 50 Hz)****Correction factor  $k_A$  for breaking  $I^2t$  value****Peak arc voltage**

## Fuse Systems


### SITOR Semiconductor Fuses

#### Cylindrical fuse design


##### 3NC14 series

Size: 14 × 51 mm  
 Operational class: aR  
 Rated voltage: 660 V AC (1 ... 4 A);  
 690 V AC/800 V DC (5 ... 50 A)  
 Rated current: 1 ... 10 A


##### Time/current characteristics diagram

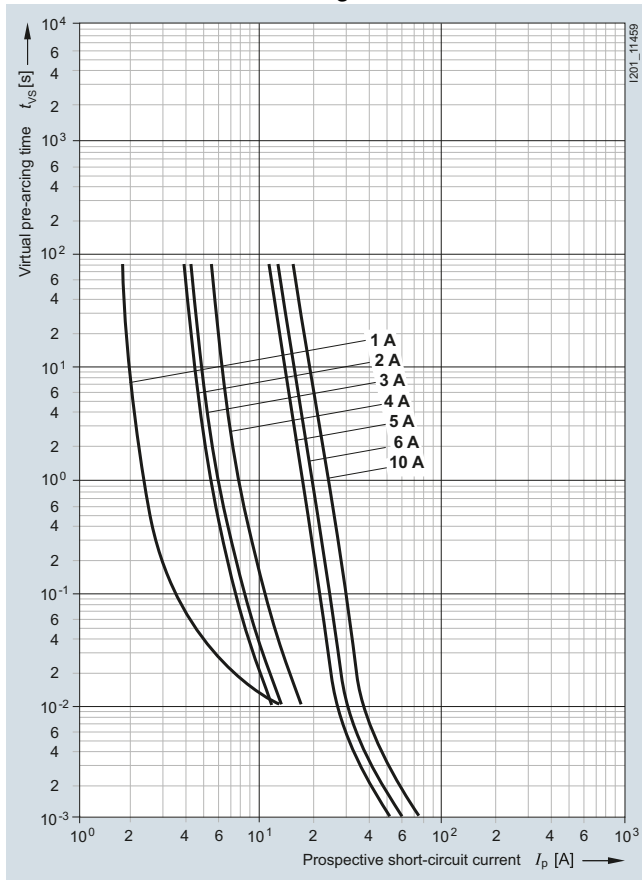


##### Let-through characteristics (current limitation at 50 Hz)

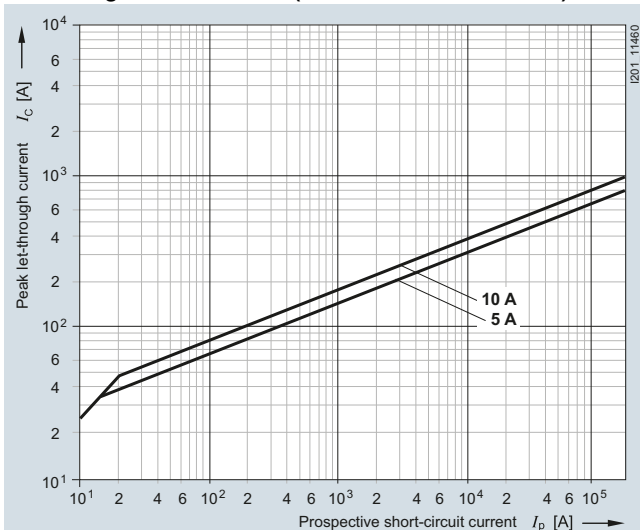

##### Correction factor $k_A$ for breaking $I^2t$ value




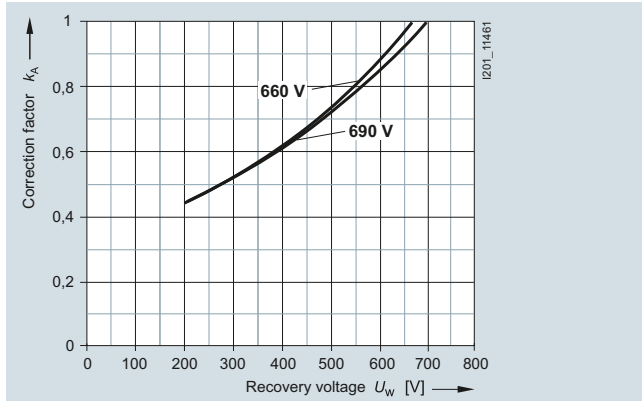


##### Peak arc voltage

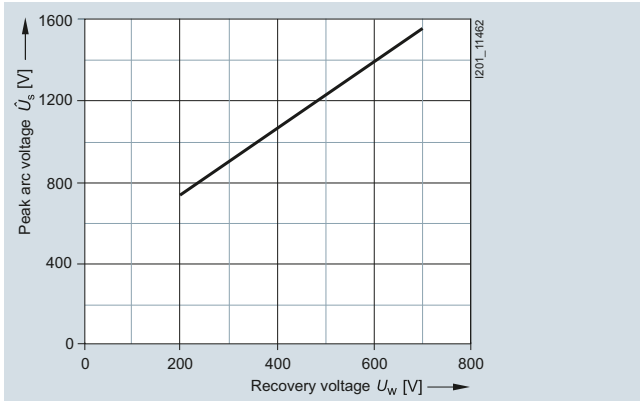

**3NC14 series**

Size: 14 × 51 mm  
 Operational class: aR  
 Rated voltage: 660 V AC (1 ... 4 A);  
 690 V AC/800 V DC (5 ... 50 A)  
 Rated current: 15 ... 50 A

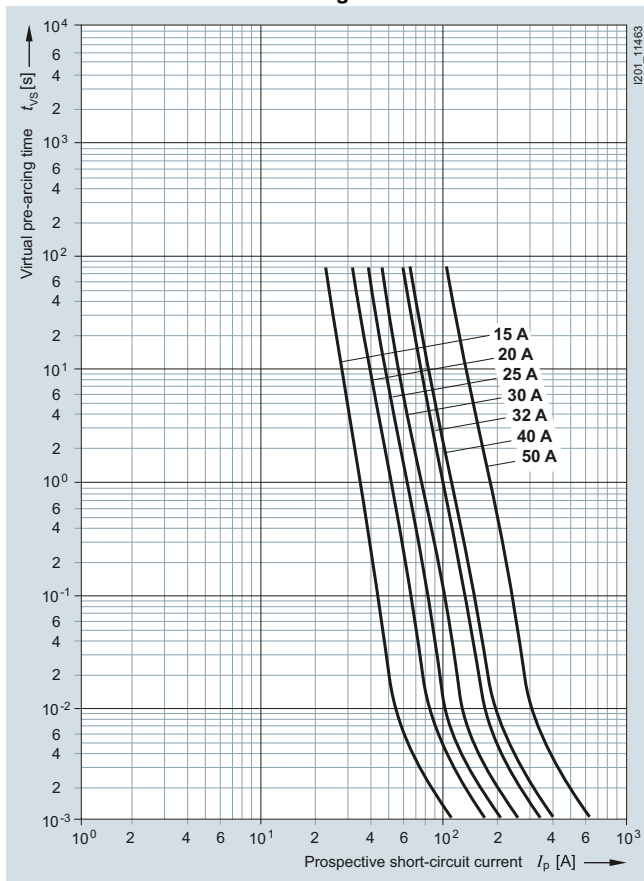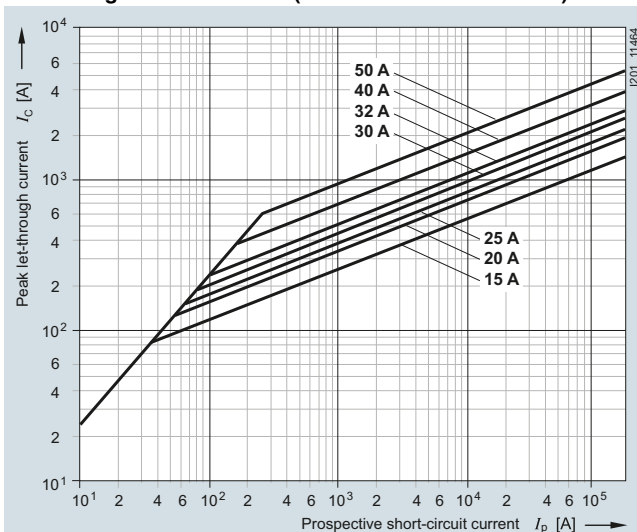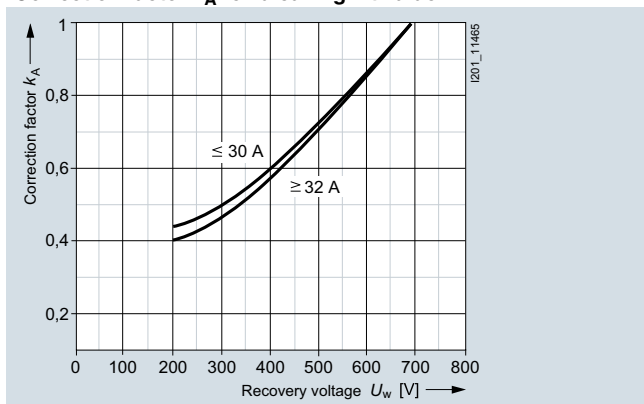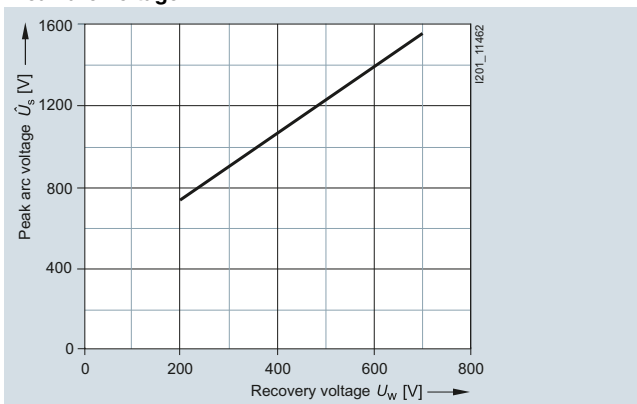**Time/current characteristics diagram****Let-through characteristics (current limitation at 50 Hz)****Correction factor  $k_A$  for breaking  $I^2t$  value****Peak arc voltage**

## Fuse Systems


### SITOR Semiconductor Fuses

#### Cylindrical fuse design


##### 3NC14...0MK series

Size: 14 × 51 mm  
 Operational class: gR, aR  
 Rated voltage: 690 V AC; 250 ... 700 V DC  
 Rated current: 6 ... 63 A


##### Time/current characteristics diagram

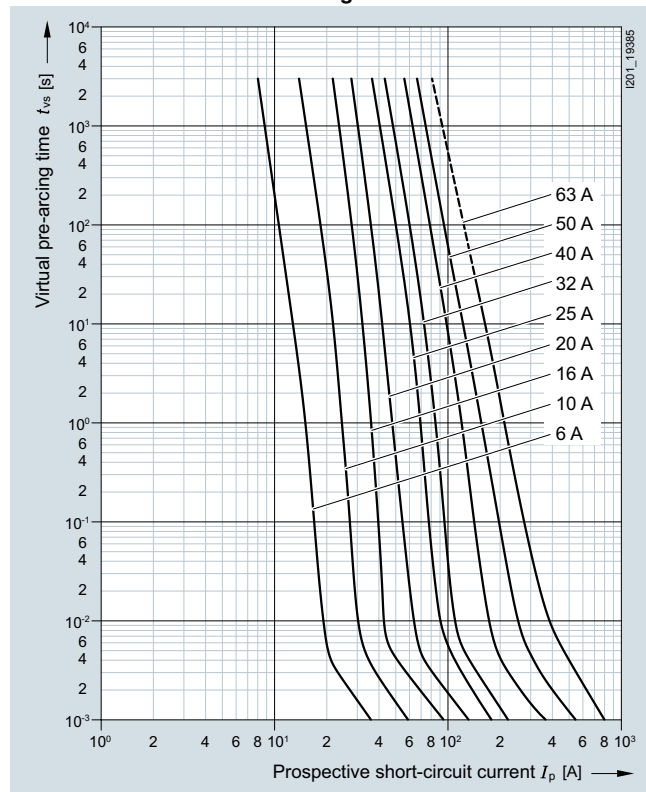


##### Let-through characteristics (current limitation at 50 Hz)

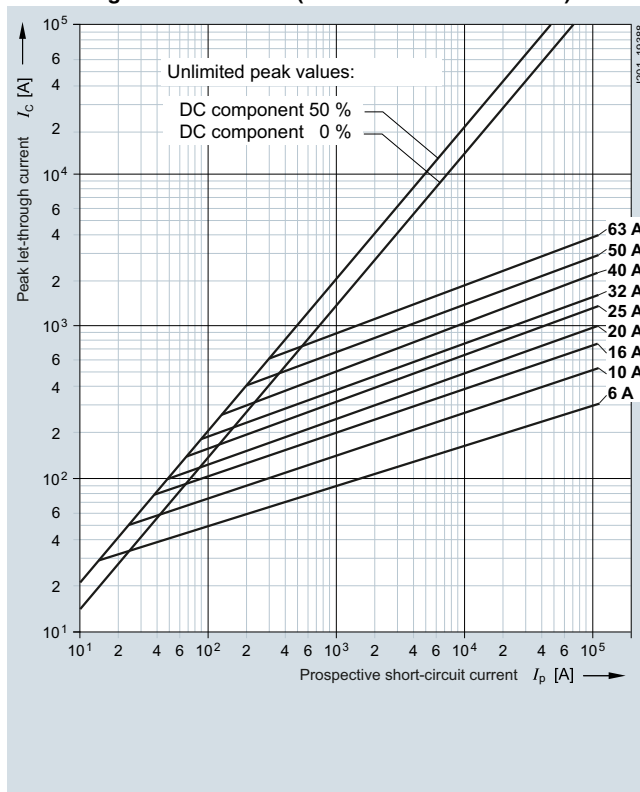

##### Correction factor $k_A$ for breaking $I^2t$ value




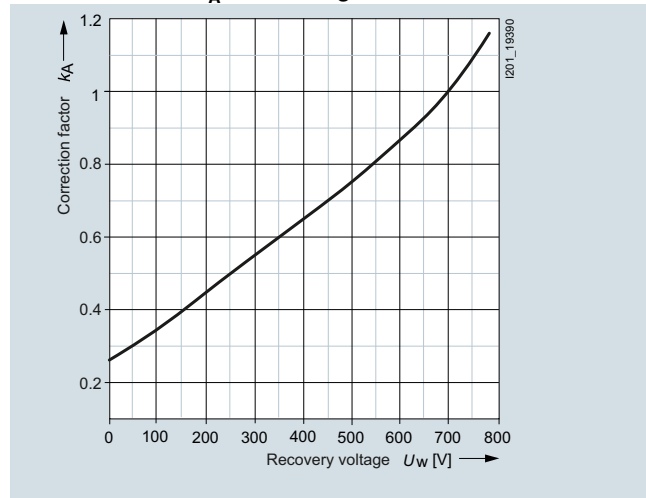


##### Peak arc voltage

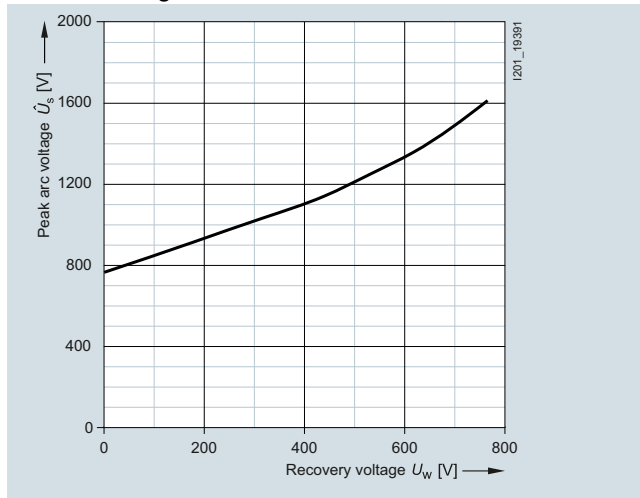

**3NC14..-5 series with striking pin**

Size: 14 × 51 mm  
 Operational class: aR  
 Rated voltage: 690 V AC/600 V DC  
 Rated current: 10 ... 50 A

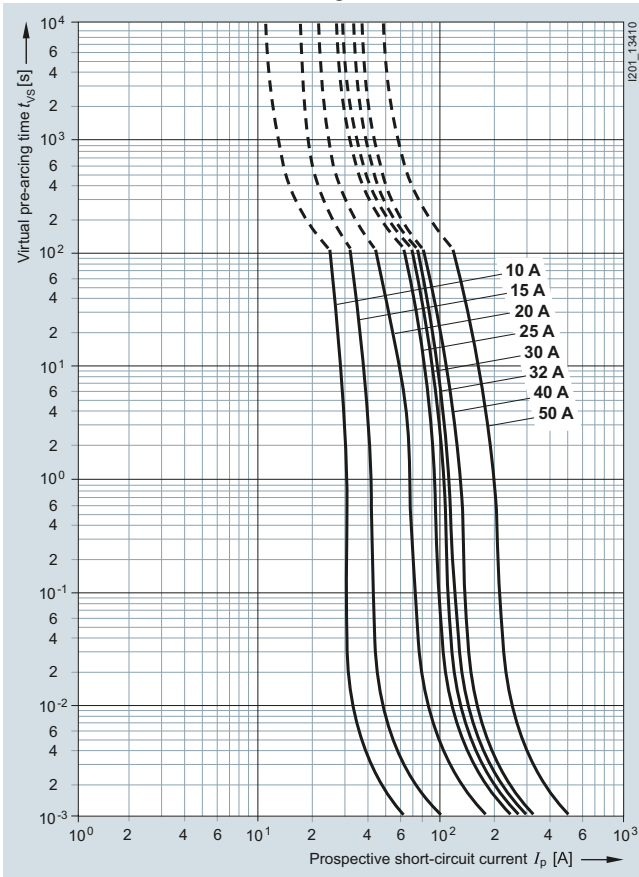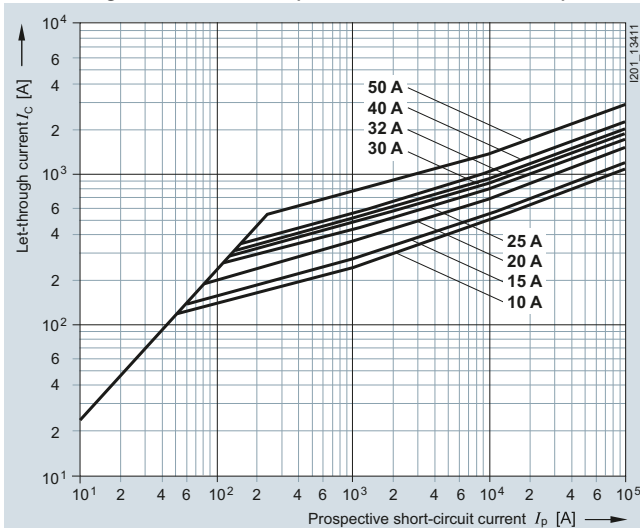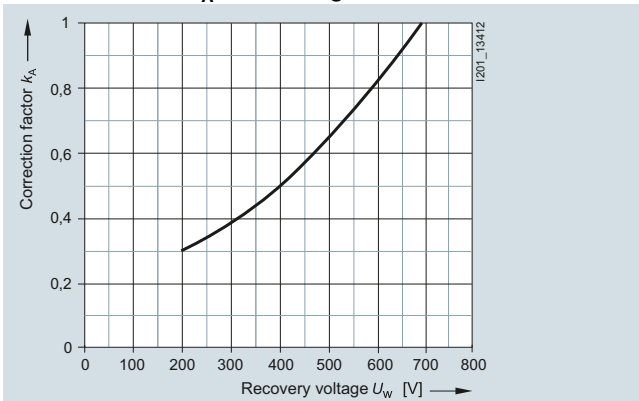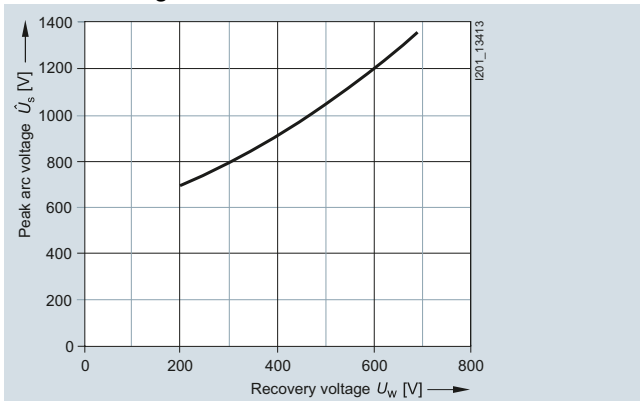**Time/current characteristics diagram****Let-through characteristics (current limitation at 50 Hz)****Correction factor  $k_A$  for breaking  $I^2t$  value****Peak arc voltage**

## Fuse Systems


### SITOR Semiconductor Fuses

#### Cylindrical fuse design


##### 3NC18...0MK series

Size: 18 × 88 mm  
 Operational class: gR  
 Rated voltage: 690 V AC/440 V DC  
 Rated current: 10 ... 50 A


##### Time/current characteristics diagram

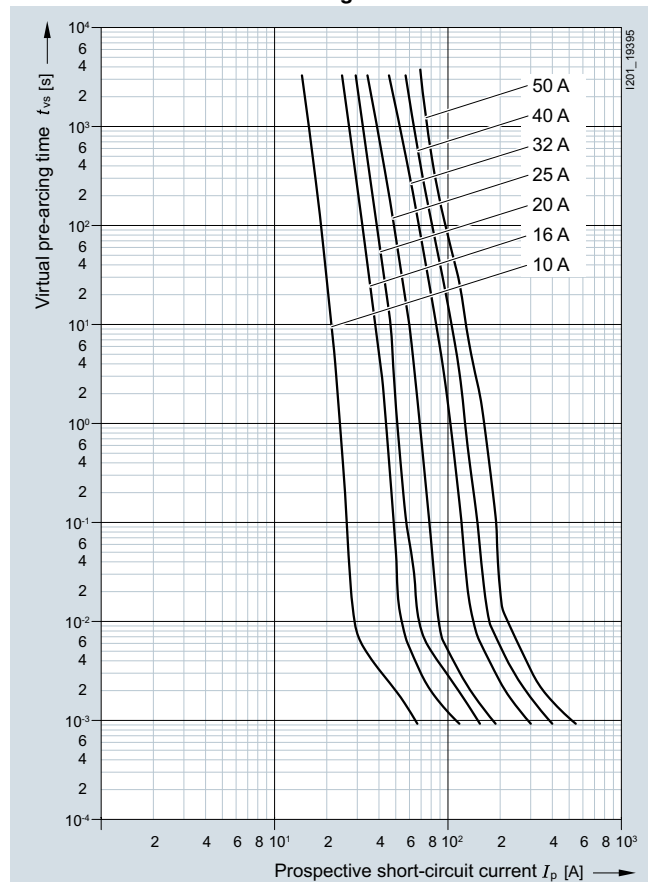


##### Let-through characteristics (current limitation at 50 Hz)

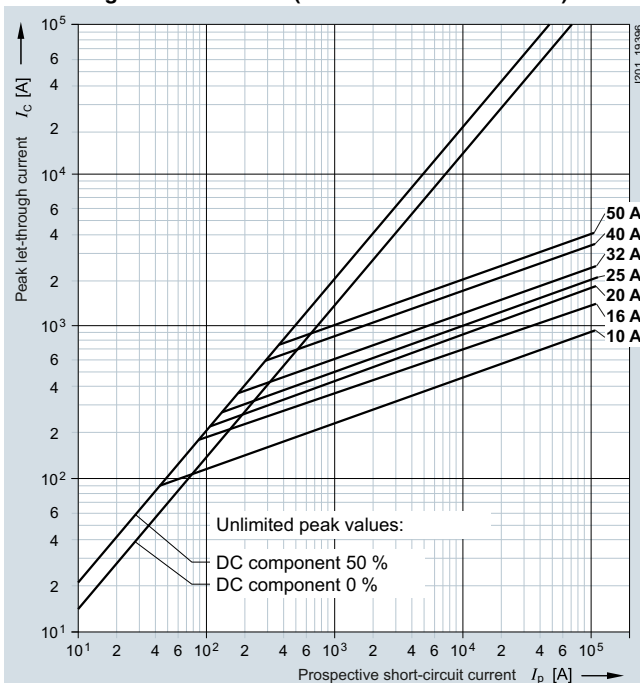

##### Correction factor $k_A$ for breaking $I^2t$ value




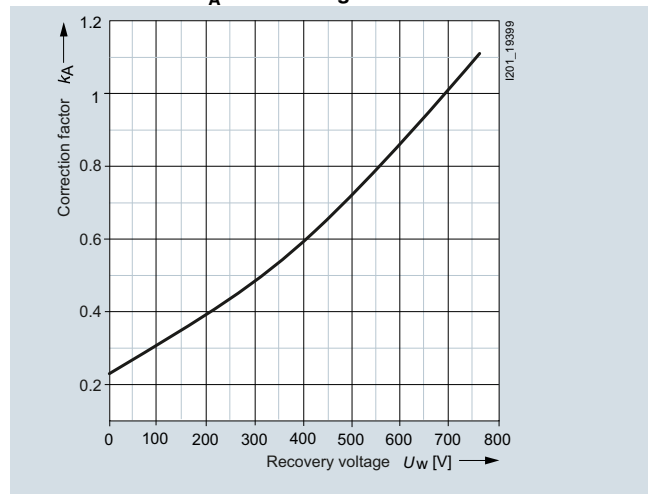


##### Peak arc voltage

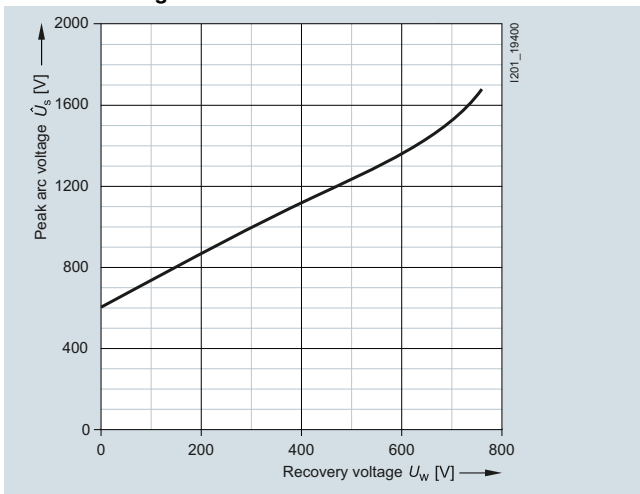

**3NC22 series**

Size: 22 × 58 mm  
 Operational class: aR  
 Rated voltage: 690 V AC/500 V DC (20 ... 80 A);  
 600 V AC/500 V DC (100 A)  
 Rated current: 20 ... 100 A

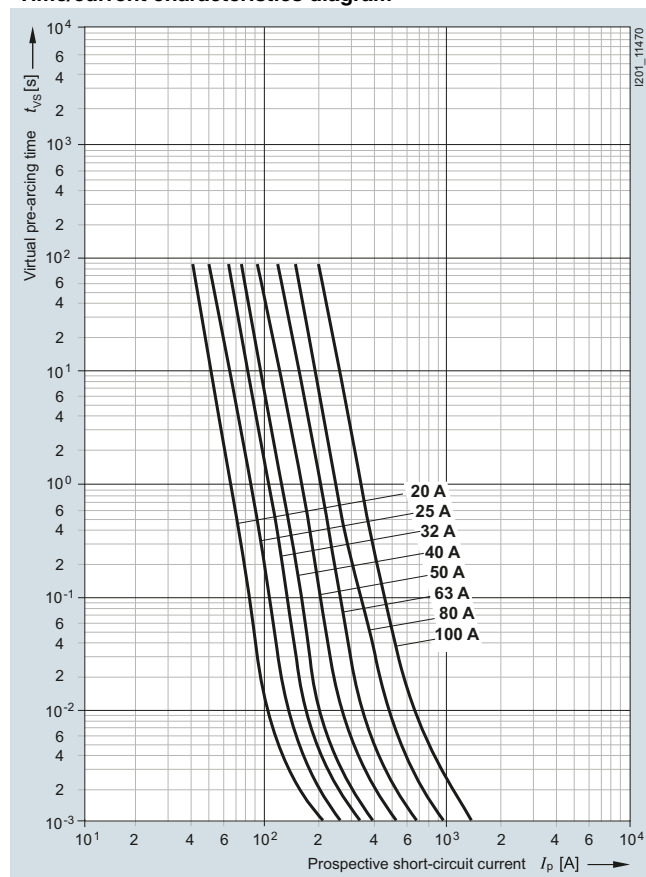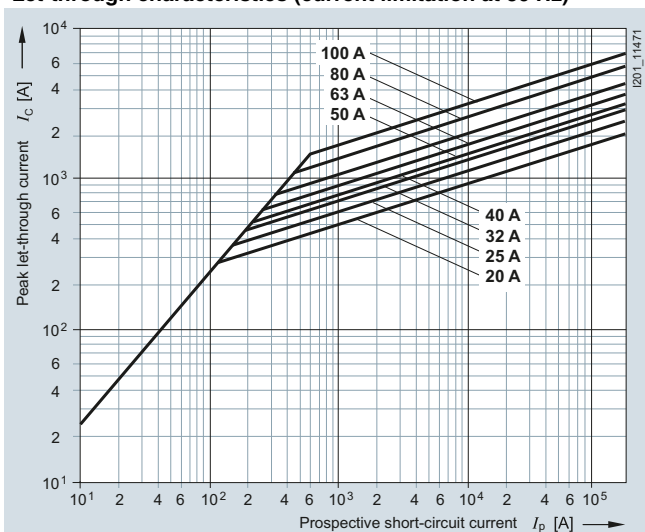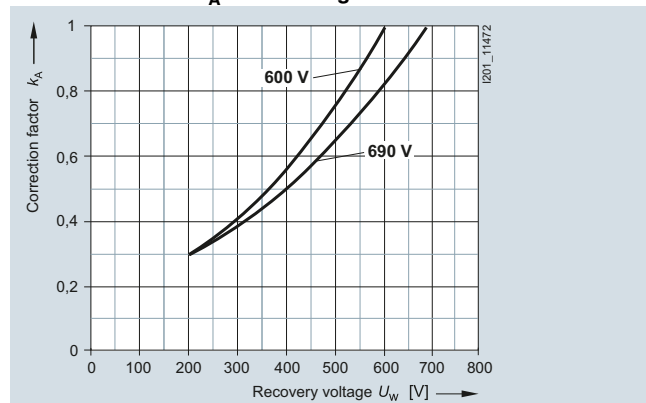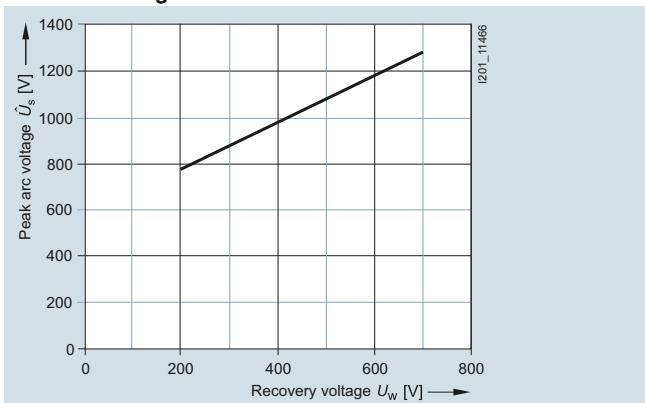**Time/current characteristics diagram****Let-through characteristics (current limitation at 50 Hz)****Correction factor  $k_A$  for breaking  $I^2t$  value****Peak arc voltage**

## Fuse Systems


### SITOR Semiconductor Fuses

#### Cylindrical fuse design


##### 3NC22..-0MK series

Size: 22 × 58 mm  
 Operational class: gR, aR  
 Rated voltage: 690 V AC; 250 ... 700 V DC  
 Rated current: 25 ... 125 A


##### Time/current characteristics diagram

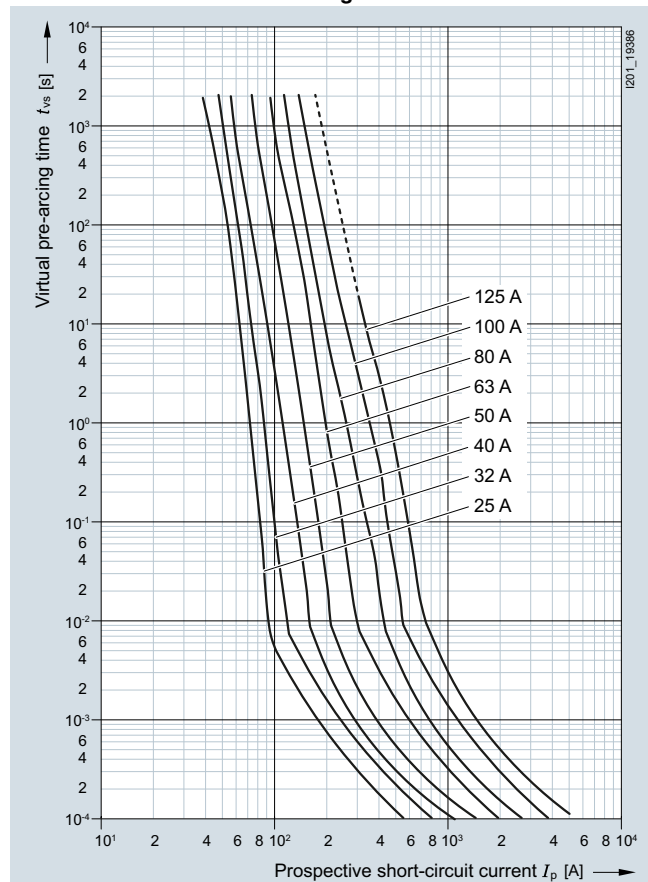


##### Let-through characteristics (current limitation at 50 Hz)

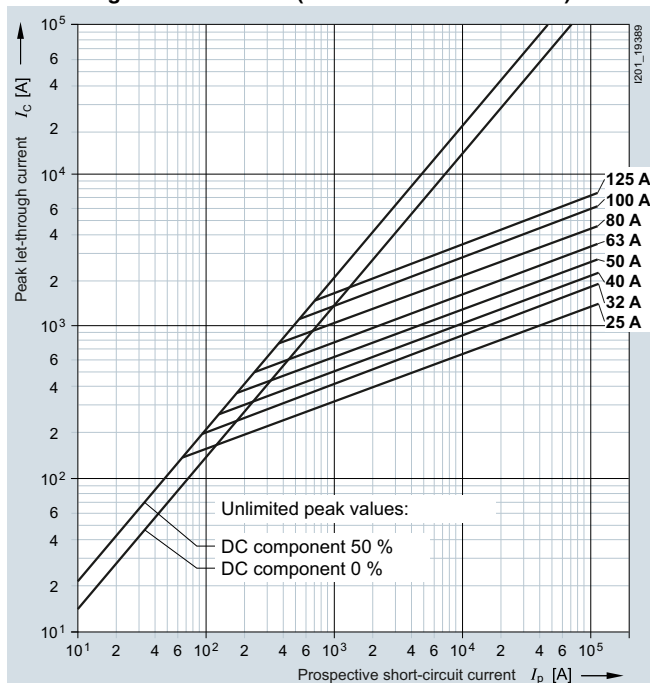

##### Correction factor $k_A$ for breaking $I^2t$ value




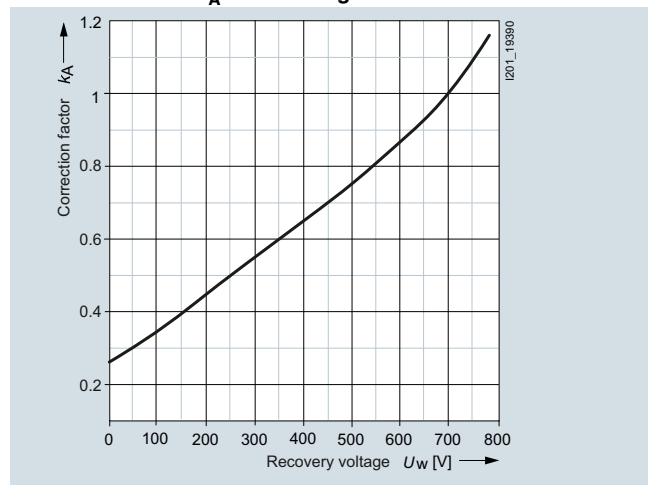


##### Peak arc voltage

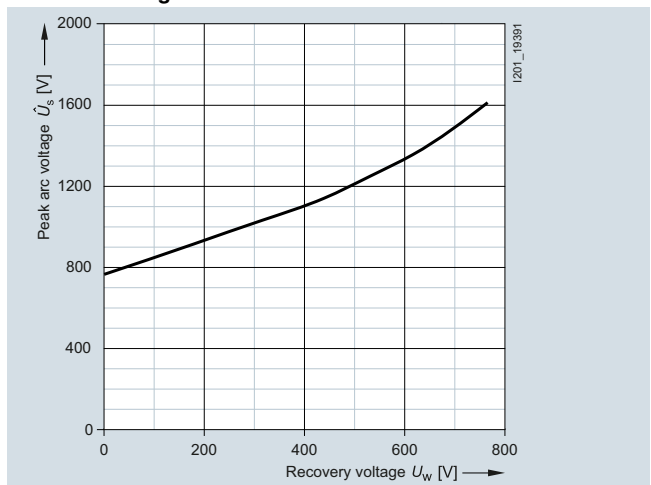

**3NC22...-5 series with striking pin**

Size: 22 × 58 mm  
 Operational class: aR  
 Rated voltage: 690 V AC/500 V DC (20 ... 80 A);  
 600 V AC/500 V DC (100 A)  
 Rated current: 20 ... 100 A

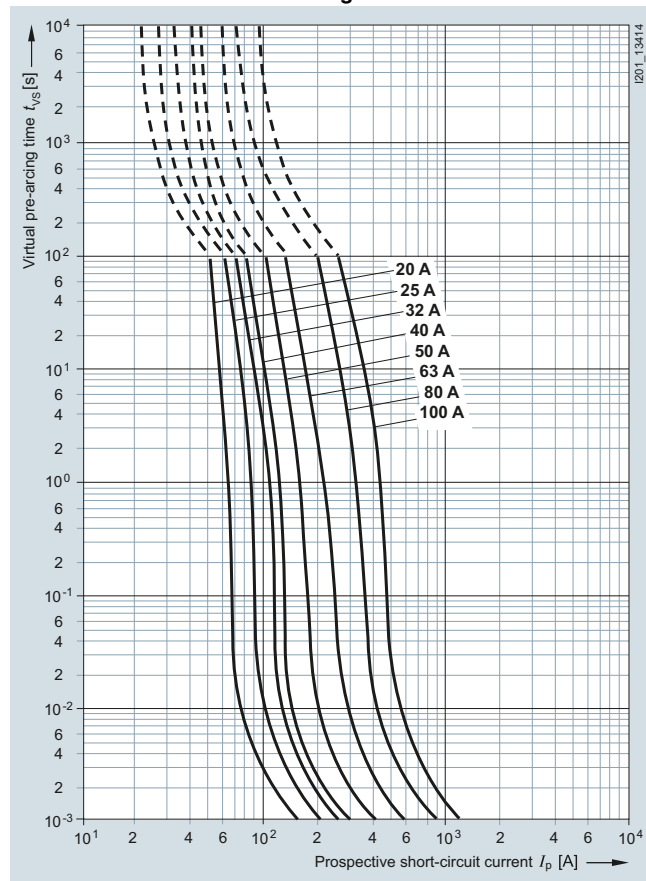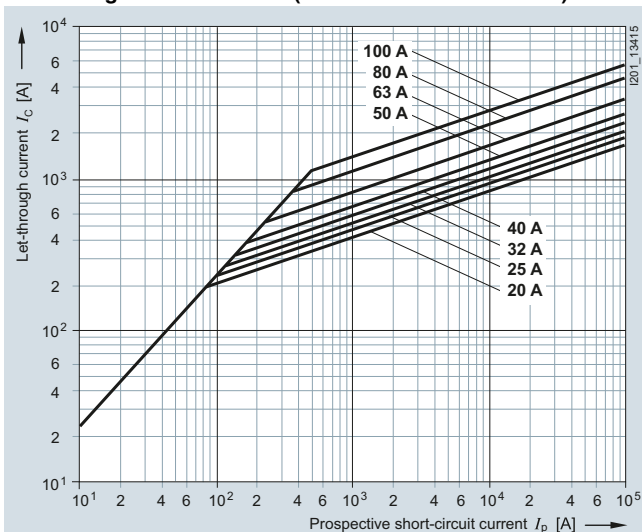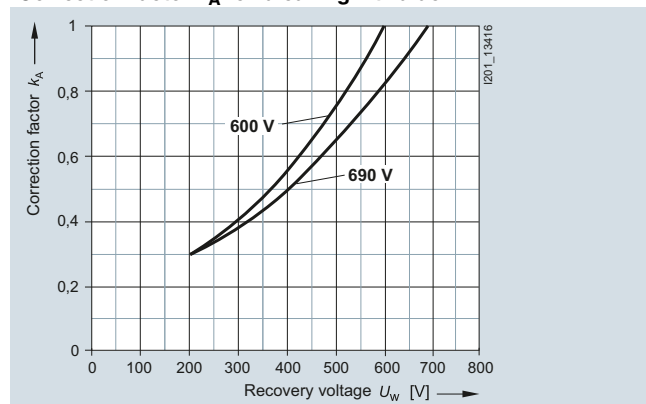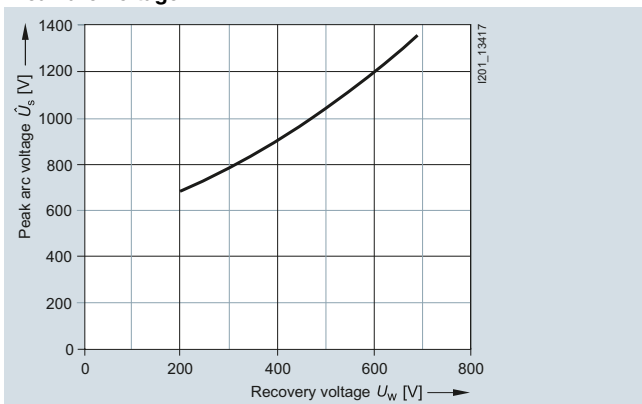**Time/current characteristics diagram****Let-through characteristics (current limitation at 50 Hz)****Correction factor  $k_A$  for breaking  $I^2t$  value****Peak arc voltage**

## Fuse Systems

### SITOR Semiconductor Fuses


#### Cylindrical fuse design

##### 3NC23...0MK series


Size: 22 × 127 mm  
Operational class: gS, gR, aR

Rated voltage: 1500 V AC/1000 V DC  
Rated current: 1 ... 50 A


##### Time/current characteristics diagram

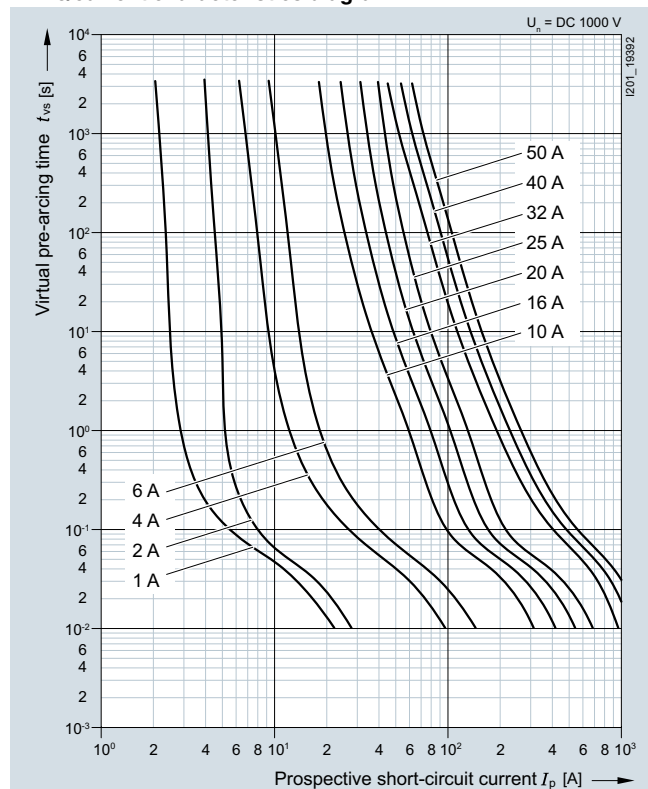

##### Let-through characteristics (current limitation at 50 Hz)




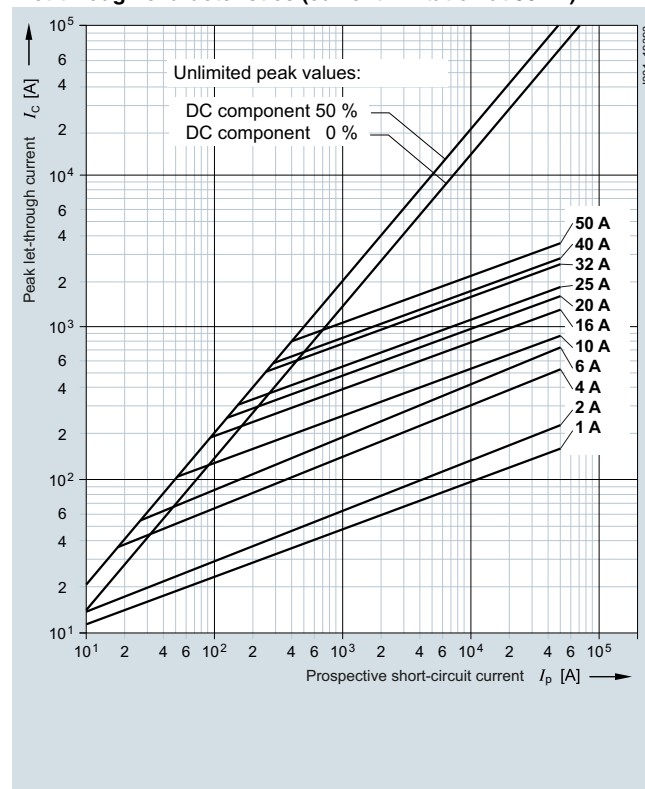


##### $I^2t$ characteristic

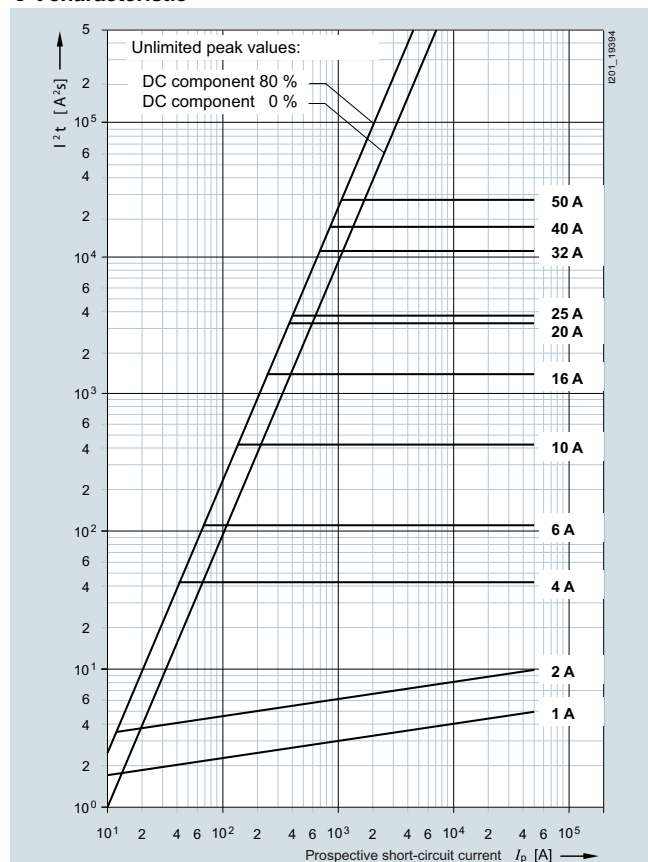

**3NC26...-0MK series**

Size: 26 × 103 mm  
 Operational class: gR, aR  
 Rated voltage: 690 V AC/440 V DC  
 Rated current: 25 ... 125 A

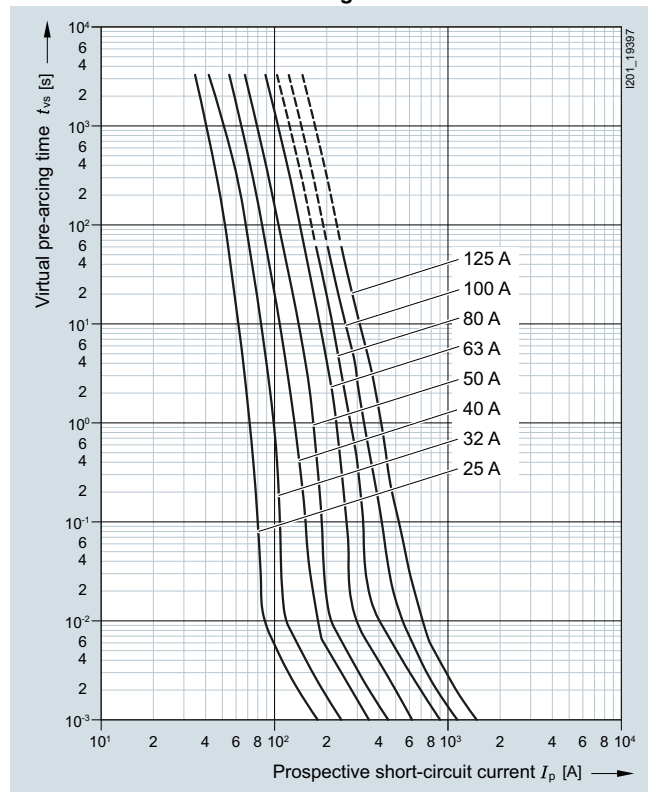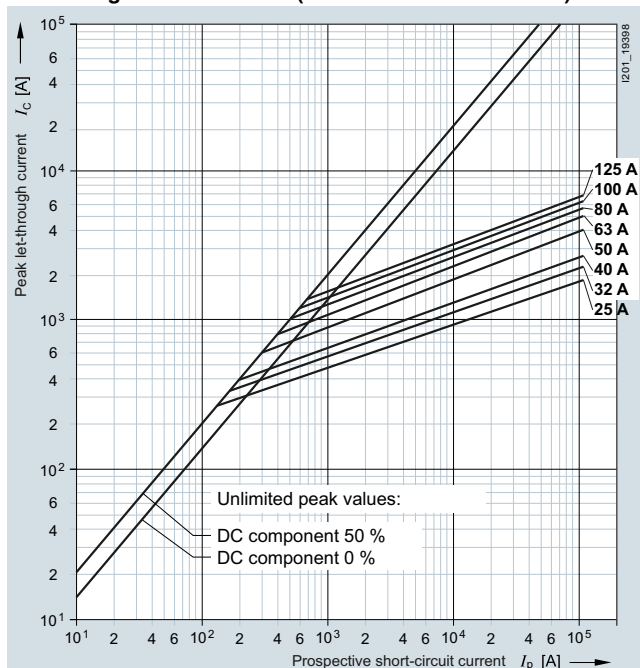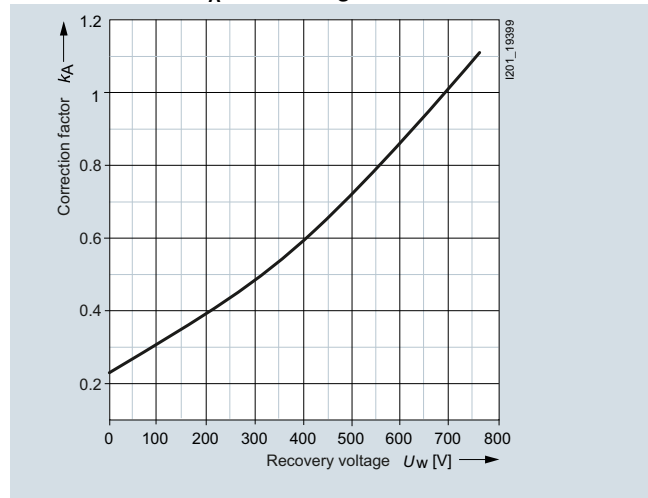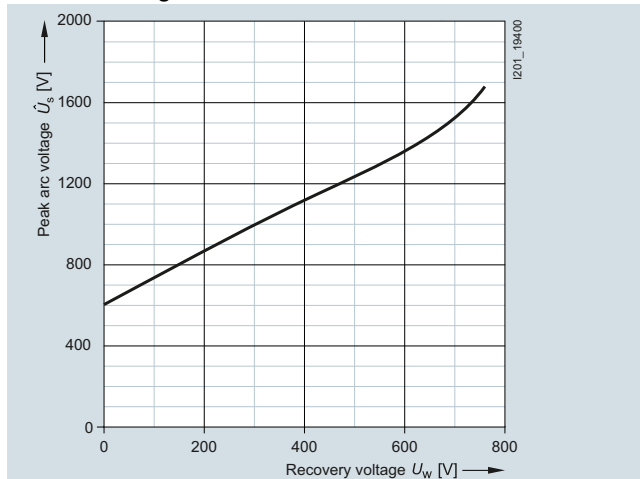**Time/current characteristics diagram****Let-through characteristics (current limitation at 50 Hz)****Correction factor  $k_A$  for breaking  $I^2t$  value****Peak arc voltage**

## Fuse Systems

### SITOR Semiconductor Fuses

#### NEOZED and DIAZED design

##### Overview

SILIZED is the brand name for the NEOZED fuses (D0 fuses) and the DIAZED fuses (D fuses) with quick-acting characteristic for semiconductor protection.

The fuses are used in combination with fuse bases, fuse screw caps and accessory parts of the standard fuse system.

SILIZED semiconductor fuses protect power semiconductors from the effects of short circuits because the super quick disconnect characteristic is far quicker than that of conventional fuses. They protect expensive devices and system components, such as semiconductor contactors, static relays, converters with fuses in the input and in the DC link, UPS systems and soft starters for motors up to 100 A.

When using fuse bases and fuse screw caps made of molded plastic, always heed the maximum permissible power loss values due to the high power loss (power dissipation) of the SILIZED fuses.

When using these components, the following maximum permissible power loss applies:

- NEOZED D02: 5.5 W
- DIAZED DII: 4.5 W
- DIAZED DIII: 7.0 W

This enables a partial thermal permanent load of only 50 %.

The DIAZED adapter DII for 25 A is used for the 30 A fuse link.

##### Benefits


- SILIZED semiconductor fuses have an extremely compact design. This means they have a very small footprint – particularly the NEOZED version
- The rugged and well-known DIAZED design complies with IEC 60269-3. It is globally renowned and can be used in many countries
- A wide range of fuse bases and accessories is available for the NEOZED and DIAZED versions of the SILIZED semiconductor fuses. This increases the application options in many devices

#### Technical specifications


|                                       |                | Fuse links, NEOZED design<br>5SE13                                   | Fuse links, DIAZED design<br>5SD4      |
|---------------------------------------|----------------|----------------------------------------------------------------------|----------------------------------------|
| <b>Standards</b>                      |                | DIN VDE 0636-3; IEC 60269-3;<br>EN 60269-4 (VDE 0636-4); IEC 60269-4 |                                        |
| <b>Operational class</b>              |                | gR                                                                   |                                        |
| <b>Characteristic</b>                 |                | Quick-acting                                                         |                                        |
| <b>Rated voltage <math>U_n</math></b> | V AC<br>V DC   | 400<br>250                                                           | 500<br>500                             |
| <b>Rated current <math>I_n</math></b> | A              | 10 ... 63                                                            | 16 ... 100                             |
| <b>Rated breaking capacity</b>        | kA AC<br>kA DC | 50<br>8                                                              |                                        |
| <b>Mounting position</b>              |                | Any, preferably vertical                                             |                                        |
| <b>Non-interchangeability</b>         |                | Using adapter sleeves                                                | Using screw adapter or adapter sleeves |
| <b>Resistance to climate</b>          | °C             | Up to 45 at 95 % rel. humidity                                       |                                        |
| <b>Ambient temperature</b>            | °C             | -5 to +40, humidity 90 % at 20                                       |                                        |

### Dimensional drawings


5SE1




5SD420, 5SD430, 5SD440, 5SD480



5SD450, 5SD460, 5SD470



5SD510, 5SD520



| Size               | D01       | D02       |
|--------------------|-----------|-----------|
| Rated current in A | 10 ... 16 | 20 ... 63 |
| Dimension d        | 11        | 15.3      |
| Dimension h        | 36        | 36        |

| Size/thread        | DII/E27 |    |    |    |
|--------------------|---------|----|----|----|
| Rated current in A | 16      | 20 | 25 | 30 |
| Dimension d        | 10      | 12 | 14 | 14 |

| Size/thread        | DIII/E33 |    |    |
|--------------------|----------|----|----|
| Rated current in A | 35       | 50 | 63 |
| Dimension d        | 16       | 18 | 20 |

| Size/thread        | DIV/R1¼" |     |
|--------------------|----------|-----|
| Rated current in A | 80       | 100 |
| Dimension d        | 5        | 7   |

### Technical specifications

| Type    | Size | NEOZED design |       |            |                          |                          |                              |                              |
|---------|------|---------------|-------|------------|--------------------------|--------------------------|------------------------------|------------------------------|
|         |      | $I_n$         | $P_v$ | $\Delta 9$ | $I^2 t_s$                |                          | $I^2 t_a$                    |                              |
|         |      | A             | W     | K          | 1 ms<br>A <sup>2</sup> s | 4 ms<br>A <sup>2</sup> s | 230 V AC<br>A <sup>2</sup> s | 400 V AC<br>A <sup>2</sup> s |
| 5SE1310 | D01  | 10            | 6.9   | 64         | 30                       | 30                       | 56                           | 73                           |
| 5SE1316 |      | 16            | 6.2   | 61         | 31                       | 34                       | 92                           | 120                          |
| 5SE1320 | D02  | 20            | 8.1   | 64         | 50                       | 56                       | 146                          | 190                          |
| 5SE1325 |      | 25            | 8.2   | 63         | 120                      | 120                      | 166                          | 215                          |
| 5SE1335 |      | 35            | 16.7  | 100        | 145                      | 182                      | 361                          | 470                          |
| 5SE1350 |      | 50            | 12.0  | 80         | 460                      | 540                      | 1510                         | 1960                         |
| 5SE1363 |      | 63            | 15.5  | 96         | 845                      | 932                      | 3250                         | 4230                         |

| Type   | Size | DIAZED design |       |            |                          |                              |  |
|--------|------|---------------|-------|------------|--------------------------|------------------------------|--|
|        |      | $I_n$         | $P_v$ | $\Delta 9$ | $I^2 t_s$                | $I^2 t_a$                    |  |
|        |      | A             | W     | K          | 1 ms<br>A <sup>2</sup> s | 500 V AC<br>A <sup>2</sup> s |  |
| 5SD420 | DII  | 16            | 12.1  | 63         | 16.2                     | 60                           |  |
| 5SD430 |      | 20            | 12.3  | 69         | 35.8                     | 139                          |  |
| 5SD440 |      | 25            | 12.5  | 61         | 48.9                     | 205                          |  |
| 5SD480 |      | 30            | 13.4  | 65         | 85                       | 310                          |  |
| 5SD450 | DIII | 35            | 14.8  | 62         | 135                      | 539                          |  |
| 5SD460 |      | 50            | 18.5  | 66         | 340                      | 1250                         |  |
| 5SD470 |      | 63            | 28    | 84         | 530                      | 1890                         |  |
| 5SD510 | DIV  | 80            | 34.3  | 77         | 980                      | 4200                         |  |
| 5SD520 |      | 100           | 41.5  | 83         | 1950                     | 8450                         |  |

## Fuse Systems

### SITOR Semiconductor Fuses


#### NEOZED and DIAZED design

#### Characteristic curves


##### 5SE13.. series

Size: D01, D02  
 Operational class: gR  
 Rated voltage: 400 V AC/250 V DC  
 Rated current: 10 ... 63 A


#### Time/current characteristics diagram

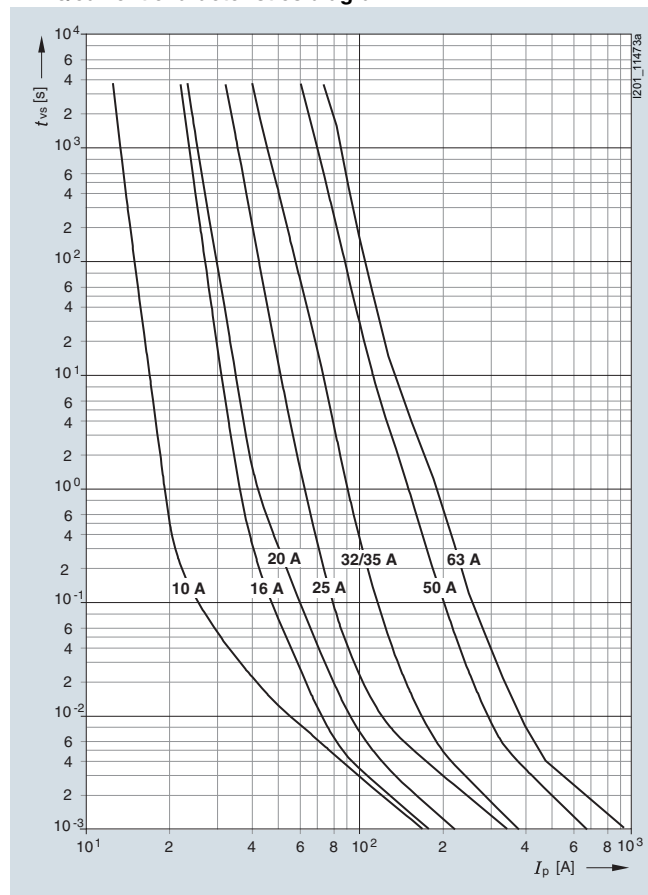

#### Melting $I^2t$ values diagram

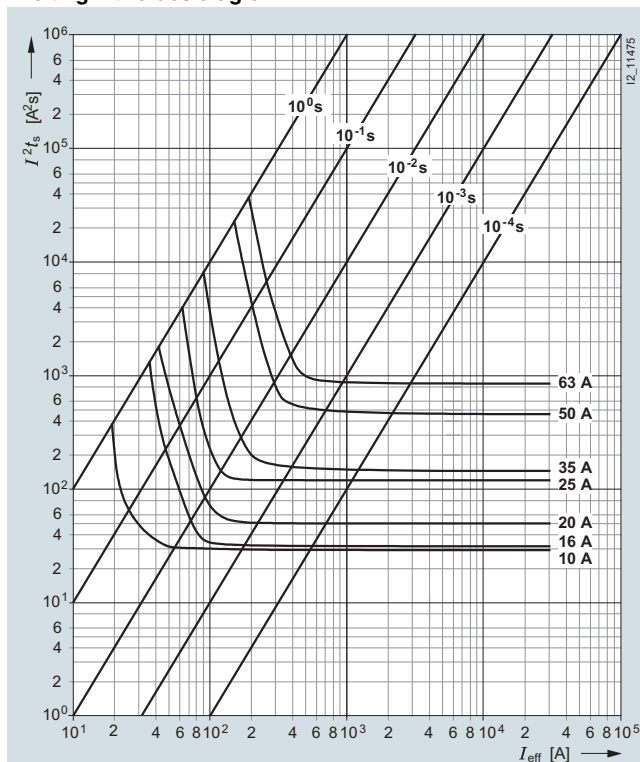




#### Current limiting diagram

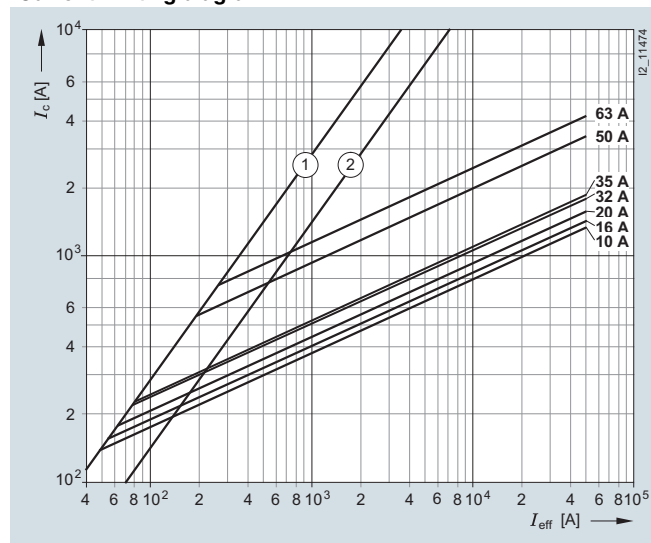

- ① Peak short-circuit current with largest DC component
- ② Peak short-circuit current without DC component

**5SD4, 5SD5 series**

Size: DII, DIII, DIV  
 Operational class: gR  
 Characteristic: Super quick  
 Rated voltage: 500 V AC/500 V DC  
 Rated current: 16 ... 100 A

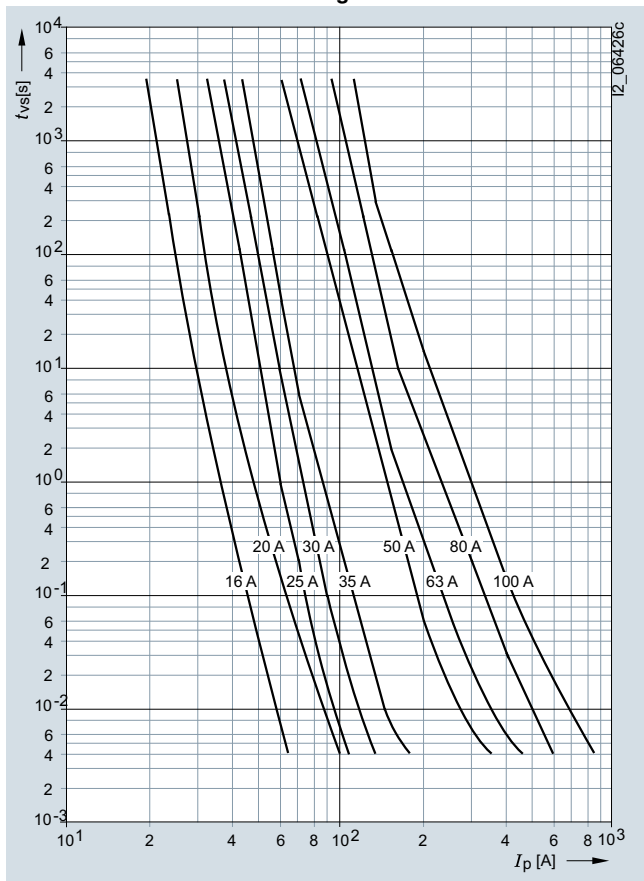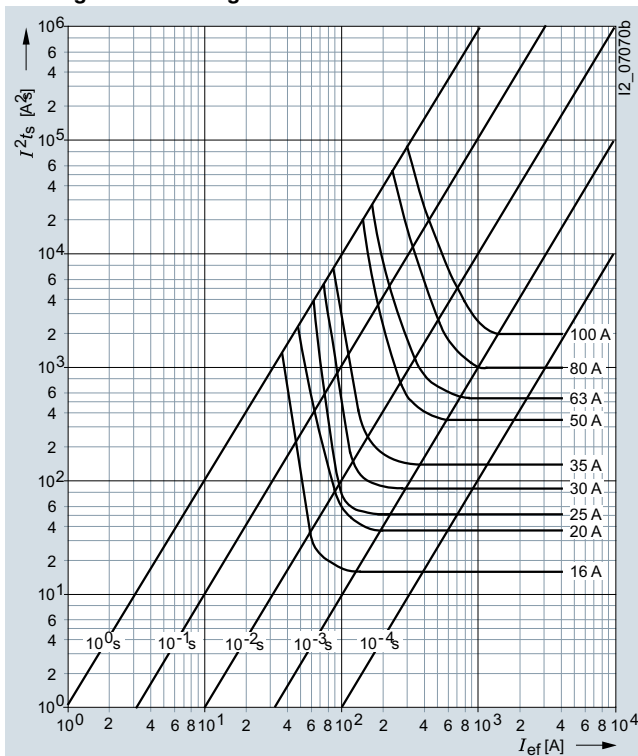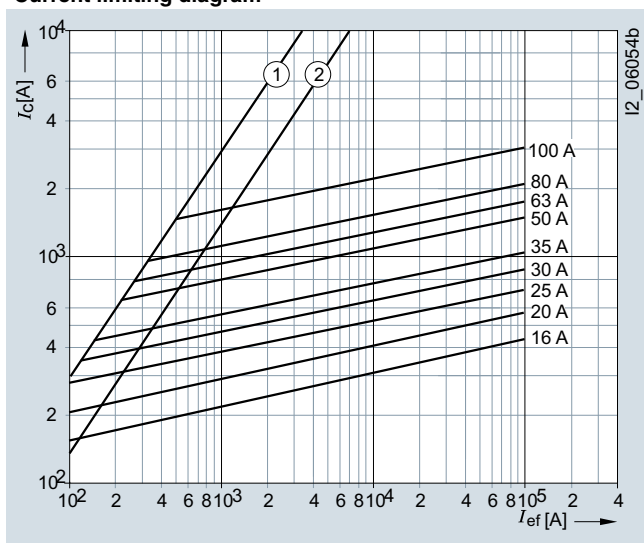**Time/current characteristics diagram****Melting  $I^2t$  values diagram****Current limiting diagram**

- ① Peak short-circuit current with largest DC component
- ② Peak short-circuit current without DC component

## Fuse Systems

### SITOR Semiconductor Fuses

#### Configuration

#### Overview

##### Parameters

The fuse links are selected according to rated voltage, rated current, breaking  $I^2t$  value  $I^2t_a$  and varying load factor, taking into consideration other specified conditions. All of the following data refers, unless otherwise specified, to use of alternating current from 45 Hz to 62 Hz.

##### Rated voltage $U_n$

The rated voltage of a SITOR fuse link is the voltage specified as the rms value of the AC voltage on the fuse link and in the ordering and configuration data and the characteristics.

Always ensure that the rated voltage of the fuse link you select is such that the fuse link will reliably quench the voltage driving the short-circuit current. The driving voltage must not exceed the value  $U_n + 10\%$ . Please note that the supply voltage  $U_{V0}$  of a power converter can also be increased by 10 %. If, in the shorted circuit, two branches of a converter circuit are connected in series, and if the short-circuit current is sufficiently high, it can be assumed that voltage sharing is uniform. It is essential to observe the instructions in "Series connection of fuse links" on page 179.

##### Rectifier operation

The supply voltage  $U_{V0}$  is the driving voltage with converter equipment that can only be used for rectifier operation.

##### Inverter operation

With converter equipment that can also be used for inverter operation, inverter shoot-through may occur as faults. In this case, the driving voltage  $U_{WK}$  in the shorted circuit is the sum of the infeed direct voltage (e.g. the e.m.f. of the DC generator) and the AC-line supply voltage. When rating a fuse link, this sum can be replaced by an AC voltage whose rms value is 1.8 times that of the AC-line supply voltage ( $U_{WK} = 1.8 U_{V0}$ ). The fuse links must be rated so that they reliably quench the voltage  $U_{WK}$ .

##### VSI voltage

VSI is the abbreviation for Voltage Sourced Inverter. The VSI voltage  $U_{VSI}$  is a DC test voltage defined in IEC 60269-4 specially for use in applications with energy stores. The characteristic feature of such applications is the extremely steep rise in current in the event of a fault. The VSI voltage and the corresponding  $I^2t$  value for SITOR fuses 3NB1 and 3NB2 is specified in the "Technical Specifications" table; the values for all other SITOR fuses are available on request.

##### Rated current $I_n$ , load rating

The rated current of a SITOR fuse link is the current specified in the "Selection and ordering data", in the "Characteristic curves" and on the fuse link as the rms value of an alternating current for the 45 Hz to 62 Hz frequency range.

When operating fuse links with rated current, the following are considered normal operating conditions:

- Natural air cooling with an ambient temperature of +45 °C
- Conductor cross-sections equal test cross-sections (see table "Test cross-sections"), for operation in LV HRC fuse bases and switch disconnectors, see "Selection and ordering data" in Catalog LV 10.
- Conduction angle of a half-period 120°el
- Continuous load maximum with rated current

For operating conditions that deviate from the above, the permissible load current  $I_n'$  of the SITOR fuse link can be determined using the following formula:

$$I_n' = k_U \times k_Q \times k_\lambda \times k_l \times VL \times I_n$$

with

$I_n$  Rated current of the fuse link<sup>1)</sup>

$k_U$  Correction factor for ambient temperature (page 173)

$k_Q$  Correction factor for conductor cross-section (page 173)

$k_\lambda$  Correction factor for conduction angle (page 173)

$k_l$  Correction factor for forced-air cooling (page 173)

VL Varying load factor (page 174).


##### Test cross-sections

| Rated current<br>$I_n$ | Test cross-sections                                                               |                    |
|------------------------|-----------------------------------------------------------------------------------|--------------------|
| A                      | (3NC10, 3NC11, 3NC14, 3NC15, 3NC22, 3NE1..., 3NE80..., 3NE4 series) <sup>1)</sup> | (all other series) |
|                        | Cu mm <sup>2</sup>                                                                | Cu mm <sup>2</sup> |
| 10                     | 1.0                                                                               | --                 |
| 16                     | 1.5                                                                               | --                 |
| 20                     | 2.5                                                                               | 45                 |
| 25                     | 4                                                                                 | 45                 |
| 35                     | 6                                                                                 | 45                 |
| 40                     | 10                                                                                | 45                 |
| 50                     | 10                                                                                | 45                 |
| 63                     | 16                                                                                | 45                 |
| 80                     | 25                                                                                | 45                 |
| 100                    | 35                                                                                | 60                 |
| 125                    | 50                                                                                | 80                 |
| 160                    | 70                                                                                | 100                |
| 200                    | 95                                                                                | 125                |
| 224                    | --                                                                                | 150                |
| 250                    | 120                                                                               | 185                |
| 315                    | 2 × 70                                                                            | 240                |
| 350                    | 2 × 95                                                                            | 260                |
| 400                    | 2 × 95                                                                            | 320                |
| 450                    | 2 × 120                                                                           | 320                |
| 500                    | 2 × 120                                                                           | 400                |
| 560                    | 2 × 150                                                                           | 400                |
| 630                    | 2 × 185                                                                           | 480                |
| 710                    | 2 × (40 × 5)                                                                      | 560                |
| 800                    | 2 × (50 × 5)                                                                      | 560                |
| 900                    | 2 × (80 × 4)                                                                      | 720                |
| 1000                   | --                                                                                | 720                |
| 1100                   | --                                                                                | 880                |
| 1250                   | --                                                                                | 960                |
| 1400                   | --                                                                                | 1080               |
| 1600                   | --                                                                                | 1200               |

<sup>1)</sup> When using SITOR fuse links in LV HRC fuse bases according to IEC/EN 60269-2-1 and in fuse switch disconnectors and switch disconnectors with fuses, please also refer to the information in the "Selection and ordering data" in Catalog LV 10.

### Correction factor for ambient temperature $k_u$


The influence of the ambient temperature on the permissible load of the SITOR fuse link is taken into account using the correction factor  $k_u$  as shown in the following diagram.

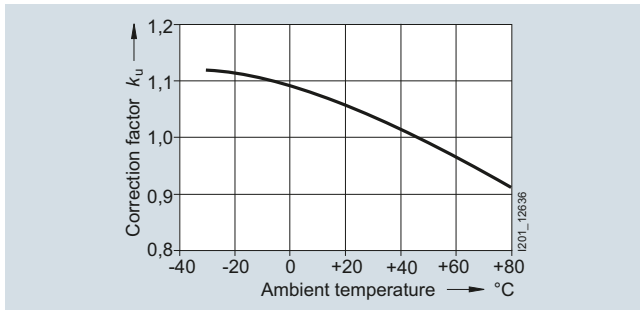

### Correction factor for conductor cross-section $k_q$

The rated current of the SITOR fuse links applies to operation with conductor cross-sections that correspond to the respective test cross-section (see the table on page 172).


In the case of reduced conductor cross-sections, the correction factor  $k_q$  must be used, as shown in the following diagram:

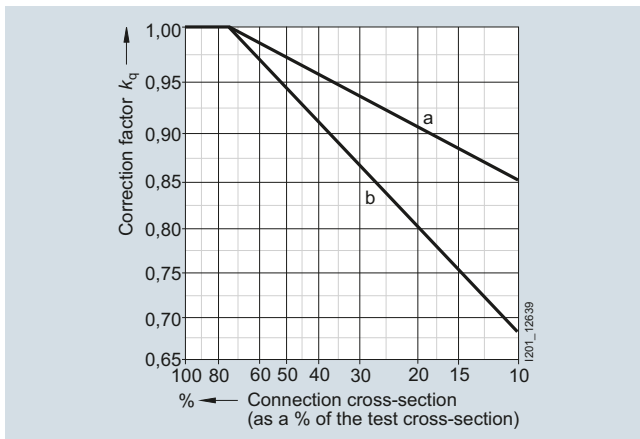

- a = Reduction of cross-section of one connection  
b = Reduction of cross-section of both connections


### Correction factor for conduction angle $k_\lambda$

The rated current of the SITOR fuse links is based on a sinusoidal alternating current (45 Hz to 62 Hz). However, in converter operation, the branch fuses are loaded with an intermittent current, whereby the conduction angle is generally 180°el or 120°el. With this load current wave form, the fuse link can still carry the full rated current. In the case of smaller conduction angles, the current must be reduced in accordance with the following diagram.

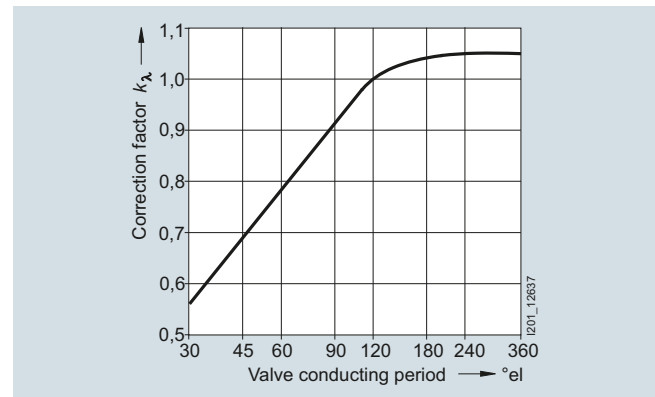

### Correction factor for forced-air cooling $k_l$

In the case of increased air cooling, the current carrying capacity of the fuse links increase with the air speed, air speeds > 5 m/s do not produce any significant further increase in current carrying capacity.

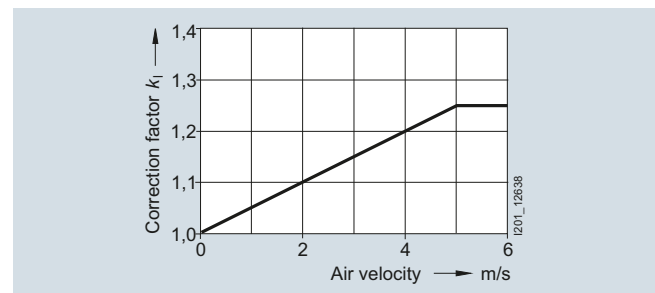

## Fuse Systems

### SITOR Semiconductor Fuses


#### Configuration

##### Varying load factor $VL$

The varying load factor  $VL$  is a reduction factor by which the non-aging current carrying capacity of the fuse links can be determined for any load cycles. Due to their design, the SITOR fuse links have different varying load factors. In the characteristic curves of the fuse links, the respective varying load factor  $VL$  for >10000 load changes (1 hour "ON", 1 hour "OFF") is specified for the expected operating time of the fuse links. In the event of a smaller number of load changes during

the expected operating time, it may be possible to use a fuse link with a smaller varying load factor  $VL$  as shown in the following diagram.

In the case of uniform loads (no load cycles and no shutdowns), the varying load factor can be taken as  $VL = 1$ . For load cycles and shutdowns that last longer than 5 min. and are more frequent than once a week, you need to select the varying load factor  $VL$  specified in the characteristic curves of the individual fuse links.

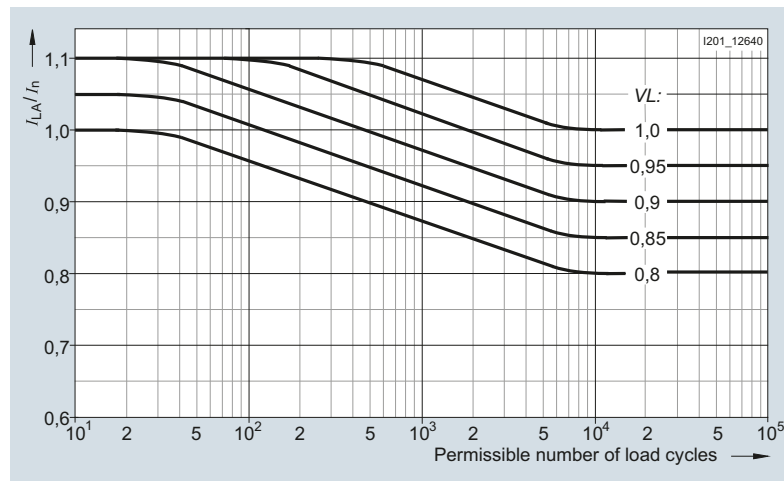

Waveform of the varying load factor  $VL$  for load cycles

##### Fuse currents for operation in power converter


The rms value of the fuse current can be calculated for the most common converter circuits from the (smoothed) direct current  $I_d$  or the conductor current  $I_L$  according to the following table:

| Converter circuit                                   |        | Rms value of the conductor current<br>(phase fuse) | Rms value of the branch current<br>(branch fuse) |
|-----------------------------------------------------|--------|----------------------------------------------------|--------------------------------------------------|
| Single-pulse center tap connection                  | (M1)   | $1.57 I_d$                                         | --                                               |
| Double-pulse center tap connection                  | (M2)   | $0.71 I_d$                                         | --                                               |
| Three-pulse center tap connection                   | (M3)   | $0.58 I_d$                                         | --                                               |
| Six-pulse center tap connection                     | (M6)   | $0.41 I_d$                                         | --                                               |
| Double three-pulse center tap connection (parallel) | (M3.2) | $0.29 I_d$                                         | --                                               |
| Two-pulse bridge circuit                            | (B2)   | $1.0 I_d$                                          | $0.71 I_d$                                       |
| Six-pulse bridge circuit                            | (B6)   | $0.82 I_d$                                         | $0.58 I_d$                                       |
| Single-phase bidirectional circuit                  | (W1)   | $1.0 I_L$                                          | $0.71 I_L$                                       |

### $I^2t$ values

In the event of a short circuit, the current of the fuse link increases during the melting time  $t_s$  up to let-through current  $I_c$  (melting current peak).

During the arc quenching time  $t_L$ , the electric arc develops and the short-circuit current is quenched (see the diagram below).

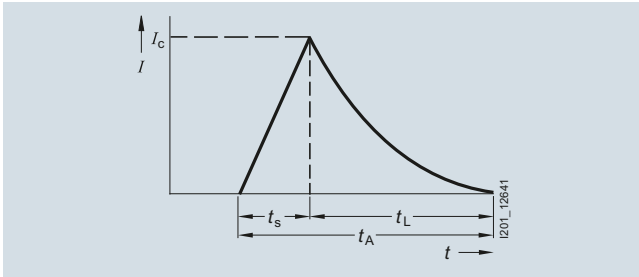

Current path when switching fuse links

The integral of the current squared ( $\int I^2 dt$ ) over the total operating time ( $t_s + t_L$ ), known as the breaking  $I^2t$  value, determines the heat to be fed to the semiconductor device that is to be protected during the breaking operation.

To ensure adequate protection, the breaking  $I^2t$  value of the fuse link must be smaller than the  $I^2t$  value of the semiconductor device. As the temperature increases, i.e. preloading increases, the breaking  $I^2t$  value of the fuse link decreases almost in the same way as the  $I^2t$  value of a semiconductor device, so that it is sufficient to compare the  $I^2t$  values in a non-loaded (cold) state.

The breaking  $I^2t$  value ( $I^2t_a$ ) is the sum of the melting  $I^2t$  value ( $I^2t_s$ ) and the quenching  $I^2t$  value ( $I^2t_L$ ).

$(\int I^2 dt)$  (semiconductor,  $t_{vj} = 25^\circ\text{C}$ ,

$t_p = 10 \text{ ms}) > (\int I^2 dt_A)$  (fuse link)

### Melting $I^2t$ value $I^2t_s$

The melting  $I^2t$  value can be calculated from the value pairs of the time/current characteristic curve of the fuse link for any periods.

As the melting time decreases, the melting  $I^2t$  value tends towards a lower limit value at which almost no heat is dissipated from the bottleneck of the fuse element to the environment during the melting process. The melting  $I^2t$  values specified in the selection and ordering data and in the characteristic curves correspond to the melting time  $t_{vs} = 1 \text{ ms}$ .

### Quenching $I^2t$ value $I^2t_L$

Whereas the melting  $I^2t$  value is a characteristic of the fuse link, the quenching  $I^2t$  value depends on circuit data, such as:

- The recovery voltage  $U_w$
- The power factor p.f. of the shorted circuit
- The prospective current  $I_p$  (current at the installation position of the fuse link if this is jumpered)


The maximum quenching  $I^2t$  value is reached at a current of  $10 \times I_n$  to  $30 \times I_n$  depending on the fuse type.

### Breaking $I^2t$ value $I^2t_a$ , correction factor $k_A$

The breaking  $I^2t$  values of the fuse links are specified in the characteristic curves for the rated voltage  $U_n$ . To determine the breaking  $I^2t$  value for recovery voltage  $U_w$  the correction factor  $k_A$  must be taken into account.

$$I^2t_a (\text{at } U_w) = I^2t_a (\text{at } U_n) \times k_A$$

The "correction factor  $k_A$ " characteristic (see the following diagram) is specified in the characteristic curves for the individual fuse series. The breaking  $I^2t$  values determined in this way apply to prospective currents  $I_p \geq 10 \times I_n$  and p.f. = 0.35.

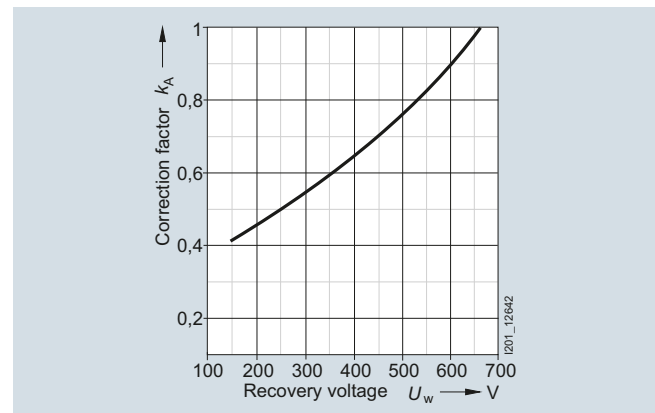

Correction factor  $k_A$  for breaking  $I^2t$  value  
Example: Series 3NE8 0..

## Fuse Systems

### SITOR Semiconductor Fuses

#### Configuration


Taking into account the recovery voltage  $U_w$

The recovery voltage  $U_w$  is derived from the voltage driving the short-circuit current. For most faults, the driving voltage is equal to the supply voltage  $U_{V0}$ ; however, for shoot-throughs it is 1.8 times the value for the supply voltage  $U_{V0}$  (see [rated voltage, page 172](#)). If the shorted circuit contains two branches of a converter circuit and thus two fuse links in series, and if the short-circuit current is sufficiently high (see [series connection, page 179](#)) it can be assumed that there is a uniform voltage sharing, i.e.  $U_w = 0.5 \times U_{V0}$  or in the case of shoot-throughs  $U_w = 0.9 \times U_{V0}$ .

Influence of the power factor p.f.

The specifications in the characteristic curves for the breaking  $I^2t$  values ( $I^2t_a$ ) refer to a power factor of p.f. = 0.35 (exception: for 3NC58.., 3NE64.., 3NE94.. SITOR fuse links, the following applies: p.f. = 0.2).

The dependence of the breaking  $I^2t$  values on the power factor p.f. at  $1.0 \times U_n$  and at  $0.5 \times U_n$  is shown in the following diagram.

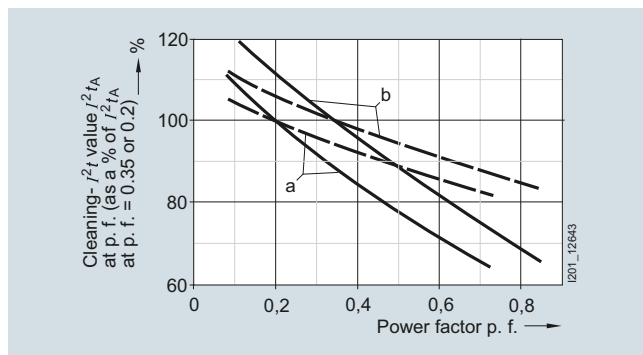

Breaking  $I^2t$  value  $I^2t_a$  of SITOR fuse links dependent on the power factor p.f.


— at  $1.0 U_n$   
 - - - at  $0.5 U_n$

a = for 3NC58.., 3NE64.., 3NE94.. SITOR fuse links  
 (reference to p.f. = 0.2)

b = for all other SITOR fuse links (reference to p.f. = 0.35)

### Time/current characteristics

The solid time/current characteristic curves in the following diagram specify the time to melting for the non-loaded fuse link in a cold state (max. +45 °C).

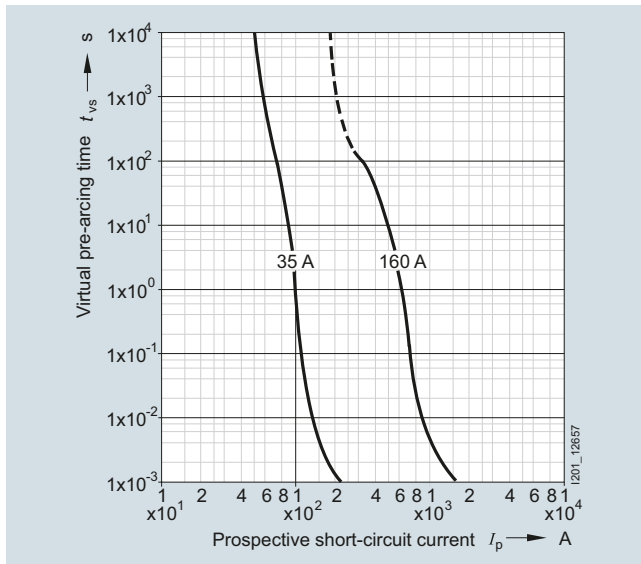

35 A: Operational class gR  
160 A: Operational class aR

If the time/current characteristic curve in the long-time range ( $t_{vs} > 30$  s) is dashed (fuse links of operational class aR), this specifies the limit of the permissible overload in a cold state. If the dotted part of the characteristic curve is exceeded, there is a risk of damage to the ceramic body of the fuse link. The fuse link can only be used for short-circuit protection. In this case, an additional protective device (overload relay, circuit breaker) is required to protect against overload. In the case of controlled converter equipment, the current limiter is sufficient.

If the time/current characteristic curve is shown as a solid line over the entire time range (fuse links of operational class gR or gS), the fuse link can operate in the entire time range. This means it can be used both for overload and short-circuit protection.

### Real melting time

The virtual melting time  $t_{vs}$  is specified in the time/current characteristic curve, depending on the prospective current. It is a value that applies to the current squared ( $dI/dt = \infty$ ).

In the case of melting times  $t_{vs} < 20$  ms the virtual melting time  $t_{vs}$  deviates from the real melting time  $t_s$ . The real melting time may be several milliseconds longer (depending on the rate of current rise).

Within a range of several milliseconds, during which the rise of the short-circuit current can be assumed to be linear, the real melting time for a sinusoidal current rise and 50 Hz is as follows:

$$t_s = \frac{3xI^2 t_s}{I_c^2}$$

### Taking into account preloading, residual value factor RV


Preloading the fuse link shortens the permissible overload duration and the melting time.

The residual value factor  $RV$  can be used to determine the time that a fuse link can be operated during a periodic or non-periodic load cycle, above and beyond the previously determined permissible load current  $I_n'$ , with any overload current  $I_{La}$  without aging.

The residual value factor  $RV$  is dependent on the preloading  $V$  ( $I_{rms}$  rms value of the fuse current during the load cycle at permissible load current  $I_n'$ )

$$V = \frac{I_{rms}}{I_n'}$$

and the frequency of the overloads (see the following diagram, curves a and b).

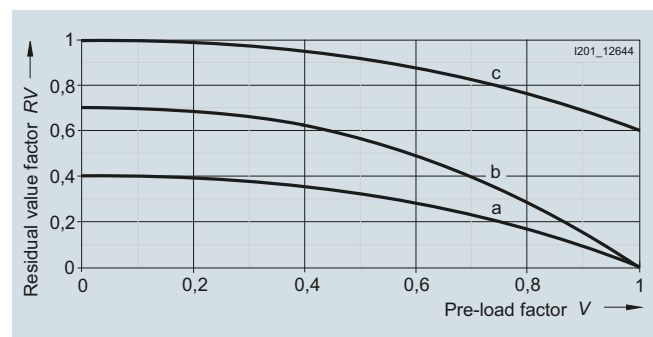

Permissible overload and melting time for previous load

- a = Frequent surge/load cycle currents (>1/week)
- b = Infrequent surge/load cycle currents (<1/week)
- c = Melting time for preloading

Permissible overload duration =  
Residual value factor  $RV \times$  melting time  $t_{vs}$   
(time/current characteristic curve)

A reduction of the melting time of a fuse link in the case of preloading can be derived from curve c.

Melting time =  
Residual value factor  $RV \times$  melting time  $t_{vs}$   
(time/current characteristic curve)

## Fuse Systems


### SITOR Semiconductor Fuses

#### Configuration

##### Let-through current $I_c$

The let-through current  $I_c$  can be determined from the current limiting characteristics (current limitation at 50 Hz) specified for the respective fuse link. This depends on the prospective current and the DC component when the short circuit occurs (instant of closing).

The following diagram shows the let-through current  $I_c$  of a fuse link, depending on the prospective short-circuit current  $I_p$  using the 3NE4333-0B SITOR fuse link as an example.

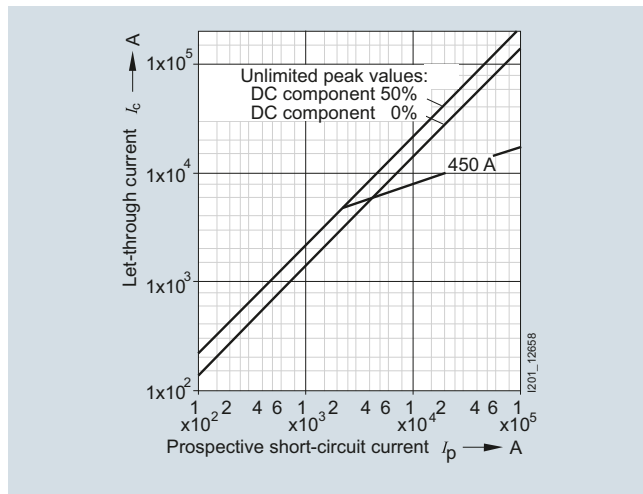

Example:  
3NE4333-0B SITOR fuse link


##### Rated breaking capacity

The rated breaking capacity of all SITOR fuse links is at least 50 kA, unless higher values are specified in the characteristic curves.

The data applies to a test voltage of  $1.1 \times U_n$ , 45 Hz to 62 Hz and  $0.1 \leq \text{p.f.} \leq 0.2$ . In the case of inception voltages that are below the rated voltage, as well as rated currents of the fuse links that are below the maximum rated current of a fuse series, the breaking capacity is considerably higher than the rated breaking capacity.

##### Peak arc voltage $\hat{U}_s$

During the quenching process, a peak arc voltage  $\hat{U}_s$  occurs at the connections of the fuse link that can significantly exceed the supply voltage. The level of the peak arc voltage depends on the design of the fuse link and the level of the recovery voltage. It is presented in characteristic curves as a function of the recovery voltage  $U_w$  (see the following diagram).

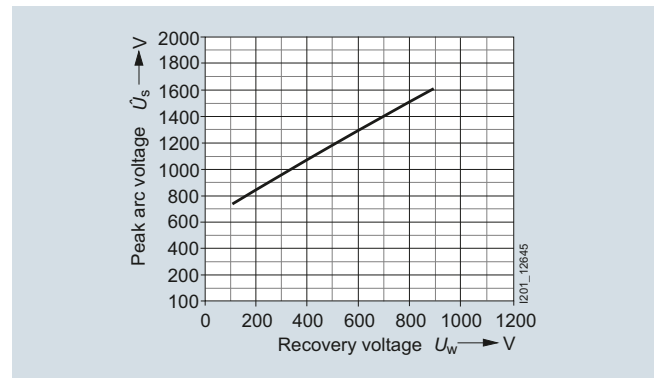

Example:  
3NE4333-0B SITOR fuse link


The peak arc voltage occurs as a cutoff voltage at the semiconductor devices not in the shorted circuit. In order to prevent voltage-related hazards, the peak arc voltage must not exceed the peak cutoff voltage of the semiconductor devices.

##### Power dissipation, temperature rise

On reaching the rated current, the fuse elements of the SITOR fuse links have a considerably higher temperature than the fuse elements of line protection fuse links.

The power dissipation specified in the characteristic curves is the upper variance coefficient if the fuse link is loaded with the rated current.

In the case of partial loads, this power dissipation decreases as shown in the following diagram.

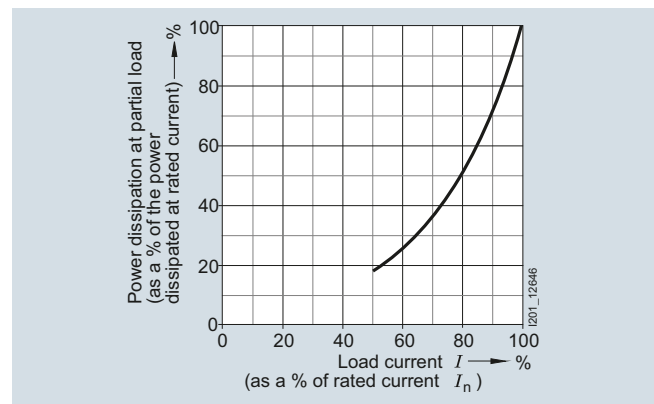

The temperature rise specified in the characteristic curves applies to the respective reference point and is determined when testing the fuse link (test setup according to DIN VDE 0636, Part 23 and IEC 269-4).

### Parallel and series connection of fuse links

#### Parallel connection

If a branch of a converter circuit has several semiconductor devices so that the fuse links are connected in parallel, only the fuse link connected in series to the faulty semiconductor device is tripped in the event of an internal short circuit. It must quench the full supply voltage.

To boost the voltage, two or more parallel fuse links can be assigned to a single semiconductor device without reducing the current. The resulting breaking  $I^2t$  value increases with the square of the number of parallel connections. In this case, in order to prevent incorrect distribution of the current, you must only use fuse links of the same type or, better still, the parallel switched SITOR 3NB fuses.

#### Series connection

There are two kinds of series connection available:

- Series connection in the converter branch
- Two fused converter branches through which a short-circuit current flows in series

In both cases, uniform voltage sharing can only be assumed if the melting time of the SITOR fuse link does not exceed the value specified in the following table.

| SITOR fuse links | Maximum melting time for uniform voltage sharing |
|------------------|--------------------------------------------------|
| Type             | ms                                               |
| 3NC10..          | 10                                               |
| 3NC14..          |                                                  |
| 3NC15..          |                                                  |
| 3NC22..          |                                                  |
| 3NC24..          | 40                                               |
| 3NC58..          | 10                                               |
| 3NC73..          |                                                  |
| 3NC84..          |                                                  |
| 3NE10..          | 10                                               |
| 3NE12..          |                                                  |
| 3NE13..          |                                                  |
| 3NE14..          | 20                                               |
| 3NE18..          | 10                                               |
| 3NE32..          | 10                                               |
| 3NE33..          |                                                  |
| 3NE34..          | 20                                               |
| 3NE35..          |                                                  |
| 3NE36..          |                                                  |
| 3NE41..          | 10                                               |
| 3NE43..          |                                                  |
| 3NE54..          | 20                                               |
| 3NE56..          |                                                  |
| 3NE64..          | 10                                               |
| 3NE74..          | 20                                               |
| 3NE76..          |                                                  |
| 3NE80..          | 10                                               |
| 3NE87..          |                                                  |
| 3NE94..          | 10                                               |
| 3NE96..          | 20                                               |

Cooling conditions for series-connected fuse links should be approximately the same. If faults are expected, during which the specified melting times are exceeded (as a result of a slower current rise), it can no longer be assumed that voltage sharing is uniform. The voltage of the fuse links must then be rated so that a single fuse link can quench the full supply voltage.

It is best to avoid the series connection of fuse links in a converter connection branch and instead use a single fuse link with a suitably high rated voltage.


### Use with direct current

In general, all SITOR fuses can be used for AC and DC applications. For AC fuse links that are to be used in DC circuits, some data may vary from the data specified in the characteristic curves for alternating current.


The new 1250 V DC fuses 3NB1 and 3NB2 have been explicitly tested with DC voltage. They can also be used with AC voltage; details on request.

#### Permissible direct voltage

The permissible direct voltage  $U_{perm}$  of the fuse links depends on the rated voltage  $U_n$ , on the time constant  $\tau = L/R$  in the DC circuit and on the prospective current  $I_p$ . The permissible direct voltage refers to the rated voltage  $U_n$  and is specified depending on the time constant  $\tau$ ; the prospective current is a parameter (see the following diagrams).

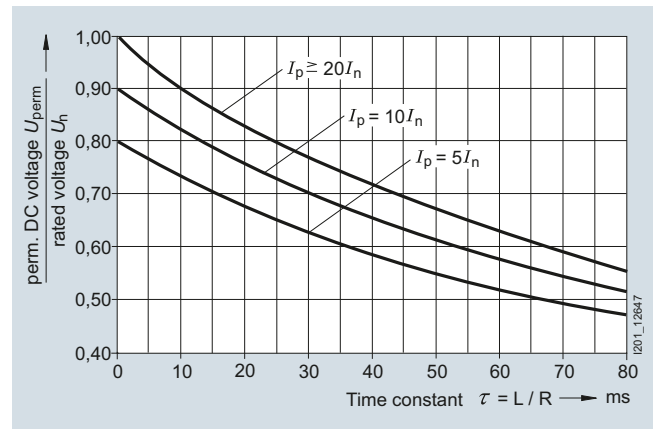

Applies to all series except 3NE10.., 3NE18..

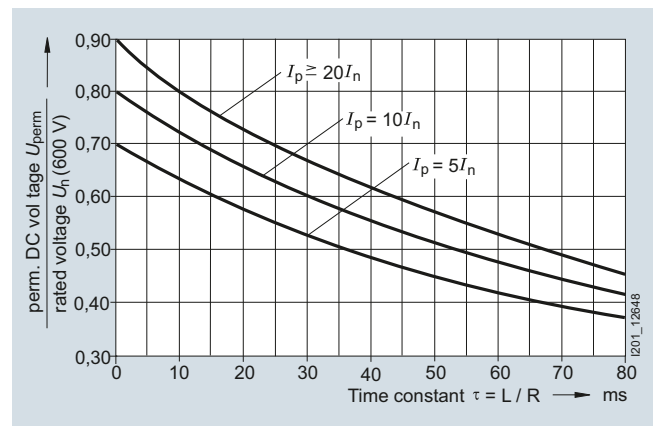

For series 3NE10.., 3NE18..

## Fuse Systems

### SITOR Semiconductor Fuses

#### Configuration

##### Breaking $I^2t$ value $I^2t_a$

The breaking  $I^2t$  value  $I^2t_a$  depends on the voltage, on the time constant  $\tau = L/R$  and on the prospective current  $I_p$ . It is calculated from the  $I^2t_a$  value specified in the characteristic curve for the respective fuse link at rated voltage  $U_n$  and correction factor  $k_A$  whereby, instead of the recovery voltage  $U_w$ , the direct voltage is used against which the fuse link is to switch.

The breaking  $I^2t$  value determined in this way applies under the following conditions:

- Time constant  $L/R \leq 25$  ms for  $I_p \geq 20 \times I_n$
- Time constant  $L/R \leq 10$  ms for  $I_p = 10 \times I_n$
- The breaking  $I^2t$  values increase by 20 %
- For  $I_p \geq 20 \times I_n$  and time constant  $L/R = 60$  ms
- For  $I_p = 10 \times I_n$  and time constant  $L/R = 35$  ms.

##### Peak arc voltage $\hat{U}_s$

The peak arc voltage  $\hat{U}_s$  is determined from the curve specified in the characteristics for the respective fuse link, whereby instead of the recovery voltage  $U_w$ , the direct voltage is used against which the fuse link is to switch.

The peak arc voltage determined in this way applies under the following conditions:

- Time constant  $L/R \leq 20$  ms for  $I_p \geq 20 I_n$
- Time constant  $L/R \leq 35$  ms for  $I_p = 10 I_n$ .

The switching voltages increase by 20 %

- For  $I_p \geq 20 I_n$  and time constant  $L/R = 45$  ms
- For  $I_p = 10 I_n$  and time constant  $L/R = 60$  ms.

##### **Indicator**

An indicator displays the switching of the fuse link. The SITOR fuse links have an indicator whose operational voltage lies between 20 V ( $U_n \leq 1000$  V) and 40 V ( $U_n > 1000$  V)

##### **Accessories**

##### Fuse bases, fuse pullers

Some of the SITOR fuse links can be inserted in matching fuse bases. The matching fuse bases (single-pole and three-pole) and the respective fuse pullers are listed in the Technical specifications, [from page 87](#).

##### Note:

Even if the values of the rated voltage and/or current of the fuse bases are lower than those of the allocated fuse link, the values of the fuse link apply.

### Fuse switch disconnectors, switch disconnectors with fuses

Some series of SITOR fuse links are suitable for operation in 3NP4 and 3NP5 fuse switch disconnectors or in 3KL and 3KM switch disconnectors with fuses (see [Catalog LV 10, chapter on "Switch Disconnectors"](#)).

When using switch disconnectors, the following points must be observed:

- Because, compared with LV HRC fuses for line protection, the power dissipation of the SITOR fuse links is higher, the permissible load current of the fuse links sometimes needs to be reduced; see [below \(Configuration Manual\)](#)
- Fuse links with rated currents  $I_n > 63$  A must not be used for overload protection even when they have operational class gR.

#### Note:

By contrast, all fuse links of the 3NE1... series with rated currents  $I_n$  from 16 A to 850 A and operational classes gR and gS can be used for overload protection.

- The rated voltage and rated isolation voltage of the switch disconnectors must at least correspond to the existing voltage
- When using fuse links of the 3NE32..., 3NE33..., 3NE43..., 3NC24... and 3NC84... series the breaking capacity of fuse switch disconnectors must not be fully utilized due to the slotted blade. Occasional switching of currents up to the rated current of the fuse links is permissible
- When used in fuse switch disconnectors, fuse links of the 3NE41... series may only be occasionally switched, and only without load, as this places the fuse blade under great mechanical stress

In the Technical specifications, [starting on page 87](#), the switch disconnectors are allocated to their respective individual fuse links.

### Specifying the rated current $I_n$ for non-aging operation with varying load

Power converters are often operated not with a continuous load, but with varying loads; these can also temporarily exceed the rated current of the power converter.

The selection process for non-aging operation of SITOR fuse links for four typical types of load is as follows:<sup>1)</sup>

- Continuous load
- Unknown varying load, but with known maximum current
- Varying load with known load cycle
- Occasional surge load from preloading with unknown surge outcome

The diagrams for the correction factors  $k_u$ ,  $k_q$ ,  $k_\lambda$ ,  $k_i$ , [page 173](#), and the residual value factor  $RV$ , [page 177](#) must be observed. The varying load factor  $VL$  for the fuse links is specified on [page 174](#).

The required rated current  $I_n$  of the fuse link is specified in two steps:

1. Specifying the rated current  $I_n$  on the basis of the rms value  $I_{rms}$  of the load current:

$$I_n > I_{rms} \times \frac{1}{k_u \times k_q \times k_\lambda \times k_i \times VL}$$

Permissible load current  $I_n'$  of the selected fuse link:

$$I_n' = k_u \times k_q \times k_i \times k_\lambda \times VL \times I_n$$

2. Checking the permissible overload duration of current blocks exceeding the permissible fuse load current  $I_n'$ .

Melting time  $t_{ys}$  (time/current characteristic curve)  $\times$  Residual value factor  $RV \geq$  Overload duration  $t_k$


To do this, you require the previous load ratio

$$V = \frac{I_{rms}}{I_n'}$$

as well as the characteristic curve "Permissible overload and melting time for previous load" ([page 177, curve a](#)) and the "Time/current characteristic curve" for the selected fuse link.

If a determined overload duration is less than the respective required overload duration, then you need to select a fuse link with a greater rated current  $I_n$  (taking into account the rated voltage  $U_n$  and the permissible breaking  $I^2t$  value) and repeat the check.

### Continuous load

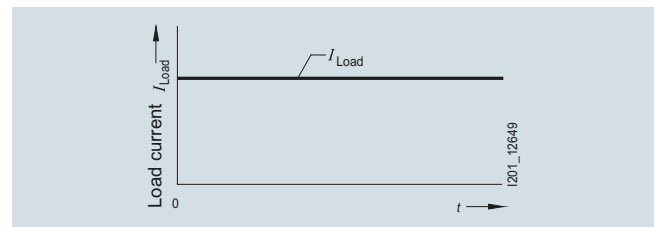

Rated current  $I_n$  of the fuse link

$$I_n \geq I_{La} \times \frac{1}{k_u \times k_q \times k_\lambda \times k_i \times VL}$$

$I_{La}$  = Load current of the fuse link (rms value)

Less than 1 shutdown per week:  $VL = 1$

More than 1 shutdown per week:  $VL$  = see [Technical specifications, from page 87](#).


<sup>1)</sup> In the case of varying loads that cannot be assigned to one of the four types of load shown here, please contact us.

## Fuse Systems

### SITOR Semiconductor Fuses

#### Configuration

Unknown varying load, but with known maximum current  $I_{\max}$

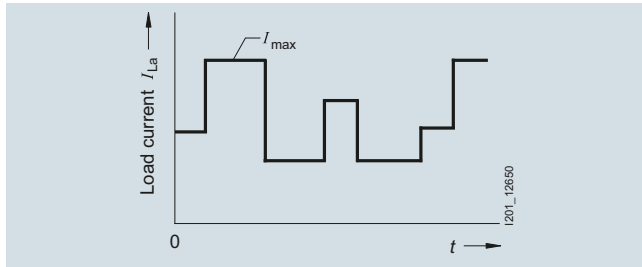


Rated current  $I_n$  of the fuse link

$$I_n \geq I_{\max} \times \frac{1}{k_u \times k_q \times k_\lambda \times k_l \times VL}$$

$I_{\max}$  = Maximum load current of the fuse link (rms value)

Varying load with known load cycle

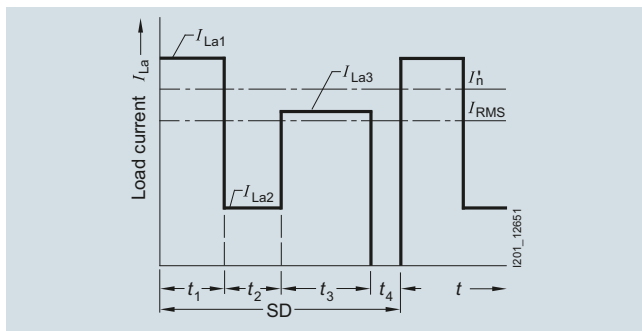

$$I_{\text{rms}} = \sqrt{\frac{\sum_{k=1}^n I_{La k}^2 \times t_k}{SD}}$$

$$I_{\text{rms}} = \sqrt{\frac{I_{La1}^2 t_1 + I_{La2}^2 t_2 + I_{La3}^2 t_3}{SD}}$$

$I_{LK}$  = Maximum load current of the fuse link (rms value)

Occasional surge load from preloading with unknown surge outcome

The required rated current  $I_n$  of the fuse link is specified in two steps:

1. Specifying the rated current  $I_n$  on the basis of the previous load current  $I_{\text{prev}}$ :

$$I_n > I_{\text{prev}} \times \frac{1}{k_u \times k_q \times k_\lambda \times k_l \times VL}$$

Permissible load current  $I_n'$  of the selected fuse link:

$$I_n' = k_u \times k_q \times k_\lambda \times k_l \times VL \times I_n$$

2. Checking the permissible overload duration of the surge current  $I_{\text{surge}}$

Melting time  $t_{\text{ms}}$  (time/current characteristic curve)  $\times$  Residual value factor  $RV$


$\geq$  surge time  $t_{\text{surge}}$

To do this, you require the previous load ratio

$$V = \frac{I_{\text{rms}}}{I_n'}$$

as well as the characteristic curve "Permissible overload and melting time for previous load" (page 177, curve a or b) and the "Time/current characteristic curve" for the selected fuse link.

If a determined overload duration is less than the respective required overload duration  $t_{\text{surge}}$ , then you need to select a fuse link with a greater rated current  $I_n$  (taking into account the rated voltage  $U_n$  and the permissible breaking  $I^2 t$  value) and repeat the check.

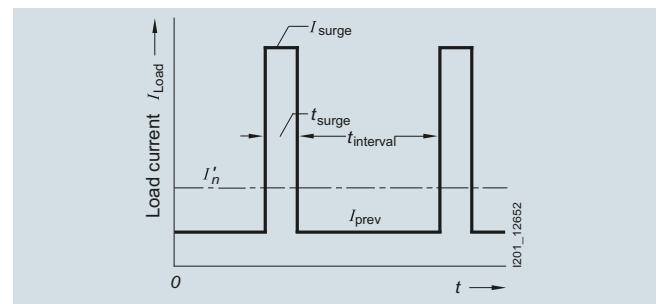

Condition:

$$t_{\text{pause}} \geq 3 \times t_{\text{surge}}$$

$$t_{\text{pause}} \geq 5 \text{ min}$$

#### Selection examples


For a converter assembly in circuit (B6) A (B6) C, whose rated direct current is  $I_{dn} = 850 \text{ A}$ , fuse links that can be installed as branch fuses should be selected. The choice of fuse is shown for different operating modes of the converter assembly.

Data for converter assembly

- Supply voltage  
 $U_N = 3 \text{ AC } 50 \text{ Hz } 400 \text{ V}$
- Recovery voltage  
 $U_W = 360 \text{ V} = U_N \times 0.9$  (for shoot-throughs)
- Thyristor T 508N (eupec),  
 $I_{2t}$  value  
 $\int I^2 dt = 320 \times 10^3 \text{ A}^2 \text{ s}$  (10 ms, cold)
- Fuse links, natural air cooling,  
ambient temperature  $\vartheta_u = +35^\circ \text{ C}$
- Conductor cross-section for copper fuse links:  $160 \text{ mm}^2$
- Conversion factor  
direct current  $I_d$ /fuse load current  $I_{La}$ :  $I_{La} = I_d \times 0.58$ .

For the following examples, it is assumed, in the case of loads that exceed the rated direct current of the converter assembly, that the converter assembly is rated for these loads.

### Continuous, no-break load

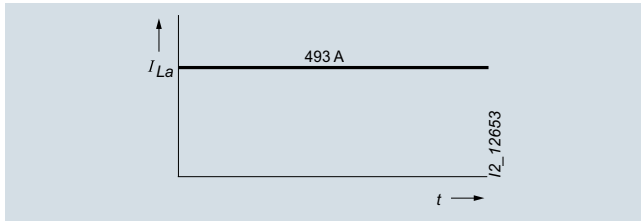

Direct current  $I_d = I_{dn} = 850 \text{ A}$

$I_{La} = I_d \times 0.58 = 493 \text{ A}$

Selected:

SITOR 3NE3335 fuse link  
(560 A/1000 V),  $VL = 1$

Breaking  $I^2t$  value

$I^2t_a = 360 \times 10^3 \times 0.53 = 191 \times 10^3 \text{ A}^2\text{s}$

Test cross-section to 172: 400 mm<sup>2</sup>

The following correction factors are to be applied:

$k_u = 1.02$  ( $\vartheta_u = +35^\circ\text{C}$ )

$k_q = 0.91$  (conductor cross-section, double-ended, 40 % of test cross-section)

$k_\lambda = 1.0$  (conduction angle  $\lambda = 120^\circ$ )


$k_i = 1.0$  (no forced-air cooling)

Required rated current  $I_n$  of the SITOR fuse link:

$$I_n \geq I_{La} \times \frac{1}{k_u \times k_q \times k_\lambda \times k_i \times VL} =$$

$$493 \text{ A} \times \frac{1}{1.02 \times 0.91 \times 1.0 \times 1.0 \times 1.0} = 531 \text{ A}$$

### Unknown varying load, but with known maximum current

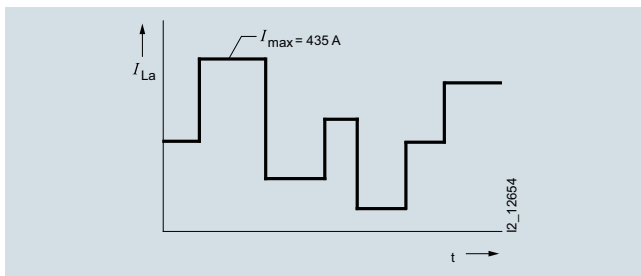

Max. direct current  $I_{dmax} = 750 \text{ A}$

Max. fuse current  $I_{max} = I_{dmax} \times 0.58 = 435 \text{ A}$

Selected:

SITOR 3NE3334-0B fuse link  
(560 A/1000 V),  $VL = 1$

Breaking  $I^2t$  value

$I^2t_a = 260 \times 10^3 \times 0.53 = 138 \times 10^3 \text{ A}^2\text{s}$

Test cross-section to 172: 400 mm<sup>2</sup>

The following correction factors are to be applied:

$k_u = 1.02$  ( $\vartheta_u = +35^\circ\text{C}$ )

$k_q = 0.91$  (conductor cross-section, double-ended, 40 % of test cross-section)

$k_\lambda = 1.0$  (conduction angle  $\lambda = 120^\circ$ )


$k_i = 1.0$  (no forced-air cooling)

Required rated current  $I_n$  of the SITOR fuse link:

$$I_n \geq I_{max} \times \frac{1}{k_u \times k_q \times k_\lambda \times k_i \times VL} =$$

$$435 \text{ A} \times \frac{1}{1.02 \times 0.91 \times 1.0 \times 1.0 \times 1.0} = 469 \text{ A}$$

### Varying load with known load cycle

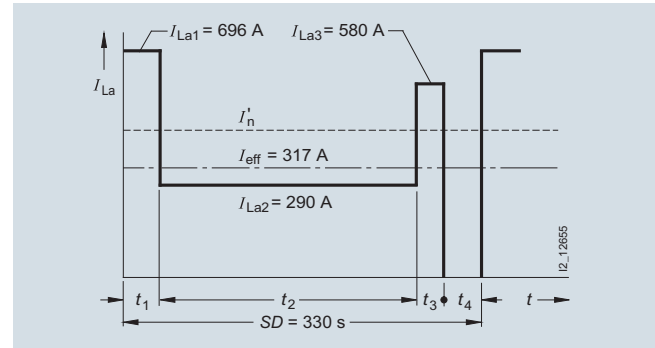

Direct current:

$I_{d1} = 1200 \text{ A}$   $t_1 = 20 \text{ s}$

$I_{d2} = 500 \text{ A}$   $t_2 = 240 \text{ s}$

$I_{d3} = 1000 \text{ A}$   $t_3 = 10 \text{ s}$

$I_{d4} = 0 \text{ A}$   $t_4 = 60 \text{ s}$

Fuse current:

$I_{La1} = 1200 \times 0.58 = 696 \text{ A}$

$I_{La2} = 500 \times 0.58 = 290 \text{ A}$

$I_{La3} = 1000 \times 0.58 = 580 \text{ A}$

rms value of load current

$$I_{rms} = \sqrt{\frac{696^2 \times 20 + 290^2 \times 240 + 580^2 \times 10}{330}} = 317 \text{ A}$$

Selected:

SITOR 3NE3333 fuse link

(450 A/1000 V),  $VL = 1$

Breaking  $I^2t$  value  $I^2t_a = 175 \times 10^3 \times 0.53 = 93 \times 10^3 \text{ A}^2\text{s}$

Test cross-section to 172: 320 mm<sup>2</sup>

The following correction factors are to be applied:

$k_u = 1.02$  ( $\vartheta_u = +35^\circ\text{C}$ )

$k_q = 0.94$  (conductor cross-section, double-ended, 50 % of test cross-section)

$k_\lambda = 1.0$  (conduction angle  $\lambda = 120^\circ$ )

$k_i = 1.0$  (no forced-air cooling)

1. Required rated current  $I_n$  of the SITOR fuse link:

$$I_n \geq I_{rms} \times \frac{1}{k_u \times k_q \times k_\lambda \times k_i \times VL} =$$

$$317 \text{ A} \times \frac{1}{1.02 \times 0.94 \times 1.0 \times 1.0 \times 1.0} = 331 \text{ A}$$

Permissible load current  $I_n'$  of the selected fuse link:

$I_n' = k_u \times k_q \times k_\lambda \times k_i \times VL \times I_n = 1.02 \times 0.94 \times 1.0 \times 1.0 \times 1.0 \times 450 = 431 \text{ A}$

2. Checking the permissible overload duration of current blocks exceeding the permissible fuse load current  $I_n'$ .

Previous load ratio:

$$V = \frac{I_{rms}}{I_n'} = \frac{317}{431} = 0.74$$

Residual value factor  $RV$ : for  $V = 0.74$  from curve a (characteristic curve [page 177](#), frequent surge/load cycle currents)  $RV = 0.2$

Current block  $I_{La1}$ : Melting time  $t_{vs}$ : 230 s (from time/current characteristic curve for 3NE3 333)

$t_{vs} \times RV = 230 \text{ s} \times 0.2 = 46 \text{ s} > t_1$

Current block  $I_{La3}$ : Melting time  $t_{vs}$ : 1200 s (from time/current characteristic curve for 3NE3 333)


$t_{vs} \times RV = 1200 \text{ s} \times 0.2 = 240 \text{ s} > t_3$

## Fuse Systems

### SITOR Semiconductor Fuses

#### Configuration

Occasional surge load from preloading with unknown surge outcome

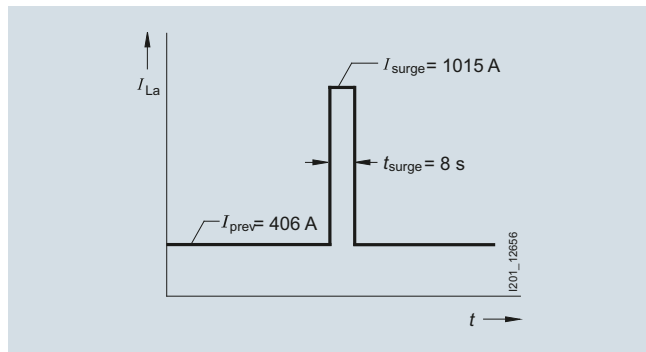

Direct current:

$$I_{dprev} = 700 \text{ A}$$

$$I_{dsurge} = 500 \text{ A} \quad t_{surge} = 8 \text{ s}$$

Fuse current:

$$I_{prev} = I_{dprev} \times 0.58 = 406 \text{ A}$$

$$I_{surge} = I_{dsurge} \times 0.58 = 1015 \text{ A}$$

Let us assume the conditions

$t_{pause} \geq 3 t_{surge}$  and  $t_{pause} \geq 5 \text{ min}$  are met.

Selected:

SITOR 3NE3333 fuse link

(560 A/1000 V),  $VL = 1$

Breaking  $I^2 t$  value  $I^2 t_a = 360 \times 10^3 \times 0.53 = 191 \times 10^3 \text{ A}^2 \text{ s}$

Test cross-section to 172: 400 mm<sup>2</sup>

The following correction factors are to be applied:

$$k_u = 1.02 \quad (\vartheta_u = +35 \text{ °C})$$

$$k_q = 0.91 \quad (\text{conductor cross-section, double-ended, 40 \% of test cross-section})$$

$$k_\lambda = 1.0 \quad (\text{conduction angle } \lambda = 120^\circ)$$

$$k_l = 1.0 \quad (\text{no forced-air cooling})$$

1. Required rated current  $I_n$  of the SITOR fuse link:

$$I_n \geq I_{prev} \times \frac{1}{k_u \times k_q \times k_\lambda \times k_l \times VL} =$$

$$406 \text{ A} \times \frac{1}{1.02 \times 0.91 \times 1.0 \times 1.0 \times 1.0} = 437 \text{ A}$$

Permissible load current  $I_n'$  of the selected fuse link:

$$I_n' = k_u \times k_q \times k_\lambda \times k_l \times VL \times I_n =$$

$$1.02 \times 0.91 \times 1.0 \times 1.0 \times 1.0 \times 560 = 520 \text{ A}$$

2. Checking the permissible overload duration of the surge current  $I_{surge}$

Previous load ratio:

$$V = \frac{I_{prev}}{I_n'} = \frac{406}{520} = 0.78$$

Residual value factor  $RV$  for  $V = 0.78$  from curve a (characteristic curve [page 177](#), frequent surge/load cycle currents)

$RV = 0.18$  surge current  $I_{surge}$ : Melting time  $t_{vs}$ : 110 s

(from time/current characteristic curve for 3NE3333)

$$t_{vs} \times RV = 110 \text{ s} \times 0.18 = 19.8 \text{ s} > t_{surge}$$

correction factors [can be found on page 172 and page 173](#).

### Overview

Special demands are made on fuses for application in photovoltaic systems. These fuses have a high DC rated voltage and a tripping characteristic specially designed to protect PV modules and their connecting cables (the newly defined operational class gPV). It is also crucial that the PV fuses do not age in spite of strongly alternating load currents, in order to ensure high plant availability throughout the service life of the PV system. The fuses must also be able to withstand high temperature fluctuations without damage. These requirements were only incorporated into an international standard in recent years and have now been published as IEC 60269-6.

All Siemens photovoltaic fuse systems comply with this new standard. Furthermore, they also already comply with the recently agreed corrections to the characteristic curves, which will be incorporated in the next standard update.

The IEC cylindrical fuses used as phase fuses also correspond to the characteristic curves specified in UL standard UL 2579. The non-fusing current  $I_{nf}$  and fusing current  $I_f$  test currents are crucial to the shape of the characteristic curves.

| Standard             | $I_{nf}$          | $I_f$             |
|----------------------|-------------------|-------------------|
| Current IEC standard | $1.13 \times I_n$ | $1.45 \times I_n$ |
| UL standard          | $1.0 \times I_n$  | $1.35 \times I_n$ |
| Future IEC standard  | $1.05 \times I_n$ | $1.35 \times I_n$ |
| Siemens fuses        | $1.13 \times I_n$ | $1.35 \times I_n$ |

These test currents of gPV phase fuses to 32 A apply to a conventional test duration of one hour; at  $I_{nf}$ , the fuse must not trip within an hour, at  $I_f$ , it must trip within an hour.

The PV cylindrical fuses of size 10 mm x 38 mm offer an especially space-saving solution for the protection of the strings.

The fuse holders of size 10 x 38 mm can be supplied in single-pole and two-pole versions with and without signal detectors. In the case of devices with signal detector, a small electronic device with LED is located behind an inspection window in the plug-in module. If the inserted fuse link is tripped, this is indicated by the LED flashing. The devices have a sliding catch that enables removal of individual devices from the assembly. The in-feed can be from the top or the bottom. Because the cylindrical fuse holders are fitted with the same anti-slip terminals at the top and the bottom, the devices can also be bus-mounted at the top or the bottom.

The PV fuses in LV HRC design are usually used as cumulative fuses upstream of the inverter. In addition, they can also be used for protecting groups (PV subarrays). For the PV cumulative fuses of size 1, the standard LV HRC fuse bases are available. For PV cumulative fuses of size 1L, 1XL, 2L, 2XL and 3L, we have developed a special 3NH7...-4 fuse base with a swiveling mechanism which combines maximum touch protection with maximum user-friendliness. This makes it possible to change fuses safely and without the need for any tools, such as a fuse handle. This provides safe and fast access even in an emergency.

Our cylindrical fuse holders and fuse bases with swiveling mechanism comply with the IEC 60269-2 standard and are considered fuse disconnectors as defined in the IEC 60947 switchgear and controlgear standard. Under no circumstances are they suitable for switching loads.

To ensure that PV fuses are correctly selected and dimensioned, the specific operating conditions and the PV module data must be taken into account when calculating voltage and current ratings.

### Benefits

- Protection of the modules and their connecting cables in the event of reverse currents
- Safe tripping in case of fault currents reduces the risk of fire due to DC electric arcs
- Safe isolation when the fuse holder/fuse base is open



PV cylindrical fuse system, 3NH70...-4, 3NH60...-4



PV LV HRC fuse systems, 3NH73...-4, 3NE13...-4D

## Fuse Systems

### Photovoltaic Fuses




#### PV cylindrical fuses

#### Technical specifications

|                                                                                               |                        | Cylindrical fuse links                                      |                                                                                                      | Cylindrical fuse holders                                                                                                                                                                                                                |                                                                                               |
|-----------------------------------------------------------------------------------------------|------------------------|-------------------------------------------------------------|------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|
|                                                                                               |                        | 3NW60...-4                                                  | 3NW66...-4                                                                                           | 3NW70...-4                                                                                                                                                                                                                              | 3NW76...-4                                                                                    |
| Size                                                                                          | mm x mm                | 10 x 38                                                     | 10 x 85                                                                                              |                                                                                                                                                                                                                                         |                                                                                               |
| Standards                                                                                     |                        | IEC 60269-6                                                 |                                                                                                      | IEC 60269,<br>IEC 60269-2,<br>IEC 60947,<br>UL 4248-1, -18                                                                                                                                                                              | IEC 60269,<br>IEC 60269-2,<br>IEC 60947,<br>UL 4248-1, -18                                    |
| Approvals                                                                                     |                        | UL 248-13, waiver<br>certification for China<br>(2 to 16 A) |  (File No. E469670) |  (File No. E355487),<br><br>(versions without<br>signal detector) |  (E355487) |
| Operational class                                                                             |                        | gPV                                                         |                                                                                                      |                                                                                                                                                                                                                                         |                                                                                               |
| Rated voltage $U_n$                                                                           | V DC                   | 1000                                                        | 1500 (20 A: 1200 V)                                                                                  | 1000                                                                                                                                                                                                                                    | 1500                                                                                          |
| Rated current $I_n$                                                                           | A DC                   | 2 to 20                                                     | 4 to 20                                                                                              | 30                                                                                                                                                                                                                                      | 32                                                                                            |
| Rated short-circuit strength                                                                  | kA                     | --                                                          |                                                                                                      | 30                                                                                                                                                                                                                                      |                                                                                               |
| Rated breaking capacity                                                                       | kA DC                  | 30                                                          | 10                                                                                                   | --                                                                                                                                                                                                                                      |                                                                                               |
| Breaking capacity<br>• Utilization category                                                   |                        | --                                                          |                                                                                                      | AC-20B, DC-20B                                                                                                                                                                                                                          |                                                                                               |
| Max. power dissipation of the fuse link                                                       | W                      | --                                                          |                                                                                                      | 4                                                                                                                                                                                                                                       | 6                                                                                             |
| Rated impulse withstand voltage                                                               | kV                     | --                                                          |                                                                                                      | 6                                                                                                                                                                                                                                       | --                                                                                            |
| Overvoltage category                                                                          |                        | --                                                          |                                                                                                      | II                                                                                                                                                                                                                                      | --                                                                                            |
| Pollution degree                                                                              |                        | --                                                          |                                                                                                      | 2                                                                                                                                                                                                                                       | --                                                                                            |
| No-voltage changing of fuse links                                                             |                        | --                                                          |                                                                                                      | Yes                                                                                                                                                                                                                                     |                                                                                               |
| Sealable when installed                                                                       |                        | --                                                          |                                                                                                      | Yes                                                                                                                                                                                                                                     |                                                                                               |
| Mounting position                                                                             |                        | Any, preferably vertical                                    |                                                                                                      |                                                                                                                                                                                                                                         |                                                                                               |
| Current direction                                                                             |                        | --                                                          |                                                                                                      | Any (signal detector with antiparallel LED)                                                                                                                                                                                             |                                                                                               |
| Degree of protection acc. to IEC 60529                                                        |                        | --                                                          |                                                                                                      | IP20, with connected conductors <sup>1)</sup>                                                                                                                                                                                           |                                                                                               |
| Terminals with touch protection acc. to BGV A3<br>incoming and outgoing feeder                |                        | --                                                          |                                                                                                      | Yes                                                                                                                                                                                                                                     |                                                                                               |
| Ambient temperature                                                                           | °C                     | -25 to +55°C, humidity 90 % at +20°C                        |                                                                                                      |                                                                                                                                                                                                                                         |                                                                                               |
| Conductor cross-sections<br>• Finely stranded, with end sleeve<br>• AWG (American Wire Gauge) | mm <sup>2</sup><br>AWG | --<br>--                                                    |                                                                                                      | 0.75 ... 25<br>18 ... 4                                                                                                                                                                                                                 |                                                                                               |
| Tightening torque                                                                             | Nm                     | --                                                          |                                                                                                      | 2.5                                                                                                                                                                                                                                     |                                                                                               |

<sup>1)</sup> Degree of protection IP20 is tested according to regulations using a straight test finger (from the front), with the device mounted and equipped with a cover, housing or some other enclosure.

### Characteristic curves

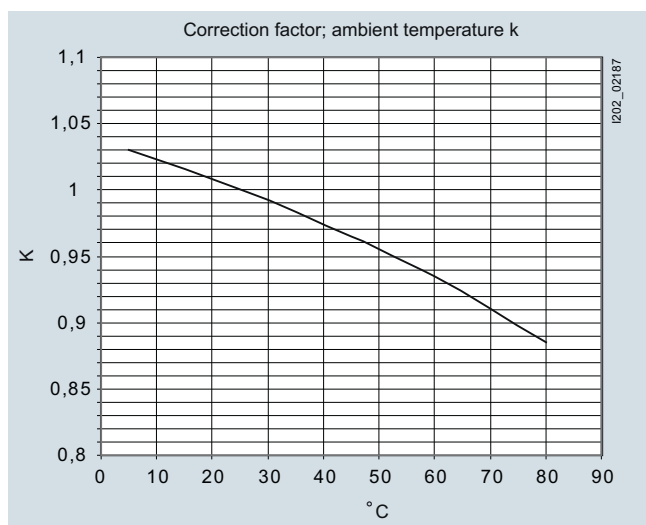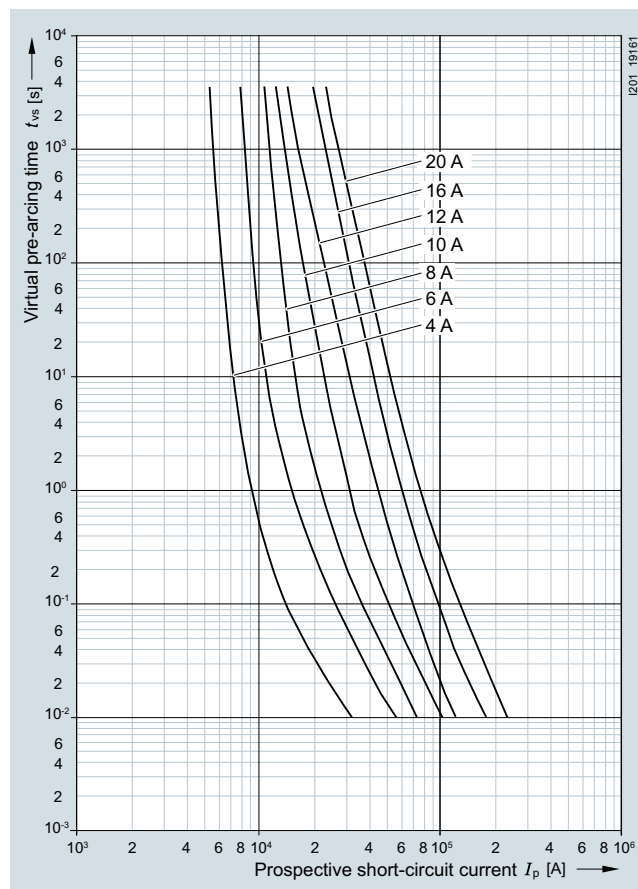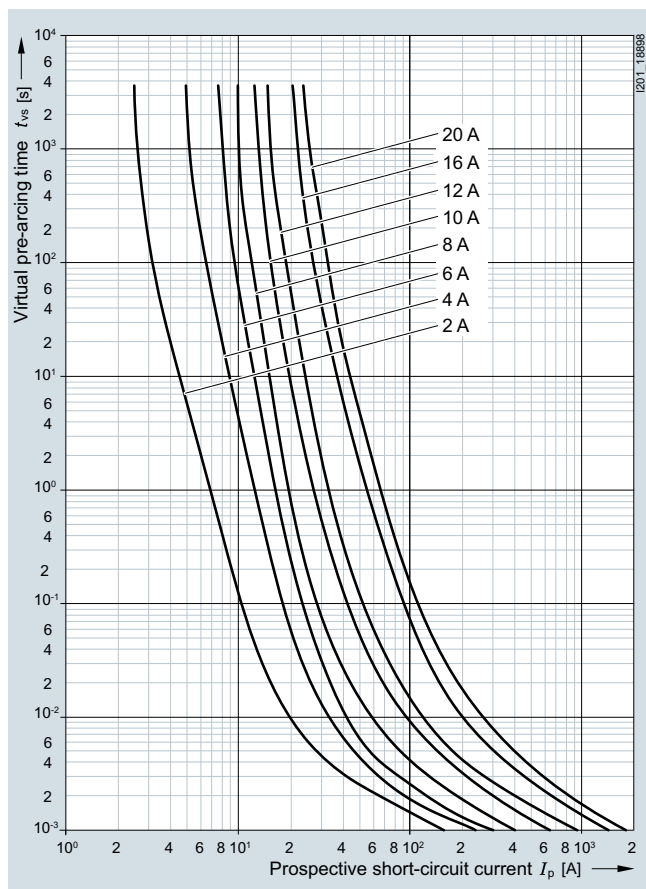

Characteristic curves diagram Correction factor Ambient temperature


## Fuse Systems

### Photovoltaic Fuses

#### PV cylindrical fuses


##### Dimensional drawings

###### 3NW600.-4




10 x 38 mm

###### 3NW660.-4




10 x 85 mm

###### 3NW7613-4

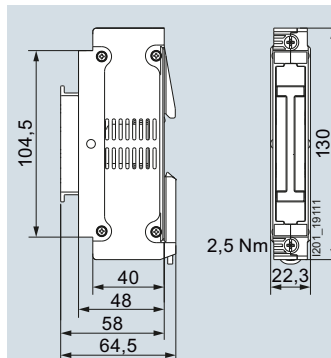


###### 3NW70.-4

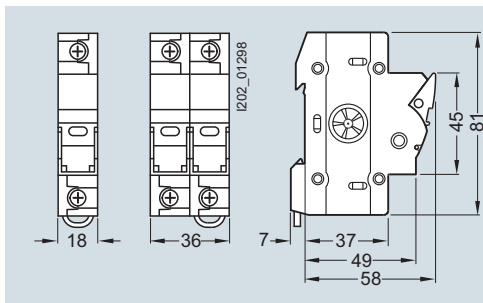

1-pole

2-pole

##### Circuit diagrams



1-pole

2-pole

### More information

#### Selecting and dimensioning photovoltaic fuses from Siemens

##### Standards:

The contents of the new standard IEC 60269-6 are currently being drawn up.

We follow this new standard when rating and labeling our PV fuses. Until now, some of our rivals have been relying on products based on the standard IEC 60269-4 "Fuses for semiconductor protection". Differences between the two standards are particularly evident for the rated voltage and the test voltage and in the definition of the operational class.

##### Terms:

$U_{OC\ STC}$  (also called  $V_{OC\ STC}$ )<sup>1)</sup>  
Voltage under standard test conditions on an unloaded string taking into account minimum ambient temperature (no-load voltage). The voltage  $U_{OC\ STC}$  of a string is obtained by multiplying the single voltages  $U_{OC\ STC}$  of a PV module ( $U_{OC\ STC} \times M$ )<sup>2)</sup>.

$I_{SC\ STC}$   
Short-circuit current of a PV module, a PV string, a PV sub-generator or a PV generator under standard test conditions

$I_{MPP}$   
Is the largest possible working current of a string (MPP = Maximum Power Point).

$I_{P\ max}$   
Is the maximum occurring load current; this is usually equivalent to  $I_{MPP}$

$I_{SC\ MOD}$   
Short-circuit current of a PV module under regional conditions.

##### Standard test conditions (STC)


Test conditions that are laid down in EN 60904-3 for PV cells and PV modules:

- Solar radiation 1000 W/m<sup>2</sup>
- Ambient temperature 25 °C
- Air distribution (AM) 1.5

Standard test conditions are normally specified by the manufacturer of the PV module in data sheets.

##### Operational class

We use draft standard IEC 60269-6 as a guide when naming the operational class gPV. Accordingly, the symbols are also on the fuse:



It is important that the fuse has a full-range characteristic that can cut off with certainty all possible fault currents, and especially also small fault currents<sup>3)</sup>.

The test currents for PV fuses are defined in draft standard IEC 60269-6.

$I_{nf} = 1.13 \times I_n$  (test current at which the fuse must not trip for one hour).

$I_t = 1.45 \times I_n$  (test current at which the fuse must trip within one hour).

For the time/current characteristic curve diagram, [see page 187](#).

##### Rated making and breaking capacity

Under draft standard IEC 60269-6 a rated breaking capacity of at least 10 kA is required. While this is comparatively low compared with other fuses, it is more than adequate for handling the fault currents occurring in PV systems.

We have tested our PV fuses at 30 kA.

##### Dimensioning rules

PV fuses are to be dimensioned according to special rules with regard to rated voltage, rated current and operational class (characteristic).

##### Dimensioning rule

The rated voltage<sup>4)</sup> of the fuse should be calibrated 20 % higher than the open-circuit voltage  $U_{OC\ STC}$  of a string. Extreme operating conditions, e.g. temperatures down to -25 °C, are thus taken into account.

##### Rated voltage

Our PV fuses have been tested according to draft standard IEC 60269-6 with the rated voltage, i.e. the test voltage is the same as the rated voltage.

Based on IEC 60269-4, some manufacturers have issued two voltage values for their fuses, e.g. 900 V (tested 1000 V).

##### Rated current

1. To prevent unwanted tripping of the PV fuse during normal operation and in case of a fault in a different string that is connected in parallel, the rated current of the PV fuse must be greater than the short-circuit current  $I_{SC}$  of the respective module or string:  $I_n \geq 1.4 I_{SC}$ .

The value 1.4 was determined in draft standard IEC 60269-6 and should apply to the simple dimensioning of the fuse.

This value contains the following correction factors for the standard test conditions:

A higher ambient temperature of 45 °C, a higher solar radiation of 1200 W/m<sup>2</sup> and the reduction due to the variable loading.

An additional reduction must be used when several fuse holders are bundled.

According to EN 60469-1, Table 1, the following reduction factors must be applied:

| Number of main circuits | Rated diversity factor |
|-------------------------|------------------------|
| 2 and 3                 | 0.9                    |
| 5 and 6                 | 0.8                    |
| 6 ... 9                 | 0.7                    |
| 10 and more             | 0.6                    |

Since the fuses are only operated with around 70 to 80 % of the load current, a further reduction is only necessary from around six main circuits (e.g. three two-pole devices), including also where the fuses only have maximum power dissipation of 3.4 W.

<sup>1)</sup> Voltage of the unloaded circuit under standard test conditions.

<sup>2)</sup> M is the number of PV modules connected in series in a string.

<sup>3)</sup> **Note:** A difference in the overload current and the short-circuit current is not meaningful when protecting PV systems, because even for a short circuit, only small currents occur, which are not designated as short-circuit currents in terms of the standards of overcurrent protective devices. Therefore in the following we shall refer to fault currents.

<sup>4)</sup> **Note:** Unlike with mechanical switching devices, when two fuses (positive pole and negative pole) are used, you cannot count on a division of the voltage in the event of fault current tripping. Accordingly every fuse must be dimensioned with the full rated voltage.

## Fuse Systems

### Photovoltaic Fuses

#### PV cylindrical fuses

Fuses with a lower rated current have a lower power dissipation, so that the reduction is considerably less. The 10 A fuse for example has a rated power dissipation of 1.5 W, with the result that no reduction is necessary here.

In the event of extreme solar radiation a further reduction of the rated current of the fuse may be necessary.

The short circuit current  $I_{SC\ MOD}$  is dependent on regional climatic conditions. Under particular climatic conditions and cloud constellations, in particular high in the mountains, higher values for the solar radiation than the 1200 W/m<sup>2</sup> used above may by all means occur (above: simplified calculation).

In order to incorporate the peak values into the calculation, we recommend using the following correction factors.

| Climate zone                         | Max. solar radiation           | Correction factor |
|--------------------------------------|--------------------------------|-------------------|
| Standard test conditions             | 1000 W/m <sup>2</sup>          | 1                 |
| Moderate climate zone                | 1200 W/m <sup>2</sup>          | 1.2               |
| Moderate climate zone/high mountains | 1400 ... 1600 W/m <sup>2</sup> | 1.4 ... 1.6       |
| Africa                               | 1400 ... 1600 W/m <sup>2</sup> | 1.4 ... 1.5       |

The rated current of the fuse refers to an ambient temperature of 25 °C.

Cut-off performance will change at higher temperatures.

A further reduction may be required for an ambient temperature higher than the ambient temperature used above (+45 °C).

2. To protect the modules and their connecting cables, the PV fuse should cut off fault currents reliably and in time.

Fault currents can result from faulty modules, double ground faults or incorrect wiring. The PV modules are rated in such a way that they can continuously withstand the fault current in the forward direction without any problems.

However, fault currents which flow through the string or the PV module in a reverse direction are particularly critical.

This fault current  $I_{SC\ REVERSE}$  is calculated from the number of parallel connected strings  $n-1$  multiplied by the short circuit current  $I_{SC\ MOD}$  of a string or module.

$$I_{SC\ REVERSE} = n-1 \times I_{SC\ MOD}$$

This  $I_{SC\ MOD}$  is likewise dependent on the regional circumstances described above:

$$I_{SC\ MOD} = 1.2^{1)} \times I_{SC\ STC}$$

Only above  $n = 3$  parallel strings are PV phase fuses meaningful at all.

To protect the PV modules against reverse currents  $I_{SC\ REVERSE}$  that have a value higher than the reverse current resistance of the PV modules  $I_{MOD\ REVERSE}$ , the "cut-off current" of the PV fuse must be of a smaller size than the permitted and tested reverse current resistance of the module.

You can dispense with PV fuses if the reverse current resistance of the PV modules is greater than the fault current:

$$I_{MOD\ REVERSE} > I_{SC\ REVERSE}$$

The manufacturers of the modules normally test their modules with a 1.35x reverse current for two hours.

For protection, you therefore need a fuse that trips earlier under these conditions.

The PV fuses have a "disconnect current" (generally referred to as high test current  $I_f$ ), which causes the fuse to disconnect at 1.45 x the rated current in less than one hour (at the latest).

To connect the tested reverse current resistance of the PV modules  $I_{MOD\ REVERSE}$  with the cut-off performance of the fuse, we recommend use of a conversion factor of 0.9.

For the rated current of the PV fuse,  $I_n$  produces the following dimensioning rules:

$$I_n \leq 0.9 \times I_{MOD\ REVERSE}$$

This does not consider possible fault currents, if any, which are fed by the back-up batteries and/or the solar converters.

Protection of the factory-fitted connecting cables of the PV modules should be mainly ensured by the manufacturer.

Connecting cables/wires of a string must generally be able to withstand  $n$  times the short-circuit current  $I_{SC\ MOD}$ . As with other cables and wires, the following simple relationship applies:


$$I_n \leq I_{z2)}$$

If several strings connected in parallel are grouped together, the aforementioned dimensioning rules also apply. The rated current of the PV fuse group should be at least 1.2<sup>1)</sup> times greater than the total of the short-circuit currents of the group.


<sup>1)</sup> Climate zone-dependent correction factor 1.2 ... 1.6 (see the table on page 190).

<sup>2)</sup>  $I_z$  is the permitted capacity of the line/cable.


### Technical specifications

|                                                                     | Fuse links<br>3NE1...-4 / -4D / -4E / -5E |                                                                                                                                                    |         |         |         |            | Fuse bases<br>3NH7...-4           |                                         |     |      |     |     |     |
|---------------------------------------------------------------------|-------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|---------|---------|---------|------------|-----------------------------------|-----------------------------------------|-----|------|-----|-----|-----|
| Size                                                                | 1                                         | 1L                                                                                                                                                 | 2L      | 3L      | 1XL     | 2XL        | 1                                 | 1L                                      | 2L  | 3L   | 1XL | 2XL |     |
| Standards                                                           | IEC 60269-6                               |                                                                                                                                                    |         |         |         |            | IEC 60269, IEC 60269-2, IEC 60947 |                                         |     |      |     |     |     |
| Operational class                                                   | gPV                                       |                                                                                                                                                    |         |         |         |            |                                   |                                         |     |      |     |     |     |
| Rated voltage $U_n$                                                 | V DC                                      | 1000 at time constant (L/R) 3 ms<br>1500 at time constant (L/R) 3 ms                                                                               |         |         |         |            | 1000                              |                                         |     | 1500 |     |     |     |
| Rated current $I_n$                                                 | A DC                                      | 63 ... 160                                                                                                                                         | 200/250 | 315/400 | 500/630 | 63 ... 200 | 250/315                           | 250                                     | 400 | 630  | 250 | 400 |     |
| Rated short-circuit strength                                        | kA                                        | --                                                                                                                                                 |         |         |         |            |                                   | 30                                      |     |      |     |     |     |
| Rated breaking capacity                                             | kA DC                                     | 30                                                                                                                                                 |         |         |         |            |                                   | --                                      |     |      |     |     |     |
| Breaking capacity<br>• Utilization category                         |                                           | --                                                                                                                                                 |         |         |         |            |                                   | AC-20B, DC-20B (switching without load) |     |      |     |     |     |
| Max. power dissipation of the fuse link                             | W                                         | --                                                                                                                                                 |         |         |         |            |                                   | 40                                      | 90  | 110  | 130 | 90  | 110 |
| No-voltage changing of fuse links                                   |                                           | --                                                                                                                                                 |         |         |         |            |                                   | Yes                                     |     |      |     |     |     |
| Sealable when installed                                             |                                           | --                                                                                                                                                 |         |         |         |            |                                   | Yes                                     |     |      |     |     |     |
| Mounting position                                                   |                                           | Any, preferably vertical                                                                                                                           |         |         |         |            |                                   |                                         |     |      |     |     |     |
| Current direction                                                   |                                           | --                                                                                                                                                 |         |         |         |            |                                   | Any                                     |     |      |     |     |     |
| Ambient temperature                                                 | °C                                        | -25 to +55°C, humidity 90 % at +20°C                                                                                                               |         |         |         |            |                                   |                                         |     |      |     |     |     |
| Tightening torque                                                   | Nm                                        | --                                                                                                                                                 |         |         |         |            |                                   | 20                                      |     |      |     |     |     |
| Microswitch for "tripped" signaling<br>5 A/250 V AC, 0.2 A/250 V DC |                                           | In the status "fuse not blown", contacts 1 and 3 are closed.<br> |         |         |         |            |                                   |                                         |     |      |     |     |     |

### Characteristic curves

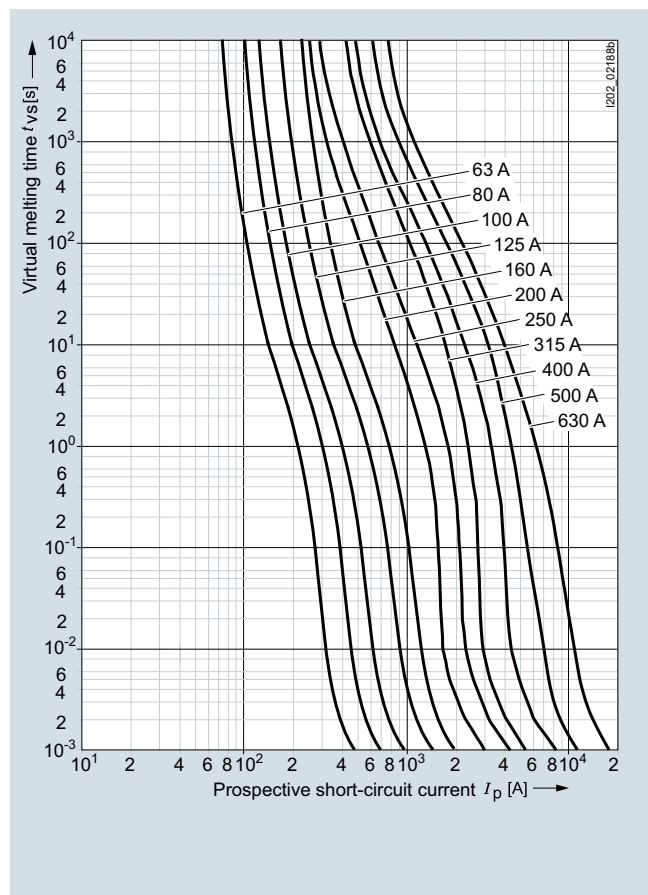

Time/current characteristics diagram 1000 V

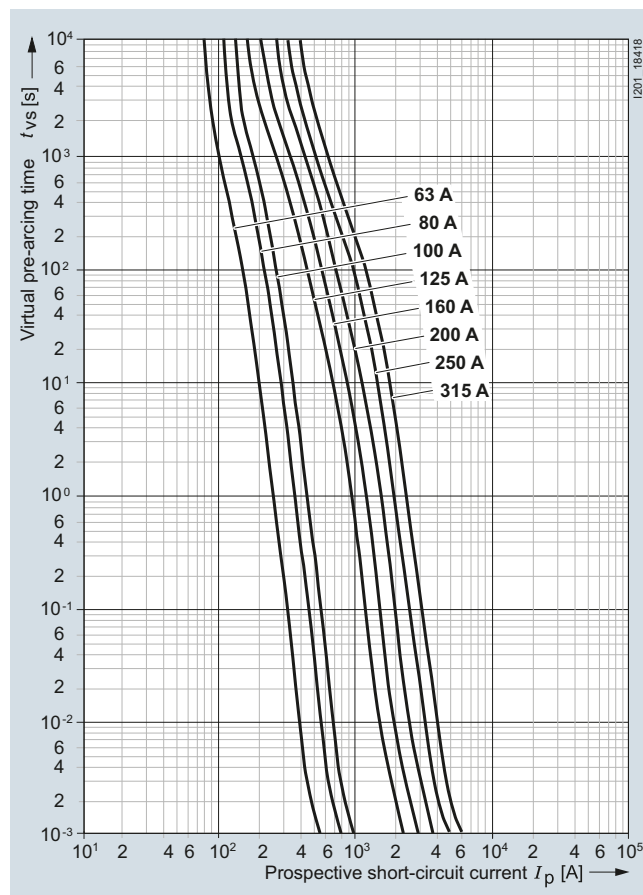

Time/current characteristics diagram 1500 V


## Fuse Systems

### Photovoltaic Fuses


#### PV cumulative fuses

#### Dimensional drawings

##### 3NE1

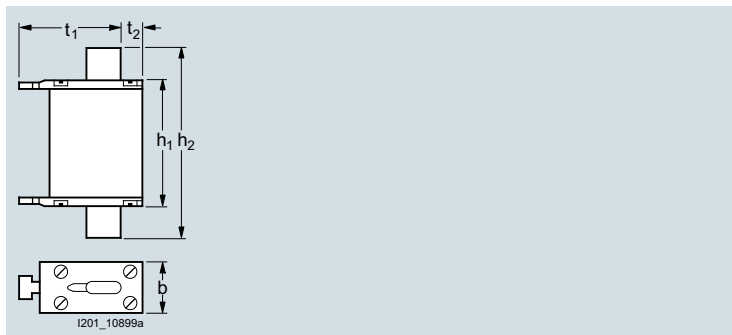


| Size | $I_n$<br>A | b<br>mm | h1    | h2  | t1   | t2   |
|------|------------|---------|-------|-----|------|------|
| 1    | 63 ... 160 | 52      | 66.5  | 135 | 50   | 13.5 |
| 1L   | 200, 250   | 52      | 106.5 | 175 | 50   | 13.5 |
| 2L   | 315, 400   | 60      | 106.5 | 189 | 57   | 15   |
| 3L   | 500, 630   | 75      | 125.5 | 201 | 68.5 | 17.5 |
| 1XL  | 63 ... 200 | 52      | 126.5 | 189 | 50   | 13.5 |
| 2XL  | 250, 315   | 60      | 126.5 | 205 | 57   | 15   |

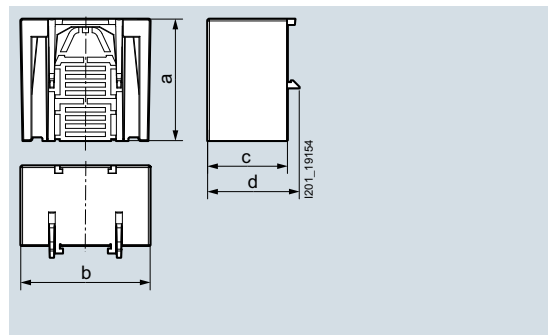


| Type    | a<br>mm | b    | c  | d    |
|---------|---------|------|----|------|
| 3NX3121 | 67      | 71.3 | 44 | 50.5 |
| 3NX3122 | 81      | 78.8 | 71 | 77   |
| 3NX3123 | 95      | 93.3 | 80 | 86   |

##### 3NH73...-4

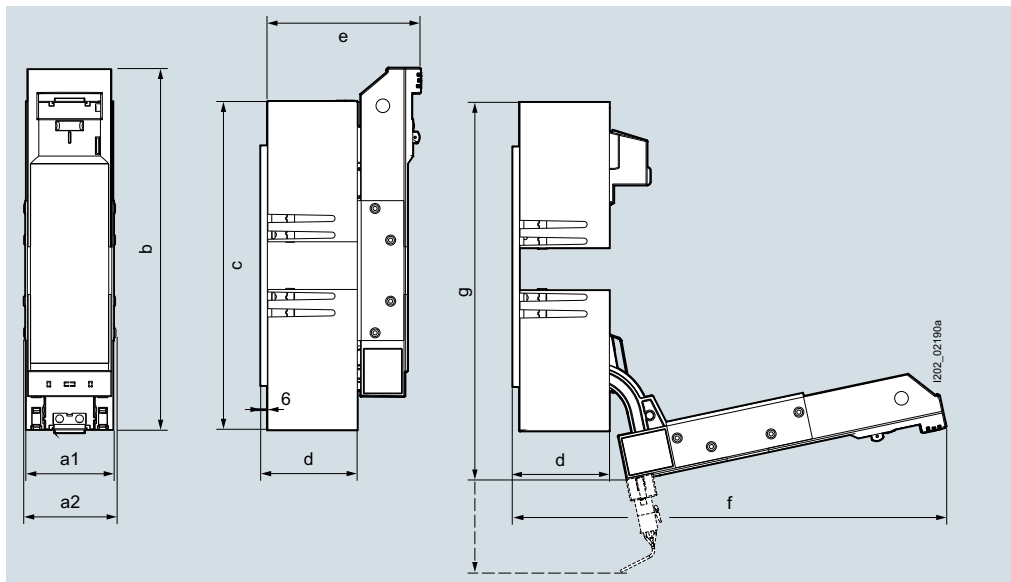

| Size | Dimensions |      | b   | c   | d   | e   | f     | g     |
|------|------------|------|-----|-----|-----|-----|-------|-------|
|      | a1<br>mm   | a2   |     |     |     |     |       |       |
| 1    | 71.3       | 71.3 | 266 | 230 | 67  | 124 | 316.4 | 317.7 |
| 1L   | 71         | 75   | 306 | 270 | 73  | 130 | 362   | 313   |
| 2L   | 79         | 83   | 326 | 296 | 87  | 144 | 390   | 335   |
| 3L   | 93         | 97   | 341 | 311 | 101 | 158 | 418   | 359   |
| 1XL  | 71         | 76   | 325 | 289 | 73  | 124 | 380   | 332   |
| 2XL  | 79         | 83   | 341 | 311 | 87  | 144 | 410   | 354   |

Drilling plan

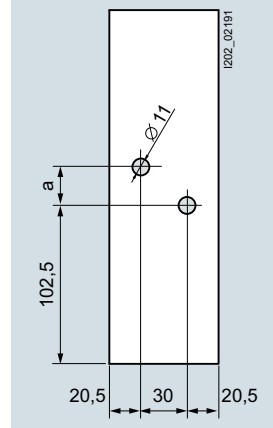

| Size | Dimension a<br>mm |
|------|-------------------|
| 1    | 25                |
| 1L   | 65                |
| 2L   | 65                |
| 3L   | 80                |
| 1XL  | 84                |
| 2XL  | 80                |

Fuse bases with swiveling mechanism, 3NH7 3...-4

#### Circuit diagrams



1-pole



Siemens AG  
Energy Management  
Low Voltage & Products  
Postfach 10 09 53  
93009 REGENSBURG  
GERMANY

Subject to change without prior notice  
PDF (3ZW1012-3NW10-0AB1)  
PH 0216 196 En  
Produced in Germany  
© Siemens AG 2016

The information provided in this brochure contains merely general descriptions or characteristics of performance which in case of actual use do not always apply as described or which may change as a result of further development of the products. An obligation to provide the respective characteristics shall only exist if expressly agreed in the terms of contract. Availability and technical specifications are subject to change without notice.  
All product designations may be trademarks or product names of Siemens AG or supplier companies whose use by third parties for their own purposes could violate the rights of the owners.