

QUICKTRONIC® Instant Start DL40

Universal Voltage Systems
High Efficiency Series



Normal Ballast Factor

QHE 40DL/SS ISN

Lamp / Ballast Guide

40W T5 - DULUX® L lamps
1 lamp QHE 1x40DL/UNV ISN-SC
2 lamp QHE 2x40DL/UNV ISN-SC
3-lamp QHE 3x40DL/UNV ISN-SC

Primary Lamp Type:
FT40DL

Also operates:
FT40DL/28W/SS
FT40DL/25W/SS

Key System Features

- High Efficiency Systems over 90% efficient
- Universal voltage (120-277V)
- QUICKSENSE® ballast technology (end-of-lamp-life sensing)
- Min. Starting Temp: 0°F (-18°C) for FT40DL and FT40DL/28W/SS
50°F (10°C) for FT40DL/25W/SS
- High luminous efficacy
- Virtually eliminates lamp flicker
- Quiet operation
- High power factor
- Low harmonic distortion
- Lightweight
- UL, CSA
- Auto Reset
- RoHS compliant
- Lead-free solder, printed circuit board and manufacturing process

Application Information

QUICKTRONIC DL40 ballasts are ideally suited for:

- Commercial
- Retail
- Hospitality
- Institutional
- Schools
- New construction
- Direct lighting
- Indirect lighting
- Surface mount
- Cove lighting

QUICKTRONIC High Efficiency (QHE)

instant start DULUX L 40W ballasts save up to 6 to 9% over standard electronic ballasts without compromising light output or lamp life. These systems provide over 30% more lumen output than 34T12 U-bend systems at nearly the same power input. The small lamp diameter and ballast profile provide compact luminaire design options with improved aesthetics and performance. When paired with DULUX L SUPERSAVER® lamps, these systems save an additional 14-33% over full wattage systems.

QUICKTRONIC QHE DL ballasts are available in a one lamp, two lamp and three lamp models, with universal input voltage (120-277V). They are also RoHS compliant and feature lead-free solder, printed circuit boards and manufacturing process.



Setting the standard for quality, QUICKTRONIC QHE DL systems are covered by the QUICK 60+® warranty, the first and most comprehensive system warranty in the industry.

System Information

QUICKTRONIC QHE DL ballasts instant start operation to provide the highest system efficacy and to assure low temperature starting capability. Instant start also provides for maximum remote wiring distances.

QUICKSENSE ballast technology helps to protect against overheated bases and sockets, as well as cracking of the glass wall, and uses dynamic end-of-lamp-life sensing to avoid false shutdowns caused by some static sensing methods. QUICKSENSE ballast technology will auto reset when the lamps are replaced with new ones.

QUICKTRONIC High Efficiency (QHE) ballasts operate on input voltage from 120V through 277V, eliminating “wrong voltage” wiring errors and reducing the number of models in inventory by half.

	Input Power (W)	Initial System Lumens	System ¹ Efficacy LPW
2-Lamp System (2 x 2)			
FB40T12 - Std. Magnetic Ballast	96	5795	60
FB40T12 - E.S. Magnetic Ballast	86	5795	67
FB34T12 - E.S. Magnetic Ballast	72	4575	66
FB032T8 - Magnetic	71	5415	76
DL40 - QHE2x40DL/UNV ISN-SC	68/67	5670	85
DL40/28W/SS - QHE2x40DL/UNV ISN-SC	64/63	5990	95
DL40/25W/SS - QHE2x40DL/UNV ISN-SC	50/49	4750	97
3-Lamp System (2 x 2)			
DL40- Std. Electronic ISN Ballast (0.96 BF)	110	9070	82
DL40 - QHE3x40DL/UNV ISN-SC	100/99	8505	86
DL40/28W/SS - QHE3x40DL/UNV ISN-SC	95/94	8990	96
DL40/25W/SS - QHE3x40DL/UNV ISN-SC	74/73	7125	98

¹ System Efficacy calculation based on lowest input power value

SAME LIGHT, LESS POWER
Saves 14% ... 15W with the new 3-Lamp QHE DL40/28W/IS SUPERSAVER System!

EVEN LESS POWER!
Saves 33% ... 36W with the new 3-Lamp QHE DL40/25W/IS SUPERSAVER System!

SPECIFICATION DATA

Catalog #	Date	Type
Project	Prepared by	
Comments		

High Efficiency Universal Voltage (120-277V)




Item Number	Description	Input Current (AMPS)*	Lamp ¹ Type	Rated ¹ Lumens (lm)	No. of Lamps	Ballast ¹ Factor (BF)	System ¹ Lumens	Mean ¹ System Lumens	Input Wattage (W)	System ³ Efficacy (lm/W)	BEF ²
49428	QHE1x40DL/UNV ISN-SC	0.30/0.13	FT40T5	3150	1	0.90	2835	2440	35/35	81	2.57
		0.27/0.12	FT40DL/28W/SS	2800	1	1.07	2995	2695	32/32	94	3.34
		0.22/0.11	FT40DL/25W/SS	2500	1	0.96	2400	2160	27/26	92	3.69
49429	QHE2x40DL/UNV ISN-SC	0.56/0.26	FT40T5	3150	2	0.90	5670	4875	68/67	85	1.34
		0.54/0.24	FT40DL/28W/SS	2800	2	1.07	5990	5395	64/63	95	1.70
		0.41/0.18	FT40DL/25W/SS	2500	2	0.95	4750	4275	50/49	97	1.94
49430	QHE3x40DL/UNV ISN-SC	0.84/0.36	FT40T5	3150	3	0.90	8505	7315	100/99	86	0.91
		0.79/0.35	FT40DL/28W/SS	2800	3	1.07	8990	8090	95/94	96	1.14
		0.62/0.27	FT40DL/25W/SS	2500	3	0.95	7125	6415	74/73	98	1.30

¹ Ballast factor based upon 225mA nominal lamp current for FT40DL and FT40DL/25W/SS and 190mA nominal lamp current for FT40DL/28W/SS.


² Ballast Efficiency Factor (BEF) shown = (Ballast Factor x 100) divided by Input Wattage (Note: calculation based on lowest input wattage).

³ System Efficacy calculation based on lowest input power value


* Data based on Input Voltage of 120-277V.



QUICKTRONIC® 1x40DL/UNV ISN-SC



QUICKTRONIC® QHE 2x40DL/UNV ISN-SC



QUICKTRONIC® QHE 3x40DL/UNV ISN-SC

Dimensions:

Overall: 9.5" L x 1.68" W x 1.18" H (241mm L x 42mm W x 30mm H)

Mounting: 8.90" (226mm)

Packaging:


Quantity: 10 pieces

Pallet Pack: 500 pieces

Weight: 1.6 lbs each (approx.)

Wiring:

Leads only (no connectors provided)

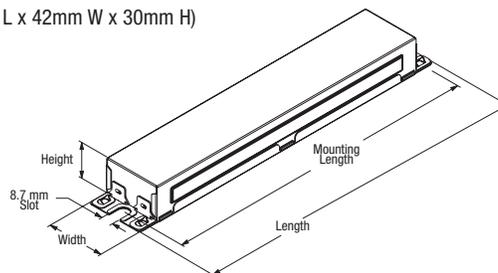

Item Number	49430	QHE 3 x 40DL / UNV ISN SC	Case Size
QUICKTRONIC High Efficiency			Starting/Ballast Factor
Number of Lamps			Line Voltage (120-277V)
			Primary Lamp Wattage

Normal Ballast Factor

DL40 Instant Start

High Efficiency

Performance Guide

Data based upon DL40 lamps shown. QUICKTRONIC® DL40 is also compatible with other lamp manufacturers equivalent lamp types that meet ANSI specifications.

Specifications

- Starting Method: Instant Start
- Ballast Factor: 0.90 - 1.07
- Circuit Type: Parallel
- Lamp Frequency: >42 kHz
- Lamp CCF: Less than 1.7
- Starting Temp:⁴ 0°F (-18°C) for FT40DL and FT40DL/28W/SS
50°F (10°C) for FT40DL/25W/SS
- Input Frequency: 60 Hz
- Low THD: <10%
- Power Factor: >98%
- Voltage Range: ±10% of 120-277V rated line (108-305V)
- UL Listed Class P, Type 1 Outdoor
- CSA Certified
- 70°C Max Case Temperature
- FCC 47CFR Part 18 Non-Consumer
- Class A Sound Rating
- ANSI C62.41 Cat. A Transient Protection
- RoHS Compliant⁵
- Remote Mounting (Max. wire length from ballast case to lampholder):
18 ft: full wattage FT40DL
6 ft: energy saving FT40DL/SS
- ⁴ Operation below 50°F (10°C) may affect light output or lamp operation. SUPERSAVER lamps operate at temperatures greater than 60°F (16°C)
- ⁵ Complies with European Union Restriction of Hazardous Substances Directive (Directive EC 2002/95)

System Life / Warranty

QUICKTRONIC products are covered by the QUICK 60+® warranty, a comprehensive lamp and ballast system warranty. For additional details, refer to the QUICK 60+ warranty bulletin.

Products distributed by LEDVANCE LLC

For Customer Service contact 1-800 LIGHTBULB

Specifications subject to change without notice.

QHE 40DL/SS ISN