

ACT20P-BRIDGE-P**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Similar to illustration****ACT20P: The flexible solution**

- Precise and highly functional signal converters
- Release levers simplify handling

General ordering data

Version	Measuring bridge converter, Resistance measuring bridge, 0(4)-20 mA
Order No.	2456820000
Type	ACT20P-BRIDGE-P
GTIN (EAN)	4050118471762
Qty.	1 pc(s).

ACT20P-BRIDGE-P

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Depth	113.6 mm	Depth (inches)	4.472 inch
Height	127.1 mm	Height (inches)	5.004 inch
Net weight	157 g	Width	22.5 mm
Width (inches)	0.886 inch		

Temperatures

Storage temperature	-40 °C...85 °C	Operating temperature	-40 °C...70 °C
Humidity	10...90 %, no condensation		

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
------------	----------------

Input

Bridge sensitivity	1.0 mV / V to 5.0 mV / V	Bridge supply voltage	5 V or 10 V
Input	Resistance measuring bridge	Input measurement range	± 10 mV / ± 20 mV / ± 30 mV / ± 50 mV (adjustable)
Number of inputs	1	Sensor	Resistance measuring bridge, Total resistance of all parallel resistance measuring bridges: min. 87Ω
Sensor supply	120 mA @ 10 V (= 4 x 350 Ω bridge resistors)		

Output

Load impedance current	≤ 600 Ω	Output	0(4)-20 mA
Output current	0...22 mA (adjustable)	Output voltage, note	0...11 V (adjustable)
Type	Voltage and current output (configurable)	load impedance voltage	600 Ω

Output (analogue)

Type (analogue output)	Voltage and current output (configurable)
------------------------	---

General data

Configuration	DIP switch and button	Linearity	Typically ± 0.05 % of signal range
Long-term drift	0.1 % / 10.000 h	Power consumption	3 W @ 24 V DC
Rail	TS 35	Repeat accuracy	± 0.05 % of final value
Step response time	< 400 ms (10...90 %)	Temperature coefficient	typ. 0.005 % / °C
Type of connection	PUSH IN	Voltage supply	10...60 V DC

Insulation coordination

EMC standards	EN 61326	Insulation voltage	5.7 kV (input / output, input / supply)
Pollution severity	2	Rated voltage	300 V _{eff}
Surge voltage category	III		

Creation date December 3, 2020 2:24:36 PM CET

Catalogue status 20.11.2020 / We reserve the right to make technical changes.

ACT20P-BRIDGE-P**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data**Classifications**

ETIM 6.0	EC002653	ETIM 7.0	EC002653
eClass 9.0	27-21-01-20	eClass 9.1	27-21-01-90
eClass 10.0	27-21-01-20	eClass 11.0	27210120

Important note

Product information

The ACT20P-BRIDGE-P bridge measuring transducer converts measuring bridge voltages into standard signals. Buttons are used for adjustment to the measuring bridge connected. The bridge measuring transducer can supply up to 4 parallel-connected measuring bridges each with 350 Ω . The device supports simple compensation of the tare weight with a separate input for an external button or an external PLC signal. The power supply is galvanically isolated from input and output (3-way isolation).T

Features

- 4-wire and 6-wire measurement
- Supply of up to 4 parallel-connected measuring bridges each with 350 Ω
- Input and output ranges can be adjusted via DIP switches
- Tare compensation via external button or PLC signal
- Front LED indicates operation status
- 3-way galvanic isolation between input, output and power supply

Approvals

Approvals



Approvals

CULUS;

ROHS

Conform

Downloads

Approval/Certificate/Document of Conformity

[Declaration of Conformity](#)

Engineering Data

[STEP](#)

Software

[DIP switch configuration tool](#)

User Documentation

[Instruction sheet](#)


ACT20P-BRIDGE-P

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Drawings

Electric symbol

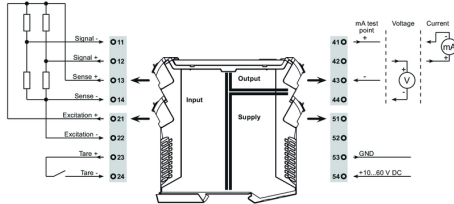


DIP switch setting



DIP switch								
Excitation	1	2	3	4	5	6	7	8
10 V	■							
5 V		■						
Output	1	2	3	4	5	6	7	8
mA		■						
V			■					
Input span	1	2	3	4	5	6	7	8
10 mV			■					
20 mV				■				
30 mV					■			
50 mV						■		
Measuring method	1	2	3	4	5	6	7	8
4-wire							■	■
6-wire								

■ = ON

Dimensioned drawing, Similar to illustration

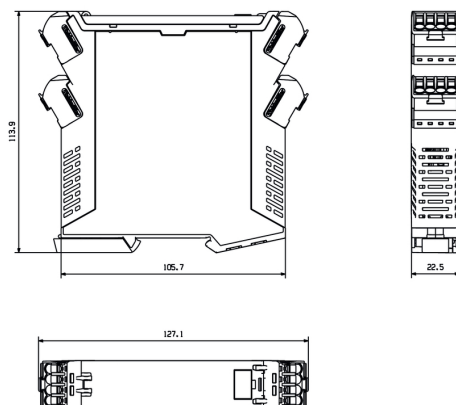

PUSH IN technology

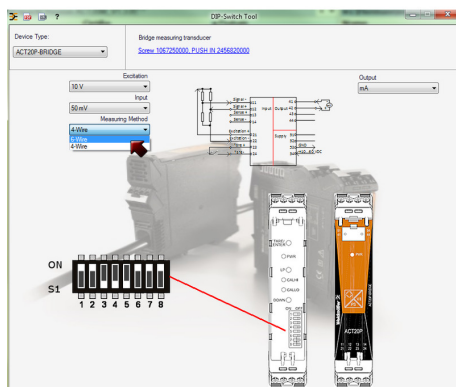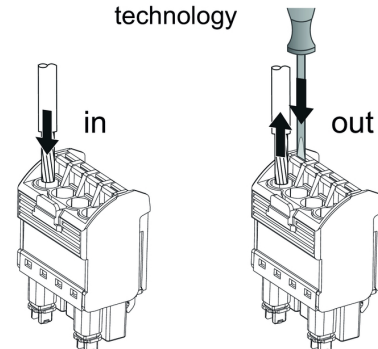

example for DIP switch setting (with ACT20 tool)