

ACT20X
ACT20X-SAI-HAO-S

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Product image, Similar to illustration


The ACT20X-SAI-HAO/2SAI-2HAO current output isolators are suitable for controlling field devices in Ex areas, up to Zone 0.

The input/output-side HART protocol transparent signal connection is implemented using 4 to 20 mA current loops.

Integrated alarm contacts issue an alert in the event of a malfunction; this makes troubleshooting easier and increases system availability.

The rail-mounted current output isolators are optionally available in one- or two-channel versions.

With 11 mm width per channel, the devices need little space in the electrical cabinet.

General ordering data

Type	ACT20X-SAI-HAO-S
Order No.	8965450000
Version	EX signal isolating converter, Safe-input: 4-20mA, Ex output: 4 - 20 mA, 1-channel
GTIN (EAN)	4032248785063
Qty.	1 pc(s).

ACT20X

ACT20X-SAI-HAO-S

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com

Technical data

Dimensions and weights

Width	22.5 mm	Width (inches)	0.886 inch
Height	119.2 mm	Height (inches)	4.693 inch
Depth	113.6 mm	Depth (inches)	4.472 inch
Net weight	189 g		

Temperatures

Humidity	0...95 % (no condensation)	Operating temperature, max.	60 °C
Operating temperature, min.	-20 °C	Storage temperature, max.	85 °C
Storage temperature, min.	-20 °C	Operating temperature	-20 °C...60 °C
Storage temperature	-20 °C...85 °C		

Probability of failure

MTBF	135 Years
------	-----------

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
------------	----------------

Rated data UL

UL certificate	E337701.pdf
----------------	-------------

Input EX

Input current	4...20mA	Input frequency	0,5...2,5 kHz @ 3,5...23 mA bi-directional HART [®] signal
Output signal in case of wire break	< 1 mA	Voltage drop	< 2 V
Voltage drop not powered	< 6 V	Voltage drop powered	< 2 V

Input

Input current	4...20mA	Input frequency	0,5...2,5 kHz @ 3,5...23 mA bi-directional HART [®] signal
Voltage drop	< 2 V		

Output

Type	intrinsically safe circuit	Influence of load resistance	≤ 0.01% of span / 100 Ω
2-wire supply	> 14.5 V @ 20 mA	Output signal limit	< 28 mA
Residual ripple (current loop)	< 7.5 mV _{eff}	Output current	4...20 mA (max. 23 mA)
Cut-off frequency (-3 dB)	0.5...2.5 kHz @ 3.5...23 mA bi-directional HART [®] signal	load impedance current	≤ 725 Ω

ACT20X

ACT20X-SAI-HAO-S

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data

Alarm output

Alarm function	Signal limit exceeded, Line interruption at the input, No supply voltage, Device error	Type	Relay, 1 NO (voltage-free)
Nominal switching voltage	≤ 125 V AC / 110 V DC (safe area) ≤ 32 V AC / 32 V DC (zone 2)	Continuous current	≤ 0,5 A AC / 1 A DC (zone 2)
Power rating	≤ 62.5 VA / 32 W (safe area) ≤ 16 VA / 32 W (Zone 2)	Hysteresis	0.1 mA (switching threshold)
Switching thresholds	0...29.9 mA (programmable)		

General specifications

Configuration	With FDT/DTM software	Voltage supply	19.2...31.2 V DC
Type of connection	Screw connection	Power consumption	≤ 1.0 W
Accuracy	< 0.1% span	Temperature coefficient	< 0.01% of span/°C (TU)
Step response time	≤ 5 ms	Protection degree	IP20
Humidity	0...95 % (no condensation)		

Insulation coordination

EMC standards	DIN EN 61326, NE 21	Insulation voltage	2.6 kV (input / output)
Rated voltage	300 V		

Data for Ex applications (ATEX)

Voltage U ₀	28 V DC	Current I ₀	93 mA
Power P ₀	< 650 mW	Marking	II (1) G [Ex ia Ga] IIC/IIB/ IIA, II (1) D [Ex ia Da] IIIC, I (M1) [Ex ia Ma] I
Installation location	Device installed in safe area, zone 2		

Safety-related basic specifications

Demand mode	High	Description of the "safe state"	analogue Output ≤ 3.6 mA or output ≥ 21 mA
Device type	A	Hardware fault tolerance (HFT)	0
Mean Time To Repair (MTTR)	24 h	Safe Failure Fraction (SFF)	85 %
T _{proof}	5 Years	Total failure rate for dangerous detected failures (λ _{DD})	127 FIT
Total failure rate for dangerous undetected failures (λ _{DU})	48 FIT	Total failure rate for safe detected failures (λ _{SD})	0 FIT
Total failure rate for safe undetected failures (λ _{SU})	164 FIT	Safety category	SIL 2
Probability of outage PFH	4.8 x 10 ⁻⁸ h ⁻¹		

Safety-related specifications Low demand mode

Average Probability of Failure on Demand (PFD _{avg})	2.29 x 10 ⁻⁴ (T _{proof} = 1 year), 4.37 x 10 ⁻⁴ (T _{proof} = 2 years), 1.06 x 10 ⁻⁴ (T _{proof} = 5 year)
--	--

ACT20X

ACT20X-SAI-HAO-S

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data

Connection data

Type of connection	Screw connection	Tightening torque, min.	0.4 Nm
Tightening torque, max.	0.6 Nm	Clamping range, rated connection	2.5 mm ²
Clamping range, min.	0.25 mm ²	Clamping range, max.	2.5 mm ²
Wire connection cross section AWG, min.	AWG 26	Wire connection cross section AWG, max.	AWG 12

Ratings IECEx/ATEX/cUL

ATEX certificate	11ATEX0164X.pdf	IEC Ex certificate	IECEx certification
Certificate no. (cULus)	E337701		

Classifications

ETIM 6.0	EC002475	ETIM 7.0	EC002475
eClass 9.0	27-21-01-23	eClass 9.1	27-21-01-23
eClass 10.0	27-21-01-23	UNSPSC	30-21-18-01

Product information

Product information	Weidmüller provides an extended guarantee period of 36 months for this device.
---------------------	--

Approvals

Approvals



Approvals	DNVGL;
ROHS	Conform

Downloads


Approval/Certificate/Document of Conformity	Certification SIL Certification DNV GL Certification ATEX Certification IECEx Certification UL Declaration of Conformity
Brochure/Catalogue	CAT 4.1 ELECTR 16/17 EN
Engineering Data	EPLAN, WSCAD
Engineering Data	STEP
Software	WI-Manager, DTM-Library for online installation V.1.2.0
User Documentation	Instruction sheet SIL certificate Handbuch ACT20X- Serie, deutsch Manual ACT20X- series, english

ACT20X ACT20X-SAI-HAO-S


Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Drawings



Application

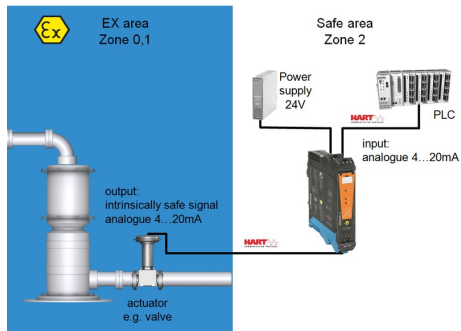


Block diagram

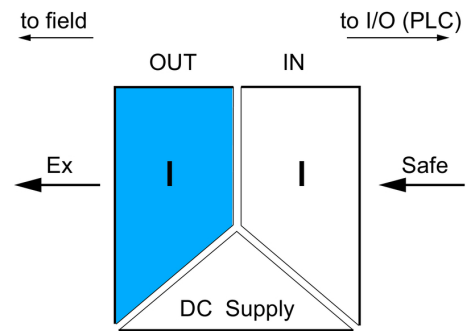

Dimensioned drawing

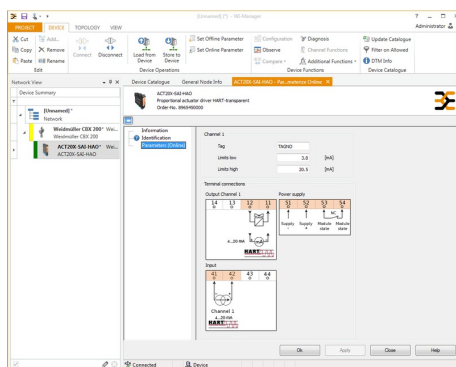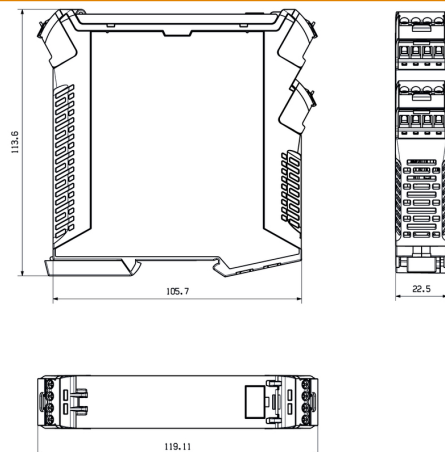

screenshot of configuration with FDT2 / DTM software

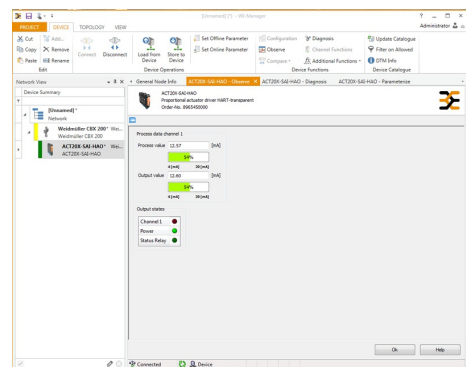


screenshot of "observe" with FDT2 / DTM software

ACT20X ACT20X-SAI-HAO-S

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Drawings

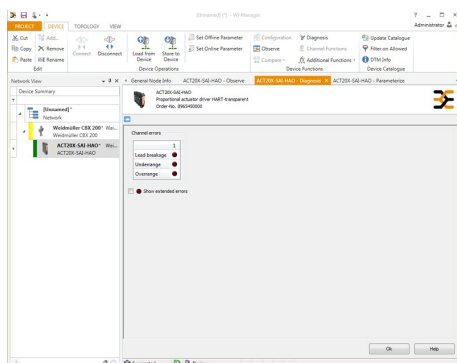

screenshot of "diagnosis" with FDT2 / DTM software

Connection diagram

