


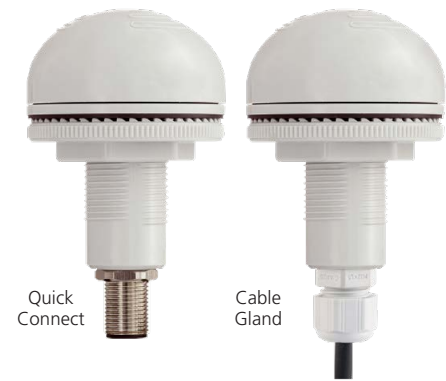

► Model PM22A

Panel Mount 22mm Electronic Sounder

Model PM22A is a multifunctional piezoelectric sounder and offers seven different tones, controllable via independent electric contacts. It is available in two electrical connection options: M12 cable gland with 12" (300 mm) leads or M12 4-pin quick connect (-Q models).

The PM22 Series is panel mounted through a 22 mm/0.87" hole and secured with the provided locking ring. It offers a self-extinguishing polycarbonate body that protects against vibrations, dust and other atmospheric elements.


FEATURES

- Available in 12-24VAC/DC
- 7 tones include: steady, slow intermittent, fast intermittent, 2x intermittent, 3x intermittent, telegraph and random
- Choice of M12 cable gland or M12 4-pin quick connect (-Q models) electrical connections
- Type 3R, IP65 enclosure
- CE Certified
- UL and cUL listed

MODEL	VOLTAGE	DECIBELS 10'	MAXIMUM 1 M	MAXIMUM OPERATING CURRENT (mA)			
				12VDC	24VDC	12VAC	24VAC
PM22A-012-024*	12-24VAC/DC	82	92	15	25	40	70

* Indicates electrical connection: (-Q) Quick Connect (leave blank for M12 cable gland)

Panel Mount 22mm Electronic Sounder (PM22A)

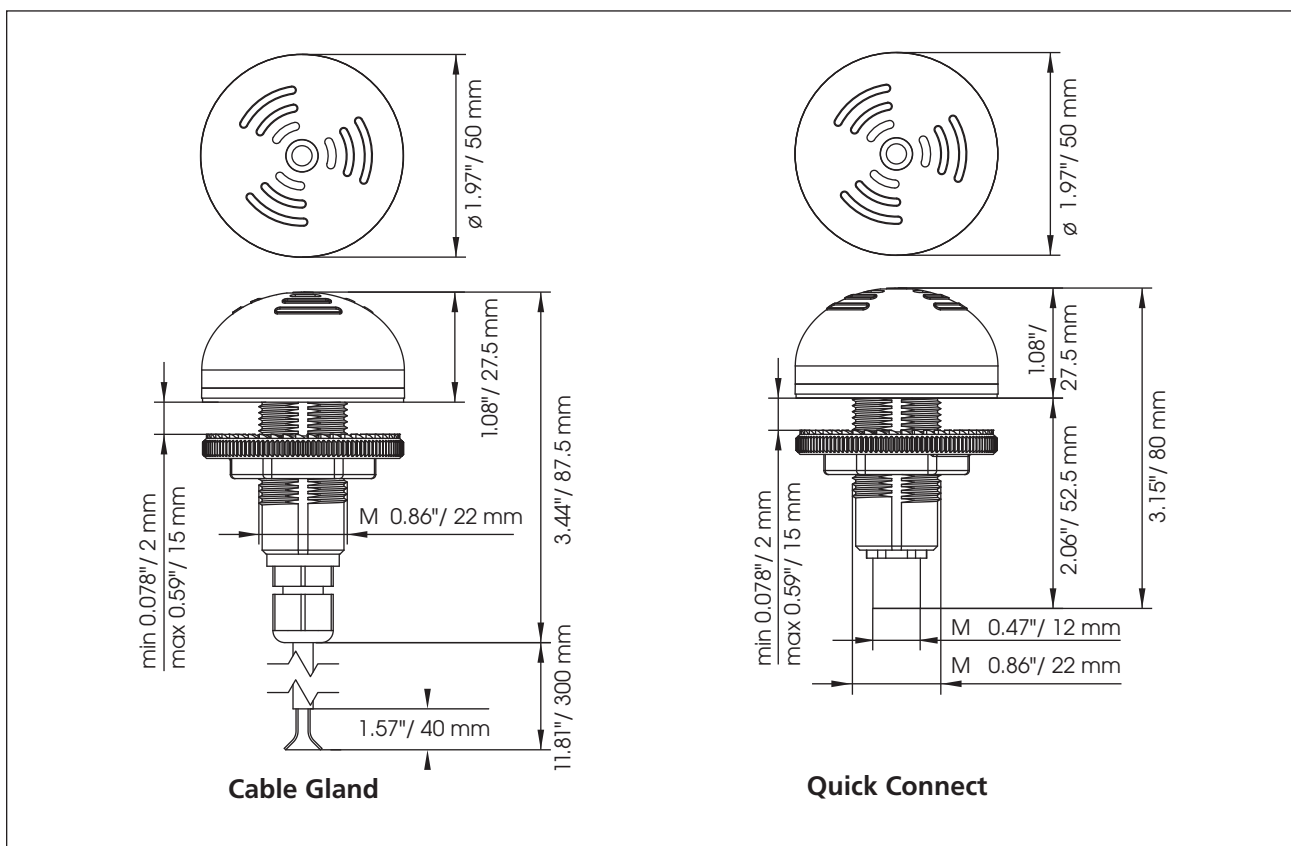

S P E C I F I C A T I O N S

Operating Temperature: -22°F to 122°F -30°C to 50°C

Net Weight: 2.47 oz 0.07 kg

M12 Cable Gland M12 Quick Connect

Diameter 1.97" 50.0 mm 1.97" 50.0 mm

Height: 3.44" 87.5 mm 3.15" 80.0 mm

Height above surface: 1.08" 27.5 mm 1.08" 27.5 mm

H O W T O O R D E R

Specify Model:

PM22A-012-024 - Panel Mount 22 mm, Sounder,
12-24VAC/DC, M12 Cable Gland

PM22A-012-024-Q - Panel Mount 22 mm, Sounder,
12-24VAC/DC, M12 Quick Connect