


Data sheet | Item number: 852-602

Industrial-Managed-Switch; 8-port 100Base-TX; PROFINET; Extended temperature range; black metallic

www.wago.com/852-602

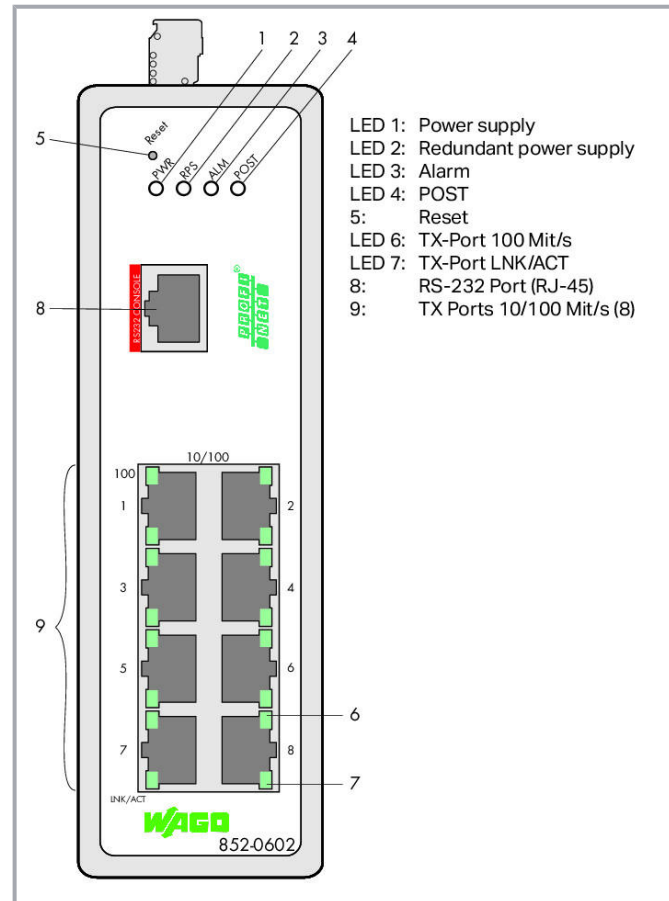

Item description

The 852-602 Industrial Managed Switch is a configurable ETHERNET switch equipped with eight 10/100Base-TX copper ports. Packaged in a rugged housing, this switch offers both a redundant power supply and relay-based function monitoring.

The PROFINET certificate (conformity class B) guarantees easy integration into PROFINET automation systems using the device description file (GSD). In addition, the device supports the PROFINET Netload Class II.

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



The device supports flexible multi-port mirroring configuration via device description file or Web-Based Management. Function blocks allow cyclic PROFINET switch diagnostics to be efficiently implemented within the TIA Portal. An application note that outlines this process is available.

Features:

- Web-based/SNMP management
- Redundant DC power supply
- Power supply range: 12 ... 60 VDC
- DIP switches to set alarm functions
- Full compliance with IEEE802.3, 802.3u, 802.3x, 802.1d, 802.1w, 802.1s, 802.1Q, 802.1p standards
- Media redundancy protocol (MRP) as manager (MRM) or client (MRC), redundant ring
- Non-blocking, store-and-forward switching, rapid spanning tree protocol (RSTP)
- Autonegotiation and AUTO-MDI/MDIC (crossover)
- VLAN (802.1Q) VID
- IGMP snooping
- Port configuration, status, statistics
- Port trunking and multi-port mirroring
- SNMP v1/v2c/v3 and RMON
- Time synchronization via SNTP
- Storm control, bandwidth limitation and loop detection

Data

Technical data

Switching mode	Store-and-forward; non-blocking
Number of 100Base-TX ports	8
Communication standards	IEEE 802.3 10BASE-T IEEE 802.3u 100BASE-TX IEEE 802.3x Flow Control IEEE 802.1d Spanning Tree Protocol (STP) IEEE 802.1w Rapid Spanning Tree Protocol (RSTP) IEEE 802.1s Multiple Spanning Tree Protocol (MSTP) IEEE 802.1Q VLAN Tagging IEEE 802.1p Class of service IEEE 802.1ab Link Layer Discovery Protocol (LLDP) PROFINET Conformance Class B
Redundancy function	Redundant DC power supply; STP; RSTP; MSTP; Media redundancy protocol as manager or client
Configuration options	DIP switch for signal contact Web-Based Management Command Line Interface SNMPv1/v2c/v3
Diagnostics	Signal contact; Port status; Port statistics; Port load; Traffic monitor;

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



	SFP information; Syslog; SNMP traps; PN diagnostics (cyclic and acyclic)
MAC table (size)	16000 addresses
Jumbo frame size	10000. Byte
Supply voltage	12 ... 60 VDC
Power consumption (max.)	12 W
ESD (contact/air discharge)	8 KV / 15 KV
Baud rate	Copper cable: 10/100 Mbit/s
Transmission medium (communication/fieldbus)	Copper cable: Cat. 5e or higher, 100 m maximum cable length
VLAN	Port-based and tag-based (4k VIDs)
Indicators	Device: LED (PWR, RPS) green: Power supply (primary), redundant power supply (secondary); LED (ALM) red: Alarm or PROFINET error (with active PROFINET mode); pro Port: LED (100, LNK/ACT) green: Status 100 Mbps, LNK/ACT ports 1 ... 8

Connection data

Connection technology: communication/fieldbus	Copper cable: 8 x RJ-45
Connection technology: supply	1 x Built-in male connector: 231-436/001-000; included female connector (MCS Connectors): 2231-106/026-000

Physical data

Width	50 mm / 1.969 inch
Height	162 mm / 6.378 inch
Depth	120 mm / 4.724 inch

Mechanical data

Weight	882 g
Color	black metallic

Environmental requirements

Ambient temperature (operation)	-40 ... +70 °C
Surrounding air temperature (storage)	-40 ... +80 °C
Protection type	IP30
Relative humidity (without condensation)	95 %
Mounting type	DIN-35 rail
Vibration resistance	per IEC 60068-2-6
Shock resistance	per IEC 60068-2-27
EMC immunity to interference	per EN 61000-6-2

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



EMC emission of interference	per EN 61000-6-4
Fire load	0.234 MJ

Commercial data

PU (SPU)	1 Each
Packaging type	box
Country of origin VKOrg Germany	TW
GTIN	4055143907989
Customs tariff number VKOrg Germany	85176200000

Approvals / Certificates

Country specific Approvals

Logo	Approval	Additional Approval Text	Certificate name
	EAC Brjansker Zertifizierungsstelle	TP TC 020/2011	EAC RU C-DE.AM02. B.00087 /19

Other Approvals

Logo	Approval	Additional Approval Text	Certificate name
	Profi-Net Siemens AG/ComDeC	-	Z12462

UL-Approvals

Logo	Approval	Additional Approval Text	Certificate name
	UL Underwriters Laboratories Inc. (ORDINARY LOCATIONS)	UL 61010-2-201	E175199

Optional accessories

Cables and pluggable connectors

Connector plug	
Item no.: 750-976 PROFINET RJ-45 connector, IP20; ETHERNET 10/100 Mbit/s; for field assembly	www.wago.com/750-976

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

**Item no.: 750-978/000-012**

Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568B; AWG 22; Strain relief

www.wago.com/750-978/000-012**Item no.: 750-979/000-012**

Connector ETHERNET; RJ-45; Cat. 6A; angled; Code T568B; AWG 22; Strain relief

www.wago.com/750-979/000-012**Item no.: 750-978/000-021**

Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568A; AWG 24; Strain relief

www.wago.com/750-978/000-021**Item no.: 750-979/000-022**

Connector ETHERNET; RJ-45; Cat. 6A; angled; Code T568B; AWG 24; Strain relief

www.wago.com/750-979/000-022**Item no.: 750-978/000-022**

Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568B; AWG 24; Strain relief

www.wago.com/750-978/000-022**Item no.: 750-979/000-011**

Connector ETHERNET; RJ-45; Cat. 6A; angled; Code T568A; AWG 22; Strain relief

www.wago.com/750-979/000-011**Item no.: 750-979/000-013**

Connector PROFINET; RJ-45; Cat. 6A; angled; AWG 22; Strain relief

www.wago.com/750-979/000-013**Item no.: 750-979/000-021**

Connector ETHERNET; RJ-45; Cat. 6A; angled; Code T568A; AWG 24; Strain relief

www.wago.com/750-979/000-021**Item no.: 750-977/000-011**

Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568A; AWG 22

www.wago.com/750-977/000-011**Item no.: 750-978/000-013**

Connector PROFINET; RJ-45; Cat. 6A; straight; AWG 22; Strain relief

www.wago.com/750-978/000-013**Item no.: 750-978/000-011**

Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568A; AWG 22; Strain relief

www.wago.com/750-978/000-011**Item no.: 750-977/000-022**

Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568B; AWG 24

www.wago.com/750-977/000-022**Item no.: 750-977/000-012**

Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568B; AWG 22

www.wago.com/750-977/000-012

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.



Item no.: 750-977/000-013

Connector PROFINET; RJ-45; Cat. 6A; straight; AWG 22

www.wago.com/750-977

/000-013

Item no.: 750-977/000-021

Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568A; AWG 24

www.wago.com/750-977

/000-021

Interface module

Interface module



Item no.: 289-195

Interface module; RJ-45; IDC technology; Cat. 6; in mounting carrier; with shield connection

www.wago.com/289-195**Power supplies**

Power supply unit

Item no.: 787-1632

Switched-mode power supply; Classic; 1-phase; 24 VDC output voltage; 10 A output current; TopBoost; DC OK contact

www.wago.com/787-1632

Item no.: 787-1633

Switched-mode power supply; Classic; 1-phase; 48 VDC output voltage; 5 A output current; TopBoost; DC OK contact

www.wago.com/787-1633

Item no.: 787-1635

Switched-mode power supply; Classic; 1-phase; 48 VDC output voltage; 10 A output current; TopBoost; DC OK contact

www.wago.com/787-1635

Item no.: 787-1602

Switched-mode power supply; Classic; 1-phase; 24 VDC output voltage; 1 A output current; NEC Class 2; DC OK signal

www.wago.com/787-1602

Item no.: 787-1622

Switched-mode power supply; Classic; 1-phase; 24 VDC output voltage; 5 A output current; TopBoost; DC OK contact

www.wago.com/787-1622

Item no.: 787-1606

Switched-mode power supply; Classic; 1-phase; 24 VDC output voltage; 2 A output current; NEC Class 2; DC OK signal

www.wago.com/787-1606

Item no.: 787-1623

Switched-mode power supply; Classic; 1-phase; 48 VDC output voltage; 2 A output current; DC OK signal

www.wago.com/787-1623**Downloads****Documentation****Manual**Industrial Managed Switch
8 Ports 100BASE-TX, PROFINET; EXTV 1.0.0
Dec 12, 2019pdf
15.0 MB

Download

Bid Text

852-602

xml

Download

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.comDo you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



X81 - Datei	8.0 kB	
852-602	docx	Download
docx - Datei	18.0 kB	

Additional Information

Disposal; Electrical and electronic equipment, Packaging	V 1.0.0	pdf	Download
		265.8 kB	

System Description

Industrial Switches – General Product Information	pdf	Download
	1.9 MB	

Runtime Software

Firmware

0852-0602, Industrial-Managed-Switch	V 02	zip	Download
WAGO_FW0852-0602_V010003_IX02_F	Jul 21, 2021	9.0 MB	

CAD/CAE-Data

CAD data

2D/3D Models 852-602	URL	Download
----------------------	-----	----------

CAE data

ZUKEN Portal 852-602	URL	Download
EPLAN Data Portal 852-602	URL	Download

Device Files

Device Description File

750-916; GSD-Dateien der Version 2.x für PROFINET/ Serie 750/753, 765, 767 und 852	2.9 Oct 15, 2021	zip 2.5 MB	Download
GSD-Dateien der Version 2.x für PROFINET	2.33 Jul 9, 2019	zip 44.1 kB	Download

Subject to changes. Please also observe the further product documentation!



Environmental Product Compliance

Compliance Search

Environmental Product Compliance 852-602	URL	Download
Industrial-Managed-Switch; 8-port 100Base-TX; PROFINET; Extended temperature range; black metallic		

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.