


RCMKIT-I 24VDC 4CO LD**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Product image**

- Mounted kit consisting relay, socket and retaining clip
- 100 % function tested
- 100 % check of the dielectric strenght between input - output
- 4 CO contacts
- Test button with mechanical status indicator
- Bright status LED (AC coil: red / DC coil: green)
- Identification of coils (AC red / DC blue)

General ordering data

Version	RIDERSERIES RCM, Relay module, Number of contacts: 4, CO contact AgNi, Rated control voltage: 24 V DC, Continuous current: 6 A, Screw connection, Test button available: Yes
Order No.	8921030000
Type	RCMKIT-I 24VDC 4CO LD
GTIN (EAN)	4032248692279
Qty.	10 pc(s).
Relevant relay	8690200000
Relevant rim module	8869600000
Relevant base	8869420000

Creation date December 30, 2021 8:13:49 PM CET

RCMKIT-I 24VDC 4CO LD

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Depth	78.3 mm	Depth (inches)	3.083 inch
Height	77 mm	Height (inches)	3.031 inch
Width	27.2 mm	Width (inches)	1.071 inch
Net weight	99.9 g		

Temperatures

Storage temperature	-40 °C...70 °C	Operating temperature	-40 °C...70 °C
Humidity	40 °C / 93 % rel. humidity, no condensation		

Probability of failure

B10	150.000 AC15: 250Vac/4A
-----	----------------------------

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
------------	----------------

Control side

Rated control voltage	24 V DC	Rated current DC	32.8 mA
Power rating	804 mW	Pull-in/drop-out voltage, typ.	18 V / 2.4 V DC
Coil resistance	777 $\Omega \pm 10\%$	Status indicator	Green LED
Protective circuit	Free-wheeling diode		

Load side

Rated switching voltage	250 V AC	Continuous current	6 A
Max. switching frequency at rated load	0.1 Hz	Min. switching power	1 mA @ 24 V, 10 mA @ 12 V, 100 mA @ 5 V
Inrush current	12 A / 20 ms	AC switching capacity (resistive), max.	1500 VA
DC switching capacity (resistive), max.	144 W @ 24 V	Switch-on delay	≤ 15 ms
Switch-off delay	≤ 10 ms	Contact type	4 CO contact (AgNi)
Mechanical service life	AC coil 20×10^6 switching cycles, DC coil 30×10^6 switching cycles		

General data

Rail	TS 35	Test button available	Yes
Mechanical switch position indicator	Yes	Colour	black

Insulation coordination

Rated voltage	250 V	Pollution severity	2
Surge voltage category	III	Insulating material group	IIIa
Clearance and creepage distances for control side - load side	≥ 4 mm	Dielectric strength for control side - load side	2.5 kV _{eff} / 1 Min.
Dielectric strength of neighbouring contacts	2 kV _{eff} / 1 min	Dielectric strength of open contact	1.2 kV _{eff} / 1 min.
Impulse withstand voltage	5 kV (1.2/50 μ s)	Protection degree	IP20

RCMKIT-I 24VDC 4CO LD

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Further details of approvals / standards

Certificate no. (CSA) relay	249409-2426937
Certificate No. (DNVGL)	TAA000011A
Certificate no. (cURus) base	E223759

Certificate no. (CSA) base	249409-2295474
Certificate no. (cURus) relay	E224238

Connection data

Wire connection method	Screw connection
Tightening torque, min.	0.5 Nm
Clamping range, rated connection	2.5 mm ²
Clamping range, max.	2.5 mm ²
Wire cross-section, solid, max.	2.5 mm ²

Wire connection cross section, finely stranded, max.	2.5 mm ²
--	---------------------

Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, max.	2.5 mm ²
---	---------------------

Conductor cross-section, flexible, AEH (DIN 46228-1), max.	2.5 mm ²
--	---------------------

Wire cross-section, finely stranded, two clampable wires, max.	1.5 mm ²
--	---------------------

Stripping length, rated connection	8 mm
------------------------------------	------

Tightening torque, max.	0.7 Nm
-------------------------	--------

Clamping range, min.	1 mm ²
----------------------	-------------------

Wire cross-section, solid, min.	1 mm ²
---------------------------------	-------------------

Wire connection cross section, finely stranded, min.	1 mm ²
--	-------------------

Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, min.	1 mm ²
---	-------------------

Conductor cross-section, flexible, AEH (DIN 46228-1), min.	1 mm ²
--	-------------------

Wire connection cross section, finely stranded, two clampable wires, min.	1 mm ²
---	-------------------

Blade size	size PZ1
------------	----------

Classifications

ETIM 6.0	EC001437
ETIM 8.0	EC001437
ECLASS 9.1	27-37-16-01
ECLASS 11.0	27-37-16-01

ETIM 7.0	EC001437
ECLASS 9.0	27-37-16-01
ECLASS 10.0	27-37-16-01

Important note

Product information	IP20 without connected conductor at complete opened clamping yoke connection.
---------------------	---

Approvals

Approvals



ROHS	Conform
------	---------

Downloads

Approval/Certificate/Document of Conformity	EU Konformitätserklärung / EU Declaration of Conformity
Engineering Data	CAD data – STEP
Engineering Data	EPLAN, WSCAD, Zuken E3.S
Catalogues	Catalogues in PDF-format
Brochures	


RCMKIT-I 24VDC 4CO LD

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany


www.weidmueller.com

Drawings

Wiring diagram

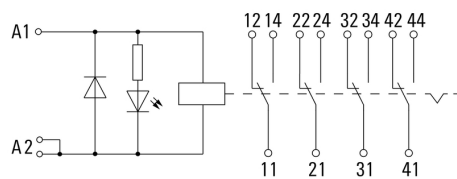


Graph

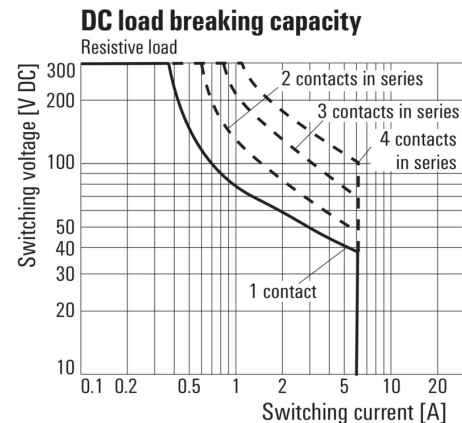


DC load limit curve
Resistive load

Graph

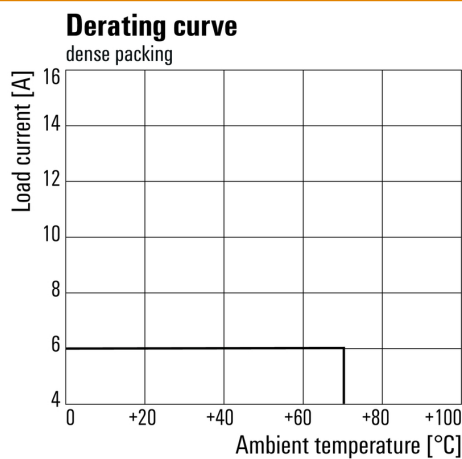


Derating curve
Relay in combination with base

Graph

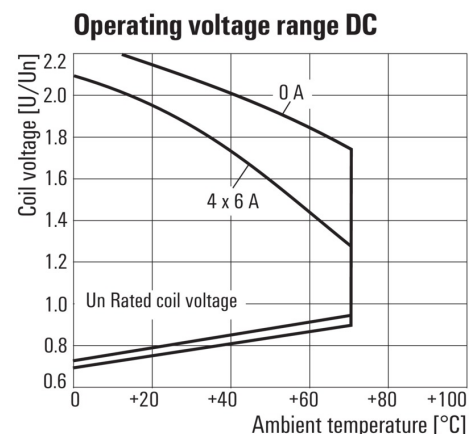


DC operational voltage range

Graph

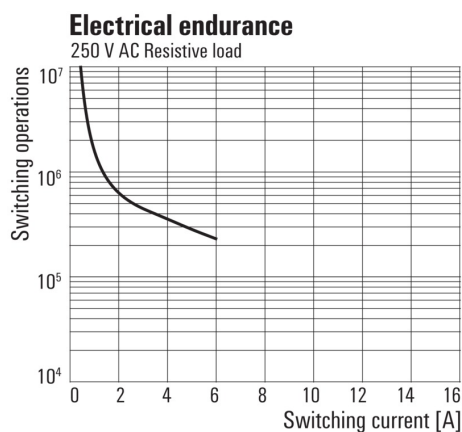

Electrical service life 250 V AC resistive load
250 V AC resistive load

Dimensional drawing

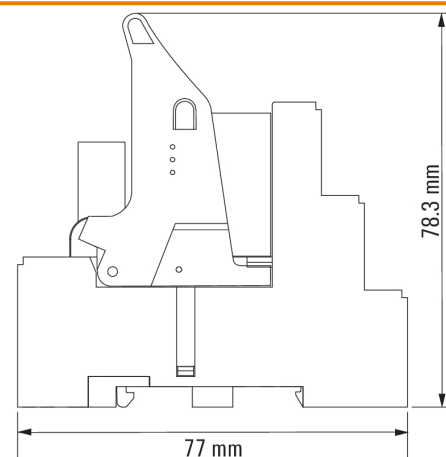

RCMKIT-I 24VDC 4CO LD**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com**Drawings**