

SACE Tmax XT

AUX-C - Contatti ausiliari 3Q, XT1-XT2-XT3-XT4

AUX-C - XT1-XT2-XT3-XT4 wired auxiliary contacts 3Q


AUX-C - Hilfskontakte 3Q, verdrahtet XT1-XT2-XT3-XT4

AUX-C - Contacts auxiliaires 3Q câblés XT1-XT2-XT3-XT4

AUX-C - Contactos auxiliares 3Q cableados XT1-XT2-XT3-XT4

AUX-C - 带导线辅助触点 3Q XT1-XT2-XT3-XT4

XT1-XT2-XT3-XT4

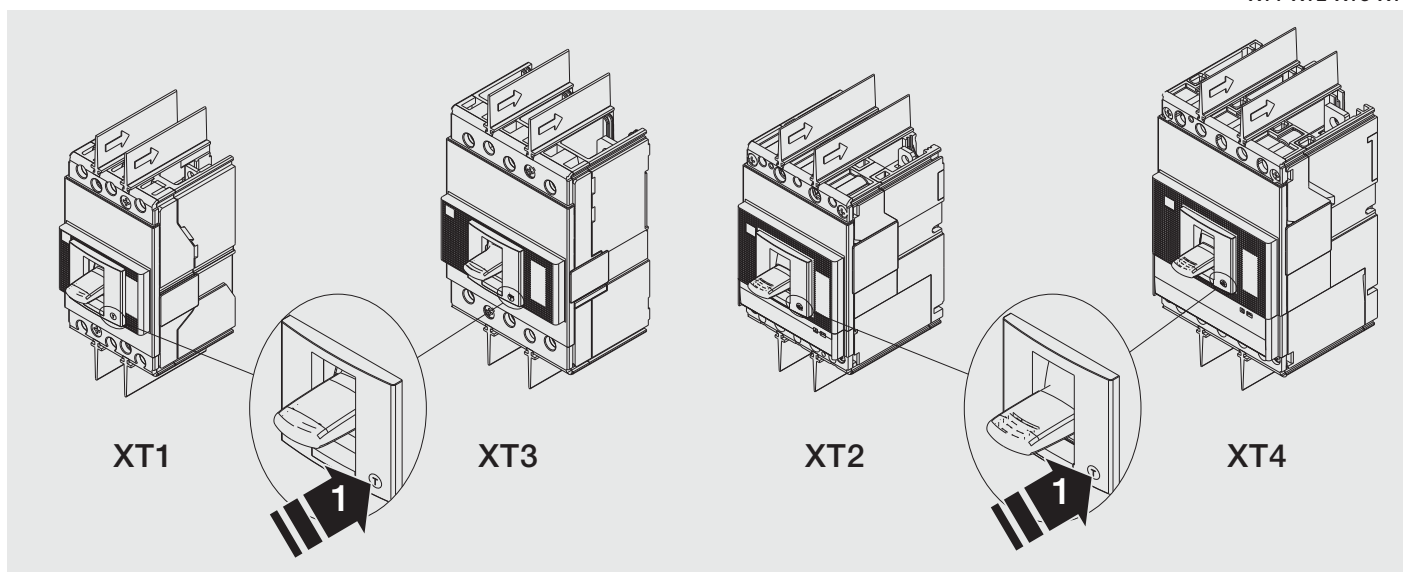

IEC60947-5-1

GB14048.5


AUX 250V, AUX-SA 250V							
IEC	Voltage	Category / Current					
		AC-15	AC-14	AC-13	DC-14	DC-13	DC-12
	250Vac	4A	5A	6A	-	-	-
	125Vac	5A	6A	6A	-	-	-
	250Vdc	-	-	-	0,03A	0,03A	0,03A
	110Vdc	-	-	-	0,05A	0,05A	0,05A

$U_{imp} = 2.5kV$

$U_i = 300V$

UL	Voltage	max Current
	250Vac	3A
	125Vac	5A
	250Vdc	0.2A
	125Vdc	0.4A

IEC	Voltage	max Current	min Current
	24Vdc	0,1A @ 30Vdc	1mA @ 5Vdc




UL	Voltage	max Current
	125Vac	0.1A
	30Vdc	0.1A


Power and productivity
for a better world™




A ONLY FOR XT1 F - XT3 F

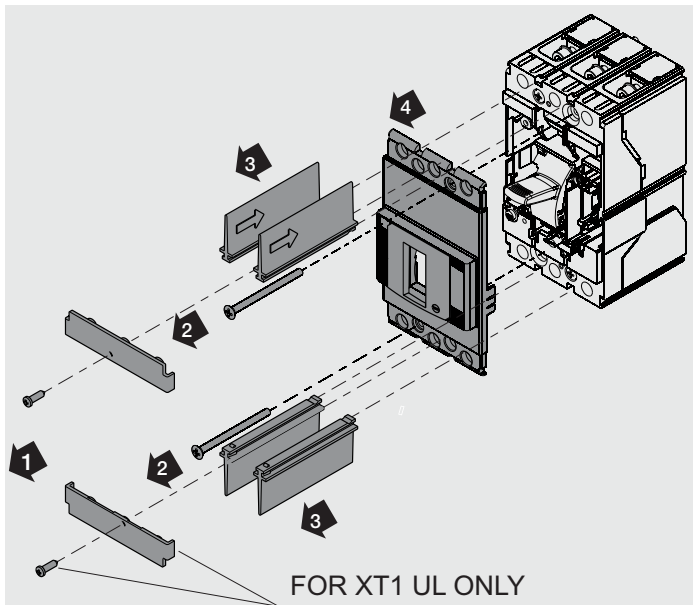


B ONLY FOR XT2 F/P - XT4 F/P

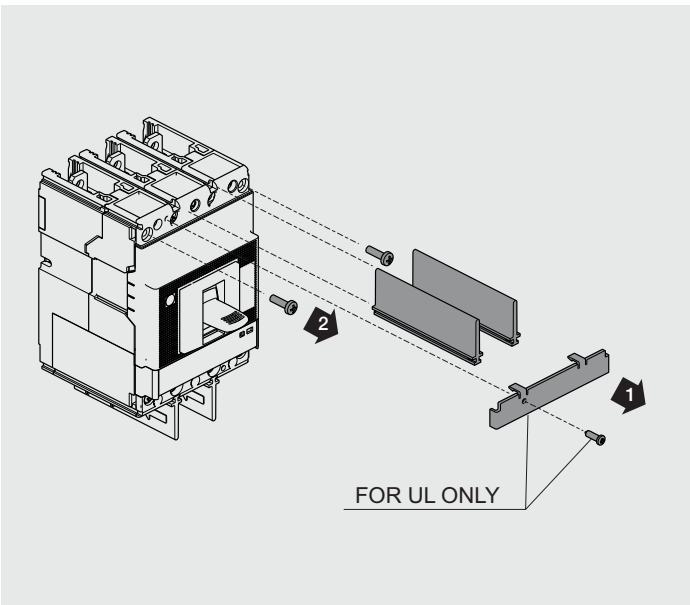


C ONLY FOR XT2 F/P - XT4 F/P

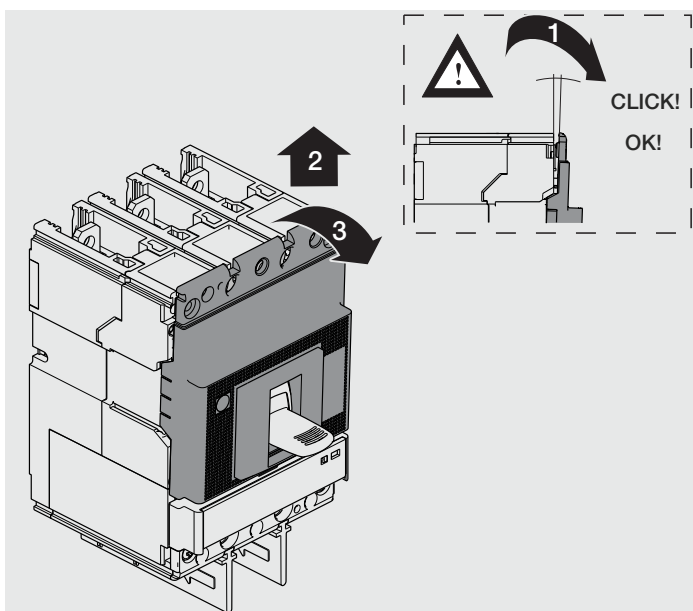


D ONLY FOR XT2 W - XT4 W

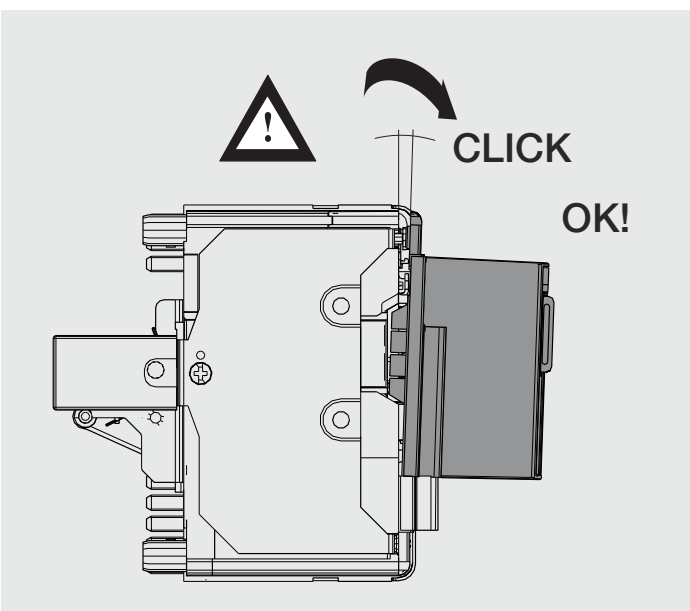

E ONLY FOR XT2 W - XT4 W

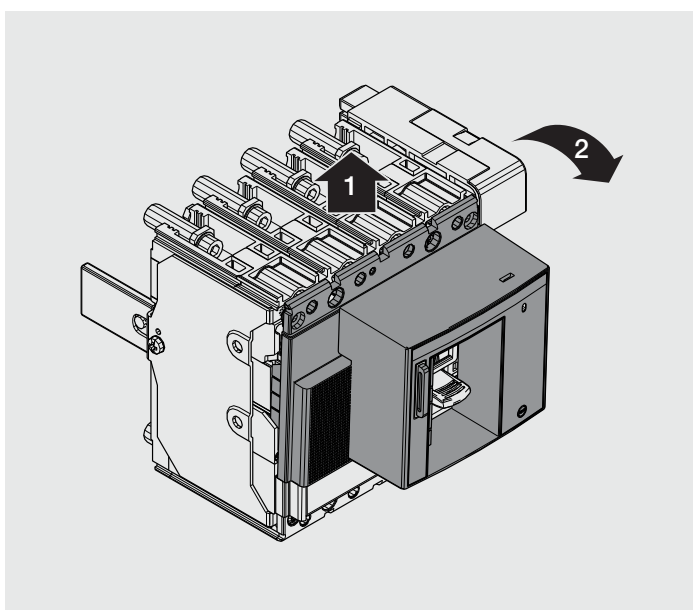


F FOR XT2 - XT4 III ONLY

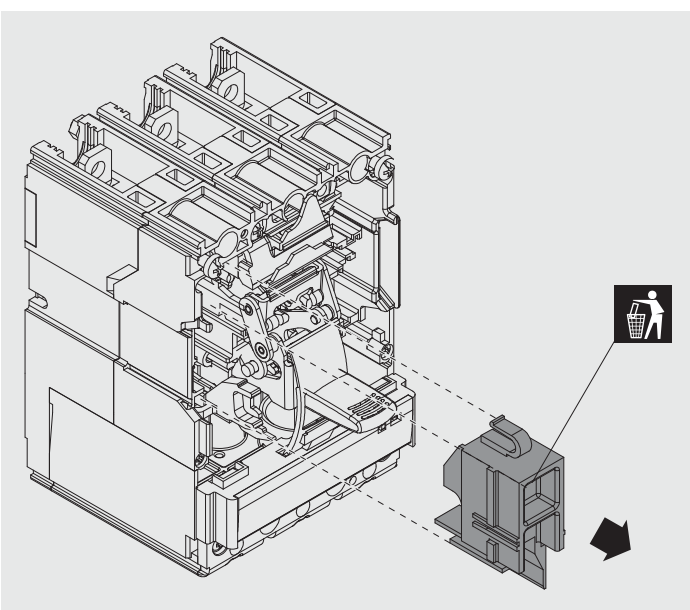


H



FOR XT1 ONLY

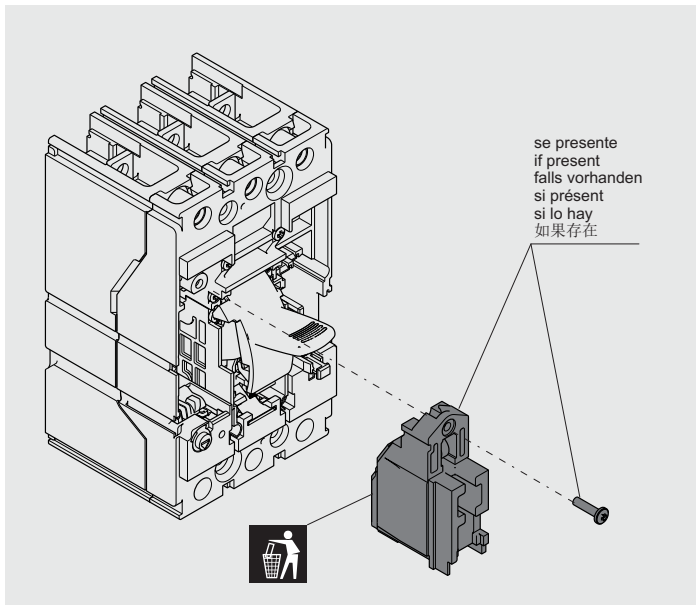
**I**

FOR XT2 - XT4 IV ONLY

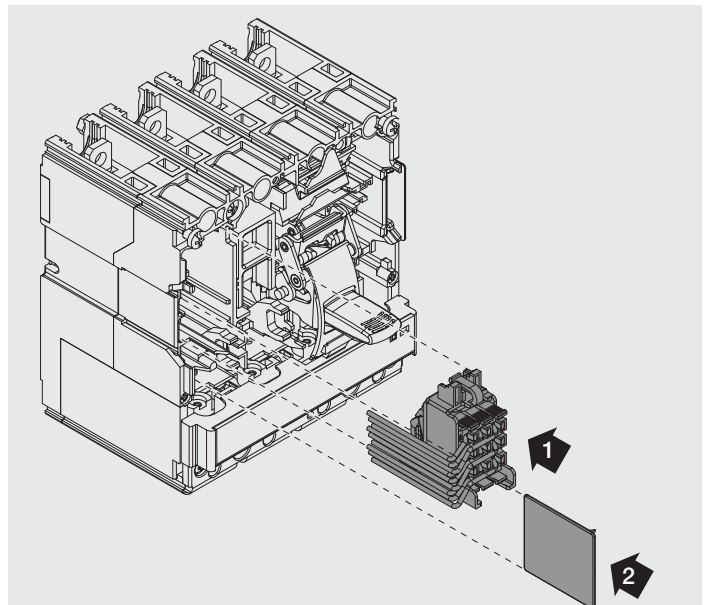**J**


EXAMPLE FOR XT1 - XT3 IV ON 4P

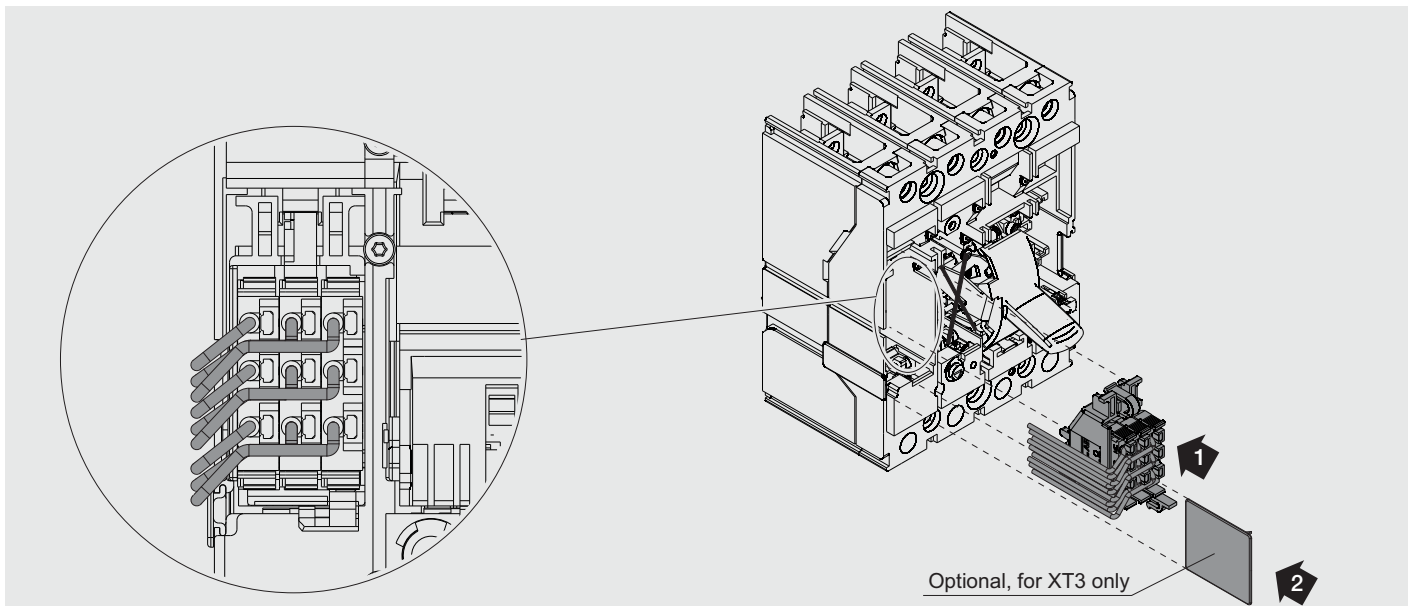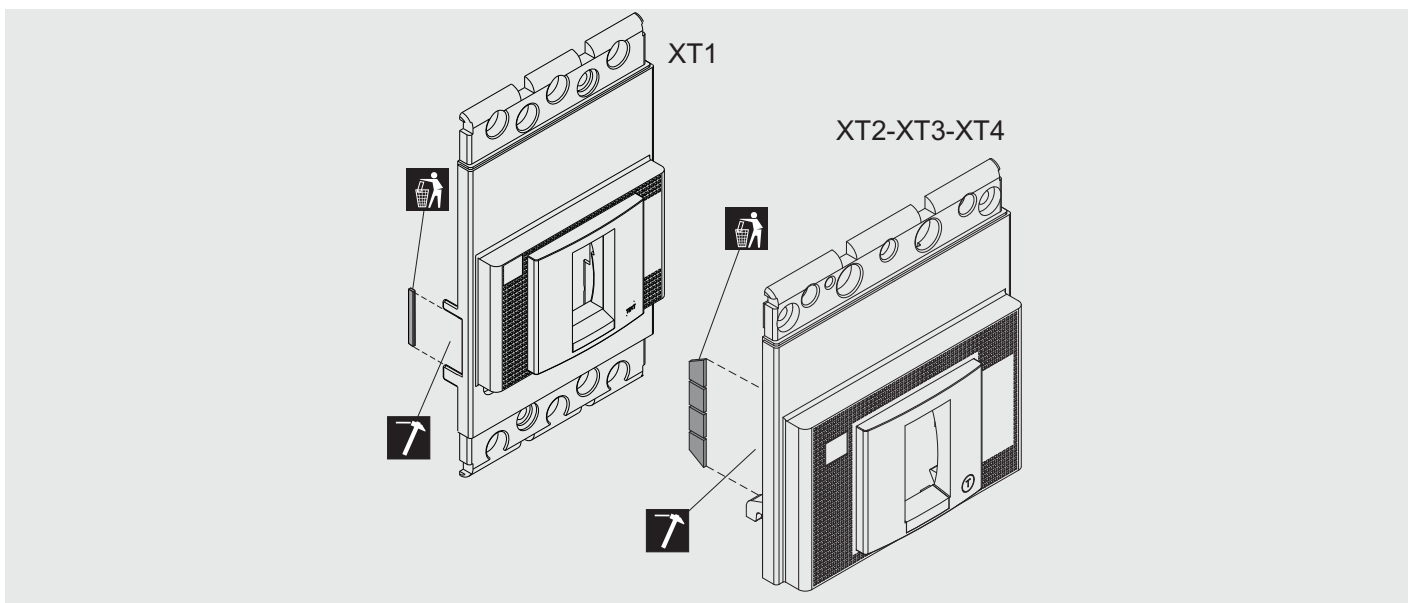**K**

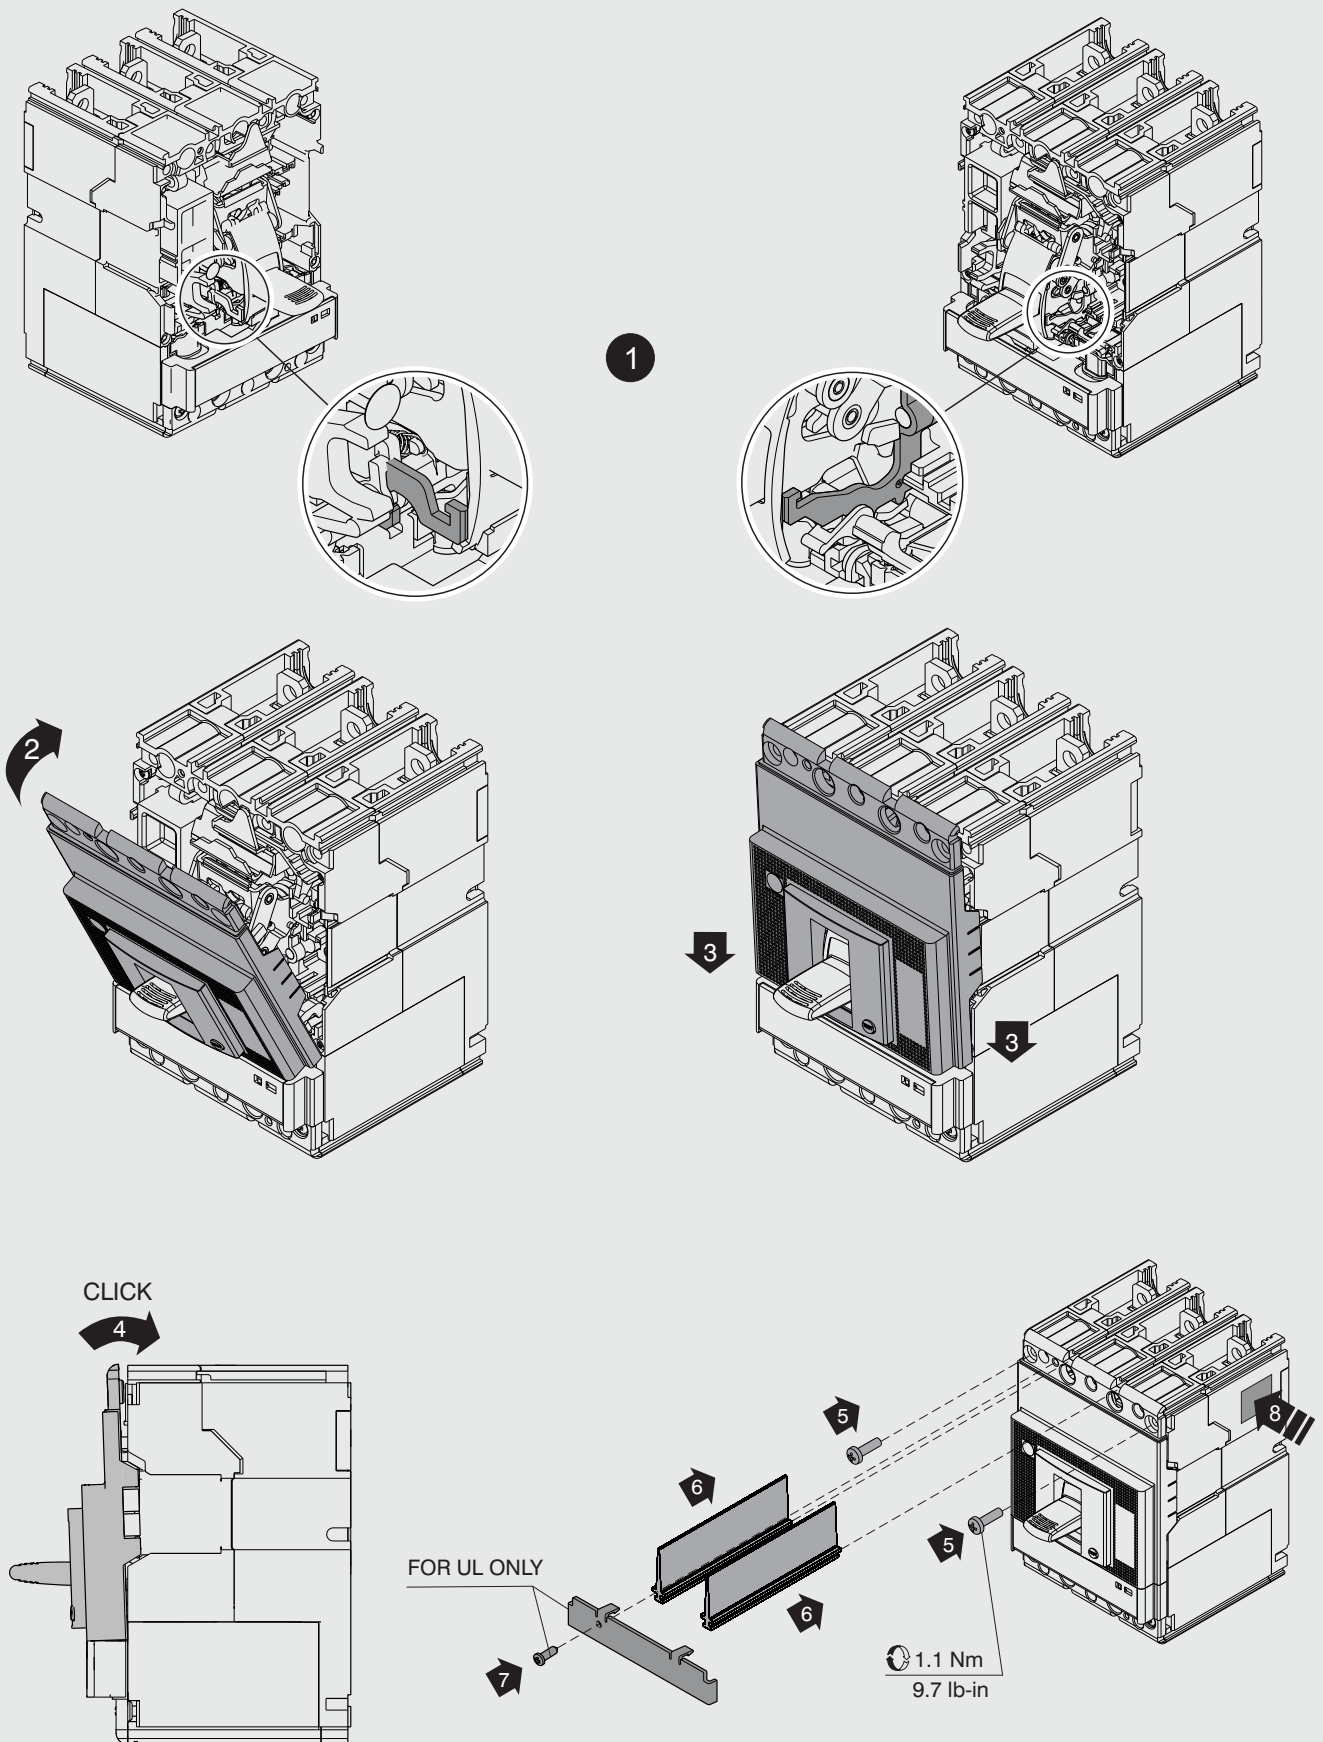


M

XT2-XT4/W

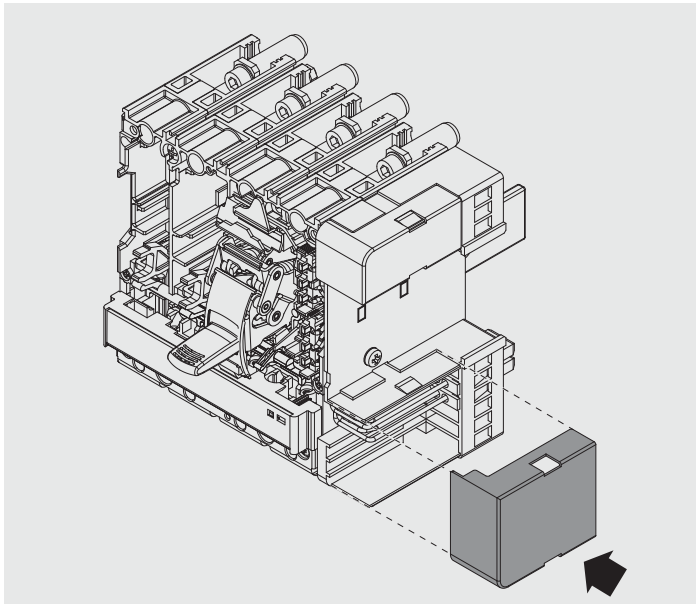

N

XT2-XT4/W

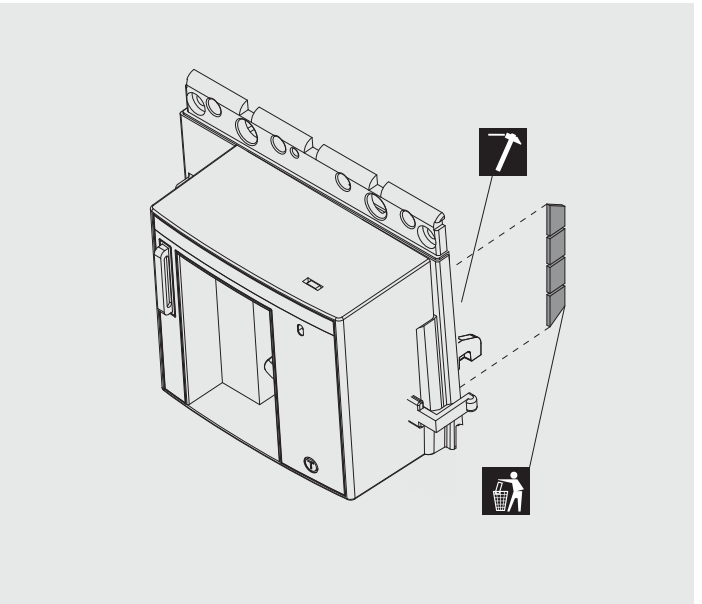


O

XT2-XT4/W



P

XT2-XT4/W

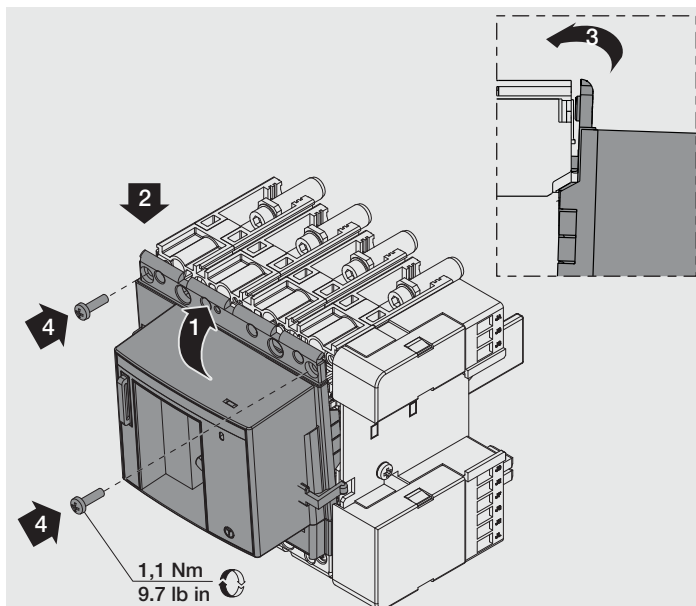

Q

XT2-XT4/W

