

JB8 screwless jumper bars

Common terminal block accessories



JB8
8 mm 0.315 in spacing

Description

Facilitate & secure your jumper bar assembly process:

- Screwless mounting,
- Pre-cut poles for alternated jumpering between terminal blocks,
- Insulated,
- Positive locking.

Ordering details

Description		Color	Type	Order code	Pkg pce	Weight (1 pce) g
8 mm 0.315 in spacing	2 poles	Orange	JB8-2	1SNK908302R0000	50	2.70
	3 poles		JB8-3	1SNK908303R0000	50	4.10
	4 poles		JB8-4	1SNK908304R0000	50	5.60
	5 poles		JB8-5	1SNK908305R0000	40	7.00
	10 poles		JB8-10	1SNK908310R0000	20	14.20


Main technical data

Material specifications	Insulating material	Polyamide		
	Flammability	V0		
Ambient temperature min/max	NF F 16 101	I2F3		
	Service IEC 60068-2-1	-55 ... +110 °C	-67 ... +230 °F	
	Storage	-55 ... +110 °C	-67 ... +230 °F	
	Installing	-5 ... +40 °C	-23 ... +104 °F	
		IEC	UL - CSA	Ex e
Rated current		57 A	42 A	
Rated voltage	Standard use	1000 V	600 V	630 V
	Cut extremities	800 V	300 V	400 V
	Cut poles	400 V	300 V	Consult us
Impulse withstand voltage		6000 V		
Protection		IP20	NEMA 1	
All the main technical data provided are "manufacturer" values.				
RoHS				

Accessories

Description		Color	Type	Order code	Pkg pce	Weight (1 pce) g
Circuit separators	0 mm 0 in spacing	Dark grey	CS	1SNK900101R0000	20	0.20

Mounting instructions

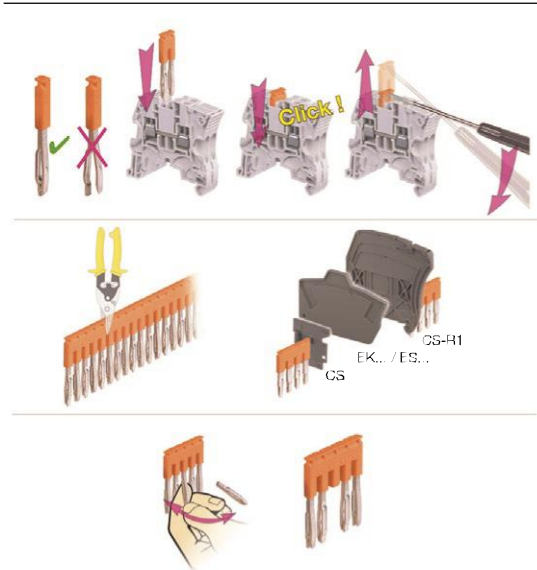

Additional accessories must be installed on the cut side of the jumper bar with cut extremities:

	Feed-through	Double-deck	Others
ZS	CS	ES...	CS-R1
ZK		EK...	

All the technical data for UL/CSA standard and dimensions in inches are in italic.