
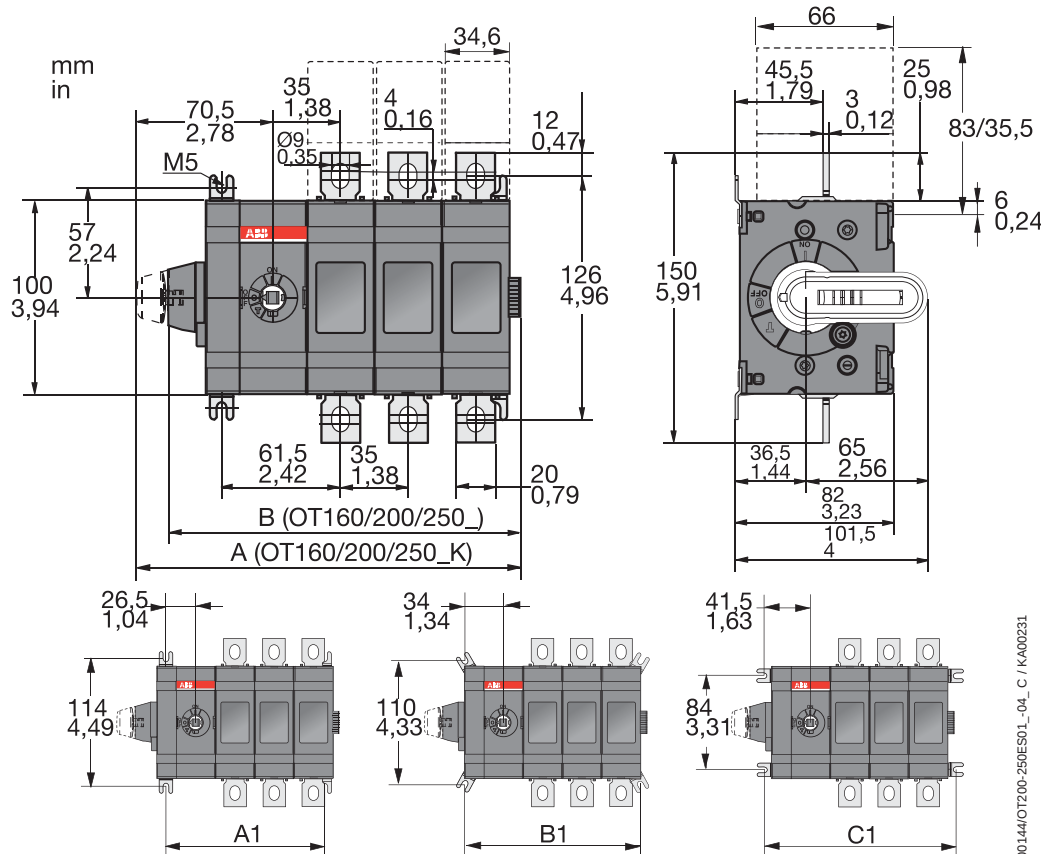


OT160-250_S

1SCC301068M0203

Document no. 34OT200-250_S C

OT160EVS_, OT200ES_, OT250ES_

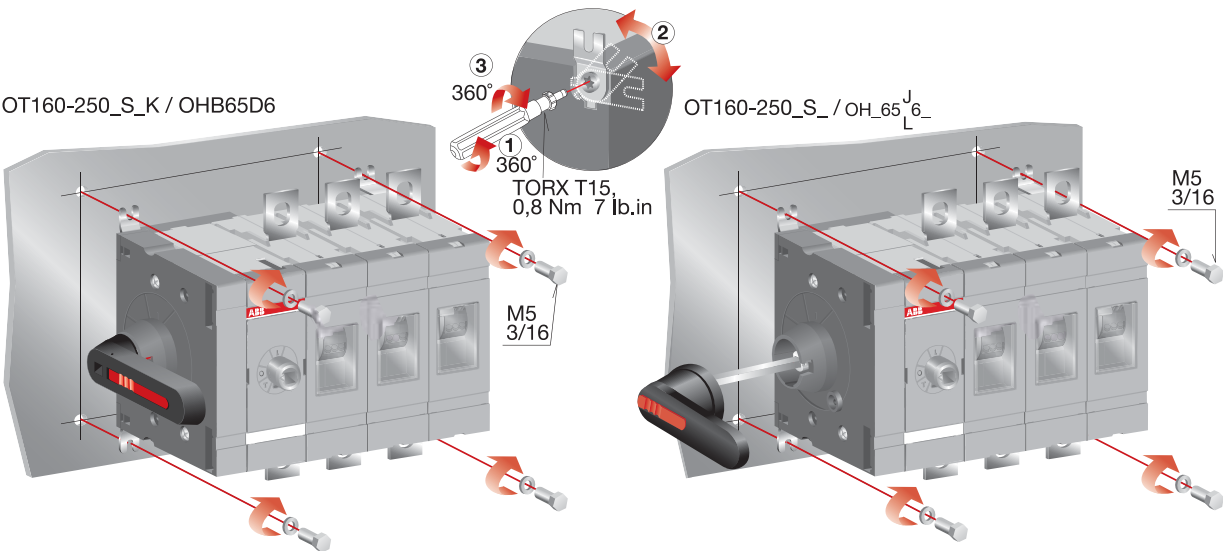


OT160EVS_, OT200ES_, OT250ES_/OT160EVS_K, OT200ES_K, OT250ES_K				
	01	02	03	04
	mm / in	mm / in	mm / in	mm / in
A	128,5 / 5,06	163,5 / 6,44	198,5 / 7,82	233,5 / 9,2
B	111,5 / 4,39	146,5 / 5,77	181,5 / 7,15	216,5 / 8,53
A1	71,5 / 2,81	106,5 / 4,2	141,5 / 5,57	176,5 / 6,95
B1	86,5 / 3,41	121,5 / 4,79	156,5 / 6,16	191,5 / 7,54
C1	101,5 / 4	136,5 / 5,38	171,5 / 6,75	206,5 / 8,14


M00144/OT200-250ES01_04_C / KA00231

OT160-250_S

OT200US_

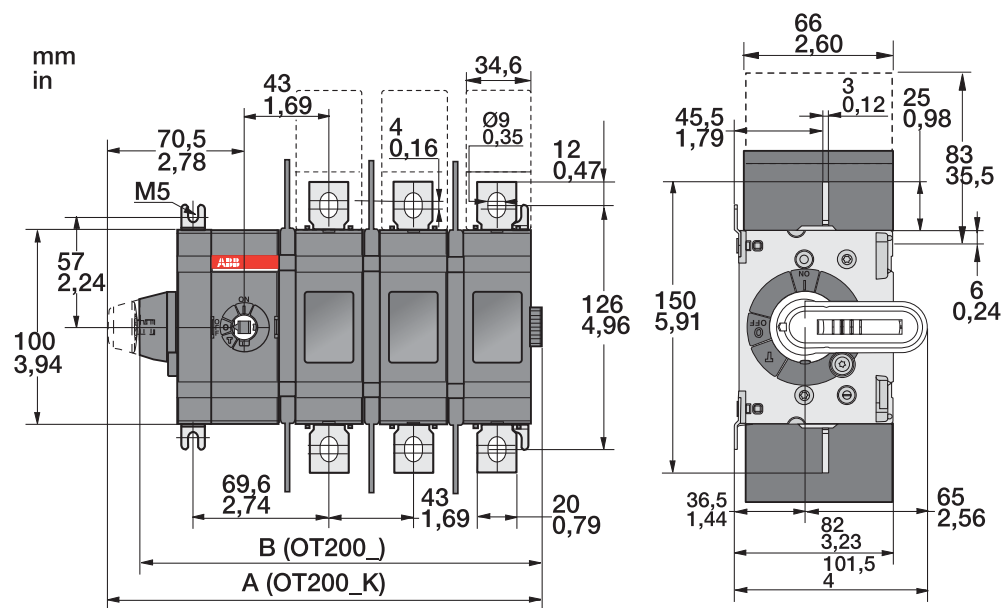

OT200_ , OT200_K				
	US01	US02	US03	US04
	mm / in	mm / in	mm / in	mm / in
A	136,5 / 5,38	179,5 / 7,07	222,5 / 8,77	265,5 / 10,5
B	119,5 / 4,71	162,6 / 6,4	205,5 / 8,1	248,5 / 9,79
A1	79,5 / 3,13	122,5 / 4,83	165,5 / 6,52	208,5 / 8,21
B1	94,5 / 3,72	137,5 / 5,42	180,5 / 7,11	223,5 / 8,81
C1	109,5 / 4,31	152,5 / 6,01	195,5 / 7,7	238,5 / 9,4

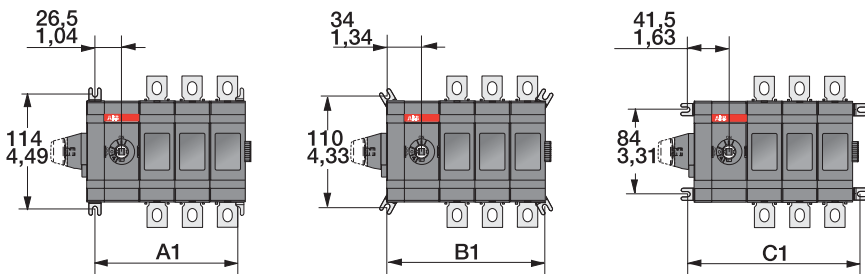

M00213;OT200-250US01_-04_ B / KA00365

Clearances per UL98


Height mm/in	406/16
Width mm/in	255/10
Depth mm/in	152/6

Minimum enclosure size or equivalent volume

A	0
B	13 mm/0,5 in
D	13 mm/0,5 in


Cable size	
MCM	C
250	200 mm/8 in
300	250 mm/10 in

Cable size	
AWG	C
4-3	100 mm/4 in
2	100 mm/4 in
1	100 mm/4 in
1/0	125 mm/5 in
2/0	150 mm/6 in
3/0 - 4/0	175 mm/7 in

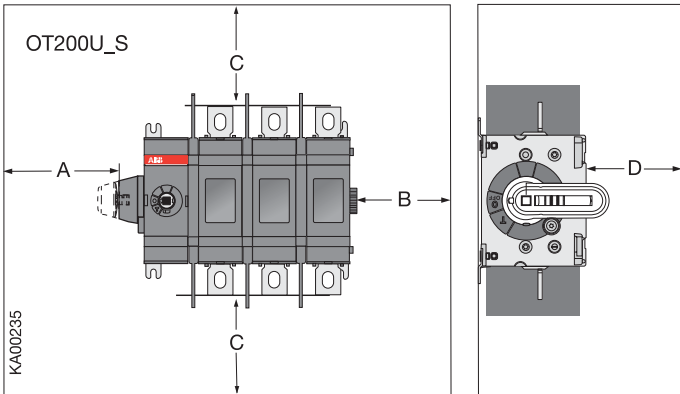


OT160-250_S


OTZ250E

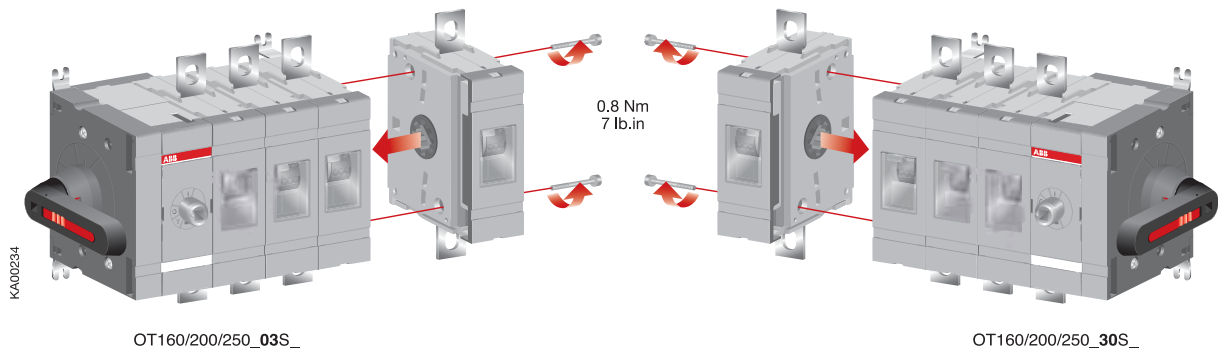

OT160/200/250_S/OH_65^J_{L6}_

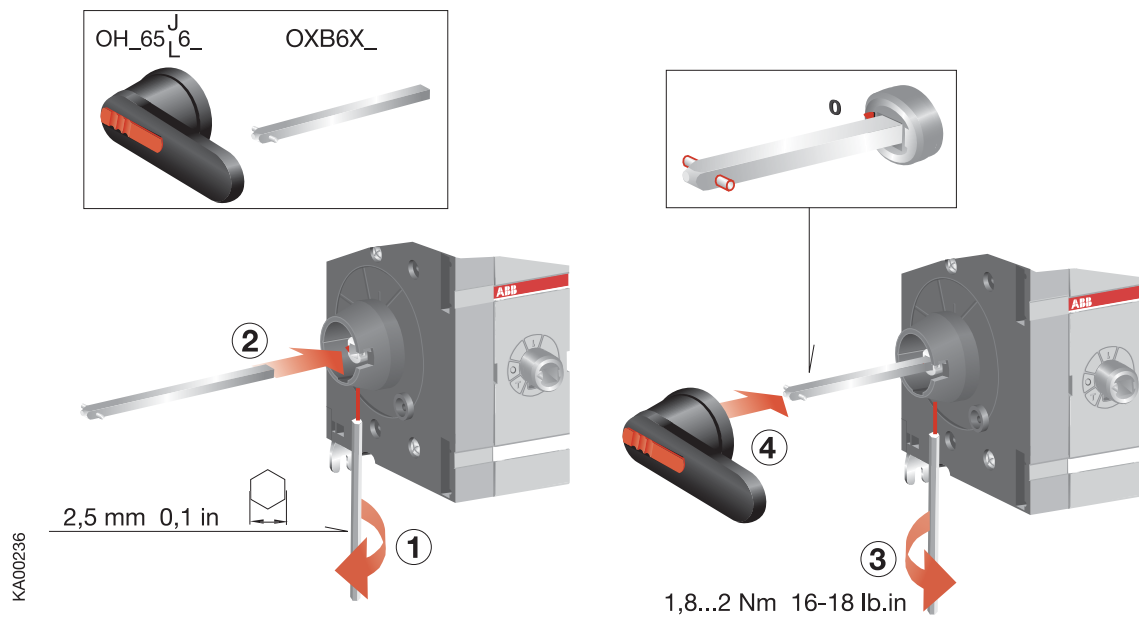


Handles

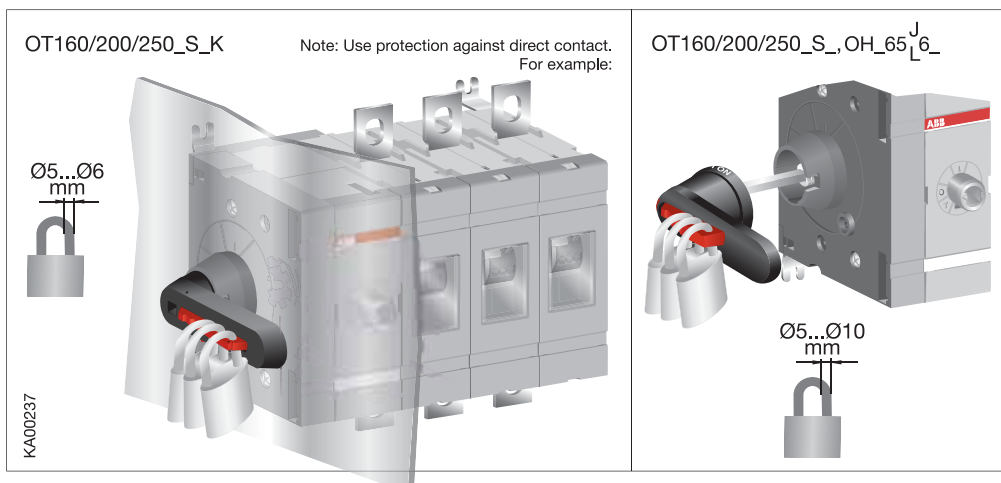

OT160-250_S

Label

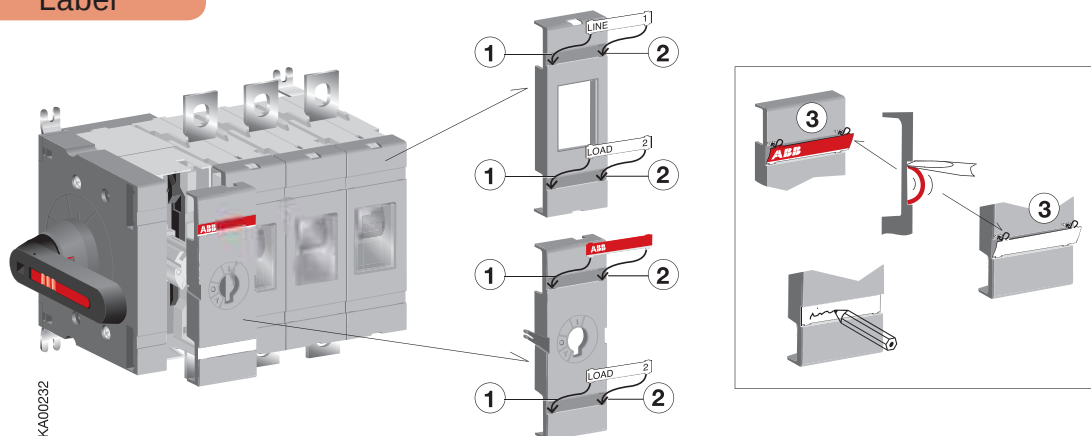


OZX_

OT160EV, OT200,
OT250



OZXB1L
OZXB2
OZXB2L
OZXB8

OT200U


OZXA-200_
OZXA-206_

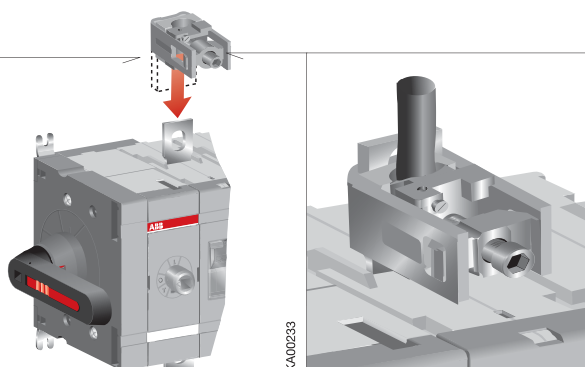




OA_

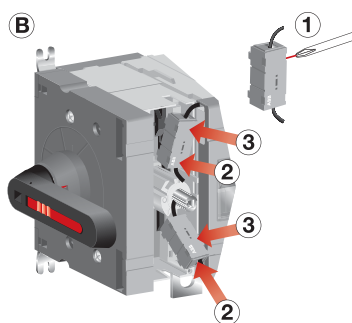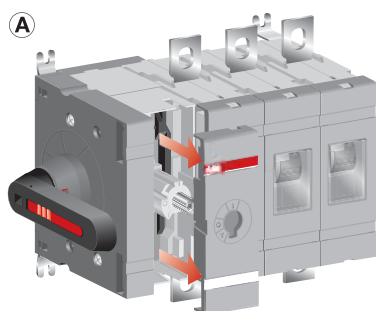

NO: OA1G10
NC: OA3G01

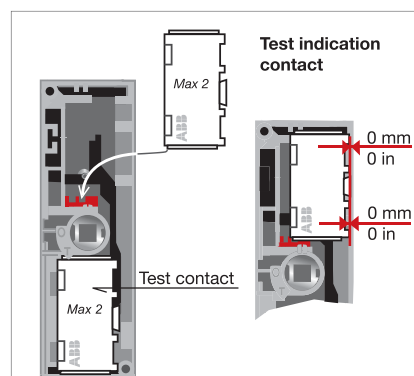


OR

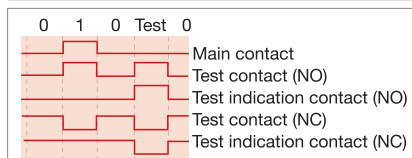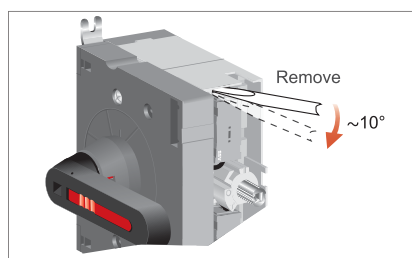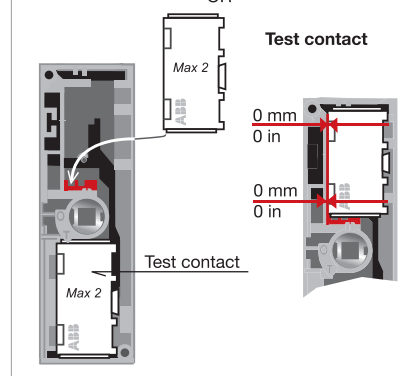

KA00238

OT160-250_S

OTS_

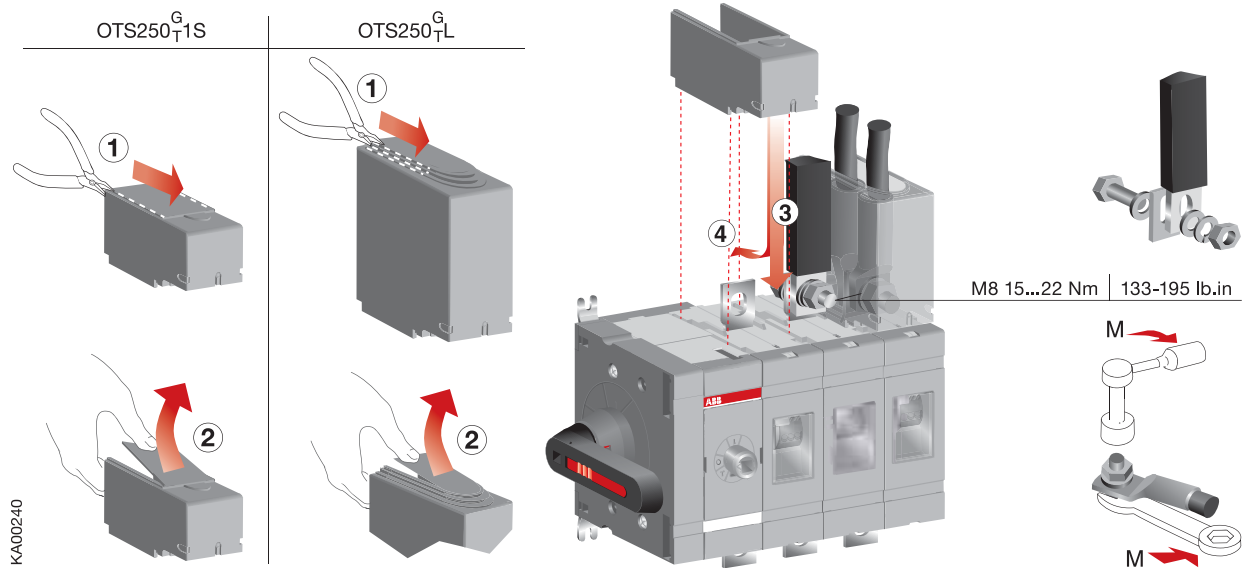

OEA28_

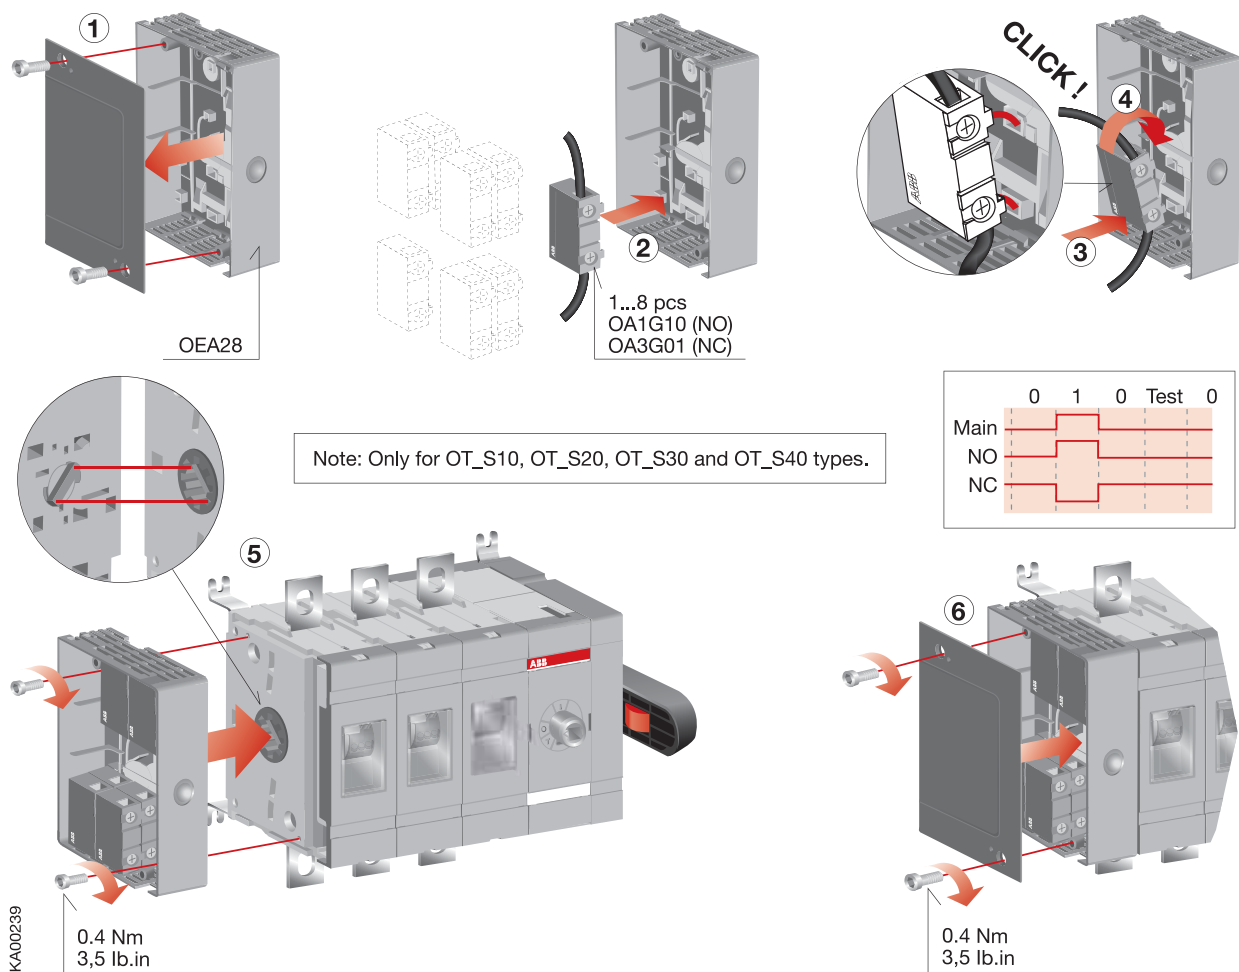


ABB Oy
Low Voltage Switches
P.O. Box 622 Telephone +358 10 2211
FIN-65101 Vaasa, Finland Telefax +358 10 224 5708