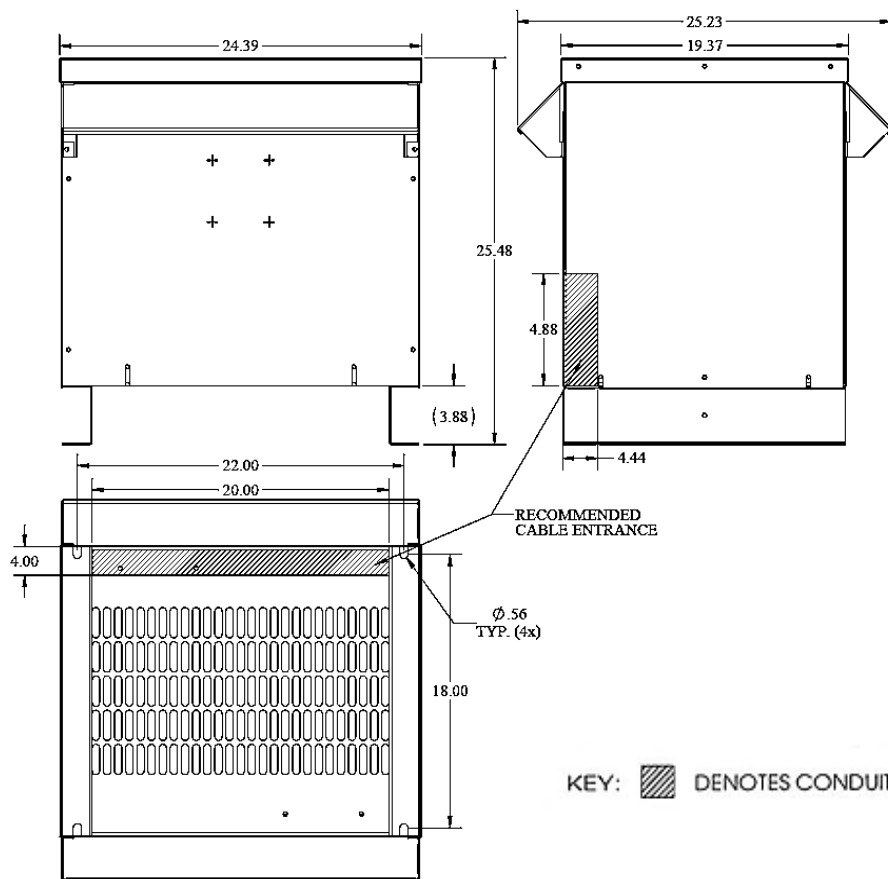


Primary Volts	Connect Primary Lines To	Inter-Connect	Connect Secondary Lines To
252	H1, H2, H3	1	
246	H1, H2, H3	2	
240	H1, H2, H3	3	
234	H1, H2, H3	4	
228	H1, H2, H3	5	
Secondary Volts			
208			X1, X2, X3
120 1 phase			X1 to X0 X2 to X0 X3 to X0

NOTE:
PRIMARY AND SECONDARY BUS AREA
IN FRONT OF CASE.

REVISIONS

NOTES:

1. Dry Type
2. Class AA
3. Ventilated
4. Paint - #61 ANSI



KVA	CATALOG NUMBER	VOLTAGE		LUG KIT	WEIGHT	PHASE	FREQUENCY
		HIGH	LOW				
45	T3045K0044B	240Δ	208Y/120		438 Lbs	3φ	60Hz
Temp Rise:		150°C	TYPICAL PERFORMANCE DATA			Typical Efficiency @ 35%	98.49%
Insulation:		220°C				Typical No Load Losses:	139.03
NEMA ST20 Standard:	45 dB	Regulation @ 100% PF	2.20%	Standards:	UL/CSA	100% Load (Typ) Load Losses (I²R)	1124.13
Electrostatic Shield:	Option	Approvals:	DOE-2016	Windings:	AL	Total Load Losses: (W)	1263.16
				Impedance:	4.29%		
				Enclosure:	3R		

Meets US DOE 2016 Efficiency

DATE: 11-Jan-16

TYPE NO:

CASE 1