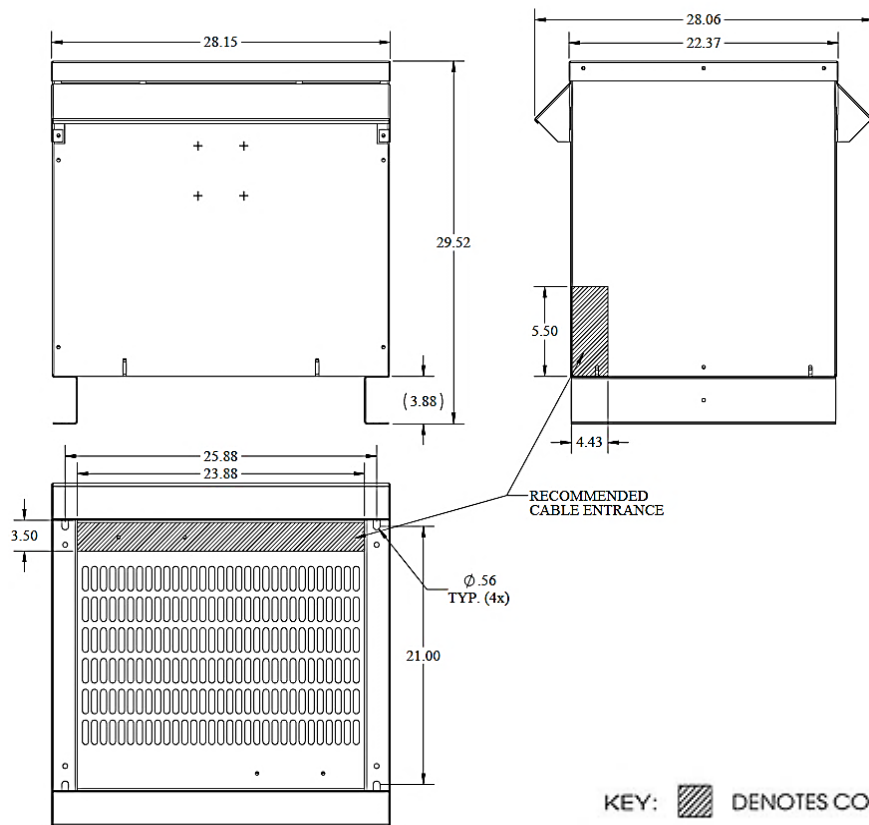


Primary Volts	Connect Primary Lines To	Inter-Connect	Connect Secondary Lines To
504	H1, H2, H3	1	
492	H1, H2, H3	2	
480	H1, H2, H3	3	
468	H1, H2, H3	4	
456	H1, H2, H3	5	
444	H1, H2, H3	6	
432	H1, H2, H3	7	

Secondary Volts			
480			X1, X2, X3
277 1 phase			X1 to X0 X2 to X0 X3 to X0

NOTE: PRIMARY AND SECONDARY BUS AREA IN FRONT OF CASE.

REVISIONS

NOTES:

1. Dry Type
2. Class AA
3. Ventilated
4. Paint - #61 ANSI



KVA	CATALOG NUMBER	VOLTAGE		LUG KIT	WEIGHT	PHASE	FREQUENCY					
	T3075K0053B	HIGH	LOW									
75			480Δ	480Y/277		600 Lbs	3ϕ	60Hz				
Temp Rise:		150°C	TYPICAL PERFORMANCE DATA				Typical Efficiency @ 35%	98.66%				
Insulation:		220°C	Regulation @ 100% PF	2.90%		Windings:	AL	Typical No Load Losses:	153.54			
NEMA ST20 Standard:		50 dB				Standards:	UL/CSA		Impedance:	5.44%	100% Load (Typ) Load Losses (I²R)	2229.79
Electrostatic Shield:		Option				Approvals:	DOE-2016		Enclosure:	3R	Total Load Lossess:	2383.33

Meets US DOE 2016 Efficiency

DATE: 12-Jan-16

TYPE NO:

CASE 2