



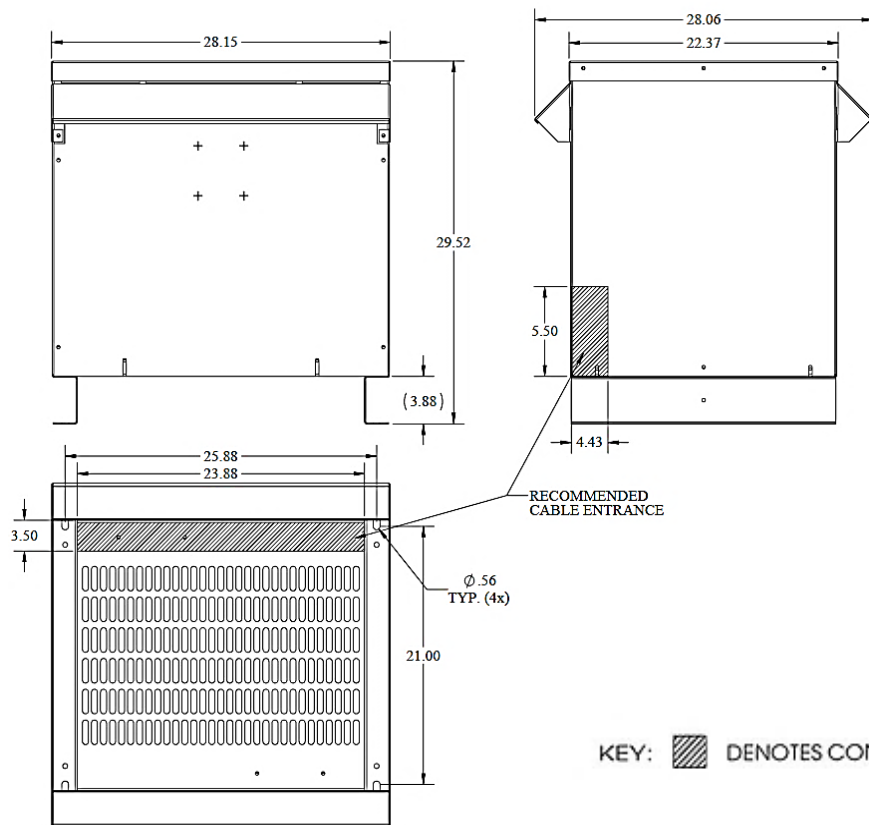

KEY: DENOTES CONDUIT AREAS

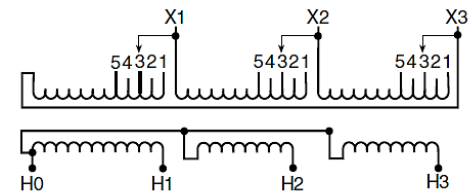

Primary Volts	Connect Primary Lines To	Inter-Connect	Connect Secondary Lines To
252	X1, X2, X3	1	
246	X1, X2, X3	2	
240	X1, X2, X3	3	
234	X1, X2, X3	4	
228	X1, X2, X3	5	
Secondary Volts			
480			H1, H2, H3
277			H1 to H0 H2 to H0 H3 to H0
1 phase			

NOTE: PRIMARY AND SECONDARY BUS AREA IN FRONT OF CASE.

REVISIONS

NOTES:

1. Dry Type
2. Class AA
3. Ventilated
4. Paint - #61 ANSI



KVA	CATALOG NUMBER	VOLTAGE		LUG KIT	WEIGHT	PHASE	FREQUENCY
		LOW	HIGH				
75	T3075K0074B	240Δ	480Y/277		600 Lbs	3φ	60Hz
Temp Rise:		150°C	TYPICAL PERFORMANCE DATA			Typical Efficiency @ 35%	98.64%
Insulation:		220°C				Typical No Load Losses:	161.10
NEMA ST20 Standard:		50 dB	Regulation @ 100% PF	2.80%	Windings:	AL	100% Load (Typ) Load Losses (I ² R)
Electrostatic Shield:		Option	Standards:	UL/CSA	Impedance:	5.34%	2189.92
			Approvals:	DOE-2016	Enclosure:	3R	Total Load Losses:
							2351.02

Meets US DOE 2016 Efficiency

DATE: 11-Jan-16

TYPE NO:

CASE 2