
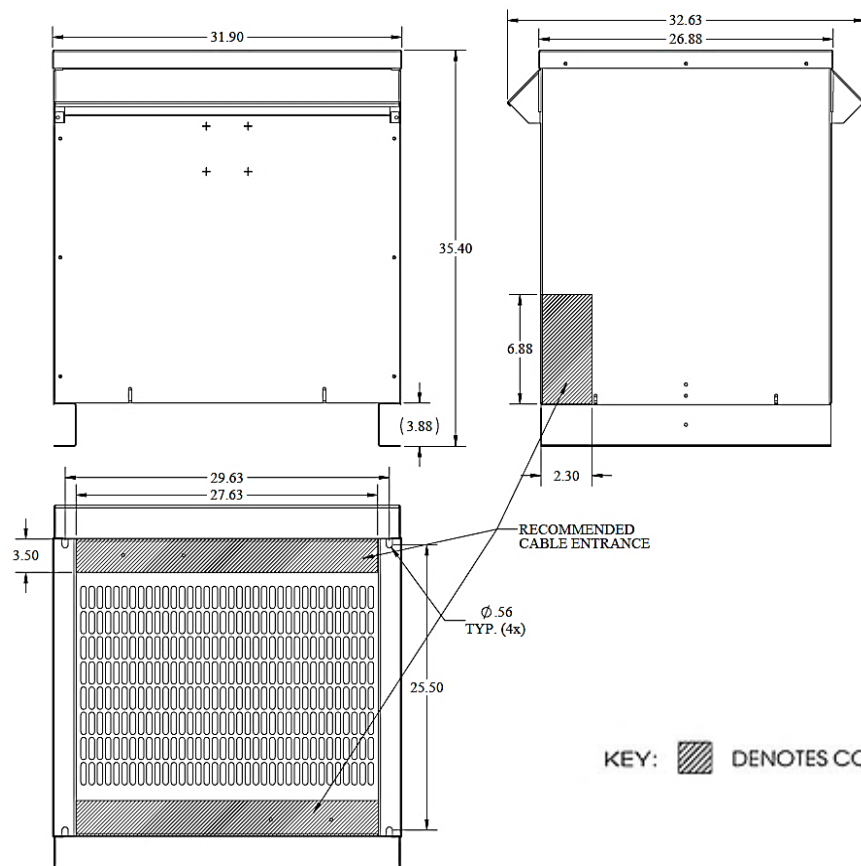


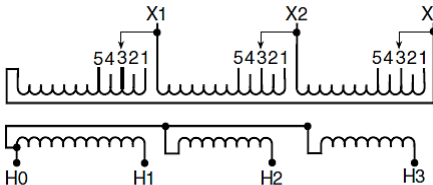

KEY: DENOTES CONDUIT AREAS

NOTE: PRIMARY AND SECONDARY BUS AREA IN FRONT OF CASE.

			
Primary Volts	Connect Primary Lines To	Inter-Connect	Connect Secondary Lines To
252	X1, X2, X3	1	
246	X1, X2, X3	2	
240	X1, X2, X3	3	
234	X1, X2, X3	4	
228	X1, X2, X3	5	
Secondary Volts			
480			H1, H2, H3
277			H1 to H0
1 phase			H2 to H0
			H3 to H0

REVISIONS

NOTES:

1. Dry Type
2. Class AA
3. Ventilated
4. Paint - #61 ANSI



KVA	CATALOG NUMBER	VOLTAGE		LUG KIT	WEIGHT	PHASE	FREQUENCY
		LOW	HIGH				
112.5	T3112K0074B	240Δ	480Y/277		859 Lbs	3φ	60Hz
Temp Rise:	150°C	TYPICAL PERFORMANCE DATA				Typical Efficiency @ 35%	98.81%
Insulation:	220°C					Typical No Load Losses:	273.39
NEMA ST20 Standard:	50 dB	Regulation @ 100% PF	1.70%	Windings:	AL	100% Load (Typ) Load Losses (I²R)	2185.82
Electrostatic Shield:	Option	Standards:	UL/CSA	Impedance:	4.49%	Total Load Losses:	2459.21
		Approvals:	DOE-2016	Enclosure:	3R		

Meets US DOE 2016 Efficiency

DATE: 11-Jan-16

TYPE NO:

CASE 3