



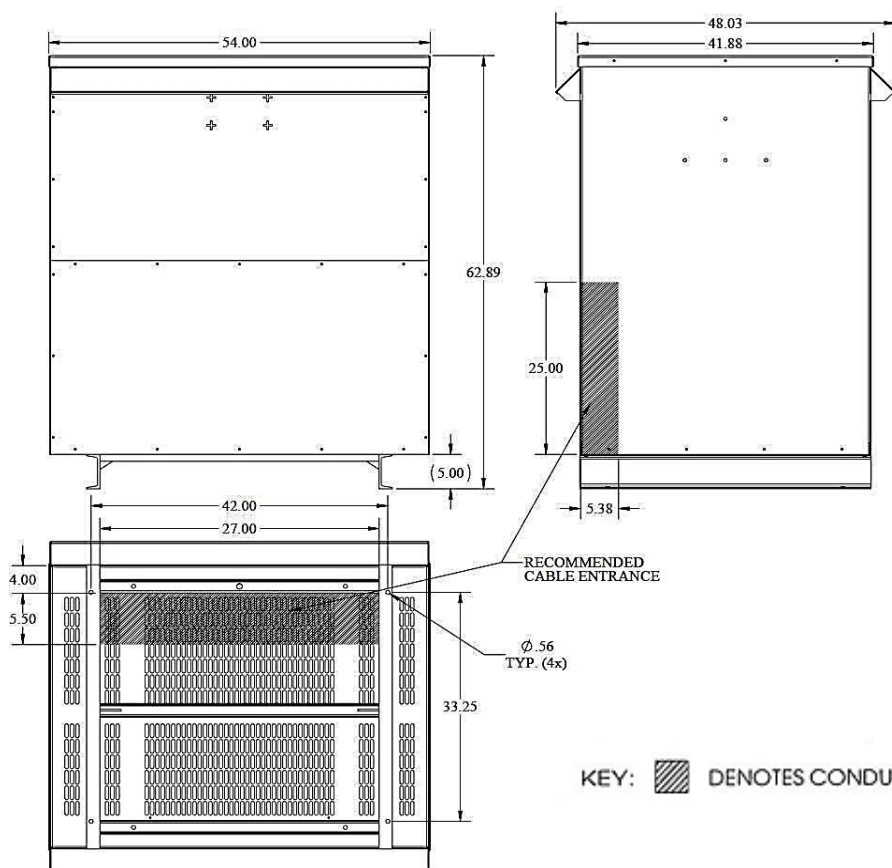

KEY: DENOTES CONDUIT AREAS

NOTE: PRIMARY AND SECONDARY BUS AREA IN FRONT OF CASE.

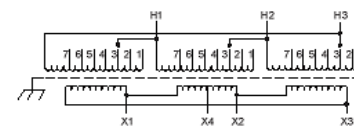

Primary Volts	Connect Primary Lines To	Inter-Connect	Connect Secondary Lines To
504	H1, H2, H3	1	
492	H1, H2, H3	2	
480	H1, H2, H3	3	
468	H1, H2, H3	4	
456	H1, H2, H3	5	
444	H1, H2, H3	6	
432	H1, H2, H3	7	
Secondary Volts			
240			X1, X2, X3
120			X1, X4 or X2, X4

REVISIONS

NOTES:

1. Dry Type
2. Class AA
3. Ventilated
4. Paint - #61 ANSI



KVA	CATALOG NUMBER	VOLTAGE		LUG KIT	WEIGHT	PHASE	FREQUENCY
		HIGH	LOW				
750	T3750K0023B	480 Δ	240 Δ /120		4260 Lbs	3 ϕ	60Hz
Temp Rise:		150°C	TYPICAL PERFORMANCE DATA			Typical Efficiency @ 35%	99.26%
Insulation:		220°C				Typical No Load Losses:	1044.92
NEMA ST20 Standard:		65 Db	Regulation @ 100% PF	1.20%	Windings:	AL	100% Load (Typ) Load Losses (I ² R)
Electrostatic Shield:		Option	Standards:	UL/CSA	Impedance:	4.57%	9817.01
			Approvals:	DOE-2016	Enclosure:	3R	Total Load Losses:
							10861.93

Meets US DOE 2016 Efficiency

DATE: 10-Dec-15

TYPE NO:

CASE 6