



Revisions




Acme Electric Corporation

Power Distribution Products Division

Type No.

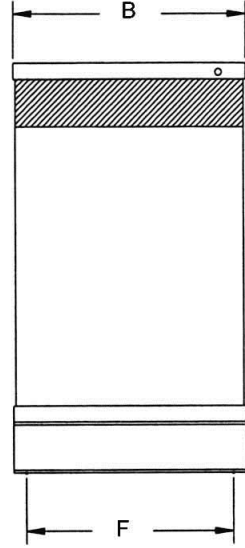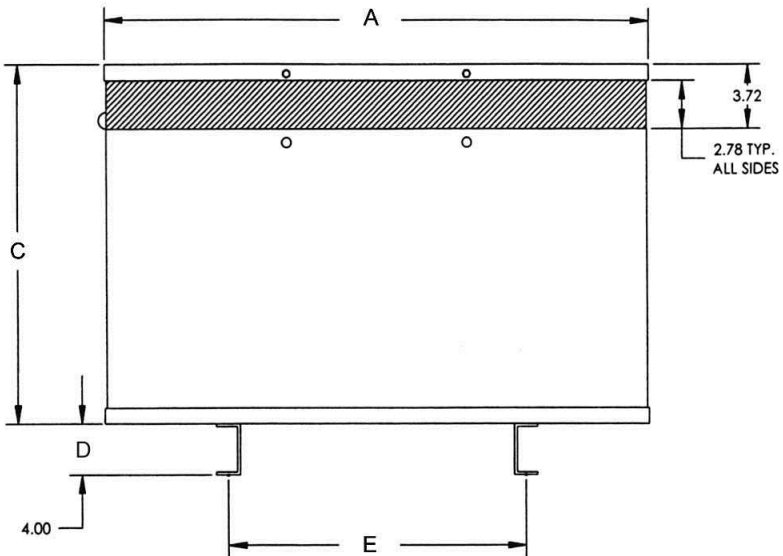

NOTES:
1. DENOTES CONDUIT AREA.

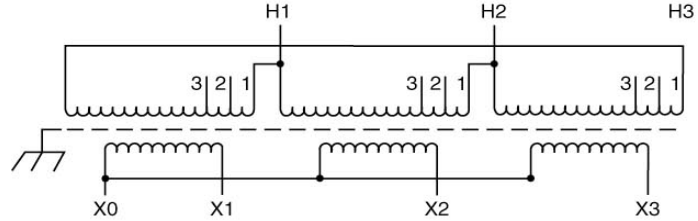

Primary Volts	Connect Primary Lines To	Inter-Connect	Connect Secondary Lines To
600	H1, H2, H3	1	
570	H1, H2, H3	2	
540	H1, H2, H3	3	
Secondary Volts			
480			X1, X2, X3
277 1 phase			X1 to X0 X2 to X0 X3 to X0

KVA	CATALOG NUMBER	VOLTAGE		WIRING DIAGRAM	WEIGHT	PHASE	FREQ.
15	T-3-79519-1S		HIGH LOW		250 Lbs	3φ	60 Hz
	A	B	C	D	E	F	
(In.)	20.30	9.03	14.86	4.00	13.25	7.00	