
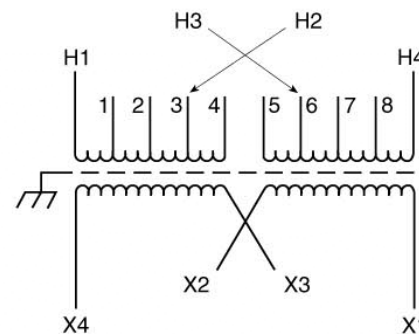


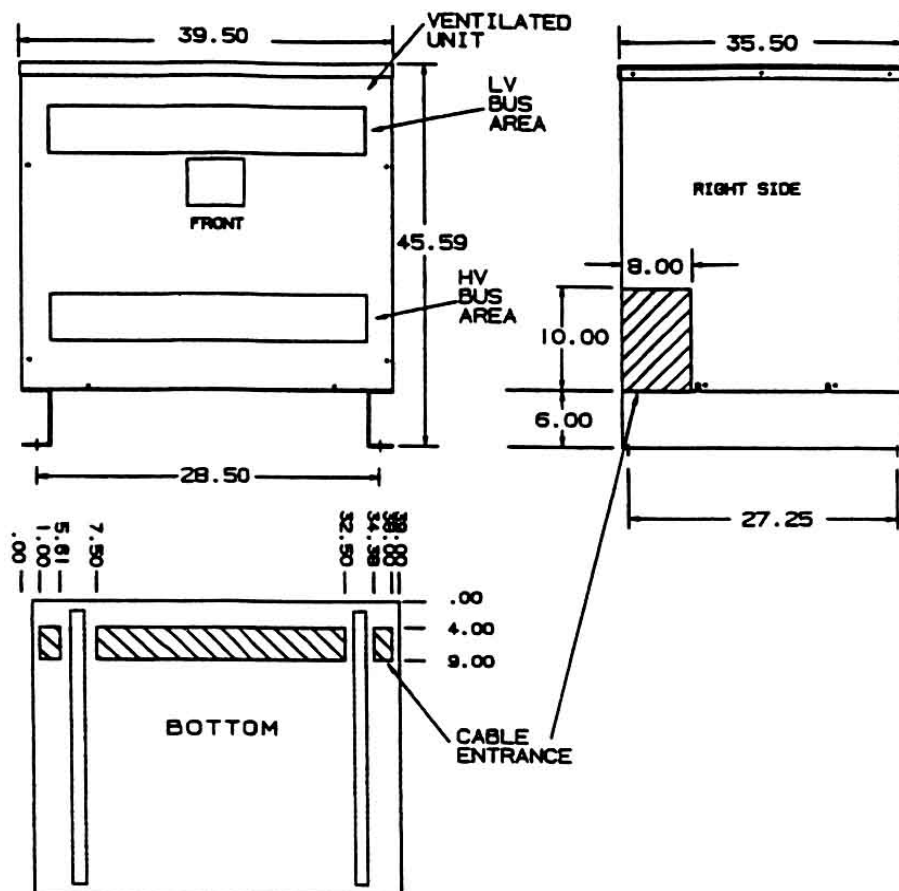

Primary Volts	Connect Primary Lines To	Inter-Connect	Connect Secondary Lines To
216	H1-H4	H1, H3, 8 & H2, H4, 1	
228	H1-H4	H1, H3, 7 & H2, H4, 2	
240	H1-H4	H1, H3, 6 & H2, H4, 3	
252	H1-H4	H1, H3, 5 & H2, H4, 4	
432	H1-H4	H2, 1 & H3, 8	
444	H1-H4	H2, 2 & H3, 8	
456	H1-H4	H2, 2 & H3, 7	
468	H1-H4	H2, 3 & H3, 7	
480	H1-H4	H2, 3 & H3, 6	
492	H1-H4	H2, 4 & H3, 6	
504	H1-H4	H2, 4 & H3, 5	
Secondary Volts			
240		X2 to X3	X1-X4
120/240		X2 to X3	X1-X2-X4
120		X1 to X3 X2 to X4	X1-X4

KVA	CATALOG NUMBER	VOLTAGE		WEATHER SHIELD	WEIGHT	PHASE	FREQ.
		HIGH	LOW				
250	TP530243S	480 X 240	120/240	WS-A-5	1445 Lbs	1 ϕ	60 Hz

Winding Rise:	150°C
Insulation:	220°C
Sound Level:	55db

TYPICAL PERFORMANCE DATA

Regulation @ 100% PF:	1.79%
Standards:	DOE 2016

Windings:	AL
Impedance:	4.108%

Typical Efficiency:	99.03%
No Load Losses:	466 W
Full Load Losses:	4,778 W

Control
7

A

Revisions

ACME ELECTRIC

CD SHEET

Type No.

DESIGN:

DRAWN: ADR

DATE:

6-13-08