
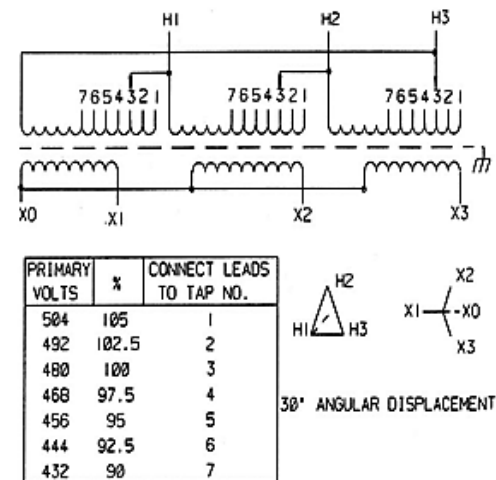


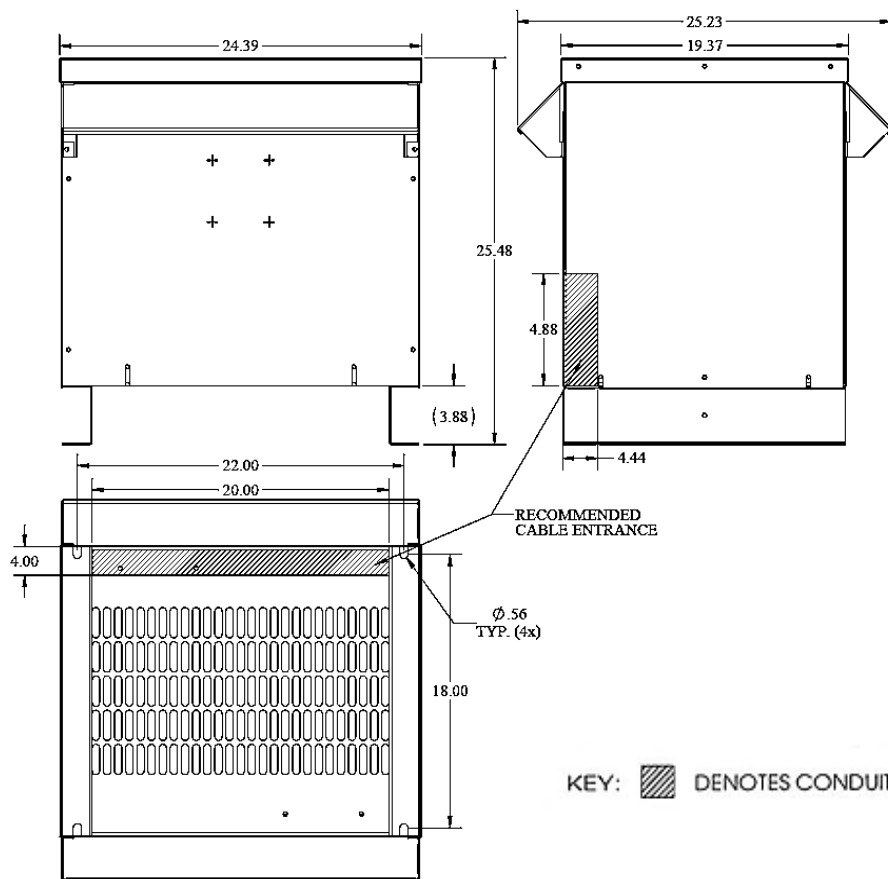

PRIMARY LINES TO H1-H2-H3
SECONDARY LINES TO X0-X1-X2-X3

NOTE:
PRIMARY AND SECONDARY BUS AREA
IN FRONT OF CASE.

REVISIONS

NOTES:

1. Dry Type
2. Class AA
3. Ventilated
4. Paint - #61 ANSI



KVA	CATALOG NUMBER	VOLTAGE		LUG KIT	WEIGHT	PHASE	FREQUENCY
		HIGH	LOW				
15	T3015K0013B	480Δ	208Y/120		218 Lbs	3φ	60Hz
Temp Rise:		150°C	TYPICAL PERFORMANCE DATA			Typical Efficiency @ 35%	97.90%
Insulation:		220°C				Typical No Load Losses:	76 W
NEMA ST20 Standard:		45 dB	Regulation @ 100% PF	2.64%	Windings:	AL	100% Load (Typ) Load Losses (I²R)
Electrostatic Shield:		Option	Standards:	UL/CSA	Impedance:	3.00%	394 W
			Approvals:	DOE-2016	Enclosure:	3R	Total Load Losses:
							470 W

Meets US DOE 2016 Efficiency

DATE: 14-Aug-13

TYPE NO:

CASE 1