



Xitanium LED Driver Outdoor Dimmable (US)

XITANIUM 75W 0.70A 1-10V INT-Y

Xitanium Outdoor LED Drivers are available in wattages from 40W to 150W for hard-wire integration into outdoor luminaires for the most rugged applications. These drivers operate to specification under wide temperature and electrical ranges to ensure reliability. 1-10V dimming enables luminaires to be easily connected to a wide variety of sensors and control systems to facilitate dimming, thus maximizing energy savings.

Product data


Operating and Electrical		Secondary Fusing	
Input Frequency	50 to 60 Hz	Input Wire Gauge	18
Total Harmonic Distortion IEC (Max)	20 %	Control Wire Gauge	18
Power Factor 100% Load (Min)	0.95	Output Wire Gauge	18
Output Current (Nom)	700 mA	Temperature	
Output Current Tolerance (Max)	5 %	T-Case Maximum (Max)	80 °C
Output Current Tolerance (Min)	-5 %	Controls and Dimming	
Input Voltage (AC)	120-277 V	Control Interface	0-10V
Input Current (Max)	700 mA	Dimming Range	100-10 %
Input Power (Nom)	84 W	Approval and Application	
Output Power (Nom)	75 W	Short Circuit Protection	Protected
Wiring		EMI Standard	FCC 47 Part 15; Class A
Control Wire Length	270.0 mm	Environmental Standard	UL Damp & Dry
Output Wire Length	270.0 mm		
Primary Fusing	Fused		

Xitanium LED Driver Outdoor Dimmable (US)

Approval Marks	RoHS compliance CSA certificate
Output Insulation	Yes
Product Data	
Order product name	XITANIUM 75W 0.70A 1-10V INT-Y
EAN/UPC - Product	781087137543
Order code	929000725013

Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	12
Material Nr. (12NC)	929000725013
Net Weight (Piece)	803.000 g

Dimensional drawing

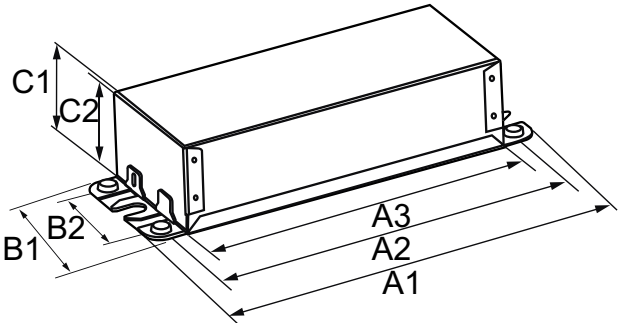

Xitanium 75W 0.70A 1-10V INT-Y SXT

Product	B2	C1	A1	A2	B1
XITANIUM 75W 0.70A 1-10V INT-Y	42.9 mm	38 mm	168 mm	153 mm	59.1 mm

