

Single Pole Devices and Temporary Power

150A, 600V AC/DC

Male Receptacles

HUBBELL

Ordering Information

| Description | Device Color | UPC Number | Catalog Number |
|---|--------------|--------------|----------------|
| Double Set Screw type, 150A Panel Mount, thermoplastic | Green | 783585458168 | HBL15MRGN |

Listings

UL and cUL Listed
UL Enclosure Types 3R, 4X, 12
National Electric Code (NEC), ANSI/NFPA 70


Specifications

| | |
|--------------------------|---------------------------------|
| Base Compound | Thermoplastic Elastomer (TPE) |
| Contact Material | Brass |
| Retaining Screw Material | Nylon |
| Mounting Hole | 3x Ø .20" |
| Termination | (2) 5/32 Socket Head Set Screws |

Performance

| Electrical | |
|-----------------|--------------------|
| Amperage Rating | 150A Maximum |
| Voltage Rating | 600V AC/DC Maximum |

| Mechanical | |
|------------------------|--|
| Product Identification | Ratings are a permanent part of device |
| Terminal Accommodation | #8 to #2 AWG |

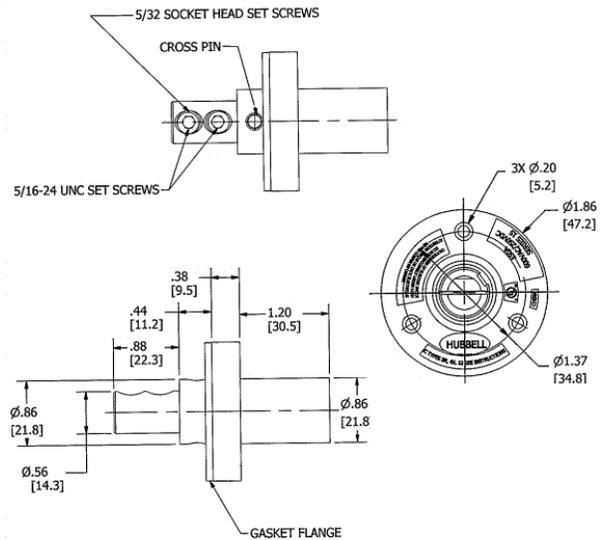

Online Resources

Customer Sales Drawings
eCatalog
Installation Instructions

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.

