


Eaton C22G32

Catalog Number: C22G32

Eaton Bussmann series low voltage 22 x 58 mm cylindrical/ferrule fuse, rated at 690 Volts AC, 32 Amps, 80 kA Breaking capacity, class gG/gL, without indicator, compatible with a CH22 Modular fuse holder

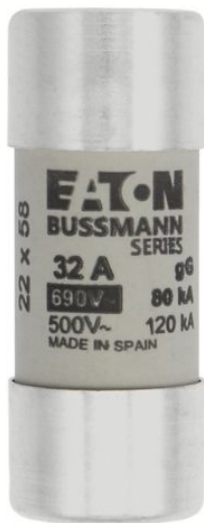

General specifications

Product Name	Catalog Number
Eaton Bussmann series low voltage cylindrical fuse	C22G32
	Model Code
	CYLINDRICAL FUSE 22 x 58 32A GG 690V AC
UPC	EAN
051712754460	5027590495400
Product Length/Depth	Product Height
58 mm	22.2 mm
Product Width	Product Weight
22.2 mm	53.6 g
Warranty	Compliances
1 year limited	CE Marked
	GoST-R
	RoHS Compliant
Certifications	
IEC 60269	

defaultTaxonomyAttributeLabel

Type

fuse

Application

for industrial applications
for general purpose use

Amperage Rating

32 A

Fuse size

22 x 58 mm

Current type

AC

Breaking capacity

80 kA

Frequency rating - max

62 Hz

Frequency rating - min

45 Hz

Rated voltage AC

690 V

Class

Class C gL/gG

Fuse type

C22G

Utilization category

gG (cable protection/equipment protection)

Fuse indicator

Other

Watt losses

3.5 W

Connection

Ferrule end x ferrule end

Construction size

22 mm x 58 mm

Fuse shape

Resources

Catalogs

[eaton-product-overview-for-machinery-catalogue-ca08103003zen-en-us.pdf](#)

[CA134002EN](#)

[Bussmann series complete full line catalog no. 1007](#)

Compliance information

[UKCA C08G, C08M, etc cylindrical fuselinks](#)

[CE C08G, C08M, etc cylindrical fuselinks](#)

Technical data sheets

[720115 Cylindrical fuses](#)

Cylindrical

Voltage type

AC

Suitable for

CH22 Modular fuse holder

Material

Ceramic

Mounting method

22 x 58 mm CH Modular fuse holder

Release characteristic

Other

Quantity

10

Voltage rating

690 V



Eaton Corporation plc
Eaton House
30 Pembroke Road
Dublin 4, Ireland
Eaton.com
© 2024 Eaton. All Rights Reserved.

Eaton is a registered trademark.

All other trademarks are
property of their respective
owners.



Eaton.com/socialmedia