



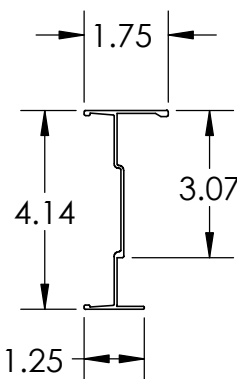

PW Ladder Cable Tray Straight Section

4A12B

4"(H) Side Rail Tray

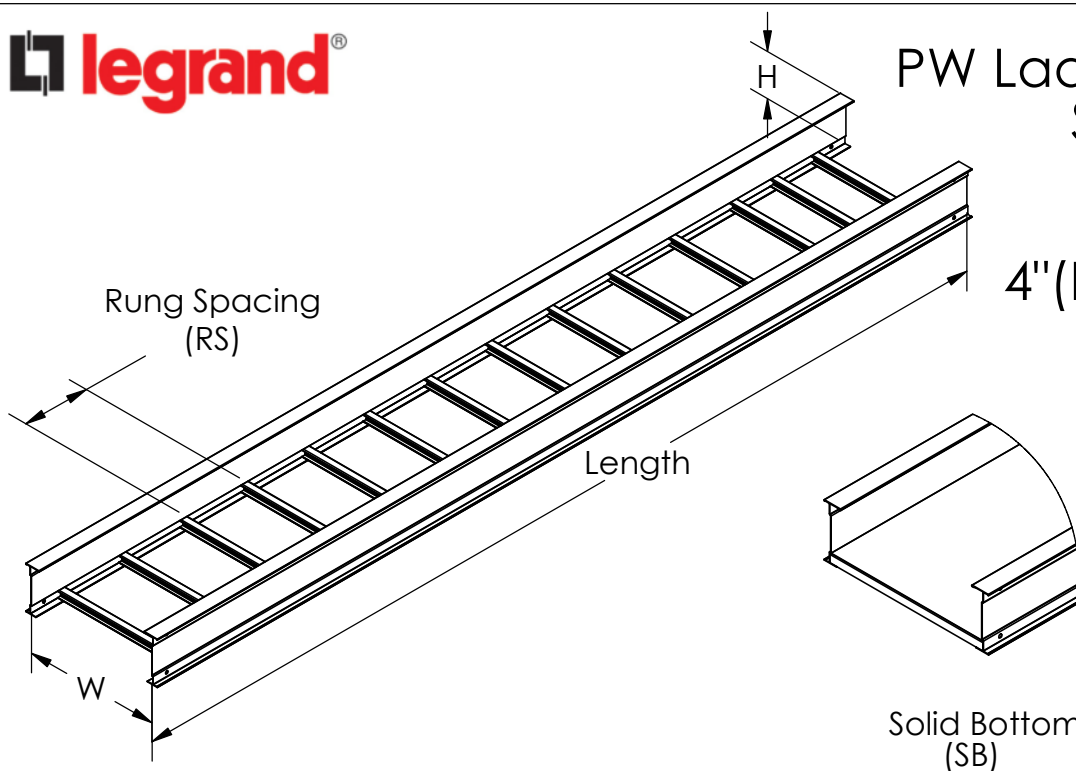

Overall Width: W+1.5"

Tray Width (W)	Tray Weight* (LBS./FT.)
6	1.47
9	1.54
12	1.62
18	1.77
24	2.08
30	2.27
36	2.46

- **Material:** Aluminum Alloy 6063-T6
- **Finish:** Plain
- **Bottom:** Ldr: 1" wide I rung
SB: Flat Sheet over 12" Rung Spacing.
- **Construction:** Welded
- **Tray Design:** Tray construction and markings are per the latest edition of NEMA Standards Publication VE1, CSA C22.2 No. 126.
- **Tray Grounding Capability:** Classified as an equipment grounding conductor per NEC 392.60 with a maximum 1200 ampere rating. UL Cross Sectional area: 1.00 in²
- **Connectors:** Supplied in pairs with hardware. Splice resistance is less than 0.00033 ohms.
- **Mechanical Properties:**
One rail: Ix-x = 1.343 in⁴, Sx-x = 0.626 in³

* Based on 9" rung spacing

SUPPORT SPAN (FT.)

6	8	10	12	14	16	18	20	22	24	26	28	30
SAFE LOAD DATA (LBS./FT.) / DEFLECTION (IN.) / SAFETY FACTOR 1.5												
348	0.43	196	0.76	125	1.19	87	1.71					

ITRAY STRAIGHT SECTION CATALOG NUMBERING EXAMPLE:

BOTTOM TYPE	09 - 4	A	12 B	- S	144	- 06	WIDTH
VENTED							06 - 6"
06 - 6" Rung Spacing							09 - 9"
09 - 9" Rung Spacing							12 - 12"
12 - 12" Rung Spacing							18 - 18"
NON-VENTED							24 - 24"
SB - Solid Bottom							30 - 30"
							36 - 36"
	RAIL HEIGHT 4 - 4"		NEMA CLASS A		LENGTH* S120 - 120" S144 - 144"		



Legrand
8319 State Route 4
Mascoutah, IL 62258 USA
800-658-4641
618-566-3230
Fax 618-566-3250
www.legrand.us/cablofil