


Duplex receptacles

Project Name:	Prepared By:
Project Number:	Date:
Catalog Number:	Type:

Description

2-pole, 3-wire grounding
 15A, 125V/AC
 20A, 125V/AC



270



4270



1107



1107-9

Design features

- Durable impact-resistant thermoplastic face and back body is virtually unbreakable
- Terminal screws are backed out and ready to wire
- Extra-long and extra-wide mounting straps
- Side-wire terminals accept up to #10 solid or stranded wire
- Copper or Copper Clad Aluminum #10-14 AWG wire is UL approved: TR270 (all models) & TR1107 (all models). Side wire Only.

Table 1. Duplex receptacles

Catalog no.	Description	Rating		NEMA	Color suffix
		A	V/AC		
□ 270__	Duplex receptacle	15	125	5-15R	A, B, BK, LA, V, W
□ 270-9__	Duplex receptacle, auto grounding	15	125	5-15R	A, B, LA, V, W
□ 4270__	Duplex receptacle	15	125	5-15R	A, B, BK, LA, V, W
□ 1107__	Decorator duplex receptacle	15	125	5-15R	A, B, BK, GY, LA, V, W
□ 1107-9__	Decorator duplex receptacle, auto grounding	15	125	5-15R	A, BK, LA, V, W

Compliances, specifications and availability are subject to change without notice.



Powering Business Worldwide

Project Name:	Prepared By:
Project Number:	Date:
Catalog Number:	Type:

Applications

For installations where tamper resistant receptacles are NOT required by 2017 NEC Article 406.12.

Table 2. Specifications

Catalog no.	270, 270-9, 4270, 1107, 1107-9 series
Receptacle type	Residential grade duplex
Wiring type	Push and Side wire
Testing & code compliance	<ul style="list-style-type: none"> • cULus Listed to UL498, file no. E15058 • UL certified to CSA C22.2, no. 42 • NOM/ANSI certified.
Environmental specifications	Flammability: Meets UL 94 requirements; TR1107, TR270 V0 rated Temperature rating: -TR1107, TR270 -20°C to 60°C (-4°F to 140°F);
Electrical specifications	Dielectric voltage: Withstands 2000V per UL 498 Current interrupting: Yes, at full-rated current Temperature rise: Max. 30°C (86°F) after 100 cycles of overload @ 150% of rated current (DC)
Mechanical specifications	Terminal accommodation: #14 - 10 AWG Voltage ratings: Permanently marked on device

Table 3. Materials

Catalog no.	270, 270-9, 4270, 1107, 1107-9 series
Receptacle type	Residential grade duplex
Body top & bottom	TR1107, TR270, PVC
Strap	Galvanized steel TR1107, TR270
Contacts	Brass alloy
Terminal screws	Brass/nickel-plated steel

Table 4. Color ordering information

For ordering devices, include Cat. no. followed by the color code: A (Almond), B (Brown), BK (Black), GY (Gray), LA (Light Almond), V (Ivory), W (White)

B	BK	GY	LA	V	W
(Brown)	(Black)	(Gray)	(Light Almond)	(Ivory)	(White)

Project Name:	Prepared By:
Project Number:	Date:
Catalog Number:	Type:

Product Dimensions

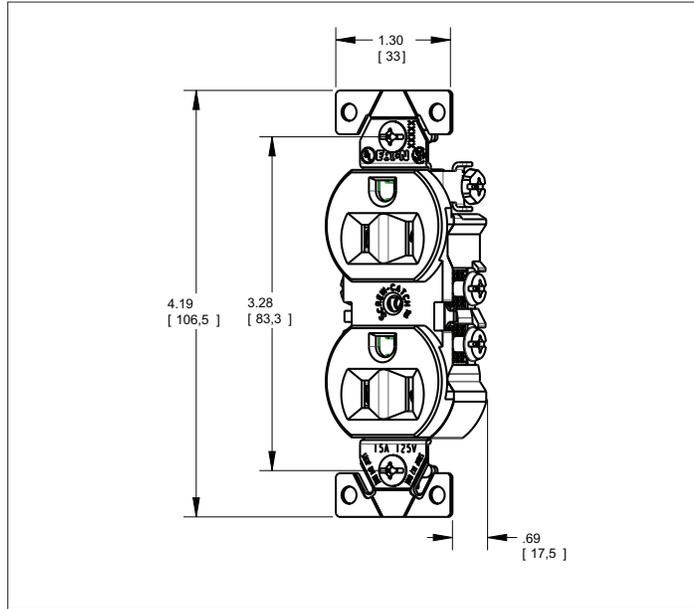


Figure 1. 270, 270-9 Line Art with Dimensions

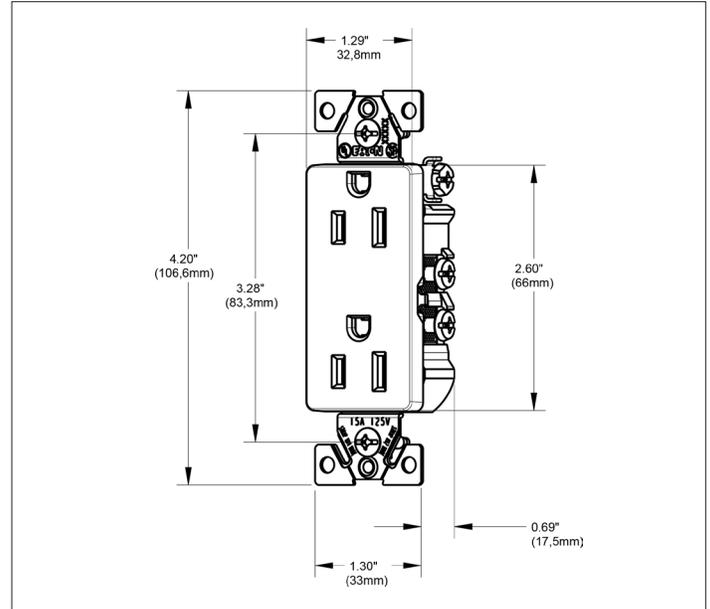


Figure 2. 1107, 1107-9 Line Art with Dimensions

Certifications & compliances

Catalog no.	cULus	NOM 426
270	•	•
270-9	•	•
4270	•	•
1107	•	•
1107-9	•	•

KEY: cULus cULus NOM 426 NOM

Compliances, specifications and availability are subject to change without notice.

Electrical Sector
203 Cooper Circle
Peachtree City, GA 30269
United States
Eaton.com
Eaton.com/wiringdevices

Electrical Sector
Canada Operations
5925 McLaughlin Road
Mississauga, Ontario, L5R 1B8
Canada
EatonCanada.ca
Eaton.com/wiringdevices

Electrical Sector
Mexico Operations
Carr. Tlalnepantla -
Cuautitlán Km 17.8 s/n
Col. Villa Jardín esq.
Cerrada 8 de Mayo
Cuautitlán, México CP 54800
México
Eaton.mx
Eaton.com/wiringdevices