


Issue Date: 10/11/2012

Page: 1 of 2

File: PSS-274J4-5

25kV	200A Loadbreak 4-Way Junction	w/ "U" Straps	274J4-5
------	-------------------------------	---------------	---------

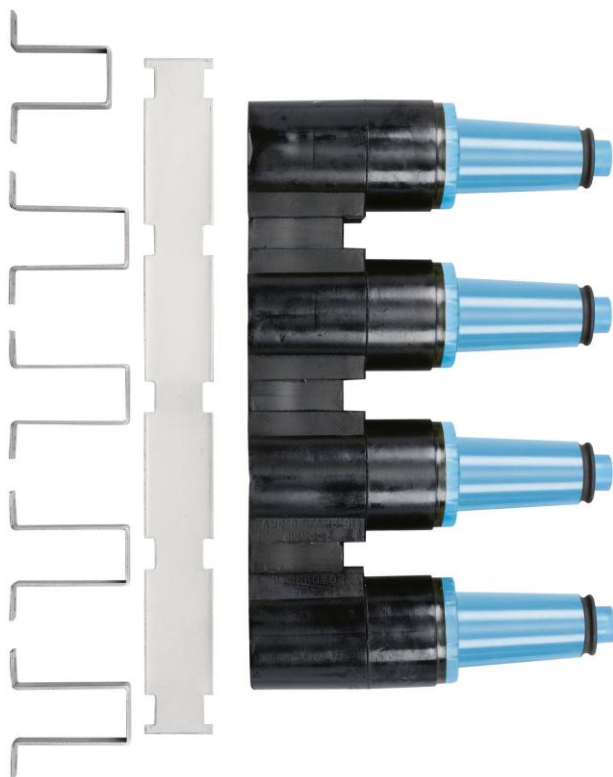

Note: Blue PBT Interface Shield available soon

Features:

- 25kV, 200 Amp Loadbreak 4-Way Junction
- Fully shielded, fully submersible molded rubber housing
- 100% peroxide-cured construction includes insulation and conductive EPDM materials
- Provides mating for other Elastimold® loadbreak type products
- Provides mating for Elastimold® Elbow connectors
- Mounting "U" Straps for installation

274J4-5 Loadbreak 4-Way Junction

Applications:

ELASTIMOLD® junctions are designed for subsurface, vault or padmount applications and can be used for sectionalizing, looping, tapping, and equipment bypass. Junctions are designed to mate with other ELASTIMOLD® products including:

- 25kV Family of Elbow Connectors
- 370GLR Grounding Elbow
- 370TR Test Rod
- 273/274DRG Insulated Cap

ELASTIMOLD® loadbreak junctions, provide a fully shielded, fully submersible, separable, insulated assembly designed for energized operation. They are suitable for use on 25-kV class distribution systems, and rated for 200-ampere loadmake/loadbreak operation. Junctions are supplied with U-strap and a back plate for front surface or back surface mounting.


Ratings:

Meets ANSI/IEEE Standard 386, Latest Revision

For 25kV Voltage Class:

15.2kV Phase-to-Ground – Operating Voltage
 26.3kV Max Phase-to-Phase
 125kV BIL – Impulse Withstand (1.2 x 50 microsecond wave)
 40kV AC – One minute withstand
 78kV DC – 15 minutes withstand
 19kV AC – Corona Extinction @ 3pC sensitivity
 200 Amp – Continuous and Loadbreak
 10kA Sym – 10 Cycles Momentary & Fault Close

25kV	200A Loadbreak 4-Way Junction	w/ "U" Straps	274J4-5
------	-------------------------------	---------------	---------

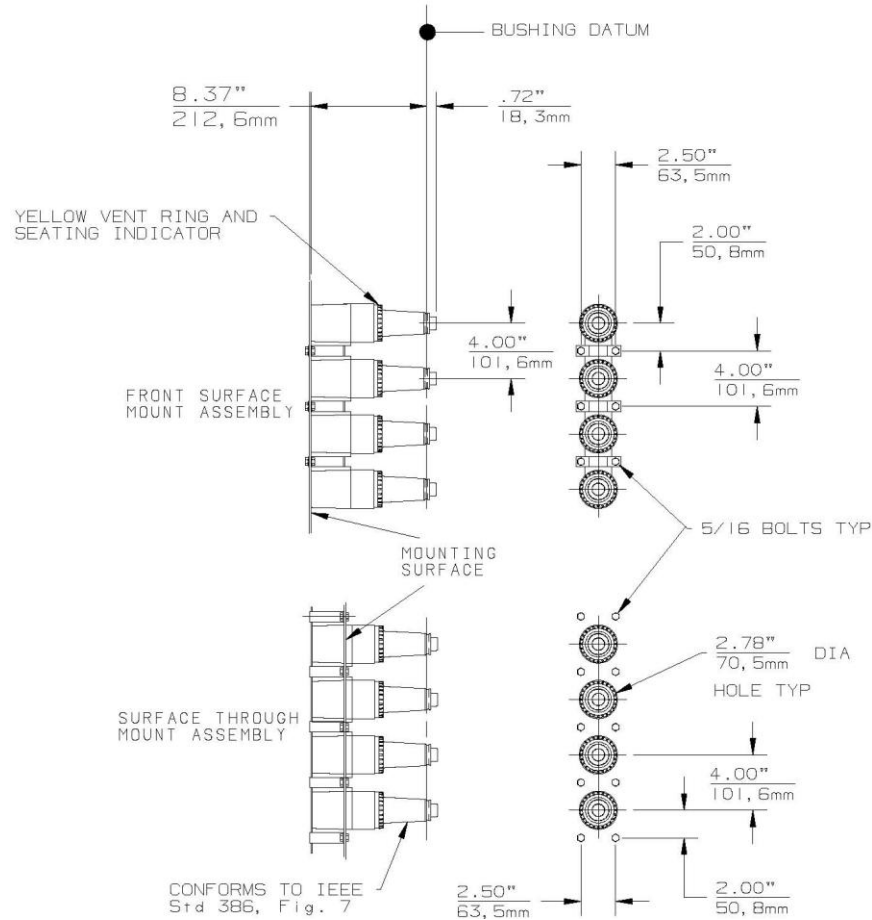

Each kit contains the following:

1	Basic molded junction	274J4-5
2	Protective shipping cap	2701-41
2	Tube, lubricant	82-08
1	Installation instruction	IS-0799

Ordering Instructions:

Specify **274J4-5** for 25kV, 200 Amp, 4-way Loadbreak Junction.