


EPIC® H-DD 24

The H-DD series with machined crimp contacts - for a large number of pins in very small spaces.

The connector insert with the highest density of pins for compact connectors is ideal, for example, for use in the plastics industry.

Info

Highest packing density for compact connectors

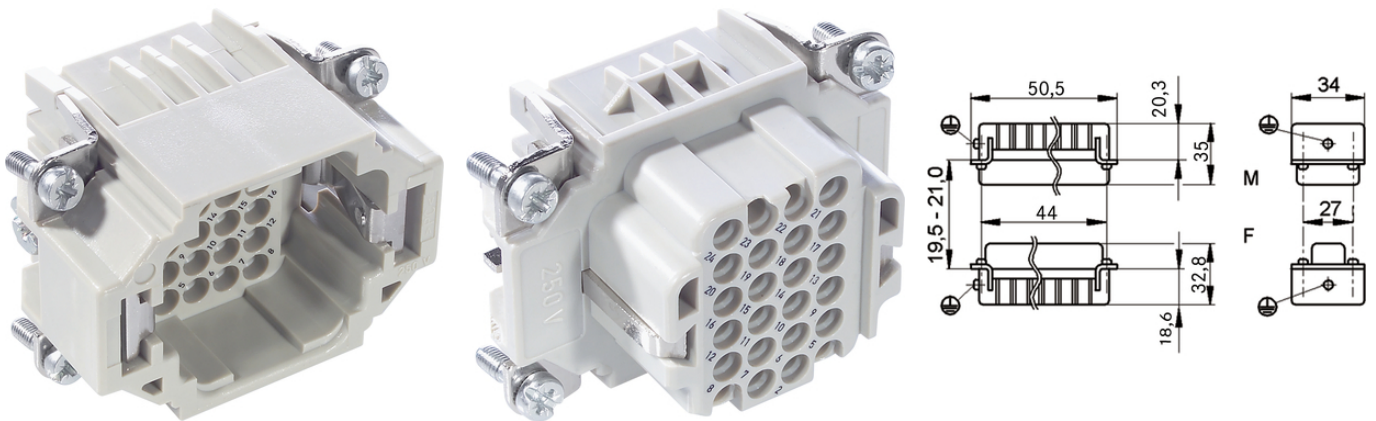

Space requirement



Industrial machinery and plant engineering

Benefits

The H-DD series with machined contacts is designed for a high number of pins in a confined space. This means a smaller housing design can be chosen.

Application range

Mechanical engineering
Event equipment
Plastics industry

EPIC® H-DD 24

Technical Data

Classification:	ETIM 5.0 Class-ID: EC000438 ETIM 5.0 Class-Description: Contact insert for industrial connectors
Rated voltage (V):	IEC: 250 V UL: 600 V CSA: 600 V
Rated impulse voltage:	2.5 kV
Rated current in A:	IEC: 10 A UL: 8.5 A CSA: 10 A
Pollution degree:	2
Contact resistance:	< 3 mOhm
Contacts:	Copper alloy, hard silver-plated/hard gold-plated
Number of contacts:	24 + PE
Cable connection:	Crimp termination: 0.14 – 2.5 mm ²
Plug cycles:	100
VDE-tested:	Certified production control: VDE reg. no.: B437 UL-tested: UL file number: E75770
Temperature range:	-40°C to +100°C, short-term up to +125°C

Note

Photographs are not to scale and do not represent detailed images of the respective products.
Prices are net prices without VAT and surcharges. Sale to business customers only.



EPIC® H-DD 24

Article number	Article description	Contact type	Article designation	Number of working contacts	L	L1	A
H-DD 24 crimp termination							
11285000	H-DD 24 SCM	male	machined	1 - 24	50.5	44	36
11286000	H-DD 24 BCM	female	machined	1 - 24	50.5	44	36

Last Update (24.05.2017)

©2017 Lapp Group - Technical changes reserved

Product Management www.lappkabel.de

You can find the current technical data in the corresponding data sheet.

PN 0456 / 02_03.16