

HYG - KIT

BUL88172

REV. A

ASSEMBLY INSTRUCTIONS FOR HYW SERIES


PARTS LIST		
PART #	HEIGHT	WIDTH
HYG1616	14.925	15.215
HYG2016	18.925	15.215
HYG2020	18.925	19.215
HYG2420	22.925	19.215
HYG2424	22.925	23.215
HYG3024	28.925	23.215
HYG3630	34.925	29.215
HYG4236	40.925	35.215
HYG4836	46.925	35.215

Mounting kits are required
to maintain marked Type rating.

Part No.	DESCRIPTION
ST1MFSS316	1" STAND-OFF
ST2MFSS316	2" STAND-OFF
ST4MFSS316	4" STAND-OFF
ST6MFSS316	6" STAND-OFF

Gasket replacing/cleaning procedure

1. Wipe down enclosure. Ensure enclosure is completely dry prior to removing cover.
2. Open door.
3. Wipe off remaining water droplets.
4. Loosen ¼-20 kep nuts on hinges.
5. Loosen door from hinge. Door do not need to be removed.
6. Carefully remove gasket.
7. Clean gasket and door.
8. Ensure gasket and door are completely dry before (re)install.
9. Place gasket firmly into door around retainer by manually pressing down along all gasket surfaces to ensure gasket is seated in place.
10. Tighten ¼-20 kep nuts on hinges.
11. Ensure gasket is flat (no bulges) and sitting flush on enclosure after latches are engaged.

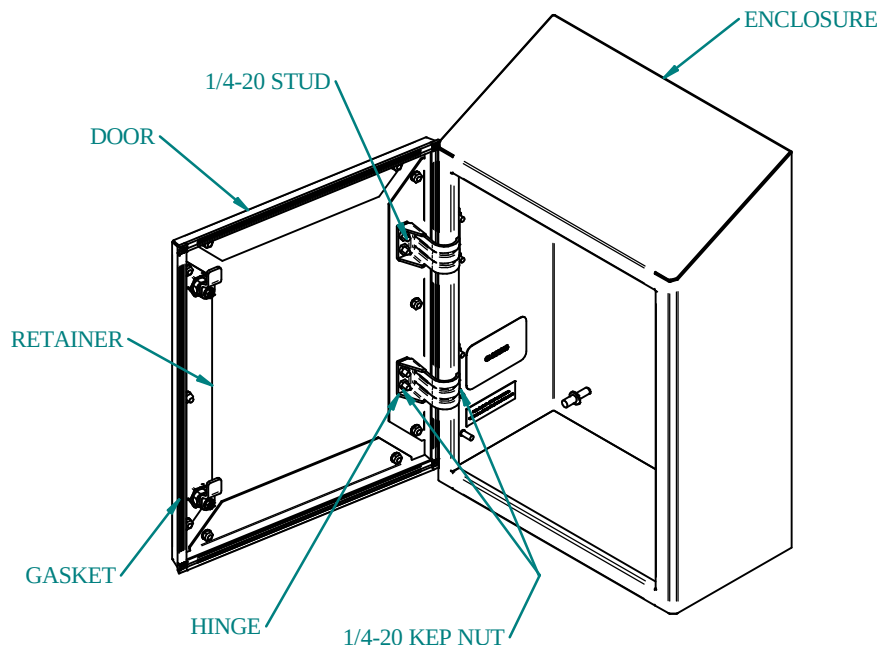

**HAMMOND
MANUFACTURING™**
www.hammondmfg.com