
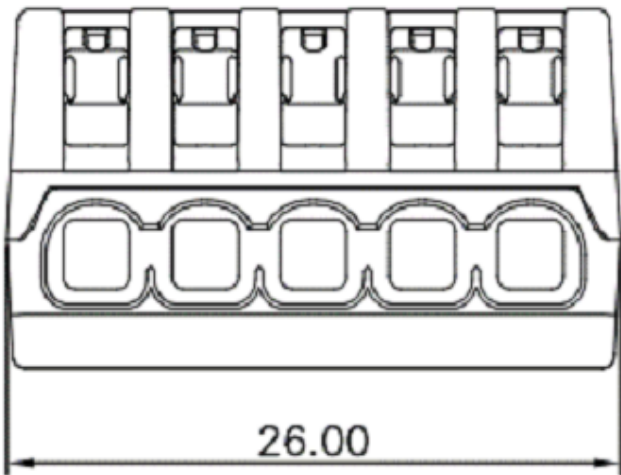
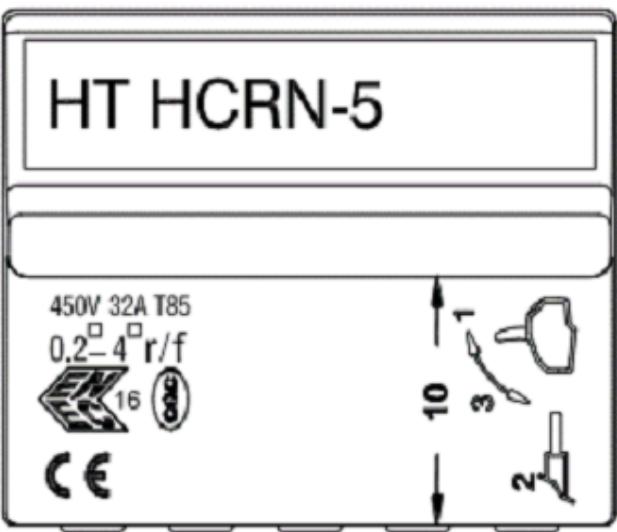
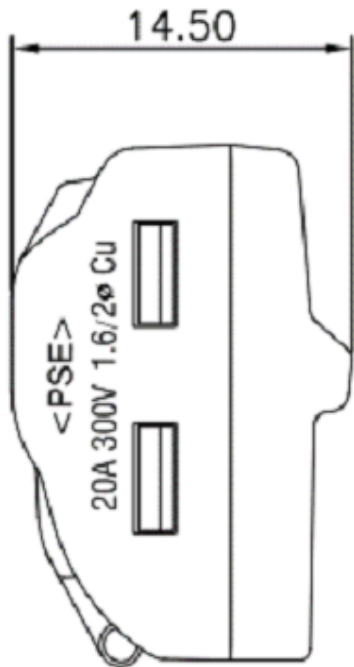
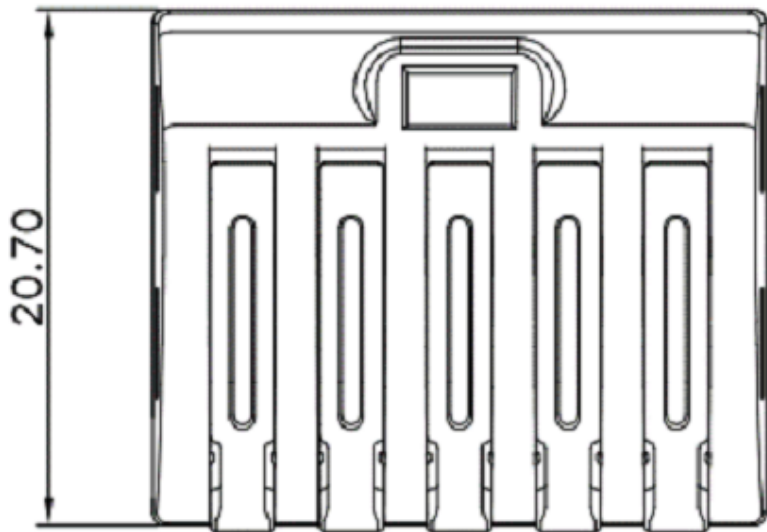


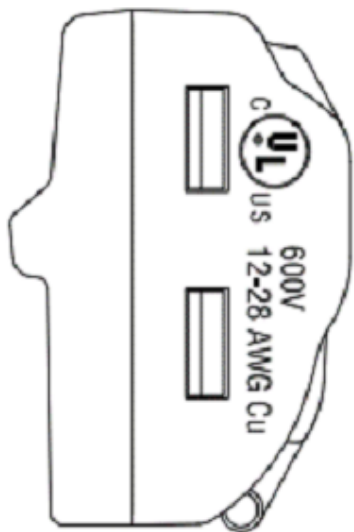

STRIPPING LENGTH:
10mm (0.39 in.)


WIRE RANGE:
28-14 AWG, Solid / Stranded
#12 AWG Solid Cu (UL)

FLAMMABILITY:
UL94-V0

WORKING TEMP:
-30°C (-22°F) TO 85°C (185°F)

VOLTAGE:
450V (VDE) 85°C
600V (CULUS) 105°C

CERTIFICATIONS:
cULus, CE, ENEC, FIMKO, CQC

Revision level			Revision Record			The copyright of this drawing is reserved by HellermannTyton.		Drawn	Date (YYYY/MM/DD)	HCRN-5 SERIES						
Drawing	State	Part	016553					JMC	2021/06/22	Title Helacon Releasable Wire Connector, 5-Port, Clear		Scale	2:1			
A.0	Design Release	-						Approved	Date (YYYY/MM/DD)			Global Project Number	21-0277			
Changed	Date (YYYY/MM/DD)							JMC	20021/06/22	All drawing revision are stored in CAD PDM database	JPG	2021/06/22	Drawing-No 21-0277-001-CSU		Format	A3
Approved	Date (YYYY/MM/DD)		Units mm		HellermannTyton www.HellermannTyton.com		Sheet	1/1								
JPG	2021/06/22															