

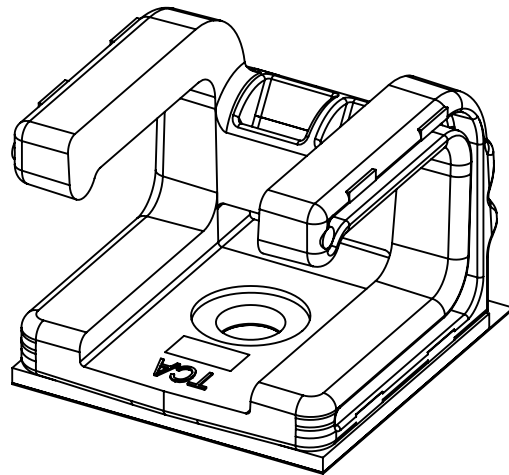
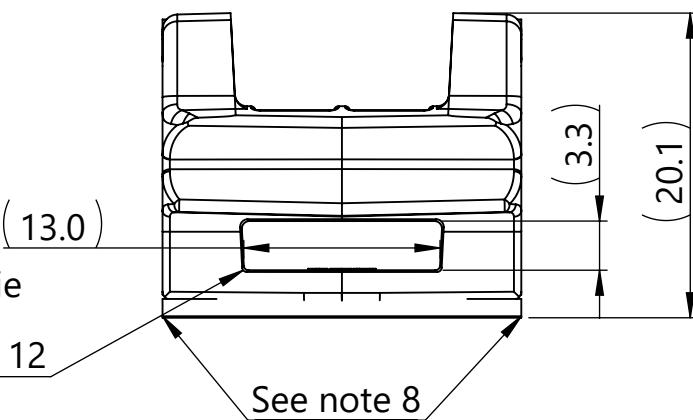


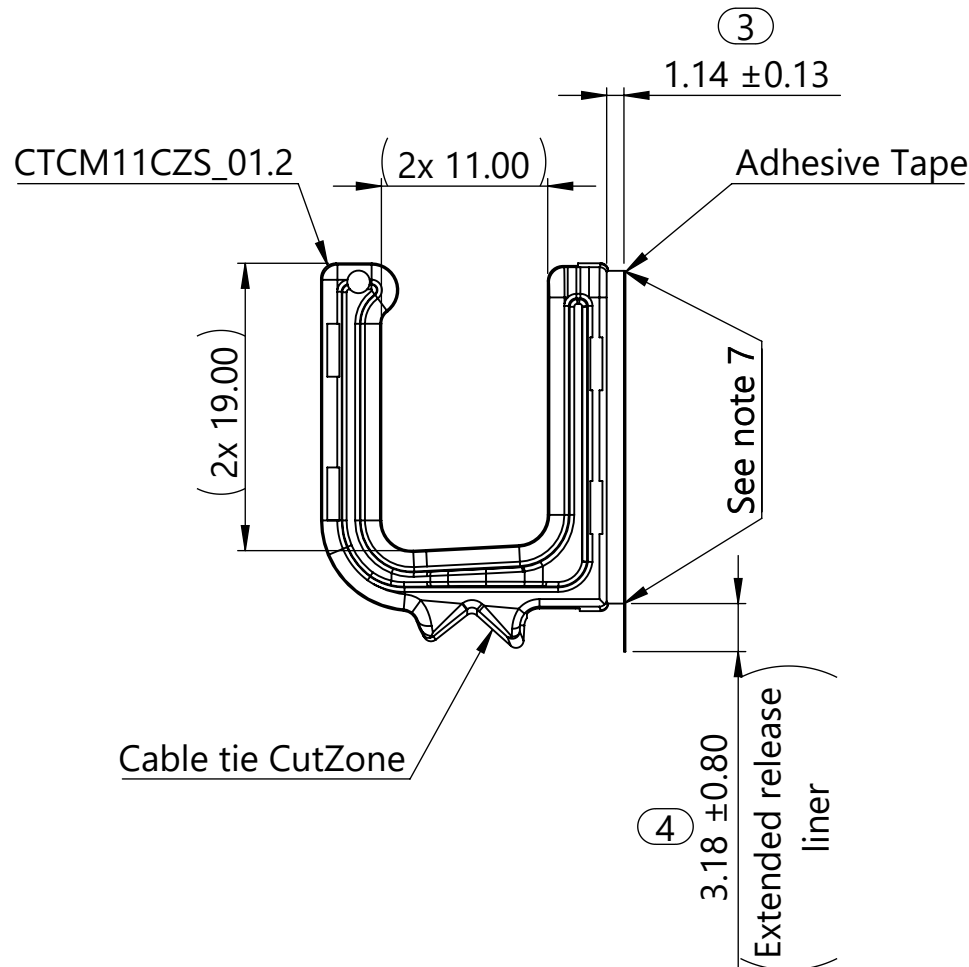

Isometric view

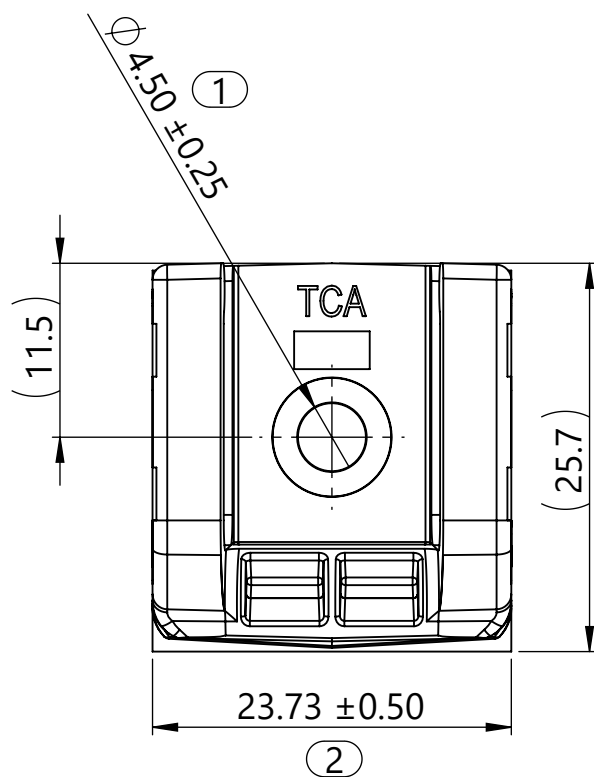

Notes:


1. Material: See chart
2. Material color: See chart
3. Maximum percent regrind permissible: 0%
4. Maximum allowable flash to be: 0.25mm
5. Maximum allowable mismatch to be: 0.10mm
6. A dimension without an inspection report symbol  does not require inspection. It may be controlled on the individual component drawing.
 - a. Total number of inspections required: 6
 - b. Last number used: 6
 - c. Missing symbols: -
7. Tape may be flush or inside the mount edge
8. Tape may be flush or extend beyond the edge of the mount
9. Store product in its original packaging between 4°C to 38°C (40°F to 100°F) and 0-95% relative humidity, the optimum storage conditions are 22°C (72°F) and 50% relative humidity out of direct sunlight
10. Mounting screw size:
 - M4
 - #8 [0.164 in]
11. Accommodates cable tie series: T18 - T120
12. Accommodates 3/8in grip tie: GT.375

Part Description	CTCM11CZS			Adhesive Tape		
	Drawing Number	Material	Color	Storage Conditions	Adhesive Material	Color
CTCM11CZA-PA66HS-BK	23-0155-002-CSU_01.2	PA66HS	Black (BK)	See note 9	241-002-07 acrylic foam tape	Black (BK)
CTCM11CZA-PA66HS-WH	23-0155-002-CSU_01.2	PA66HS	White (WH)	See note 9	241-002-07 acrylic foam tape	Black (BK)



Revision level		
Drawing	State	Part
01.2	Design Release	-
Changed	Date (YYYY/MM/DD)	
Spangler	2025/06/16	
Approved	Date (YYYY/MM/DD)	
Mann	2025/08/19	

Revision Record	
ECN 312175	



The copyright of this drawing is reserved by HellermannTyton.

Drawn		Date (YYYY/MM/DD)
Spangler		2025/03/03
Approved		Date (YYYY/MM/DD)
Mann		2025/03/03

Title		CTCM11CZA 11mm cradle with adhesive mount with CutZone	Scale	2:1
Drawing-No		25-0187-101-CSU	Global Project Number	25-0187
			Format	A3
			Sheet	1/1

HellermannTyton
www.HellermannTyton.com