
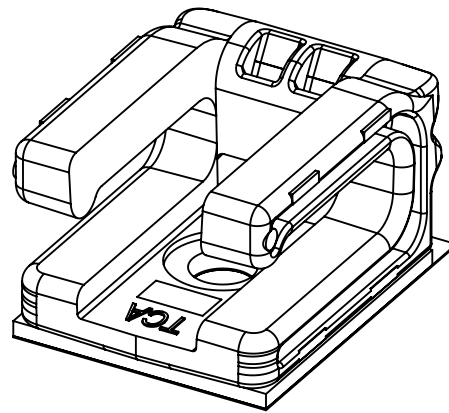
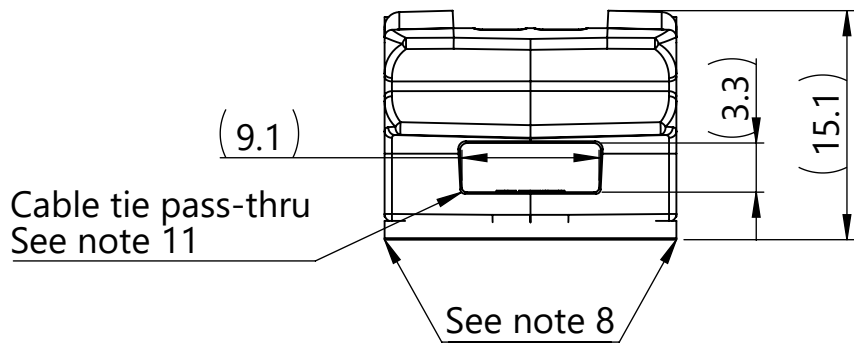
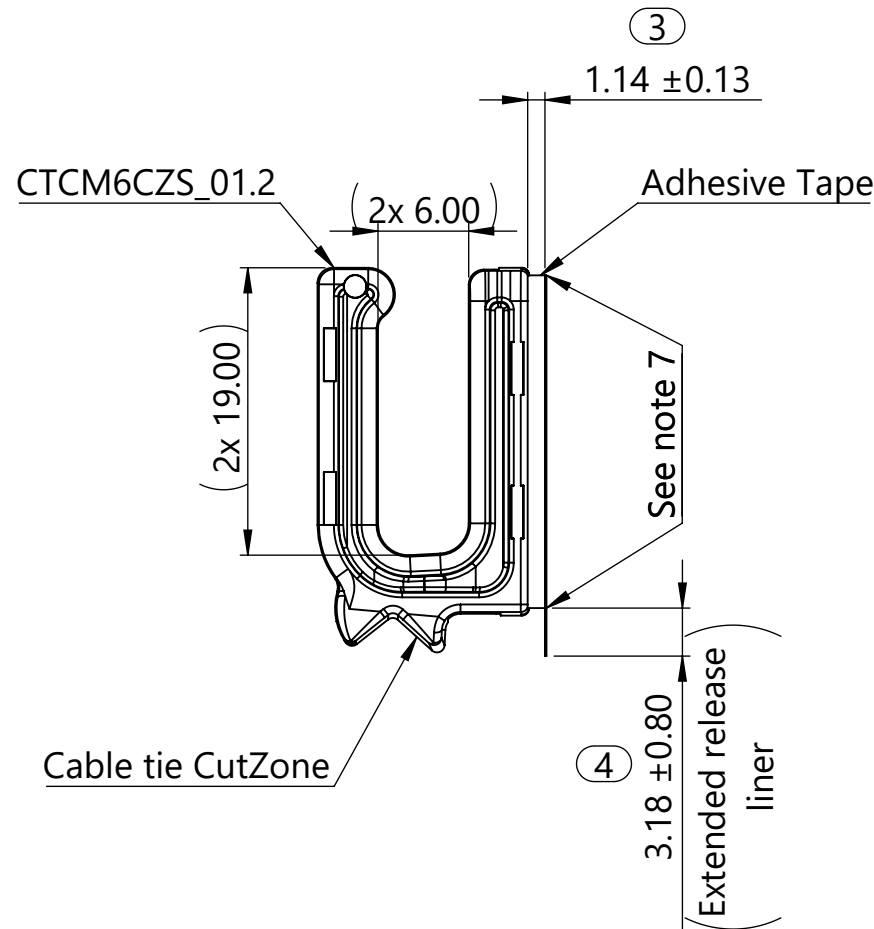


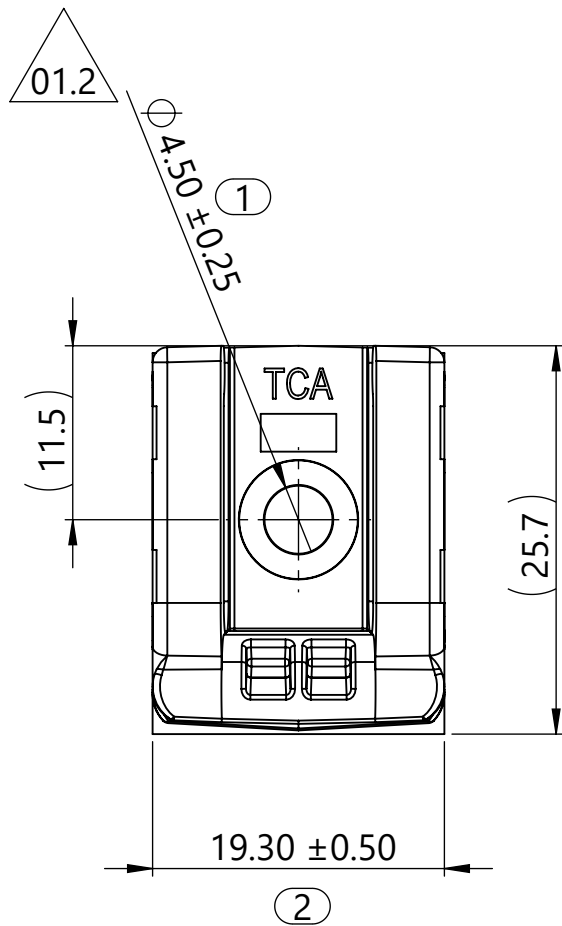

Isometric view


Notes:

1. Material: See chart
2. Material color: See chart
3. Maximum percent regrind permissible: 0%
4. Maximum allowable flash to be: 0.25 mm
5. Maximum allowable mismatch to be: 0.10 mm
6. A dimension without an inspection report symbol  does not require inspection. It may be controlled on the individual component drawing.
 - a. Total number of inspections required: 6
 - b. Last number used: 6
 - c. Missing symbols: -
7. Tape may be flush or inside the mount edge
8. Tape may be flush or extend beyond the edge of the mount
9. Store product in its original packaging between 4°C to 38°C (40°F to 100°F) and 0-95% relative humidity, the optimum storage conditions are 22°C (72°F) and 50% relative humidity out of direct sunlight
10. Mounting screw size:
 - M4
 - #8 [0.164 in]
11. Accommodates cable tie series: T18 - T120

Part Description	CTCM6CZS			Adhesive Tape		
	Drawing Number	Material	Color	Storage Conditions	Adhesive Material	Color
CTCM6CZA-PA66HS-BK	23-0156-001-CSU_04.2	PA66HS	Black (BK)	See note 9	241-002-07 acrylic foam tape	Black (BK)
CTCM6CZA-PA66HS-WH	23-0156-001-CSU_04.2	PA66HS	White (WH)	See note 9	241-002-07 acrylic foam tape	Black (BK)

Revision level		
Drawing	State	Part
01.2	Design Release	-
Changed	Date (YYYY/MM/DD)	
Spangler	2025/06/16	
Approved	Date (YYYY/MM/DD)	
Mann	2025/08/19	

Revision Record	
ECN 312175	



The copyright of this drawing is reserved by HellermannTyton.

All drawing revision are stored in CAD PDM database

Units
mm

Drawn	Date (YYYY/MM/DD)
Spangler	2025/03/03
Approved	Date (YYYY/MM/DD)
Mann	2025/03/03

Title		Scale
CTCM6CZA 6mm cradle with adhesive mount and CutZone		2:1
Drawing-No		Global Project Number
25-0186-101-CSU		25-0186
		Format
		A3
		Sheet
		1/1