




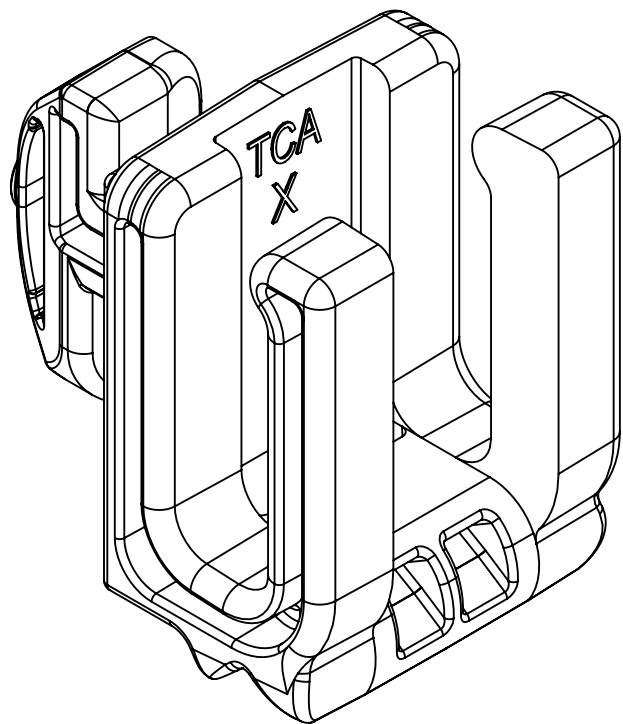


Vertical Face Orientation
Scale 3:1

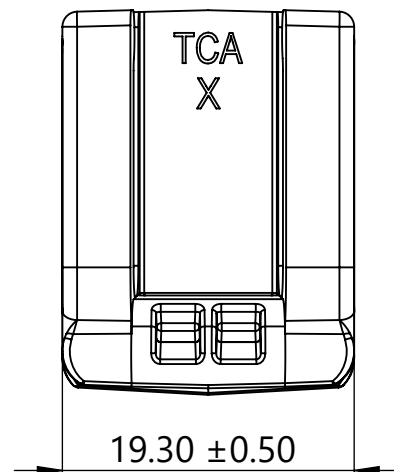


19.30 ±0.50

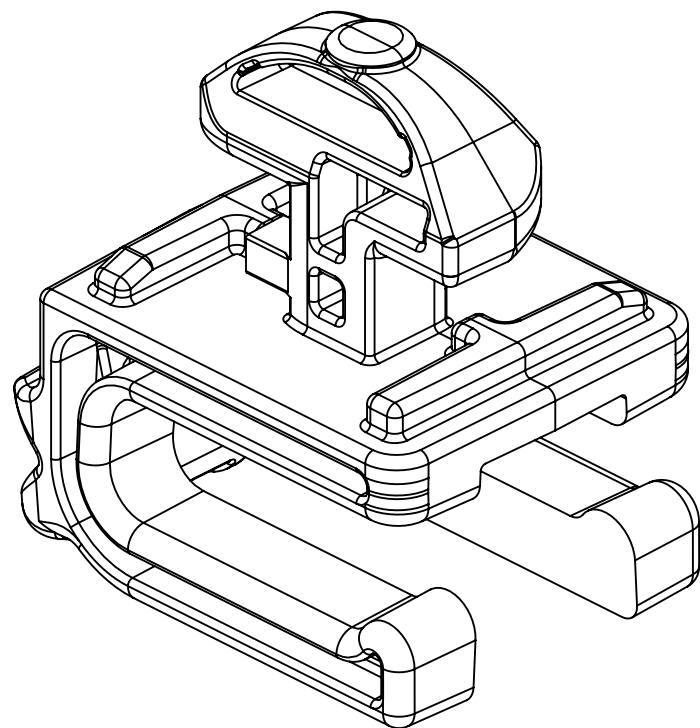

Downward Face Orientation
Scale 3:1

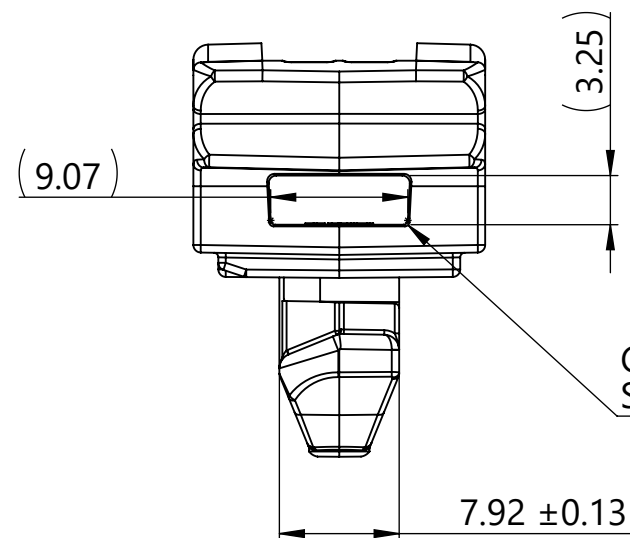

Cable tie pass-thru
See note 4

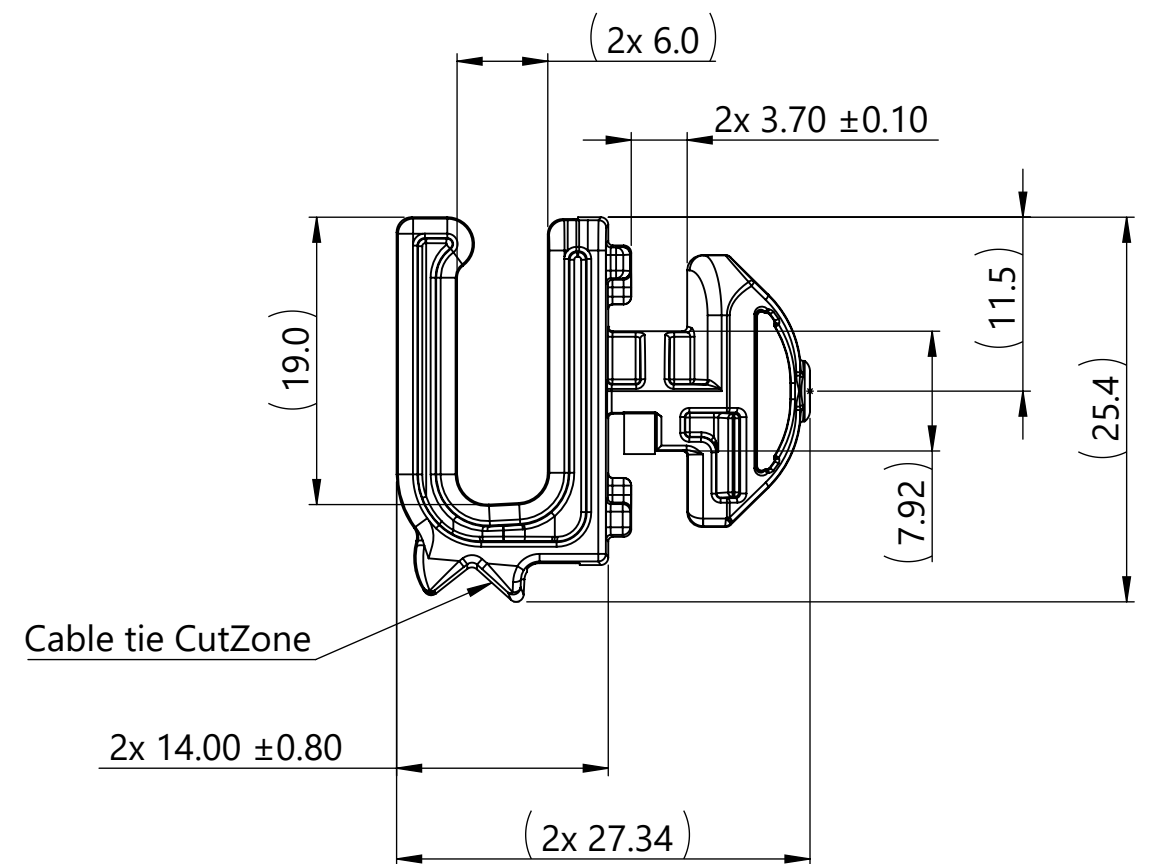

Cable tie CutZone

Performance notes:

1. PA66 performance requirements are validated at 50% relative humidity equilibrium ($2.5 \pm 0.25\%$ H₂O by weight)
2. 67 N [15 lbf] minimum load in vertical face and downward face orientations
3. Applicable aluminum framing T-slot width: 8mm [.320in]
4. Accommodates cable tie series: T18 - T120

Notes:

1. Material: See chart
2. Material color: See chart
3. Maximum percent regrind permissible: 25%
4. Maximum allowable flash to be: 0.25mm
5. Maximum allowable mismatch to be: 0.10mm

Revision level			Revision Record				The copyright of this drawing is reserved by HellermannTyton.		Drawn		Date (YYYY/MM/DD)		Title		Scale	
Drawing	State	Part	ECN 017605			All drawing revision are stored in CAD PDM database		Mann	2023/07/20		CTCM6CZF 6mm Cradle with Frame Mount and CutZone				2:1	
00.0	Design Release	-	Approved	Date (YYYY/MM/DD)				Global Project Number								
Changed		Date (YYYY/MM/DD)		Toll				2023/08/07		Drawing-No 23-0154-001-CSU				23-0154		
Mann		2023/07/20												Format		
Approved		Date (YYYY/MM/DD)							A3							
Toll		2023/08/07							Sheet							
								Units mm	HellermannTyton www.HellermannTyton.com				1/1			