
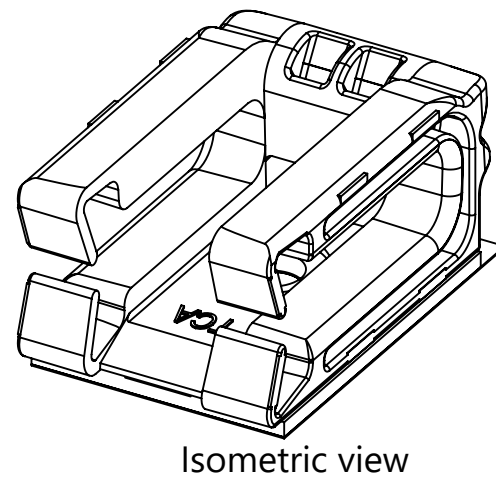
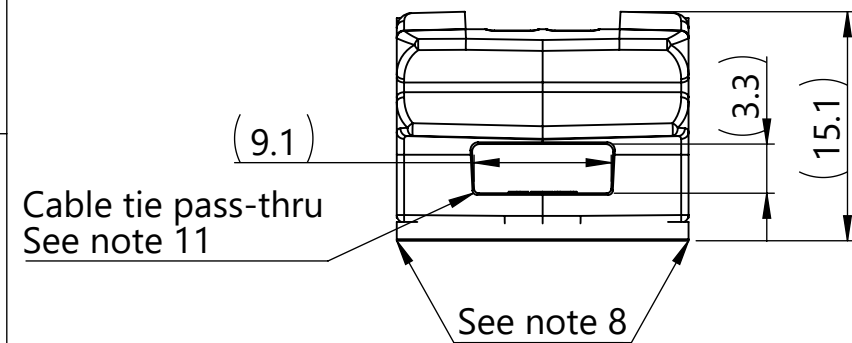
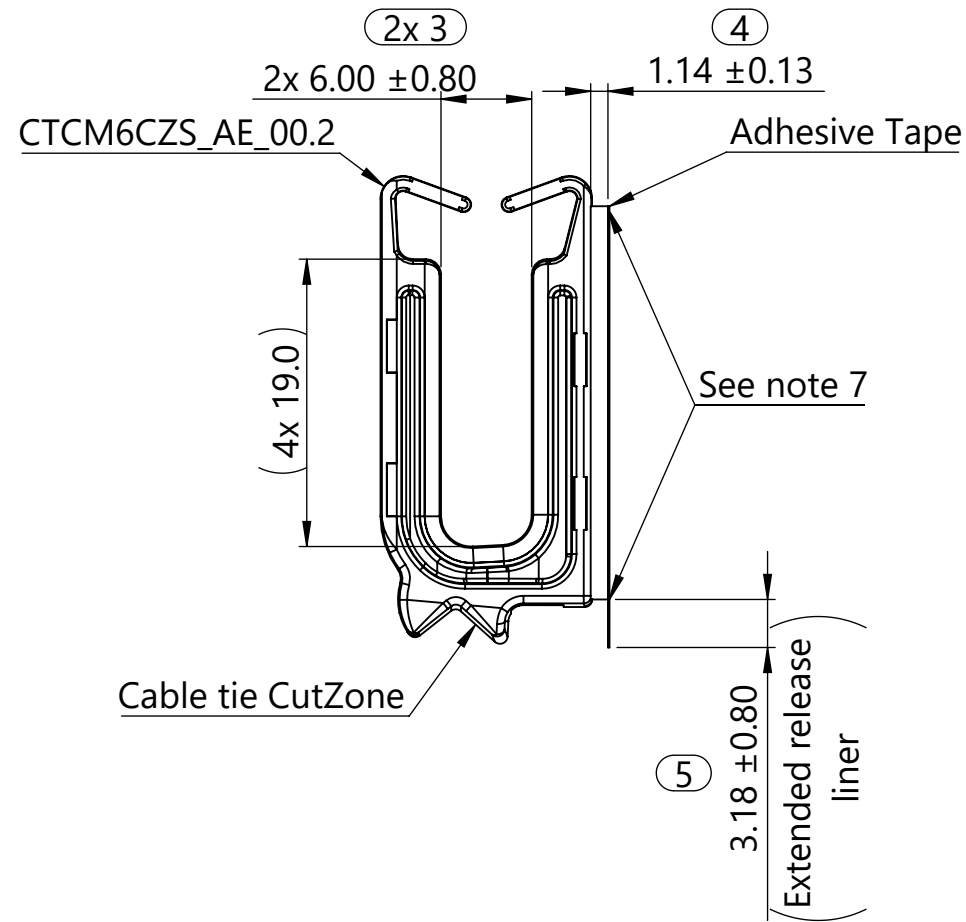
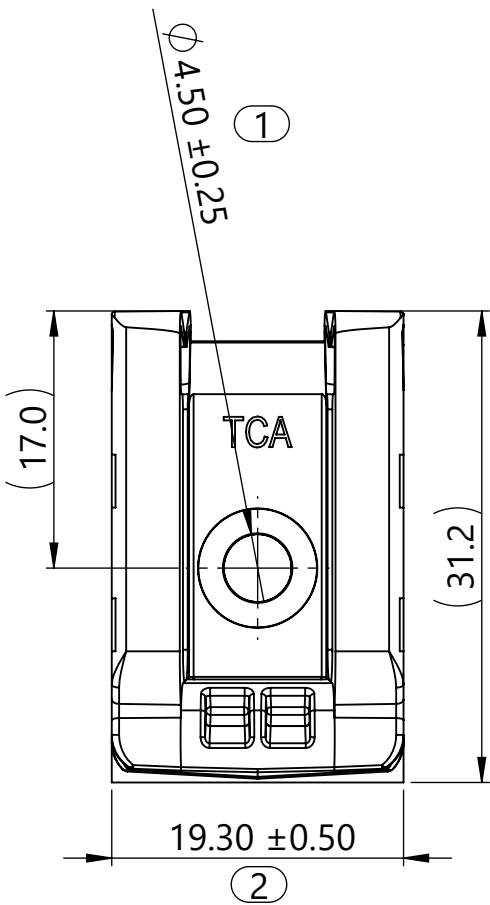




Notes:

1. Material: See chart
2. Material color: See chart
3. Maximum percent regrind permissible: 0%
4. Maximum allowable flash to be: 0.25 mm
5. Maximum allowable mismatch to be: 0.10 mm
6. A dimension without an inspection report symbol  does not require inspection. It may be controlled on the individual component drawing.
 - a. Total number of inspections required: 7
 - b. Last number used: 7
 - c. Missing symbols: -
7. Tape may be flush or inside the mount edge
8. Tape may be flush or extend beyond the edge of the mount
9. Store product in its original packaging between 4°C to 38°C (40°F to 100°F) and 0-95% relative humidity, the optimum storage conditions are 22°C (72°F) and 50% relative humidity out of direct sunlight
10. Mounting screw size:
 - M4
 - #8 [0.164 in]
11. Accommodates cable tie series: T18 - T120

Part Description				CTCM6CZS_AE			Adhesive Tape			
				Drawing Number	Material	Color	Storage Conditions	Adhesive Material	Color	
CTCM6CZA_AE-PA66HS-BK				24-1128-001-CSU_01.2	PA66HS	Black (BK)	See note 9	241-002-08 acrylic foam tape	Black (BK)	
CTCM6CZA_AE-PA66HS-WH				24-1128-001-CSU_01.2	PA66HS	White (WH)	See note 9	241-002-08 acrylic foam tape	Black (BK)	

Revision level		Revision Record			The copyright of this drawing is reserved by HellermannTyton.		Drawn	Date (YYYY/MM/DD)	Title CTCM6CZA_AE 6 mm cradle with adhesive mount, retention arms, and CutZone		Scale 2:1 Global Project Number 25-0577	
							Drawing	State				
00.2	Design Release	-	Changed				Date (YYYY/MM/DD)	Approved				
Spangler	2025/05/06	Mann	2025/08/19		All drawing revision are stored in CAD PDM database	Units mm	HellermannTyton	www.HellermannTyton.com	Drawing-No 25-0577-101-CSU	Format A3	Sheet 1/1	