


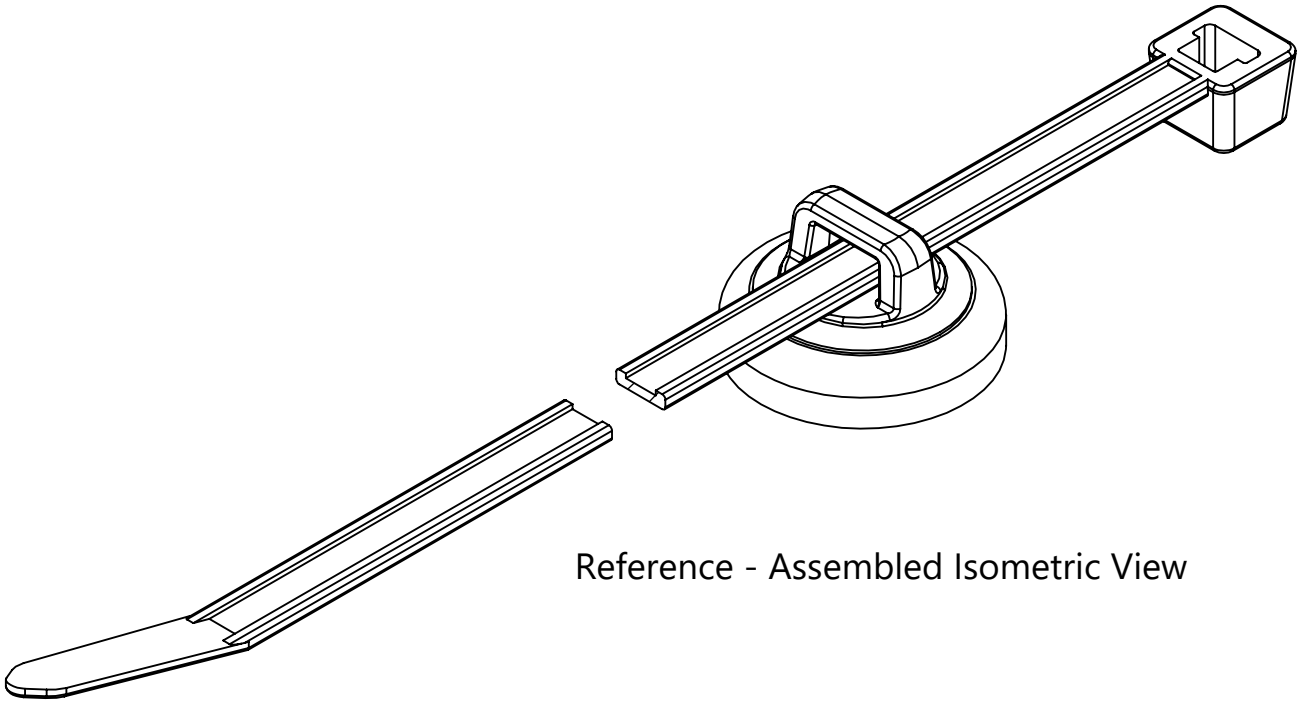


MAGCTM10S
Delivery Condition - un-assembled

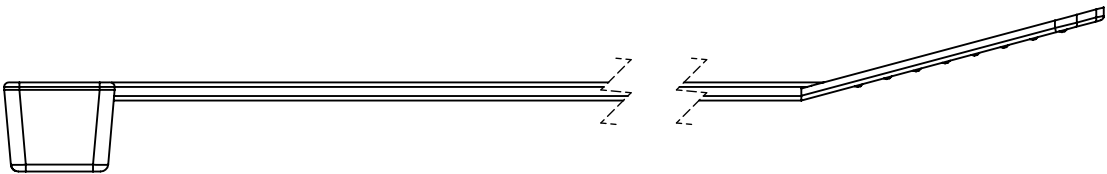



Reference - Assembled Isometric View

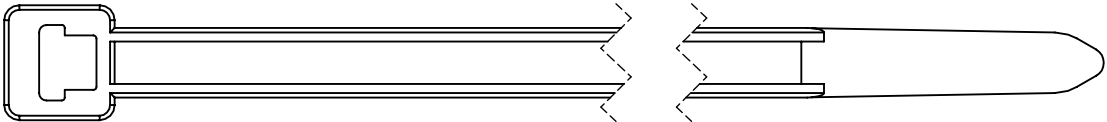

T50R
Delivery Condition - un-assembled

- Notes:
- 1. Material: See chart
 - 2. Material color: See chart
 - 3. Maximum percent regrind permissible:
 - 1. Magnet Mount: 10%
 - 2. Cable Tie: 25%
 - 4. Maximum allowable flash to be (cable tie only): 0.25mm
 - 5. Maximum allowable mismatch to be:
 - 1. Cable Tie: 0.10mm
 - 6. Magnets are very strong. Handling them with care is necessary to prevent personal injuries, property damages and magnet damages

- Reference:
- 1. Cable Tie Min Loop Tensile Strength: 222N (50 lbf)
 - 2. Magnetic Mount Min Vertical Pull Strength: 44.5N (10 lbf)
 - 1. UL Listing # E64139

Global Part Description				Magnet Mount			Cable Tie				
T50RMAGCTM10SSET-NDFEB35/POM/ST/PA66HS-BK				Drawing	Material	Color	Drawing	Material	Color		
				23-0064-002-CSU	POM	Black	CT2050007CST	PA66HS	Black		
					NdFeB N35M	Silver					
					Steel	Black					
Revision level		Revision Record			Drawn	Date (YYYY/MM/DD)	Title Magnetic Cable Tie Mount, Small, 10 lbf pull rate, Black with T50R cable tie, Unassembled Set			Scale 2:1	
Drawing	State	Part	ECN 017476 - Initial Release		Johnson	2023/04/03				Global Project Number 23-0078	
00.3	Design Release	-		The copyright of this drawing is reserved by HellermannTyton.	Approved	Date (YYYY/MM/DD)	Drawing-No 23-0078-001-CSU			Format A3	
Changed	Date (YYYY/MM/DD)				Toll	2023/04/14				Sheet 1/1	
Johnson	2023/04/03				Units mm					HellermannTyton www.HellermannTyton.com	
Approved	Date (YYYY/MM/DD)										
Toll	2023/04/14		All drawing revision are stored in CAD PDM database								