

## Specification Sheet

Part Number: MB3A10A2H4


For use with HellermannTyton T18 - T30 cable ties to provide stability when securing bundles.

4-way opening allows cable ties to be installed parallel or perpendicular to bundles.

The rubber-based adhesive is an economical choice ideal for indoor applications, with a static load weight of 0.6 lb.

Two predrilled holes extend mounting options and solutions.

Extended adhesive liner is easy to remove quickly.

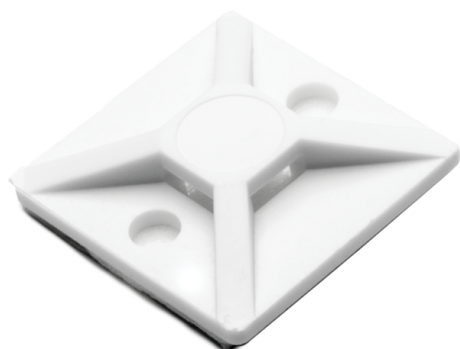

Acrylic Adhesive Cable Tie Mount, 0.75 x 0.75", Use With T18-T30 Cable Tie, PA66, White, 500/pkg

Article Number 151-28717

Type MB3A

Color White (WH)

Quantity Per pack

Product Description MB3A adhesive mounts are for use with HellermannTyton T18 - T30 Series cable ties to provide stability when securing bundles. The rubber adhesive-backed mounts can be used to secure a bundle and have two predrilled holes to extend mounting options.

|                                     |  |
|-------------------------------------|--|
| Short Description                   | Acrylic Adhesive Cable Tie Mount, 0.75 x 0.75", Use With T18-T30 Cable Tie, PA66, White, 500/pkg |
| Global Part Name                    | MB3A-PA66-WH   |
| Length L (Imperial)                 | 0.75   |
| Length L (Metric)                   | 19.0   |
| Fixation Method                     | Adhesive   |
| Width W (Imperial)                  | 0.75   |
| Width W (Metric)                    | 19.0   |
| Cable Ties                          | T18 - T30  |
| Height H (Imperial)                 | .19  |
| Height H (Metric)                   | 4.8  |
| Cable Tie Width Max (Imperial)      | 0.14   |
| Cable Tie Width Max (Metric)        | 3.6  |
| Mounting Hole Diameter D (Imperial) | 0.12   |
| Mounting Hole Diameter D (Metric)   | 3.0 mm   |
| Mounting Hole Centers (Imperial)    | 0.52   |

|                                |                                    |
|--------------------------------|------------------------------------|
| Material                       | Polyamide 6.6 (PA66)               |
| Material Shortcut              | PA66                               |
| Adhesive                       | Acrylate with base of acrylic foam |
| Flammability                   | UL 94 V-2 (excluding adhesive)     |
| UV Resistant (Yes/No)          | No                                 |
| Use Conditions                 | For Indoor Use Only                |
| Adhesive Operating Temperature | -31°F to +158°F (-35 °C to +70 °C) |
| Operating Temperature          | -40°F to +185°F (-40°C to +85°C)   |
| Reach Compliant (Article 33)   | No                                 |
| ROHS Compliant                 | Yes                                |
| Package Quantity (Imperial)    | 500                                |
| Package Quantity (Metric)      | 500                                |
| Customs Number                 | 3926909988                         |

7930 N. Faulkner Road, Milwaukee, WI 53224  
Phone: (800) 537-1512 | Email: corp@htamericas.com