

Copper Lugs

Copper Tin-Plated One-Hole Lugs

Tin-plated lugs resist corrosion

- Provides high-conductivity
- Minimizes voltage drop
- Easy identification
- UL Listed and CSA Certified



L 750-48



Cat. No.	Wire Size	Bolt Size	Installing Dies
L 8-10	#8	10	TC, 21, 171, 236
L 8-14		1/4	
L 8-38		3/8	
L 8-48		1/2	
L 6-10	#6	10	7, TE, 24
L 6-14		1/4	
L 6-516		5/16	
L 6-38		3/8	
L 4-14	#4	1/4	
L 4-516		5/16	
L 4-38		3/8	
L 2-14	#2	1/4	3/8, 10, TL-TN, 33, 162
L 2-516		5/16	
L 2-38		3/8	
L 2-48		1/2	
L 1-14	#1	1/4	11, TB, 37
L 1-516		5/16	
L 1-38		3/8	
L 1-48		1/2	
L 1/0-516	1/0	5/16	1/2, 12, TQ, 42, 163
L 1/0-38		3/8	
L 1/0-48		1/2	
L 2/0-516	2/0	5/16	13, TS, 45, 164, 241
L 2/0-38		3/8	
L 2/0-48		1/2	



Cat. No.	Wire Size	Bolt Size	Installing Dies
L 3/0-516	3/0	5-16	5/8, 14, TU, 50, 243, BG
L 3/0-38		3/8	
L 3/0-48		1/2	
L 4/0-516	4/0	5/16	15, TW-TY, 54, 243
L 4/0-38-HM		3/8	
L 4/0-48		1/2	
L 250-38	250	3/8	11/16, 16, TR, 60, 166
L 250-48		1/2	
L 300-38	300	3/8	781, 17, TV, 66
L 300-48		1/2	
L 300-58		5/8	
L 350-38	350	3/8	840, 18, TX, 71
L 350-48		1/2	
L 350-58		5/8	
L 400-48	400	1/2	840, 19, TX, 76
L 400-58		5/8	
L 500-48	500	1/2	20, TH, 87, 281
L 500-58		5/8	
L 600-48	600	1/2	1 (1/8)-1, 96
L 600-58		5/8	
L 750-48	750	1/2	1 (1/8)-2, 106
L 750-58		5/8	
L 750-68		3/4	
L 1000-48	1000	1/2	642, 125
L 1000-58		5/8	
L 1000-68		3/4	

Copper Lugs


Tin-Plated Two-Hole Straight and Stacking NEMA Lugs for general applications



L 2/0 N

L 1000 NT

- Provides high-conductivity, minimizes voltage drop
- Resists corrosion
- Provides 3/4 in. and 7/8 in. bolt hole centers for added versatility
- UL Listed and CSA Certified



Straight Lug Cat. No.	Stacking Lug Cat. No.	Wire Size	Bolt Size	Installing Dies	Dimensions						
					B	C	L	P	S	W	H
L 6-214		#6	1/4	7, TE, 27	1-1/8	5/16	2-13/16	1-5/16	5/8	7/16	
L 6-2516			5/16		1-1/8	5/16	2-11/16	1-5/16	5/8	7/16	
L 6 N			1/2		1-1/8	5/8	5	3-1/8	1-3/4	3/4	
L 4-214		#4	1/4	5/16, 8, TP, 29, IC, 1	1-1/8	5/16	2-3/4	1-5/16	5/8	1/2	
L 4-2516			5/16		1-1/8	5/16	2-3/4	1-5/16	5/8	1/2	
L 4 N			1/2		1-1/8	5/8	5	3-1/8	1-3/4	3/4	
L 2-214		#2	1/4	3/8, 10, TL-TN, 33, 162	1-1/4	3/8	3-1/8	1-1/2	5/8	5/8	
L 2-2516			5/16		1-1/4	3/8	3-5/16	1-5/8	3/4 - 7/8	5/8	
L 2 N			1/2		1-1/4	5/8	4-3/4	3	1-5/16	3/4	
L 1-214		#1	1/4	3/8, 11, TB, 37	1-3/8	3/8	3-3/8	1-5/8	5/8	11/16	
L 1-2516			5/16		1-1/2	5/16	3-3/8	1-5/8	3/4 - 7/8	11/16	
L 1 N			1/2		1-1/2		4-7/8	3	1-3/4	3/4	
L 1/0-238		1/0	3/8	1/2, 12, TQ, 42, 163	1-3/8		3-7/16	1-5/8	7/8	3/4	
L 1/0-2516			5/16		1-3/8		3-7/16	1-5/8	3/4 - 7/8	3/4	
L 1/0 N			1/2		1-7/16		4-7/8			3/4	
L 2/0-238		2/0	3/8	9/16, 13, TS, 45, 164	1-1/2		5-1/16			7/8	
L 2/0 N	SL 2/0 N		1/2		1-1/2		5-1/16			7/8	1-1/2
L 3/0-238		3/0	3/8	5/8, 14, TU, 50, BG	1-1/2		5-1/8			15/16	
L 3/0 N	SL 3/0 N		1/2		1-1/2		5-1/8			15/16	1-5/8
L 4/0-238		4/0	3/8	5/8-1, 15, TW-TY, 54, 243	1-5/8		5-3/16			11/16	
L 4/0 N	SL 4/0 N		1/2		1-5/8		5-3/16	3		11/16	1-9/16
L 250-238		250	3/8	11/16, 16, TR, 60, 116	1-11/16		5-3/16			1-1/8	
L 250 N	SL 250 N		1/2		1-11/16		5-7/16			1-1/8	1-11/16
L 300-238		300	3/8	781, 17, TV, 66, 11/16	2	5/8	5-3/4			1-1/4	
L 300 N	SL 300 N		1/2		2		5-3/4		1-3/4	1-1/4	1-3/4
L 350-238		350	3/8	840, 18, TX, 71	2		5-3/4			1-15/16	
L 350 N	SL 350 N		1/2		1-7/8		5-3/4			1-15/16	-
L 400-238		400	3/8	15/16, 19, TX, 76, 840	2-1/8		6	3-1/16		1-7/16	
L 400 N	SL 400 N		1/2		2-1/8		6	3-1/8		1-7/16	2-1/8
L 500 N	SL 500 N	500	1/2	1, 20, TH, 87, 251	2-1/4		6-1/16	3-1/8		1-9/16	
L 600 N	SL 600 N	600	1/2	1 (1/8-1), 22, 96	2-5/8		6-3/4	3-1/8		1-11/16	2-3/16
L 750 N	SL 750 N	750	1/2	1-5/16, 106, 24	2-13/16		7	3-1/8		1-3/4	2-5/8
L 1000 NT	SL 1000 NT	1000	1/2	27, 1-1/2, 125	2-15/16		7-1/4	3-1/4		1-3/4	3
L 1250 N*		1250	1/2	150, 29, 1-5/8	3		7-3/8	3-3/8		2-3/16	
L 1500 N*		1500	1/2	1-3/4, 31, 150	3-3/16		7-1/2	3		2-11/16	-
L 2000 N*		2000	1/2	2.00, 34, 175	3-3/16		8-1/16	3-3/16		3-1/16	

The "N" suffix on the catalogue number indicates NEMA bolt spacing of 1-3/4 in.

For other available sizes, please consult your Thomas & Betts representative.


* L 1250 N, L 1500 N and L 2000 N are not UL Listed or CSA Certified.

Copper Lugs

Tin-Plated Four-Hole NEMA Lugs

These four-hole NEMA lugs are great for a standard installation


- Resistance against corrosion
- Easy identification

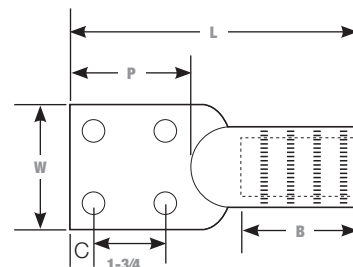

Cat. No.	Wire Size	Bolt Size	Installing Dies	Dimensions				
				B	C	L	P	W
L 750 4N	750	1/2	106, 21, 209, 1-5/16	4-3/8	5/8	8-7/8	3-3/16	3
L 1000 4N	1000		786, 1-1/2, 27, 125, 642	4-3/8		9-1/8	3-5/16	
L 1500 4N	1500		1-3/4, 31, 150, 302	3-3/16		7-1/2	3	2-5/8
L 2000 4N	2000		2.00, 34, 175	3-3/16		8-1/16	3-3/16	3-1/16



HDL 1000 N



Copper Lugs

Heavy-duty two-hole NEMA lugs

Heavy-wall lugs for grounding and other critical applications

- Able to handle the most severe heavy-loading applications
- Ease cable insertion

Cat. No.	Wire Size	Installing Dies	Dimensions			
			B	L	P	W
HDL 2 N	#2	TQ, 42, 183, 1/2	1-1/2	5-1/4	3	13/16
HDL 1 N	#1	TS, 45, 241, 1/2				
HDL 1/0 N	1/0	TU, 50, 165, 5/8				
HDL 2/0 N	2/0	TZ, 166, 5/8-1	1-3/4	5-1/2		15/16
HDL 3/0 N	3/0	60, 16, 166, 206	1-11/16	5-3/16		1
HDL 4/0 N	4/0	71, 168, 840	1-3/4	5-5/8		1-1/8
HDL 250 N	250	80, 169				1-1/4
HDL 300 N	300	87, 170, 1	2-1/4	5-13/16		1-3/8
HDL 350 N	350	96, 276, 1 (1/8)-1	2-5/16	6-9/16		1-9/16
HDL 500 N	500	112, 210, 1-5/16	2-5/8	6-3/8		1-3/4
HDL 750 N	750	138, 627, 1-5/8	3-3/8	7-3/16		2-3/16
HDL 1000 N	1000	160, 345, 2	4-5/8	9-5/8	3-5/8	2-5/8

For tin-plated option, add “-TN” suffix to the catalogue number.
For oxide-inhibiting compound, please consult your Thomas & Betts representative.

Copper Lugs


Copper Heavy-Duty Four-Hole NEMA Lugs

Heavy-wall lugs for grounding and other critical applications

- Able to handle the most severe heavy-loading applications
- Ease cable insertion



HDL 4/0 4N



Cat. No.	Wire Size	Installing Dies	Dimensions			
			B	L	P	W
HDL 4/0 4N	4/0	71, 168, 840	1-3/4	4-3/4	3	3
HDL 350 4N	350	96, 267, 1 (1/8-1)	2-5/16	6-9/16		
HDL 500 4N	500	112, 210, 1-5/16	3-1/8	6-3/8		
HDL 750 4N	750	138, 627, 1-5/8	3-7/8	8-1/4		

For tin-plated option, add "-TN" suffix to the catalogue number.
For oxide-inhibiting compound, please consult your Thomas & Betts representative.