

Straight Blade Devices
15A, 125V, 2 Pole, 3 Wire Grounding
Flanged Inlets



Features

- Stainless steel flange
- Minature style
- Mounting screws included

Ordering Information

Description	Device Color	UPC	Catalog Number
Stainless steel flange, phenolic body, miniature style	Brown	783585013138	HBL5240

Listings


UL Listed, File E2186
Certified to CSA, C22.2, No. 42
NEMA® WD-6 Compliant

Specifications

Face	Phenolic
Blades	.040" (1.0) Brass
Terminal Screw	#5-40 Brass, straight
Mounting Screw	Nickel plated brass

Performance

Electrical	
Current Interrupting	Certified for current interrupting at full rated current
Dielectric Voltage	Withstands 2,000V minimum
Mechanical	
Product Identification	Ratings are a permanent part of the device
Terminal Accommodation	#18-#14 AWG copper stranded or solid wire only
Terminal Identification	Terminals identified in accordance with UL 498 and CSA
Environmental	
Flammability	UL 94 V-0
Operating Temperatures	Maximum continuous 75°C; minimum -40°C (w/o impact)

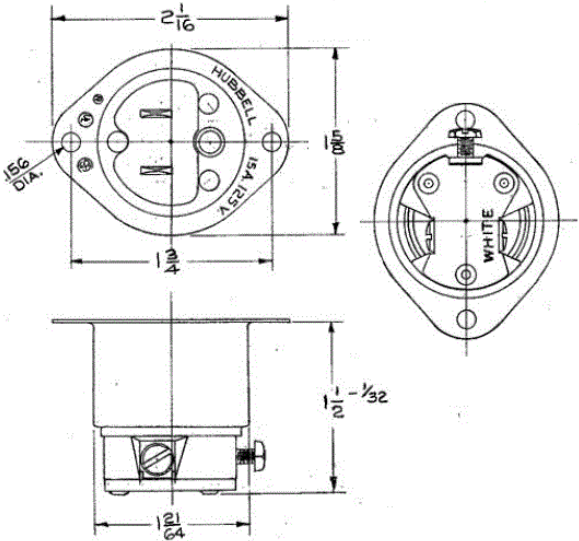

Resources

Customer Use Drawing
eCatalog

