

## Single Eye, Tin-Coated Bronze and Stainless Steel

### IMPORTANT:


Read all breaking strength, safety and technical data relating to this product.

Refer to pages Y-33 and Y-34.

### Light Duty, Single Eye, Closed Mesh, Single Weave

For permanent support when cable end is available to be installed.

| Cable Diameter Range Inches (cm) | Approx. Breaking Strength Lbs. |                 | Working Load Lbs. |                 | E Inches (cm) | M Inches (cm)  | Tin-Coated Bronze | Stainless Steel |
|----------------------------------|--------------------------------|-----------------|-------------------|-----------------|---------------|----------------|-------------------|-----------------|
|                                  | Tin-Coated Bronze              | Stainless Steel | Tin-Coated Bronze | Stainless Steel |               |                |                   |                 |
| .23"-.31" (.58-.79)              | 290                            | 700             | 29                | 70              | 3" (7.62)     | 3.75" (9.52)   | 02216001          | 02416001        |
| .29"-.37" (.74-.94)              | 290                            | 700             | 29                | 70              | 5" (12.70)    | 4.25" (10.79)  | 02216002          | 02416002        |
| .35"-.44" (.89-1.12)             | 500                            | 850             | 50                | 85              | 5.5" (13.97)  | 4.75" (12.06)  | 02216003          | 02416003        |
| .41"-.50" (1.04-1.27)            | 500                            | 850             | 50                | 85              | 5.5" (13.97)  | 5" (12.70)     | 02216004          | 02416004        |
| .46"-.56" (1.17-1.42)            | 660                            | 850             | 66                | 85              | 6" (15.24)    | 5.25" (13.33)  | 02216005          | 02416005        |
| .52"-.62" (1.32-1.57)            | 790                            | 1,050           | 79                | 105             | 7" (17.78)    | 6.25" (15.87)  | 02216006          | 02416006        |
| .58"-.68" (1.47-1.73)            | 790                            | 1,050           | 79                | 105             | 7" (17.78)    | 6-1/2" (16.51) | 02216007          | 02416007        |
| .64"-.75" (1.63-1.90)            | 790                            | 1,050           | 79                | 105             | 7" (17.78)    | 6.75" (17.14)  | 02216008          | 02416008        |
| .70"-.81" (1.78-2.06)            | 790                            | 2,050           | 79                | 205             | 7" (17.78)    | 7.25" (18.41)  | 02216009          | 02416009        |
| .75"-.87" (1.90-2.21)            | 1,020                          | 2,050           | 102               | 205             | 8" (20.32)    | 8" (20.32)     | 02216010          | 02416010        |
| .81"-.94" (2.06-2.39)            | 1,020                          | 2,050           | 102               | 205             | 8" (20.32)    | 8.25" (20.95)  | 02216011          | 02416011        |
| .87"-1.00" (2.21-2.54)           | 1,020                          | —               | 102               | —               | 8" (20.32)    | 8.75" (22.22)  | 02216012          | —               |
| .94"-1.06" (2.39-2.69)           | 1,020                          | 2,050           | 102               | 205             | 9" (22.86)    | 9" (22.86)     | 02216013          | 02416013        |
| 1.00"-1.18" (2.54-3.00)          | 1,020                          | 2,050           | 102               | 205             | 9" (22.86)    | 9.5" (24.13)   | 02216014          | 02416014        |
| 1.06"-1.25" (2.69-3.17)          | 1,020                          | 2,050           | 102               | 205             | 9" (22.86)    | 9.5" (24.13)   | 02216015          | 02416015        |


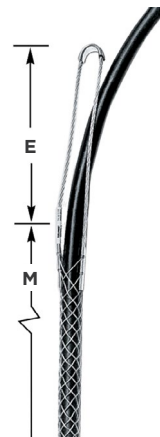


### Heavy Duty, Single Eye, Closed Mesh, Multi-Weave

For permanent support when cable end is available to be installed.

| Cable Diameter Range Inches (cm) | Approx. Breaking Strength Lbs. |                 | Working Load Lbs. |                 | E Inches (cm) | M Inches (cm) | Tin-Coated Bronze | Stainless Steel |
|----------------------------------|--------------------------------|-----------------|-------------------|-----------------|---------------|---------------|-------------------|-----------------|
|                                  | Tin-Coated Bronze              | Stainless Steel | Tin-Coated Bronze | Stainless Steel |               |               |                   |                 |
| .23"-.31" (.58-.79)              | 500                            | 1,400           | 50                | 140             | 5" (12.70)    | 4.5" (11.43)  | 02217001          | 02417001        |
| .29"-.37" (.74-.94)              | 500                            | 1,150           | 50                | 115             | 5" (12.70)    | 5.5" (13.97)  | 02217002          | 02417002        |
| .35"-.44" (.89-1.12)             | 870                            | 1,700           | 87                | 170             | 6" (15.24)    | 6.5" (16.51)  | 02217003          | 02417003        |
| .41"-.50" (1.04-1.27)            | 870                            | 1,700           | 87                | 170             | 6" (15.24)    | 7.5" (19.05)  | 02217004          | 02417004        |
| .46"-.56" (1.17-1.42)            | 1,050                          | 2,100           | 105               | 210             | 6" (15.24)    | 8" (20.32)    | 02217005          | 02417005        |
| .52"-.62" (1.32-1.57)            | 1,050                          | 2,100           | 105               | 210             | 7" (17.78)    | 8.5" (21.59)  | 02217006          | 02417006        |
| .58"-.68" (1.47-1.73)            | 1,050                          | 2,100           | 105               | 210             | 7" (17.78)    | 9.5" (24.13)  | 02217007          | 02417007        |
| .64"-.75" (1.63-1.90)            | 1,390                          | 4,161           | 139               | 416             | 7" (17.78)    | 9.5" (24.13)  | 02217008          | 02417008        |
| .70"-.81" (1.78-2.06)            | 1,390                          | 4,100           | 139               | 410             | 8" (20.32)    | 10.5" (26.67) | 02217009          | 02417009        |
| .75"-.87" (1.90-2.21)            | 1,390                          | —               | 139               | —               | 8" (20.32)    | 10.5" (26.67) | 02217010          | —               |
| .81"-.94" (2.06-2.39)            | 1,390                          | —               | 139               | —               | 8" (20.32)    | 10.5" (26.67) | 02217011          | —               |
| .87"-1.00" (2.21-2.54)           | 1,790                          | 5,350           | 179               | 535             | 8" (20.32)    | 11.5" (29.21) | 02217012          | 02417012        |
| .94"-1.06" (2.39-2.69)           | 1,790                          | 5,300           | 179               | 530             | 9" (22.86)    | 12.5" (31.75) | 02217013          | 02417013        |
| 1.00"-1.18" (2.54-3.00)          | 1,790                          | 5,300           | 179               | 530             | 9" (22.86)    | 13.5" (34.29) | 02217014          | 02417014        |
| 1.06"-1.25" (2.69-3.17)          | 1,790                          | 5,350           | 179               | 535             | 9" (22.86)    | 14.5" (36.83) | 02217015          | 02417015        |

Note: E-Eye length. M-Mesh length at nominal diameter.

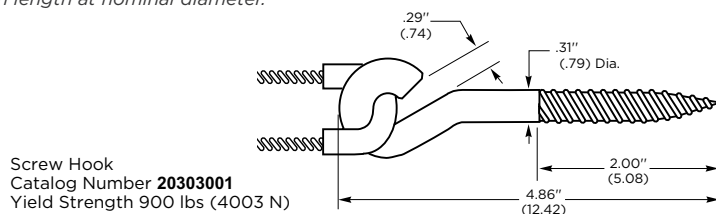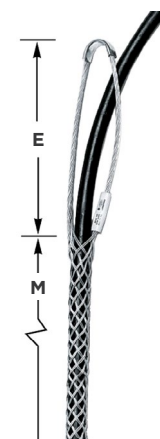

Dimensions in Inches (mm)