



Fittings, Standard Horizontal Tee (Width 1 = Width 2)

Features

- All fittings have 3" flat sections at the ends to allow space for mounting splices
- For use indoors, outdoors or in harsh environments
- Aluminum Alloy 6063
- Rungs are welded to stringers for strength and continuity
- 9" Rung spacing
- Class 1 Fitting
- Splice plates and hardware included*

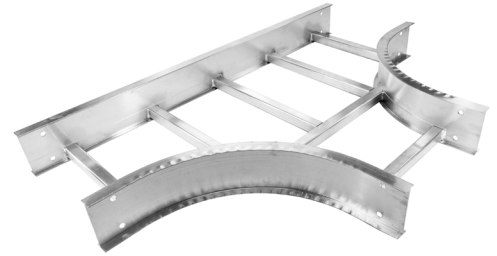

Rail Height	Width 1	Width 2	Radius	90 Degree	
4"	6"	6"	12"	LFT4060612	
			24"	LFT4060624	
			36"	LFT4060636	
	9"	9"	12"	LFT4090912	
			24"	LFT4090924	
			36"	LFT4090936	
	12"	12"	12"	LFT4121212	
			24"	LFT4121224	
			36"	LFT4121236	
	18"	18"	12"	LFT4181812	
			24"	LFT4181824	
			36"	LFT4181836	
	24"	24"	12"	LFT4242412	
			24"	LFT4242424	
			36"	LFT4242436	
	30"	30"	12"	LFT4303012	
			24"	LFT4303024	
			36"	LFT4303036	
	36"	36"	12"	LFT4363612	
			24"	LFT4363624	
			36"	LFT4363636	
	6"	6"	6"	12"	LFT6060612
				24"	LFT6060624
				36"	LFT6060636
9"		9"	12"	LFT6090912	
			24"	LFT6090924	
			36"	LFT6090936	
12"		12"	12"	LFT6121212	
			24"	LFT6121224	
			36"	LFT6121236	
18"		18"	12"	LFT6181812	
			24"	LFT6181824	
			36"	LFT6181836	
24"		24"	12"	LFT6242412	
			24"	LFT6242424	
			36"	LFT6242436	
30"		30"	12"	LFT6303012	
			24"	LFT6303024	
			36"	LFT6303036	
36"		36"	12"	LFT6363612	
			24"	LFT6363624	
			36"	LFT6363636	

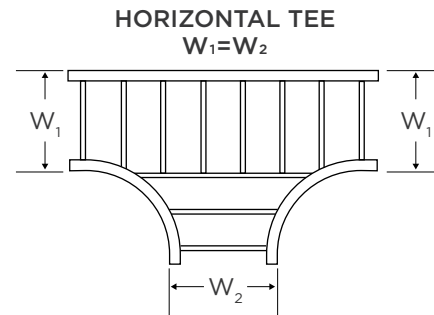

Note: *Included hardware is geomet-plated steel.

Dimensions in Inches (mm)