


# Fittings, Standard Cross (Width 1 = Width 2)


## Features

- All fittings have 3" flat sections at the ends to allow space for mounting splices
- For use indoors, outdoors or in harsh environments
- Aluminum Alloy 6063
- Rungs are welded to stringers for strength and continuity
- 9" Rung spacing
- Class 1 Fitting
- Splice plates and hardware included\*

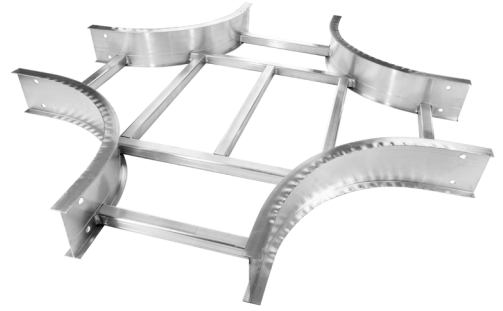

Rail Height	Width 1	Width 2	Radius	Catalog	
4"	6"	6"	12"	LFX4060612	
			24"	LFX4060624	
			36"	LFX4060636	
	9"	9"	12"	LFX4090912	
			24"	LFX4090924	
			36"	LFX4090936	
	12"	12"	12"	LFX4121212	
			24"	LFX4121224	
			36"	LFX4121236	
	18"	18"	12"	LFX4181812	
			24"	LFX4181824	
			36"	LFX4181836	
	24"	24"	12"	LFX4242412	
			24"	LFX4242424	
			36"	LFX4242436	
	30"	30"	12"	LFX4303012	
			24"	LFX4303024	
			36"	LFX4303036	
	36"	36"	12"	LFX4363612	
			24"	LFX4363624	
			36"	LFX4363636	
	6"	6"	6"	12"	LFX6060612
				24"	LFX6060624
				36"	LFX6060636
9"		9"	12"	LFX6090912	
			24"	LFX6090924	
			36"	LFX6090936	
12"		12"	12"	LFX6121212	
			24"	LFX6121224	
			36"	LFX6121236	
18"		18"	12"	LFX6181812	
			24"	LFX6181824	
			36"	LFX6181836	
24"		24"	12"	LFX6242412	
			24"	LFX6242424	
			36"	LFX6242436	
30"		30"	12"	LFX6303012	
			24"	LFX6303024	
			36"	LFX6303036	
36"		36"	12"	LFX6363612	
			24"	LFX6363624	
			36"	LFX6363636	

HORIZONTAL CROSS

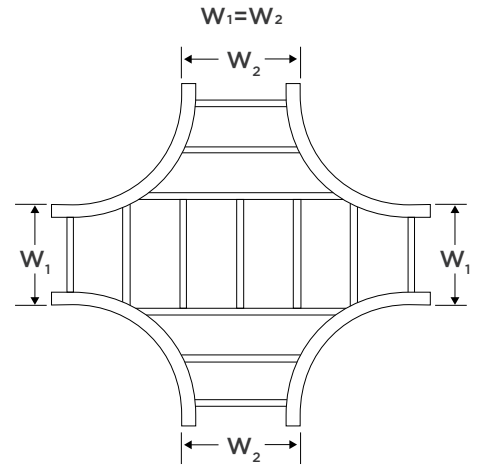

Note: \*Included hardware is geomet-plated steel.

Dimensions in Inches (mm)