


Fittings, Reducing Cross (Width 1 > Width 2)

Features

- All fittings have 3" flat sections at the ends to allow space for mounting splices
- For use indoors, outdoors or in harsh environments
- Aluminum Alloy 6063
- Rungs are welded to stringers for strength and continuity
- 9" Rung spacing
- Class 1 Fitting
- Splice plates and hardware included*

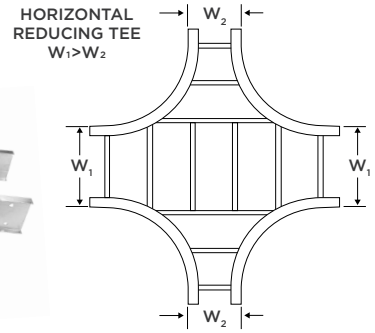

Rail Height	Width 1	Width 2	Radius	Catalog	
4"	9"	6"	12"	LFX4090612	
			24"	LFX4090624	
			36"	LFX4090636	
	12"	6"	12"	LFX4120612	
			24"	LFX4120624	
			36"	LFX4120636	
		9"	12"	12"	LFX4120912
				24"	LFX4120924
				36"	LFX4120936
	18"	6"	12"	LFX4180612	
			24"	LFX4180624	
			36"	LFX4180636	
		9"	12"	12"	LFX4180912
				24"	LFX4180924
				36"	LFX4180936
		12"	24"	12"	LFX4181212
				24"	LFX4181224
				36"	LFX4181236
24"	6"	12"	LFX4240612		
		24"	LFX4240624		
		36"	LFX4240636		
	9"	12"	12"	LFX4240912	
			24"	LFX4240924	
			36"	LFX4240936	

Rail Height	Width 1	Width 2	Radius	Catalog	
4"	24"	9"	24"	LFX4240924	
			36"	LFX4240936	
		12"	24"	LFX4241212	
			36"	LFX4241236	
		18"	12"	LFX4241812	
			24"	LFX4241824	
		36"	12"	LFX4241836	
			24"	LFX4241836	
		30"	6"	12"	LFX4300612
				24"	LFX4300624
				36"	LFX4300636
			9"	12"	LFX4300912
	24"			LFX4300924	
	36"			LFX4300936	
	12"		12"	LFX4301212	
			24"	LFX4301224	
			36"	LFX4301236	
	18"		12"	LFX4301812	
			24"	LFX4301824	
			36"	LFX4301836	
	24"	12"	LFX4302412		
		24"	LFX4302424		
		36"	LFX4302424		

Rail Height	Width 1	Width 2	Radius	Catalog
4"	30"	24"	36"	LFX4302436
			12"	LFX4360612
			24"	LFX4360624
	6"	6"	36"	LFX4360636
			12"	LFX4360912
			24"	LFX4360924
	9"	12"	36"	LFX4360936
			12"	LFX4361212
			24"	LFX4361224
	12"	24"	36"	LFX4361236
			12"	LFX4361812
			24"	LFX4361824
	18"	36"	36"	LFX4361836
			12"	LFX4362412
			24"	LFX4362424
	24"	30"	36"	LFX4362436
			12"	LFX4363012
			24"	LFX4363024
	36"	36"	36"	LFX4363036

Rail Height	Width 1	Width 2	Radius	Catalog	
4"	9"	6"	12"	LFX6090612	
			24"	LFX6090624	
			36"	LFX6090636	
	12"	6"	12"	LFX6120612	
			24"	LFX6120624	
			36"	LFX6120636	
		9"	12"	12"	LFX6120912
				24"	LFX6120924
				36"	LFX6120936
	18"	6"	12"	LFX6180612	
			24"	LFX6180624	
			36"	LFX6180636	
		9"	12"	12"	LFX6180912
				24"	LFX6180924
				36"	LFX6180936
		12"	24"	12"	LFX6181212
				24"	LFX6181224
				36"	LFX6181236
24"	6"	12"	LFX6240612		
		24"	LFX6240624		
		36"	LFX6240636		
	9"	12"	12"	LFX6240912	
			24"	LFX6240924	
			36"	LFX6240936	

Rail Height	Width 1	Width 2	Radius	Catalog	
4"	24"	9"	24"	LFX6240924	
			36"	LFX6240936	
		12"	24"	LFX6241212	
			36"	LFX6241236	
		18"	12"	LFX6241812	
			24"	LFX6241824	
		36"	12"	LFX6241836	
			24"	LFX6241836	
		30"	6"	12"	LFX6300612
				24"	LFX6300624
				36"	LFX6300636
			9"	12"	LFX6300912
	24"			LFX6300924	
	36"			LFX6300936	
	12"		12"	LFX6301212	
			24"	LFX6301224	
			36"	LFX6301236	
	18"		12"	LFX6301812	
			24"	LFX6301824	
			36"	LFX6301836	
	24"	12"	LFX6302412		
		24"	LFX6302424		
		36"	LFX6302424		

Rail Height	Width 1	Width 2	Radius	Catalog
4"	30"	24"	36"	LFX6302436
			12"	LFX6360612
			24"	LFX6360624
	6"	6"	36"	LFX6360636
			12"	LFX6360912
			24"	LFX6360924
	9"	12"	36"	LFX6360936
			12"	LFX6361212
			24"	LFX6361224
	12"	24"	36"	LFX6361236
			12"	LFX6361812
			24"	LFX6361824
	18"	36"	36"	LFX6361836
			12"	LFX6362412
			24"	LFX6362424
	24"	30"	36"	LFX6362436
			12"	LFX6363012
			24"	LFX6363024
	36"	36"	36"	LFX6363036

Note: *Included hardware is geomet-plated steel.

Note: *Included hardware is geomet-plated steel. Dimensions in Inches (mm)