

Straight Blade Devices, Duplex Receptacle, Hubbell-Pro, Hospital Grade, LED Indicator, 2-Pole 3-Wire Grounding, 15A 125V, 5-15R, Ivory

By Hubbell Wiring Device-Kellems  
Catalog # [8200IVL](#)

Straight Blade Devices, Duplex Receptacle, Hubbell-Pro, Hospital Grade, LED Indicator, 2-Pole 3-Wire Grounding, 15A 125V, 5-15R, Ivory

Features

- Green LED Power Indicators to identify emergency circuits
- Triple wipe contacts
- High impact resistant face with circuit I.D. marking area
- Steel mounting strap

Application

Hubbell-Pro Heavy Duty Hospital Grade

Performance

Electrical - Current Interrupting - Certified for current interrupting at full rated current, Electrical - Dielectric Voltage - Withstands 2,000V minimum, Environmental - Flammability - UL 94V-2, Environmental - Operating Temperature - Maximum continuous 75°C, minimum -40°C (w/o impact), Mechanical - Product Identification - Ratings are a permanent part of the device, Mechanical - Terminal Accommodation - #14-#10 AWG copper stranded or solid conductor only, Mechanical - Terminal Identification - Terminals identified in accordance with UL 498 and CSA

Specifications


|                          |                                                                                                                                                                                                    |
|--------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Environmental Conditions | Indoor Dry Unless Protected By Additional Means                                                                                                                                                    |
| EU RoHS Indicator        | No                                                                                                                                                                                                 |
| Nema Rating              | 5-15R                                                                                                                                                                                              |
| Industry Standard(s)     | <ul style="list-style-type: none"><li>• Certified to CSA, C22.2, No. 42 File 285</li><li>• Fed. Spec. W-C-596</li><li>• NEMA® WD-6 Compliant</li><li>• UL Listed to UL498 File No. E2186</li></ul> |

Conductor

|                 |                    |
|-----------------|--------------------|
| Number Of Wires | 3-Wire             |
| Wire Size       | #14 AWG to #10 AWG |
| Number Of Poles | 2-Pole             |

Current

|                            |       |
|----------------------------|-------|
| Amperage Rating            | 15 A  |
| Voltage Rating Description | 125 V |

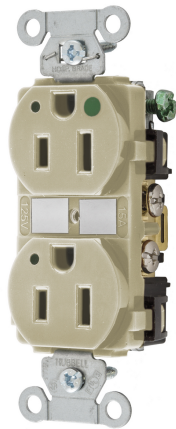

|                           |                           |
|---------------------------|---------------------------|
| Dielectric Strength       | Withstands 2,000V minimum |
| Current Rating            | 15 A                      |
| Voltage Rating            | 125 VAC                   |
| Wattage                   | 1875 W                    |
| Connectivity              | Back and Side Wired       |
| Phase                     | Single Phase              |
| Current / Amperage Rating | 15 A                      |

Dimensions

|              |                             |
|--------------|-----------------------------|
| Length       | 3.28 in                     |
| Display Size | Standard Sized Product      |
| Weight       | 0.15 lb.                    |
| Height       | 1.15 in                     |
| Width        | 1.57 in                     |
| Dimensions   | 3.28 in x 1.57 in x 1.15 in |

General

|                              |                                                                                                                                                                                                                                                                                                                                                      |
|------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Color                        | Ivory                                                                                                                                                                                                                                                                                                                                                |
| Style                        | Smooth Face                                                                                                                                                                                                                                                                                                                                          |
| Series                       | Hubbell-Pro                                                                                                                                                                                                                                                                                                                                          |
| Specifications               | <ul style="list-style-type: none"><li>• Automatic Self-grounding Staple - Stainless steel</li><li>• Base - PBT</li><li>• Clamping Plate - Plated steel</li><li>• Face - Nylon</li><li>• Ground Contacts - Brass</li><li>• Mounting Screws - Zinc plated steel</li><li>• Mounting Strap - Galvalized steel</li><li>• Power Contacts - Brass</li></ul> |
| UPC                          | 783585196985                                                                                                                                                                                                                                                                                                                                         |
| Type                         | Receptacle                                                                                                                                                                                                                                                                                                                                           |
| Material - Mounting Hardware | Screw Mounting                                                                                                                                                                                                                                                                                                                                       |
| Item Type                    | Traditional Duplex                                                                                                                                                                                                                                                                                                                                   |
| Material                     | Nylon                                                                                                                                                                                                                                                                                                                                                |

Logistics

|                 |    |
|-----------------|----|
| Carton Quantity | 10 |
|-----------------|----|

Operational

|                       |                                                          |
|-----------------------|----------------------------------------------------------|
| Operating Temperature | Maximum continuous 75°C and minimum -40°C without Impact |
| Horsepower - Maximum  | 0.5                                                      |
| Indicator(s) Type     | Green LED                                                |

Product Assets

- Catalog [English]
- Catalog Page [English]
- Catalog Page [English]



A Hubbell brand