
HUBBELL
Wiring Device-Kellems

Straight Blade Devices, Duplex Receptacle, Hubbell-Pro, Hospital Grade, LED Indicator, 20A 125V, 2-Pole 3-Wire Grounding, 5-20R, Black

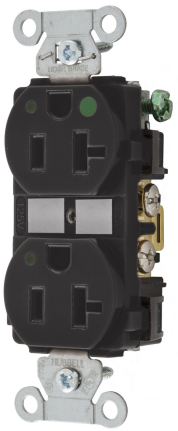

By Hubbell Wiring Device-Kellems
Catalog # 8300BKL

Straight Blade Devices, Duplex Receptacle, Hubbell-Pro, Hospital Grade, LED Indicator, 20A 125V, 2-Pole 3-Wire Grounding, 5-20R, Black

Features

- Green LED Power Indicators to identify emergency circuits
- Triple wipe contacts
- High impact resistant face with circuit I.D. marking area
- Steel mounting strap

Application

Hubbell-Pro Heavy Duty Hospital Grade

Performance

Electrical - Current Interrupting - Certified for current interrupting at full rated current, Electrical - Dielectric Voltage - Withstands 2,000V minimum, Environmental - Flammability - UL 94V-2, Environmental - Operating Temperature - Maximum continuous 75°C, minimum -40°C (w/o impact), Mechanical - Product Identification - Ratings are a permanent part of the device, Mechanical - Terminal Accommodation - #12-#10 AWG stranded or solid copper wire only, Mechanical - Terminal Identification - Terminals identified in accordance with UL 498 and CSA

Specifications

Environmental Conditions	Indoor Dry Unless Protected By Additional Means
EU RoHS Indicator	No
Nema Rating	5-20R
Industry Standard(s)	• Certified to CSA, C22.2, No. 42 File 285 • Fed. Spec. W-C-596 • NEMA® WD-6 Compliant • UL Listed to UL498 File No. E2186

Conductor

Number Of Wires	3-Wire
Wire Size	#12 AWG to #10 AWG
Number Of Poles	2-Pole

Current

Amperage Rating	20 A
Voltage Rating Description	125 V
Dielectric Strength	Withstands 2,000V minimum
Current Rating	20 A
Voltage Rating	125 VAC
Wattage	2500 W
Connectivity	Back and Side Wired
Phase	Single Phase
Current / Amperage Rating	20 A

Dimensions

Length	3.28 in
Display Size	Standard Sized Product
Weight	0.2 lb.
Height	1.15 in
Width	1.57 in
Dimensions	3.28 in x 1.57 in x 1.15 in

General

Color	Black
Style	Smooth Face
Series	Hubbell-Pro
Specifications	• Automatic Self-grounding Staple - Stainless steel • Base - PBT • Clamping Plate - Plated steel • Face - Nylon • Ground Contacts - Brass • Mounting Screws - Zinc plated steel • Mounting Strap - Galvalized steel • Power Contacts - Brass
UPC	783585196930
Type	Receptacle
Material - Mounting Hardware	Screw Mounting
Item Type	Traditional Duplex
Material	Nylon

Logistics

Carton Quantity	10

Operational

Operating Temperature	Maximum continuous 75°C and minimum -40°C without Impact
Horsepower - Maximum	1
Indicator(s) Type	Green LED

Product Assets

Catalog [English]
Catalog Page [English]
Catalog Page [English]

A Hubbell brand

© 2026 Hubbell Incorporated. All rights reserved