



Features


- Low profile, less than 1 inch deep
- Self-grounding feature is standard
- Operating temperature: -20°C to 60°C
- UL Listed, CSA Certified

Combination Quiet Rocker Switches/Devices

Description	Three (3) Single Pole Switches.	Two (2) Single Pole Switches.	Single Pole and Three Way Switch.	Single Pole Switch, 2 Pole, 3 Wire Receptacle.
Termination	Self-Grounding, Side Wire	Self-Grounding, Side Wire	Self-Grounding, Side Wire	Self-Grounding, Side Wire
Rating	15A 120-277V AC	15A 120-277V AC	15A 120-277V AC	15A 120V (switch) 15A 125V (recept.) NEMA 5-15R
Black Gray Ivory Light Almond White	— — RCD111I RCD111LA RCD111W	RCD101BK RCD101GY RCD101I RCD101LA RCD101W	RCD103BK RCD103GY RCD103I RCD103LA RCD103W	RCD108BK RCD108GY RCD108I RCD108LA RCD108W
Description	 Single Pole Switch, Tamper-Resistant, 2 Pole, 3 Wire, Receptacle.	Two (2) Three Way Switches.	 Three Way Switch, Tamper-Resistant, 2 Pole, 3 Wire, Receptacle.	
Termination	Self-Grounding, Side Wire	Self-Grounding, Side Wire	Self-Grounding, Side Wire	
Rating	15A 120V (switch) 15A 125V (recept.) NEMA 5-15R	15A 120-277V AC	15A 120V (switch) 15A 125V (recept.) NEMA 5-15R	
Black Gray Ivory Light Almond White	RCD108BKTR RCD108GYTR RCD108ITR RCD108LATR RCD108WTR	RCD303BK — RCD303I RCD303LA RCD303W	RCD308BKTR RCD308GYTR RCD308ITR RCD308LATR RCD308WTR	
Description	Single Pole Switch, Pilot Light, Clear Lens, Amber Neon Bulb.	Three Way Switch, Pilot Light, Clear Lens, Amber Neon Bulb.	Nightlight Only.	
Termination	Self-Grounding, Side Wire	Self-Grounding, Side Wire	Self-Grounding, 6" Pre-wired Stranded Wire, 1/2" Stripped Ends	
Rating	15A 120V	15A 120V	120V	
Ivory Light Almond White	RCD109I* RCD109LA* RCD109W*	RCD309I* RCD309LA* RCD309W*	DD100NLIV* DD100NLLA* DD100NLWH*	

Note: See page Tech-10 for Tamper-Resistant description. *Requires neutral wire.

Pilot Light Wiring Diagram

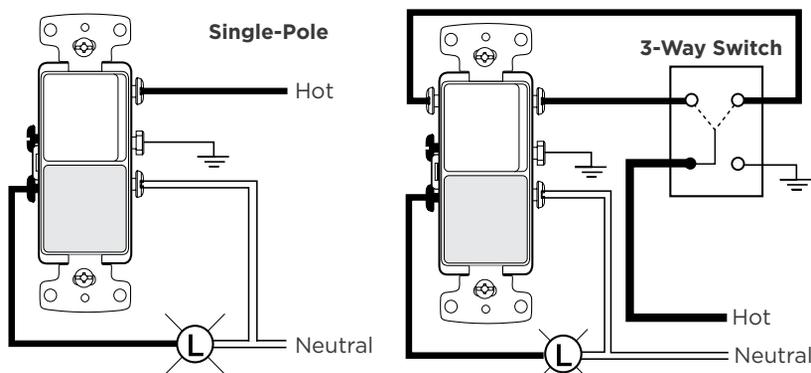

Dimensions in Inches (mm)



RCD111W



RCD101W



RCD108W



RCD109W



DD100NLWH