


Heavy Duty, Commercial Grade GFCI  
Receptacle, 20A 125V, With Alarm, Black

By Hubbell Wiring Device-Kellems  
Catalog # [GFR20BKB](#)

Spec Grade, 5-20R AUTOGUARD® Self-Testing, Self-Grounding GFCI

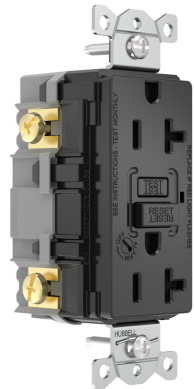

Features

- Audible alarm when tripped - perfect for non-visible GFCI locations or when audible alerts are necessary.
- Patented AUTOGUARD® self test technology with LED power and trip indicator and lin-load reversal protection
- CLAD Technology for superior resistance to building noise
- Internal back wiring clamp and guide for quick and secure termination.
- Triple Wipe Construction for enhanced blade contact and long lasting plug retention

Specifications

|                      |                             |
|----------------------|-----------------------------|
| Nema Rating          | 5-20R                       |
| Industry Standard(s) | Meets All NEC® Requirements |

Current

|                            |       |
|----------------------------|-------|
| Voltage Rating Description | 125 V |
| Current / Amperage Rating  | 20 A  |

Dimensions

|        |         |
|--------|---------|
| Weight | 0.4 lb. |
| Height | 4.12 in |
| Width  | 1.75 in |
| Length | 4.12 in |
| Depth  | 1.19 in |

Dimensions

4.12 in x 1.75 in x 4.12 in

General

Specifications

- Base - Nylon
- Face - Nylon
- Ground Contacts - Brass
- Mounting Screws - Zinc plated steel
- Mounting Strap - Galvanized Steel
- Power Contacts - Brass

Color  
Style  
UPC  
Type  
Series

Black  
Alarm  
883778931215  
Standard  
Heavy Duty

Logistics

|                 |      |
|-----------------|------|
| Pallet Quantity | 2240 |
| Carton Quantity | 10   |

Product Assets

- [Catalog \[English\]](#)  
[Catalog Page \[English\]](#)  
[Installation Manual \[Spanish, French, English\]](#)