

Features and Benefits

- Powder coated, solid U.S. steel construction
- Multi-position roller guide can be mounted in four different positions
- Ratchet lock can be disengaged in the field for constant tension applications
- UL Type 4X enclosure protects spring motor, junction box, slip ring assembly and cable entrance from hosedown or corrosion
- Optional pivot base allows 340° rotation of the reel and increases the range of cable to nearly any direction



HBL501242w
with HBL16PB



Heavy Duty Industrial Weatherproof Reels*

Description	Amps	Volts AC	Cable Length Feet (m)	Cable Type	Weight lbs. (kg)	Catalog Number
14" yellow weatherproof reel.	15	600	50 (15.2)	14/3 SOW-A	55 (24.9)	HBL501431W
16" weatherproof reel. yellow housing white housing.	20	600	50 (15.2)	12/3 SOW-A	80 (36.3)	HBL501232W HBL501232WM1
16" yellow weatherproof reel.	16	600	50 (15.2)	12/4 SOW-A	86 (39.0)	HBL501242W
16" weatherproof reel. yellow housing white housing.	25	600	50 (15.2)	10/3 SOW-A	86 (39.0)	HBL501032W HBL501032WM1
16" yellow weatherproof reel.	20	600	50 (15.2)	10/4 SOW-A	92 (41.7)	HBL501042W

Note: *All heavy duty industrial cord reels are supplied with wire leads and 3/4" NPT hub feed. Power supply cable not supplied.



HBL501232WM1



HBL501242w
with HBL16PB

Accessories

Description	Weight lbs. (kg)	Catalog Number
16" pivot base.	13 (5.9)	HBL16PB
Replacement stop.	0.2 (.09)	HBLWPBS

Specifications

Listing/Certification	UL 355 and CSA, C22.2 No. 308
Environment	Type 4X enclosure, CAN/CSA - C22.2 No. 308 Dry, indoor and wet and damp outdoor non-hazardous location

Dimensions


Inch (mm)	A	B	C	D	E	F	G	H	I	J
14" Reel	6.50" (165)	8.12" (206)	16.25" (413)	13.75" (349)	3.00" (76)	12.19" (310)	3.00" (76)	3.00" (76)	3.00" (76)	6.50" (165)
16" Reel	6.50" (165)	9.12" (232)	18.25" (464)	15.75" (400)	3.00" (76)	14.19" (360)	6.00" (152)	6.00" (152)	4.94" (125)	6.50" (165)



HBL16PB




HBLWPBS

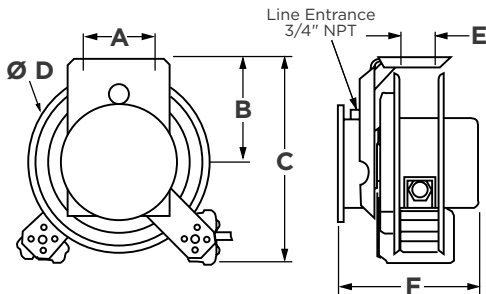

Pivot Base

340° Pivot Base (Optional)

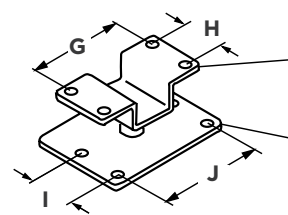

Mounting Surface 4 Holes

14" 0.44 (11) diameter
16" 0.53 (13) diameter

Reel Base 4 Holes

14" 0.47 (12) diameter
16" 0.53 (13) diameter

Note: Pivot base for use only with Weatherproof Cable Reel.

Dimensions in Inches (mm)