

Straight Blade Devices, IEC 320 Devices,
Inlet with Wire Bail, 16 A250V, International
Rated, Pressure Screw Terminal, Black, Sin le Pack

By Hubbell Wiring Device-Kellems
Catalog # [H320BL](#)

Straight Blade Devices, IEC 320 Devices, Inlet with Wire Bail, 16 A250V, International Rated, Pressure Screw Terminal, Black, Sin le Pack

Features

- Compatible with IEC320
- Latching wire locks in connector
- Low profile
- Impact resistant

Application

Heavy Duty Industrial

Performance

Electrical - Dielectric Voltage - Withstands 2,000V minimum,
Electrical - Rating - 16A 250V AC for European service, 20A 250V AC for North American service, Environmental - Flammability - UL 94V-2, Environmental - Operating Temperatures - Maximum continuous 75°C minimum -40°C (w/o impact), Mechanical - Terminal Accommodation - North American - #16-12 AWG stranded or solid copper conductor only.


Specifications

Standards - RoHS Compliance Status	CM
Environmental Conditions	Impact Resistant
EU RoHS Indicator	Yes
Nema Rating	Non-NEMA
Industry Standard(s)	• CSA certified 20A 250V AC-File No. 17337 • TUV and VDE Certified • UL classified to IEC 320, 16A 250V AC-File No. E111246 • UL Listed 20A 250V AC-File No. E1706

Conductor

Number Of Wires	3-Wire
Wire Size	• North American-#16AWG-#12AWG • International-1.55mm²-2.5mm².
Number Of Poles	2-Pole

Current

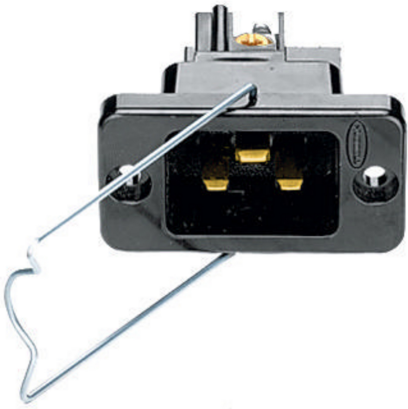

Amperage Rating	20/16 A
Voltage Rating Description	250 V
Dielectric Strength	Withstands 2,000V minimum
Current Rating	20/16 A
Voltage Rating	250 V
Wattage	7500 W
Connectivity	Screw Terminals
Phase	Single Phase
Current / Amperage Rating	20/16 A

Dimensions

Length	1.47 in
Display Size	Standard Sized Product
Weight	0.1 lb.
Height	1.19 in
Width	1.64 in
Dimensions	1.47 in x 1.64 in x 1.19 in

General

Color	Black
Specifications	• Assembly Screws - Zinc plated steel • Configuration - IEC 60320-1 Style appliance coupler, C20 • Contact Blades - .040" (1.0) Brass • Device Type - 2 Pole + earth • Terminal Clamp - Nickel plated steel • Terminal Retainer - Nylon • Terminal Screws - Stainless steel
UPC	783585777047
Material - Mounting Hardware	Screw Mounting
Insulation	Insulated Body
Item Type	Chassis Single
Material	Nylon

Logistics

Carton Quantity	10
-----------------	----

Operational

Temperature Rating	• Maximum Continuous: 75° C • Minimum Continuous: -40° C w/o impact, -25° with impact.
Operating Temperature	Maximum continuous 75°C and minimum -40°C without Impact

Product Assets

- [Catalog \[English\]](#)
- [Catalog Page \[English\]](#)
- [Catalog Page \[English\]](#)
- [Installation Manual \[French\]](#)



A Hubbell brand