

Commercial Grade, Panel Mount and
Specialty Switches, Bat Handle Switches,
Single Pole Single Throw 4A 250V/8A 125V,
Wire Leads, Nickel

By Hubbell Wiring Device-Kellems
Catalog # [HBL11WL](#)

Switches and Lighting Controls, Commercial Grade, Panel Mount
and Specialty Switches, Bat Handle Switches, Single Pole Single
Throw 4A 250V/8A 125V, Wire Leads, Nickel

Features

- Nickel Plated for Corrosion Resistance

Performance

Environmental - Operating Temperatures - Max Continuous- 75
°C, Minimum -40 °C Without Impact

Specifications

EU RoHS Indicator	No
Industry Standard(s)	UL Listed

Conductor

Wire Size	#18 AWG
Number Of Poles	Single Pole

Configuration


Mounting Method	Panel Mount
-----------------	-------------

Current

Amperage Rating	4/8/10 A
Voltage Rating	250/125/120 VAC
Current / Amperage Rating	4/8/10 A

Dimensions

Length	1.5 in
Weight	0.25 lb.
Height	0.64 in
Width	0.98 in
Dimensions	1.5 in x 0.98 in x 0.64 in

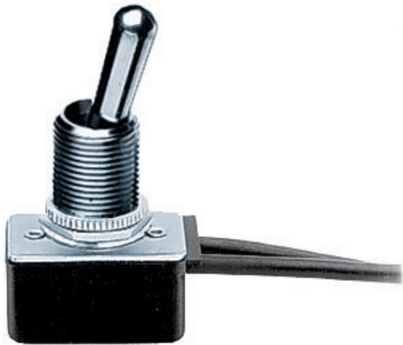

General

Color	Metallic
Style	Wire Leads #18 AWG
Series	Single Pole/Single Throw
Specifications	- Body Material - Impact Resistant Thermoplastic Body - Bushing - Brass- Nickel Plated - Contacts - Fine Silver - Strap Material - Nickel Plated - Toggle - Brass- Nickel Plated
UPC	783585016726
Type	General Purpose
Item Type	Panel Mount and Bat Handle Switch

Logistics

Carton Quantity	10
-----------------	----

Operational

Action	SPST
Operating Temperature	Maximum continuous 75°C and minimum -40°C without Impact
Horsepower - Maximum	0.33

Product Assets

[Catalog \[English\]](#)
[Catalog Page \[English\]](#)