


## 30 Amp, 600 and 480 Volts AC, 20 Amp, 250 Volts DC

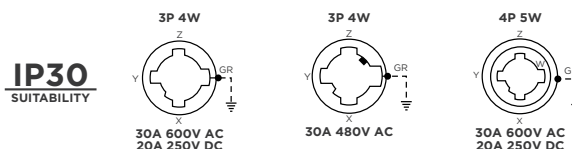

### Connector Bodies

| Description                                  | Cord Dia.                    | Catalog Number     |                  |                  |
|----------------------------------------------|------------------------------|--------------------|------------------|------------------|
| Black nylon housing, thermoplastic interior. | .700"-1.200"<br>(17.78-30.5) | <b>HBL21414B</b>   | —                | —                |
| Same as above except corrosion resistant.    | .700"-1.200"<br>(17.78-30.5) | <b>HBL21CM414B</b> | —                | —                |
| Red nylon housing, thermoset interior.       | .700"-1.200"<br>(17.78-30.5) | —                  | <b>HBL20444B</b> | —                |
| Black nylon housing, thermoplastic interior. | .700"-1.200"<br>(17.78-30.5) | —                  | —                | <b>HBL25414B</b> |

Note: See page C-68 for accessories.

### Receptacles

| Description                                                                                                   | Catalog Number    |                 |                 |
|---------------------------------------------------------------------------------------------------------------|-------------------|-----------------|-----------------|
| Black phenolic.                                                                                               | <b>HBL20403</b>   | —               | —               |
| Weathertight, corrosion resistant, nickel plated brass plate, for FS/FD box mounting. IP44 suitability.       | <b>HBL22CM427</b> | —               | —               |
| Aluminum angle housing, with 3/4" NPT hub for surface mounting. IP44 suitability.                             | <b>HBL21420</b>   | —               | —               |
| Black phenolic, red center insert.                                                                            | —                 | <b>HBL20443</b> | —               |
| Black phenolic interior, aluminum housing, blue finish, for FS/FD box mounting.                               | —                 | —               | <b>HBL25403</b> |
| Black phenolic interior, aluminum weatherproof housing, blue finish for FS/FD box mounting. IP44 suitability. | —                 | —               | <b>HBL25250</b> |

Note: See page C-68 for accessories.


### Receptacle Accessories

| Description                                                                                 | Catalog Number     |
|---------------------------------------------------------------------------------------------|--------------------|
| Thermoplastic, wet and damp locations with cover "open", gray.                              | <b>HBL7428WOG*</b> |
| Thermoplastic, wet and damp locations with cover "open", yellow.                            | <b>HBL7428WOY*</b> |
| Thermoplastic, wet and damp locations with cover "open", red.                               | <b>HBL7428WOR*</b> |
| Cast aluminum, wet locations only when cover "closed" and damp locations, lift cover plate. | <b>HBL20405</b>    |
| Cast aluminum, wet locations only when cover "closed" and damp locations, red finish.       | <b>HBL20446</b>    |
| 302/304 stainless, single gang, smooth. NOT weatherproof.                                   | <b>SS737</b>       |

Note: \*Features two #6-32 threaded inserts to back mount device to cover.




**HBL21414B**




**HBL20444B**




**HBL25414B**




**HBL21420**

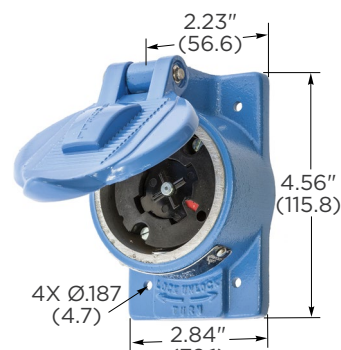

**HBL25250**



**HBL25403**



**HBL20443**

Dimensions in Inches (mm)