

Locking Devices, Hubbellock, Industrial, Receptacle, 60A 600V AC, 3-Pole 4-Wire Grounding, Non NEMA, Screw Terminal, Cast Aluminum, Short Housing.

By Hubbell Wiring Device-Kellems
Catalog # [HBL26410](#)

Locking Devices, Hubbellock, Industrial, Receptacle, 60A 600V AC, 3-Pole 4-Wire Grounding, Non NEMA, Screw Terminal, Cast Aluminum, Short Housing.

Features

- Spring loaded safety shutter contains arcing when mating or un-mating devices under load
- Spring loaded safety shutter automatically ejects the plug eliminating contact teasing
- Box terminals in conjunction with stainless steel screws provide maximum termination strength and dependability
- Metallic weather protective spring loaded cover provides protection from moisture and dust

Application

Heavy Duty Industrial

Performance

Electrical - Current Interrupting - Certified for current interrupting at full rated current, Electrical - Dielectric Voltage - 2,000V minimum, Environmental - Flammability - UL 94 V0, Environmental - Moisture Resistance - IP44 Suitability, Environmental - Operating Temperatures - Maximum Continuous 75°C, Minimum -40°C (w/o impact), Mechanical - Terminal Identification - Terminals identified in accordance with UL 498

Specifications


Environmental Conditions	Indoor Dry Unless Protected By Additional Means
EU RoHS Indicator	No
Industry Standard(s)	• Certified to CSA Standard • Listed to UL Standard

Conductor

Number Of Wires	4-Wire
Wire Size	#8 AWG to #4 AWG
Number Of Poles	3-Pole

Current

Amperage Rating	60 A
Voltage Rating Description	600 V
Dielectric Strength	Withstands 2,000V minimum
Current Rating	60 A
Voltage Rating	600 V
Connectivity	Screw Terminals

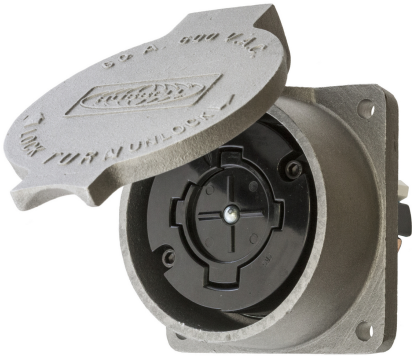

Phase	Multi Phase
Current / Amperage Rating	60 A

Dimensions

Length	3.5 in
Display Size	Standard Sized Product
Weight	1.7 lb.
Height	3.58 in
Width	4.62 in
Dimensions	3.5 in x 4.62 in x 3.58 in

General

Color	Metallic
Specifications	• Contacts / Springs - Copper alloy • Flange Gasket - Neoprene • Housing / Cover - Cast Aluminum • Mounting Screws - Zinc plated steel • Receptacle Interior - Phenolic • Rivet - Aluminum • Spring - Stainless steel • Terminal - Copper • Terminal Screws - Stainless steel
UPC	783585017303
Type	Receptacle
Material - Mounting Hardware	Screw Mounting
Item Type	60A Hubbellock® Grounding Receptacle
Material	Aluminum, Cast

Logistics

Pallet Quantity	560
Carton Quantity	5

Operational

Operating Temperature	Maximum continuous 75°C and minimum -40°C without Impact
-----------------------	--

Product Assets

[Catalog \[English\]](#)

[Catalog Page \[English\]](#)

[Installation Manual \[English\]](#)



A Hubbell brand