

Locking Devices, Twist-Lock®, Industrial,
Panel Mount Receptacle, 15A 277V AC, L7-
15R, Screw Terminal, 1.75 " or 1.937"
Mounting

By Hubbell Wiring Device-Kellems
Catalog # [HBL4763](#)

Twist-Lock® Industrial Panel Mount Receptacle 15A 1.75 " or 1.937"
Mounting

Features

- Reinforced thermoplastic construction
- Single piece, all brass contacts
- All terminals are back and side wired
- Brass mounting strap with stainless steel grounding clip

Application

Heavy Duty Industrial

Performance

Electrical - Current Interrupting - Certified for current interrupting at full rated current, Electrical - Dielectric Voltage - Withstands 2,000V minimum, Environmental - Flammability - HB or better per UL94/CSA 22.2 No.0.17, Environmental - Operating Temperatures - Maximum Continuous 75°C, Minimum -40°C (w/o impact), Mechanical - Terminal Accommodation - #18 AWG - #10 AWG solid or stranded copper wire only., Mechanical - Terminal Identification - Terminals identified in accordance with UL 498

Specifications


Standards - RoHS Compliance Status	CM
Environmental Conditions	Indoor Dry Unless Protected By Additional Means
EU RoHS Indicator	Yes
Nema Rating	L7-15R
Industry Standard(s)	• Certified to CSA C22.2 No.42 • Fed. Spec. W-C-596 • Listed to UL 498

Conductor

Number Of Wires	3-Wire
Wire Size	#18 AWG to #10 AWG
Number Of Poles	2-Pole

Current

Amperage Rating	15 A
Voltage Rating Description	277 VAC
Dielectric Strength	Withstands 2,000V minimum

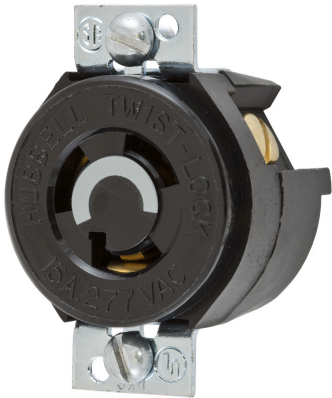

Current Rating	15 A
Voltage Rating	277 VAC
Connectivity	Screw Terminals
Phase	Single Phase
Current / Amperage Rating	15 A

Dimensions

Length	1.75 in
Display Size	Standard Sized Product
Weight	0.10 lb.
Height	1.27 in
Width	1.42 in
Dimensions	1.75 in x 1.42 in x 1.27 in

General

Specifications	• Base - RTP • Clamp - Brass • Contacts - Brass • Face - RTP • Ground Contact - Brass • Terminal Screws - Brass
UPC	783585236919
Type	Receptacle
Material - Mounting Hardware	Screw Mounting
Item Type	15A Grounding Single Receptacle
Material	Thermoplastic

Logistics

Carton Quantity	10
-----------------	----

Operational

Operating Temperature	Maximum continuous 75°C and minimum -40°C without Impact
Horsepower - Maximum	2

Product Assets

[Catalog \[English\]](#)
[Catalog Page \[English\]](#)
[Installation Manual \[English\]](#)